
Online Food Ordering Website

Basil & Bowl concept preview followed by the complete website source code.

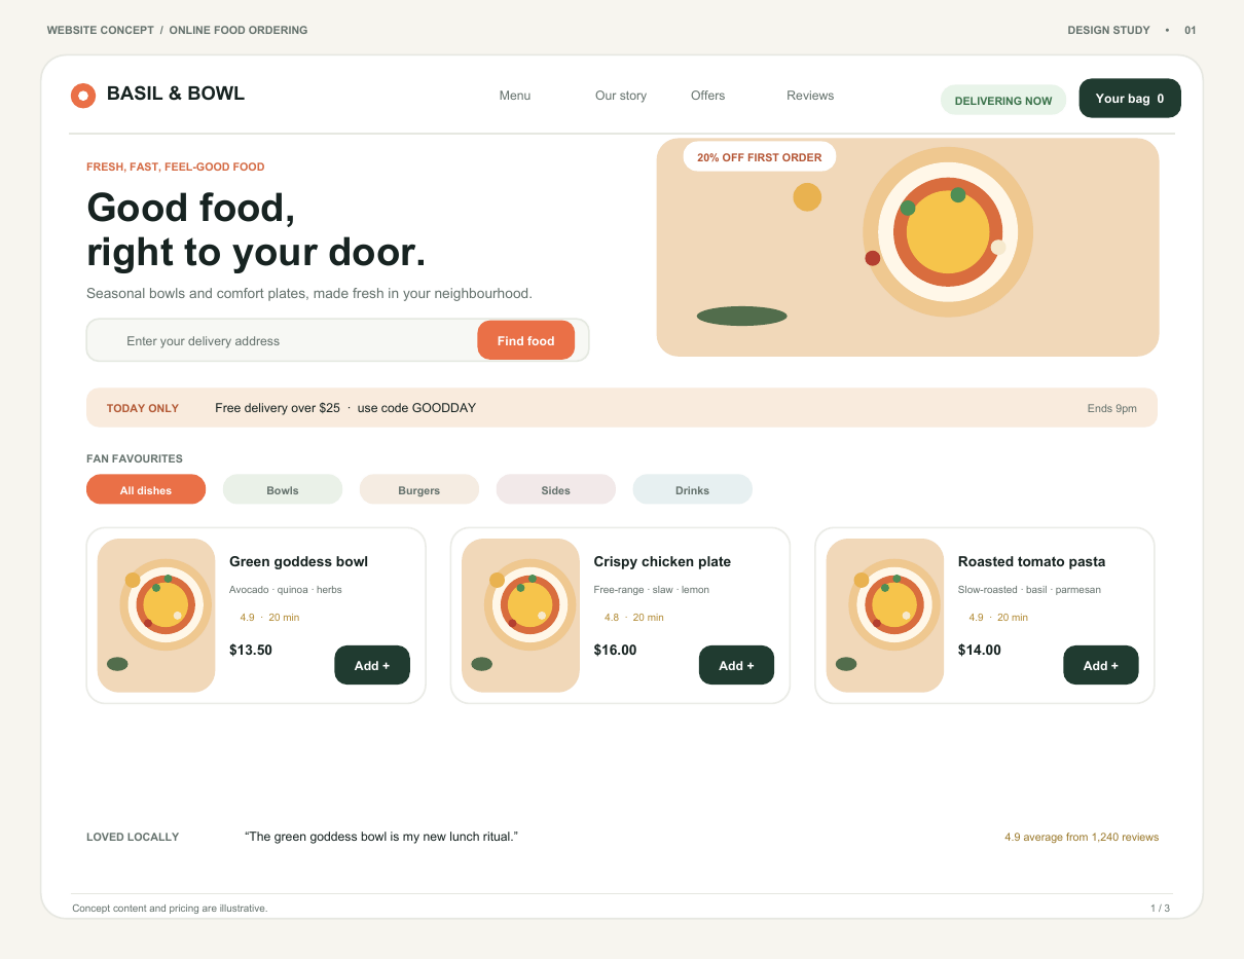

Website source code

Self-contained HTML, CSS, and JavaScript. The matching editable file is online_food_ordering_website.html.

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<title>Basil & Bowl</title>
<style>
  * { box-sizing: border-box; }
  body { margin: 0; font: 16px Arial, sans-serif; color: #20352c; background: #f8f6ef; }
  header { padding: 18px 7%; display: flex; justify-content: space-between; align-items: center; background: white; }
  nav a { margin-left: 18px; color: inherit; text-decoration: none; }
  main { max-width: 1100px; margin: auto; padding: 35px 20px; }
  .hero { padding: 38px; border-radius: 20px; background: #f4dfc4; }
  h1 { font-size: clamp(2rem, 6vw, 4rem); margin: 8px 0; }
  .filters, .cards { display: flex; gap: 14px; flex-wrap: wrap; margin: 22px 0; }
  button { border: 0; border-radius: 10px; padding: 11px 16px; cursor: pointer; background: #204333; color: white; }
  .filters button { background: #e8eee6; color: #20352c; }
  .cards { display: grid; grid-template-columns: repeat(auto-fit, minmax(220px, 1fr)); }
  .card { padding: 16px; background: white; border-radius: 16px; box-shadow: 0 4px 16px #20352c12; }
  .food { height: 145px; display: grid; place-items: center; background: #f3e5d0; border-radius: 12px; font-size: 70px; }
  .price { font-weight: bold; }
  .offer { padding: 16px; border-radius: 12px; background: #faead8; }
</style>
</head>
<body>
<header>
  <strong>BASIL & BOWL</strong>
  <nav><a href="#menu">Menu</a><a href="#reviews">Reviews</a>
    <button id="cart">Cart (0)</button></nav>
</header>
<main>
  <section class="hero">
```

```
    <small>FRESH, FAST, FEEL-GOOD FOOD</small>
    <h1>Good food,<br>right to your door.</h1>
    <p>Seasonal bowls and comfort plates, made fresh nearby.</p>
    <input aria-label="Delivery address" placeholder="Enter your delivery address">
    <button>Find food</button>
  </section>
  <p class="offer">TODAY ONLY — Free delivery over $25. Use code GOODDAY.</p>
  <h2 id="menu">Fan favourites</h2>
  <div class="filters">
    <button onclick="filterMenu('All')">All</button>
    <button onclick="filterMenu('Bowls')">Bowls</button>
    <button onclick="filterMenu('Mains')">Mains</button>
    <button onclick="filterMenu('Sides')">Sides</button>
  </div>
  <section class="cards" id="items"></section>
  <h2 id="reviews">Loved locally</h2>
  <p>★★★★★ “Fresh, delicious, and always right on time.” — Customer review</p>
</main>
<script>
const dishes = [
  {name:"Green goddess bowl", category:"Bowls", price:13.50, icon:"■", desc:"Avocado, quinoa and herbs"},
  {name:"Crispy chicken plate", category:"Mains", price:16, icon:"■", desc:"Chicken, slaw and lemon"},
  {name:"Roasted tomato pasta", category:"Mains", price:14, icon:"■", desc:"Tomato, basil and parmesan"},
  {name:"Golden fries", category:"Sides", price:5, icon:"■", desc:"Crispy potatoes, sea salt"}
];
let count = 0;
function show(items) {
  document.querySelector("#items").innerHTML = items.map((d, i) => `
    <article class="card">
      <div class="food">${d.icon}</div><h3>${d.name}</h3>
      <p>${d.desc}</p><p class="price">$${d.price.toFixed(2)}</p>
      <button onclick="addToCart()">Add to order</button>
    </article>`).join("");
}
function filterMenu(category) {
  show(category === "All" ? dishes : dishes.filter(d => d.category === category));
}
function addToCart() {
  count++;
  document.querySelector("#cart").textContent = `Cart (${count})`;
}
show(dishes);
</script>
</body>
</html>
```