

VIETNAM NATIONAL UNIVERSITY,  
HO CHI MINH CITY

UNIVERSITY OF SCIENCE  
FACULTY OF INFORMATION TECHNOLOGY

---

# Project 01: Ares's Adventure Report

---

CS14003 – INTRODUCTION TO ARTIFICIAL INTELLIGENCE

Ngo Nguyen The Khoa 23127065  
Bui Minh Duy 23127040  
Nguyen Le Ho Anh Khoa 23127211

March 3, 2025

# Contents

<b>1</b>	<b>Group Information</b>	<b>2</b>
<b>2</b>	<b>Project Information</b>	<b>3</b>
<b>3</b>	<b>Work assignment table</b>	<b>3</b>
<b>4</b>	<b>Self-evaluation</b>	<b>4</b>
<b>5</b>	<b>Screenshots</b>	<b>5</b>
5.1	Breadth First Search . . . . .	5
5.2	Depth First Search . . . . .	6
5.3	Uniform Cost Search . . . . .	8
5.4	A* Search with heuristic . . . . .	8
5.5	Greedy Best-First Search . . . . .	10
5.6	Dijkstra’s Algorithm . . . . .	11
5.7	Swarm Algorithm . . . . .	11
<b>6</b>	<b>References</b>	<b>12</b>

# 1 Group Information

- **Subject:** Introduction to Artificial Intelligence.
- **Class:** 23CLC09.
- **Lecturer:** Bui Duy Dang, Le Nhut Nam.
- **Team members:**

No.	Fullname	Student ID	Email
1	Ngo Nguyen The Khoa	23127065	<a href="mailto:nntkhoa23@clc.fitus.edu.vn">nntkhoa23@clc.fitus.edu.vn</a>
2	Bui Minh Duy	23127040	<a href="mailto:bmduy23@clc.fitus.edu.vn">bmduy23@clc.fitus.edu.vn</a>
3	Nguyen Le Ho Anh Khoa	23127211	<a href="mailto:nlhakhoa23@clc.fitus.edu.vn">nlhakhoa23@clc.fitus.edu.vn</a>

- **Tools:**
  - **Git, GitHub:** Source code version control.
  - **DrawIO:** UML drawing.
  - **CapCut:** Video editing.
  - **ChatGPT, Gemini** and **DeepSeek**.
  - **Visual Studio Code:** Code editing (Python, Latex).

## 2 Project Information

- **Name:** Ares.
- **Developing Environment:** Visual Studio Code (Windows).
- **Programming Language:** Python.
- **Libraries and Tools:**
  - **rye:** A comprehensive project and package management solution for Python.
  - **CustomTkinter:** GUI library.

## 3 Work assignment table

No.	Task Description	Assigned to
1	desc	member

## 4 Self-evaluation

No.	Criteria	Score
1	Implement BFS correctly.	100%
2	Implement DFS correctly.	100%
3	Implement UCS correctly.	100%
4	Implement A* correctly.	100%
5	Implement GBFS correctly.	100%
6	Generate at least 10 test cases for each level with different attributes.	100%
7	Result (output file and GUI).	100%
8	Video to demonstrate all algorithms for some test cases.	100%
9	Report.	100%
10	Implement, written report for Dijkstra's Algorithm, Swarm Algorithm, Convergent Swarm Algorithm and Bidirectional Swarm Algorithm.	100%

## 5 Screenshots

### 5.1 Breadth First Search

Breadth First Search (BFS), as the name says, explores the search space in the increasing order of the depth and the costs of traveling from one state to another is assumed to be a positive number. Typically, this algorithm is often associated with the concept of stack and queue and pushing and popping from the stack.

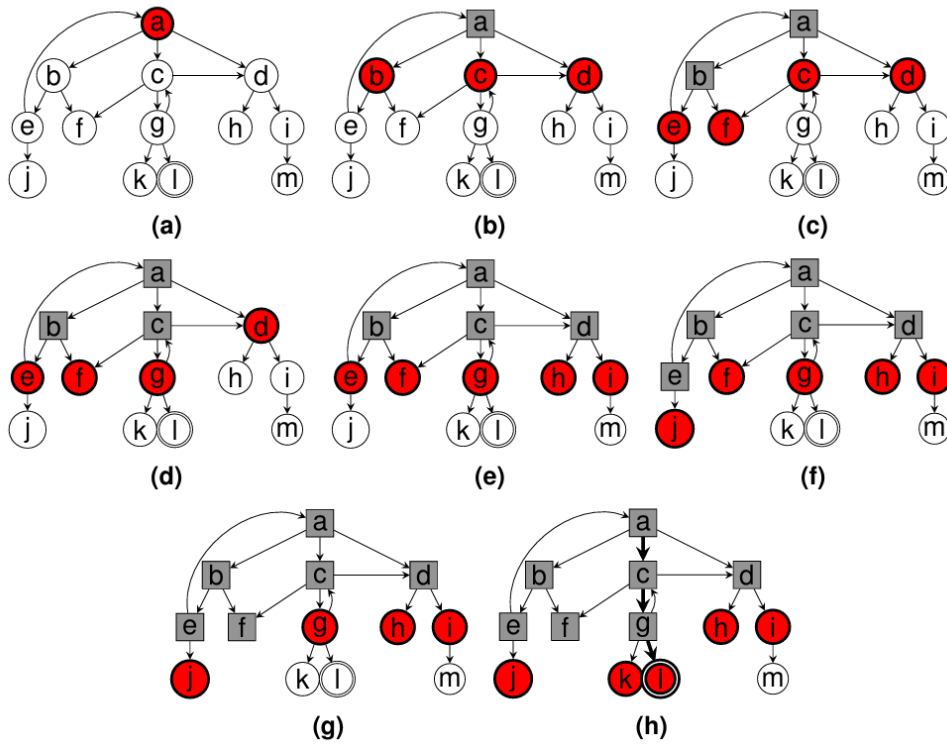


Figure 1: Breadth First Search

## Pseudocode

---

**Algorithm 1** Breadth First Search (*start*, *goal*)
 

---

```

1: queue  $\leftarrow$  [start]
2: while queue is not empty do
3:   node  $\leftarrow$  dequeue(queue)
4:   if node = goal then
5:     return path
6:   end if
7:   for all neighbor in valid moves do
8:     if neighbor not visited then
9:       mark neighbor as visited
10:      enqueue(queue, neighbor)
11:    end if
12:  end for
13: end while
14: return failure

```

---

## Implementation

### Time and Space Complexity

**Time Complexity:**  $O(V + E)$ , where  $V$  is the number of vertices and  $E$  is the number of edges. Each node and edge is processed once.

**Space Complexity:**  $O(V)$  in the worst case, as the queue stores all nodes at the widest level of the graph.

## 5.2 Depth First Search

Depth First Search (DFS) is a special case of backtracking search algorithm. The search starts from the root and proceeds to the farthest node before backtracking. The difference between this and the backtracking is that this stops the search once a goal is reached and does not care if it is not minimum.

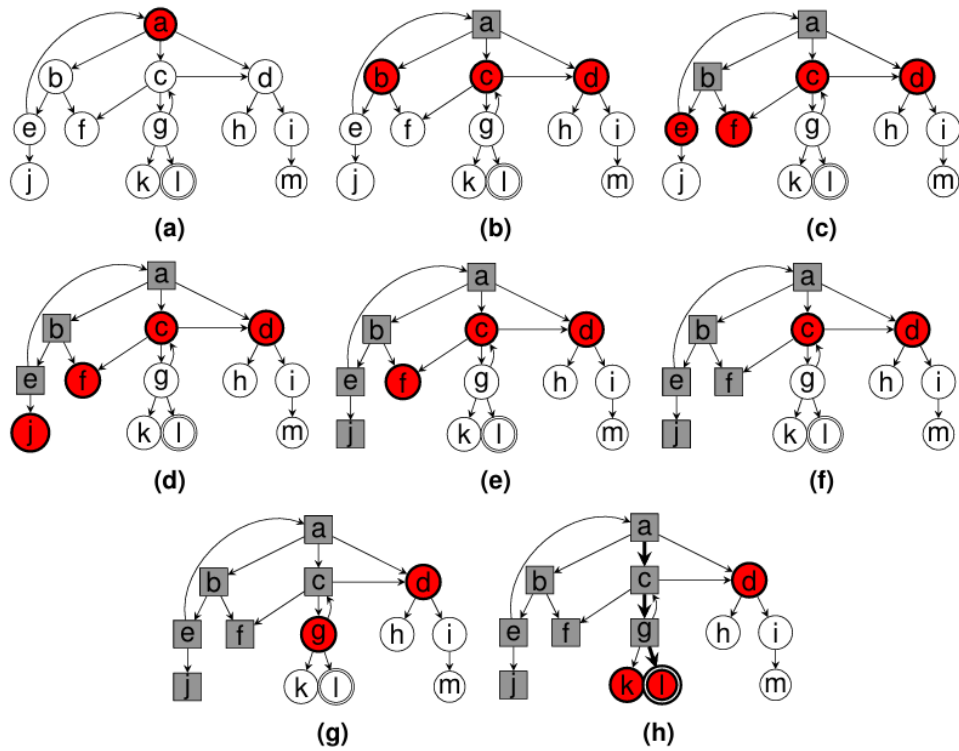


Figure 2: Depth First Search

## Pseudocode

---

### Algorithm 2 Depth First Search (*start*, *goal*)

---

```

1: stack  $\leftarrow$  [start]
2: while stack is not empty do
3:   node  $\leftarrow$  pop(stack)
4:   if node = goal then
5:     return path
6:   end if
7:   for all neighbor in valid moves do
8:     if neighbor not visited then
9:       mark neighbor as visited
10:      push(stack, neighbor)
11:    end if
12:  end for
13: end while
14: return failure

```

---



## Implementation

### Time and Space Complexity

### 5.3 Uniform Cost Search

For any search problem, Uniform Cost Search (UCS) is the better algorithm than the previous ones. The search algorithm explores in branches with more or less same cost. This consist of a priority queue where the path from the root to the node is the stored element and the depth to a particular node acts as the priority. UCS assumes all the costs to be non negative. While the DFS algorithm gives maximum priority to maximum depth, this gives maximum priority to the minimum cumulative cost.

### Pseudocode

---

**Algorithm 3** Uniform Cost Search (*start*, *goal*)

---

```

1: priority queue  $\leftarrow$  [(start, cost = 0)]
2: while priority queue is not empty do
3:   (node, cost)  $\leftarrow$  dequeue(priority queue)
4:   if node = goal then
5:     return path
6:   end if
7:   for all neighbor in valid moves do
8:     new cost  $\leftarrow$  cost + move cost
9:     if neighbor not visited or new cost < previous cost then
10:      mark neighbor as visited
11:      enqueue(priority queue, (neighbor, new cost))
12:    end if
13:  end for
14: end while
15: return failure

```

---

## Implementation

### Time and Space Complexity

### 5.4 A\* Search with heuristic

A\* algorithm is one of the popular technique used in path finding and graph traversals. This algorithm completely relies on heuristics for computing the future cost of a problem. This algorithm is equivalent to the uniform cost search with modified edge cost. This heuristics is chosen according to the case where the algorithm is implemented, thus emphasizing the importance of domain knowledge. This algorithm is consistent if the modified cost is greater than zero.

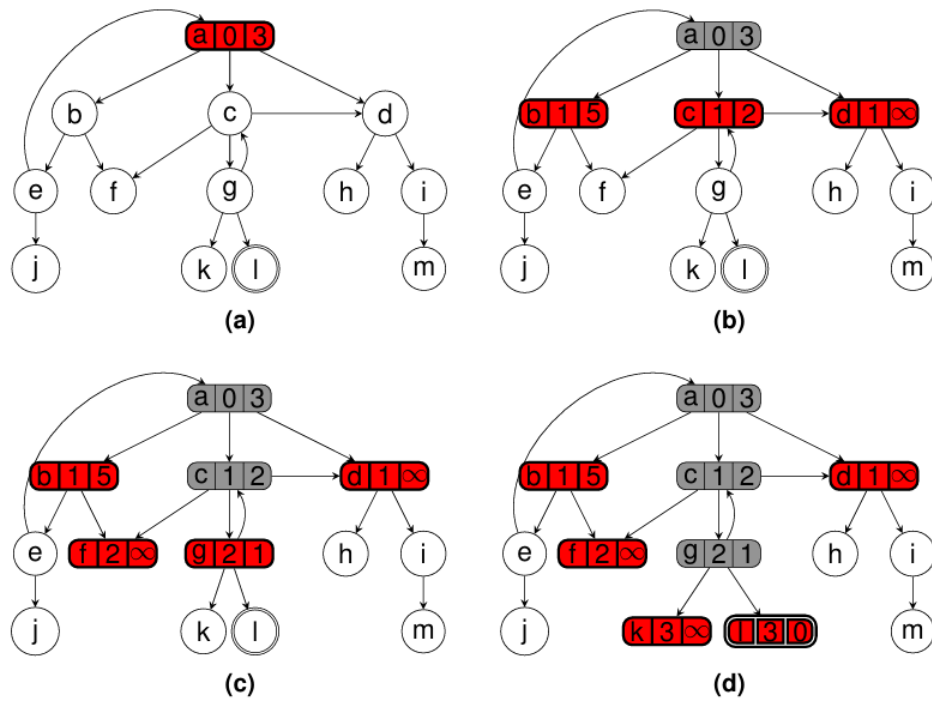


Figure 3: A\* Algorithm

## Pseudocode

---

### Algorithm 4 A\* Search (*start*, *goal*, *heuristic*)

---

```

1: priority queue  $\leftarrow [(start, cost = 0, estimated\ total\ cost = heuristic(start))]$ 
2: while priority queue is not empty do
3:   (node, cost)  $\leftarrow$  dequeue(priority queue)
4:   if node = goal then
5:     return path
6:   end if
7:   for all neighbor in valid moves do
8:     new cost  $\leftarrow$  cost + move cost
9:     estimated total cost  $\leftarrow$  new cost + heuristic(neighbor)
10:    if neighbor not visited or new cost < previous cost then
11:      mark neighbor as visited
12:      enqueue(priority queue, (neighbor, new cost, estimated total cost))
13:    end if
14:  end for
15: end while
16: return failure

```

---

## Implementation

### Time and Space Complexity

#### 5.5 Greedy Best-First Search

Greedy Best-First Search is similar to A\* algorithm. The difference is that the vertices in the priority queue are ordered only by the estimated remaining distance to the solution. It has to be noted that complete best first search is not optimal.

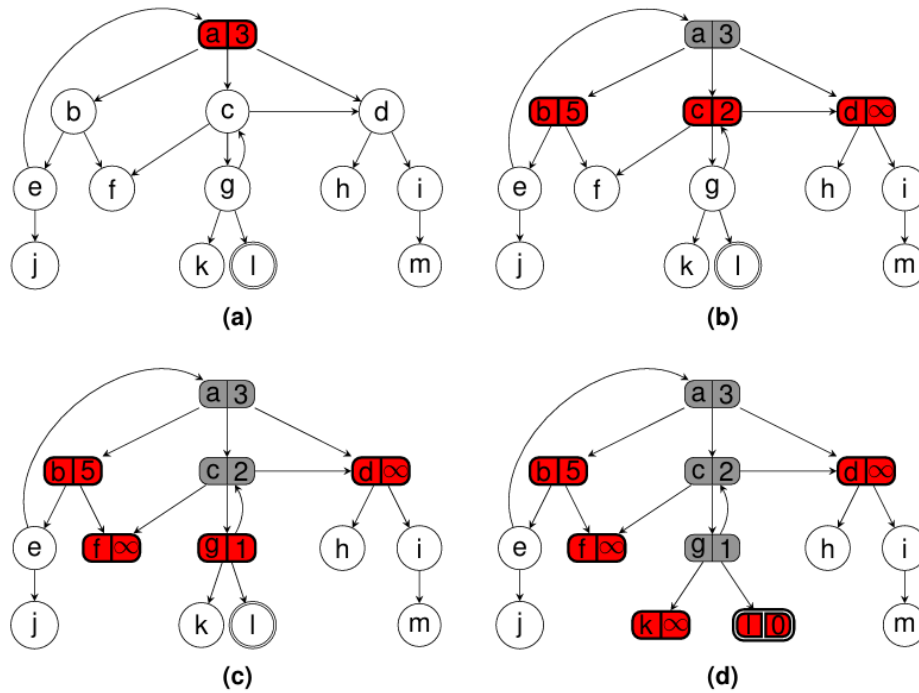


Figure 4: Greedy Best-First Search

## Pseudocode

---

### Algorithm 5 Greedy Best-First Search (*start*, *goal*, *heuristic*)

---

```

1: priority queue  $\leftarrow [(start, heuristic(start))]$ 
2: while priority queue is not empty do
3:   node  $\leftarrow$  dequeue(priority queue)
4:   if node = goal then
5:     return path
6:   end if
7:   for all neighbor in valid moves do
8:     if neighbor not visited then
9:       mark neighbor as visited
10:      enqueue(priority queue, (neighbor, heuristic(neighbor)))
11:    end if
12:  end for
13: end while
14: return failure

```

---

**Implementation****Time and Space Complexity****5.6 Dijkstra's Algorithm****Pseudocode**

---

**Algorithm 6** Dijkstra's Algorithm (*start*, *goal*)

---

```

1: priority queue  $\leftarrow$  [(start, cost = 0)]
2: distances[start]  $\leftarrow$  0
3: while priority queue is not empty do
4:   (node, cost)  $\leftarrow$  dequeue(priority queue)
5:   if node = goal then
6:     return distances
7:   end if
8:   for all neighbor in valid moves do
9:     new cost  $\leftarrow$  cost + move cost
10:    if new cost < distances[neighbor] then
11:      distances[neighbor]  $\leftarrow$  new cost
12:      enqueue(priority queue, (neighbor, new cost))
13:    end if
14:  end for
15: end while
16: return distances

```

---

**Implementation****Time and Space Complexity****5.7 Swarm Algorithm****Pseudocode****Implementation****Time and Space Complexity**

## 6 References

1. [Rye documentation](#)