


a From composition to raw 3D structure


$C_7H_{15}N$ · neutral singlet · no input bond graph

Harmonic-mixture source



$$X_0 \sim q_0(\cdot | c)$$


Dashed links are auxiliary springs

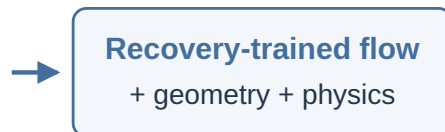


32 midpoint steps

Same camera and scale
No geometry optimization

Raw generated output

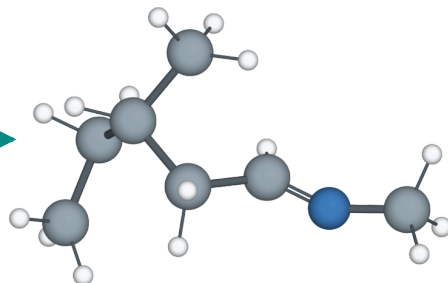


X_{gen}



b Correct the predicted endpoint at every step

FM : $H = X + (1 - p)v$

Diffusion : $H = (X - \sigma_t \epsilon) / \alpha_t$

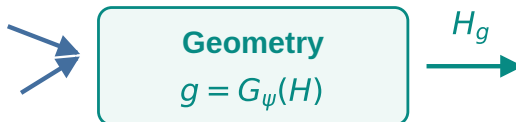

$$H_g = H + (1 - p)g$$

$$\Delta H = (1 - p)(g + \eta f)$$

c Offline training

Backbone recovery

Perturbed flow states

Geometric correction

Perturbed references

Fixed neural networks at sampling

Physical correction

Initial endpoints + eSEN forces