

KG Integration API

Reponsible Person	Jay
Status	Approved
Document Version	1.1
Last Revision Date	10/01/2011

Keno Group

Contents

1.	Login	3
	re 1.1	
	Tranfer	
	re 2.1	
•		
	Check Credit	
•	ıre 3.1	
4.	GET Profit & Loss	10


1. Login

Login			
<pre><parameter></parameter></pre>	*	<type></type>	<description></description>
VendorSite	*	text	Vendor client side frontend url
FundLink	*	text	vendor for player fund in/out url
Vendorld	*	int(10)	kenogroup assigned vendor id
PlayerId	*	varchar(100)	vendor assigned player id (should be unique to each vendor)
PlayerRealName	*	varchar(50)	player game front-end name display
PlayerCurrency	*	varchar(3)	player credit currenccy (kenogroup will check the player currency if came before, not match will reject)
PlayerCredit	*	float(10,2)	0, please put 0 on this value.
PlayerAllowStake	*	int(10)	player allow to select the stake limit group, vendor should setup the stake group before on kenogroup vendor admin website
Trial	*	tinyint(4)	identify the account is for trial
Language	*	varchar(10)	language display of the player frontend
PlayerIP	*	varchar(15)	passing the player using ip address
VendorRef		varchar(100)	vendor generate reference number for checking
Remarks		text	remark information for add on information use

XML Structure Example Call Strcuture <?xml version="1.0" encoding="iso-8859-1"?> <methodCall> <methodName>PlayerLanding</methodName> <params> <param> <value> <struct> <member><name>VendorSite</name><value><string>XXX</string></value></member> <member><name>FundLink</name><value><string>XXX</string></value></member> <member><name>VendorId</name><value><string>XXX</string></value></member> <member><name>PlayerId</name><value><string>XXX</string></value></member> <member><name>PlayerRealName</name><value><string>XXX</string></value></member> <member><name>PlayerCurrency</name><value><string>XXX</string></value></member> <member><name>PlayerCredit</name><value><string>XXX</string></value></member> <member><name>PlayerAllowStake</name><value><string>XXX</string></value></member> <member><name>Trial</name><value><string>XXX</string></value></member> <member><name>Language</name><value><string>XXX</string></value></member> <member><name>PlayerIP</name><value><string>XXX</string></value></member> <member><name>VendorRef</name><value><string>XXX</string></value></member> <member><name>Remarks</name><value><string>XXX</string></value></member> </struct> </value> </param> </params> </methodCall>

```
Success Response
<?xml version="1.0" encoding="iso-8859-1"?>
 <methodResponse>
 <params>
 <param>
 <value>
 <struct>
<member><name>Link</name><value><string>XXX</string></value></member>
 </struct>
 </value>
 </param>
 </params>
 </methodResponse>
Fail Response
<?xml version="1.0" encoding="iso-8859-1"?>
<methodResponse>
 <params>
 <param>
 <value>
  <struct>
<member><name>Error</name><value><string>XXX</string></value></member>
 </struct>
 </value>
 </param>
 </params>
 </methodResponse>
Fail: status false with error reason
VENDOR NOT AUTHORIZED
                                          the xmlrpc request ip is not match the vendor setting
VENDOR ACCOUNT SUSPENDED
                                          vendor account suspended
NOT ACCEPT NEGATIVE AMOUNT
                                          only accept positive or 0 credit transfer
TRANSFER
GAME SERVER MAINTENANCE
                                          game server down or cannot connect
                                          requested connect game server is not associated
GAME SERVER NOT APPROPRIATE
                                          with vendor
PLAYER ACCOUNT SUSPENDED
                                          player came before and account suspended
                                          player requested currency does not support in
PLAYER CURRENCY NOT SUPPORT
                                          kenogroup system
                                          player came before and requested currency not
PLAYER CURRENCY NOT MATCH BEFORE
                                          match the existing record
PLAYER STAKE NOT BELONG TO VENDOR
                                          requested stake not belong to vendor, only allow
(ONLY ALLOW: [X,X,X])
                                          stake inside the bracket
```

Figure 1.1

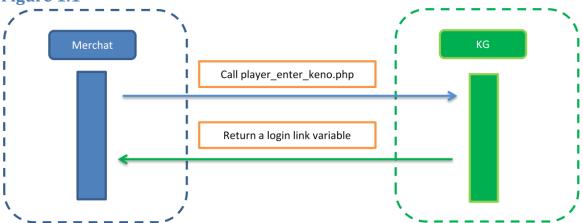

URL: http://test.integrate.v88kgg.com/player_enter_keno.php

2. Tranfer


<param>

Transfer			
<pre><parameter></parameter></pre>	*	<type></type>	<description></description>
Vendorld	*	int(10)	kenogroup assigned vendor id
PlayerId	*	varchar(100)	vendor assigned player id (should be unique to each vendor)
Amount	*	decimal(10,2)	player amount wish to transfer, positive means deposit to KENO, negative means withdraw from KENO.
PlayerIP	*	varchar(15)	passing the player using ip address
VendorRef	*	varchar(100)	vendor generate unique reference number for checking

XML Structure Example
Call Strcuture
xml version="1.0" encoding="iso-8859-1"?
<methodcall></methodcall>
<methodname>FundInOut</methodname>
<pre><params></params></pre>
<pre><param/></pre>
<value></value>
<struct></struct>
<member><name>VendorId</name><value><string>XXX</string></value></member> <member><name>PlayerId</name><value><string>XXXX</string></value></member>
<pre><member><name>rayerid</name></member></pre> /rame> <value><string>XXX</string></value>
<pre><member><name>Amount</name></member></pre> /value> <string>XXX</string>
<pre><member><name>rayerr</name></member></pre> <pre><member></member></pre>
Success Response
xml version="1.0" encoding="iso-8859-1"?
<methodresponse></methodresponse>
<pre><pre><pre><pre></pre></pre></pre></pre>
- <param/>
- <value></value>
<struct></struct>
<member><name>Remain</name><value><string>XXX</string></value></member>
Fail Response
xml version="1.0" encoding="iso-8859-1"?
<methodresponse></methodresponse>
<pre><params></params></pre>

_			
<value></value>			
<struct></struct>			
<member><name>Error</name><value><string>XXX</string></value></member>			
Fail: status false with error reason			
VENDOR NOT AUTHORIZED	the xmlrpc request ip is not match the vendor setting		
VENDOR ACCOUNT SUSPENDED	vendor account suspended		
PLAYER NOT FOUND	player not found in kenogroup database		
NOT ENOUGH CREDIT TO FUND OUT	not enough credit		

Figure 2.1

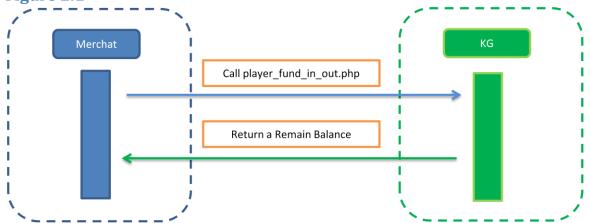

http://test.integrate.v88kgg.com/player_fund_in_out.php


3. Check Credit

Transfer			
<parameter></parameter>	*	<type></type>	<description></description>
Vendorld	*	int(10)	kenogroup assigned vendor id
PlayerId	*	varchar(100)	vendor assigned player id (should be unique to each vendor)

```
XML Structure Example
Call Strcuture
<?xml version="1.0" encoding="iso-8859-1"?>
<methodCall>
 <methodName>GetCredit</methodName>
 <params>
 <param>
 <value>
 <struct>
<member><name>VendorId</name><value><string>XXX</string></value></member>
<member><name>PlayerId</name><value><string>XXX</string></value></member>
 </struct>
 </value>
 </param>
 </params>
 </methodCall>
Success Response
<?xml version="1.0" encoding="iso-8859-1"?>
<methodResponse>
 <params>
 <param>
 <value>
 <struct>
<member><name>Credit</name><value><string>XXX</string></value></member>
<member><name>Jackpot</name><value><string>XXX</string></value></member>
<member><name>Status</name><value><string>XXX</string></value></member>
<member><name>LastLoginTime</name><value><string>XXX</string></value></member>
 </struct>
 </value>
 </param>
 </params>
</methodResponse>
Fail Response
<?xml version="1.0" encoding="iso-8859-1"?>
<methodResponse>
 <params>
 <param>
 <value>
  <struct>
<member><name>Error</name><value><string>XXX</string></value></member>
 </struct>
 </value>
```

Fail: status false with error reason		
VENDOR NOT AUTHORIZED	the xmlrpc request ip is not match the vendor setting	
VENDOR ACCOUNT SUSPENDED	vendor account suspended	
PLAYER NOT FOUND	player not found in kenogroup database	

Figure 3.1

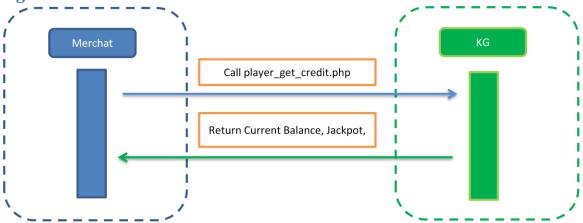

http://test.integrate.v88kgg.com/player_get_credit.php

4. GET Profit & Loss

Transfer			
<pre><parameter></parameter></pre>	*	<type></type>	<description></description>
Vendorld	*	int(10)	kenogroup assigned vendor id
Date	*	Date	Date of the Profit & Loss
HourType	*	Int(1)	1 is 12:00:00-12:00:00, 2 is 00:00:00 – 23:59:59

```
XML Structure Example
Call Strcuture
<?xml version="1.0" encoding="iso-8859-1"?>
<methodCall>
 <methodName>GetPNL</methodName>
 <params>
 <param>
 <value>
 <struct>
<member><name>VendorId</name><value><string>XXX</string></value></member>
<member><name> Date</name><value><string>XXX</string></value></member>
<member><name> HourType</name><value><string>XXX</string></value></member>
 </struct>
 </value>
 </param>
 </params>
</methodCall>
Success Response
<?xml version="1.0" encoding="iso-8859-1"?>
<methodResponse>
<params>
<param>
<value>
 <array>
 <data>
  <value>
  <struct>
   <member>
   <name>PlayerId</name>
   <value>
    <string>xxx</string>
   </value>
   </member>
   <member>
   <name>Total_Stake_Accurate</name>
   <value>
    <string>xxx</string>
   </value>
   </member>
   <member>
   <name>Total PNL</name>
   <value>
    <string>xxx</string>
```

```
</value>
   </member>
  </struct>
  </value>
 </data>
 </array>
 </value>
</param>
</params>
</methodResponse>
Fail Response
<?xml version="1.0" encoding="iso-8859-1"?>
<methodResponse>
 <params>
 <param>
 <value>
 <struct>
<member><name>Error</name><value><string>XXX</string></value></member>
 </struct>
 </value>
 </param>
 </params>
 </methodResponse>
Fail: status false with error reason
VENDOR NOT AUTHORIZED
                                          the xmlrpc request ip is not match the vendor setting
VENDOR ACCOUNT SUSPENDED
                                          vendor account suspended
VENDOR ID NOT VALID
                                          Vendor id must be integer
DATE FORMAT NOT VALID
                                          E.g. valid date is 2012-01-10
                                          1 is 12:00:00-12:00:00, 2 is 00:00:00 - 23:59:59
HOURTYPE NOT VALID
DATE NOT VALID MUST BEFORE THAT
                                          The date must before the current date.
```

http://integrate.v88kgg.com/player_pnl.php