Api Documentation

Api Documentation

[Apache 2.0](#)

agency-controller : Agency Controller

GET	/api/v1/agency	get all agency

Response Class (Status 200)
OK

Model	Example Value

```
{}
```

Response Content Type `*/* ▾`

Response Messages

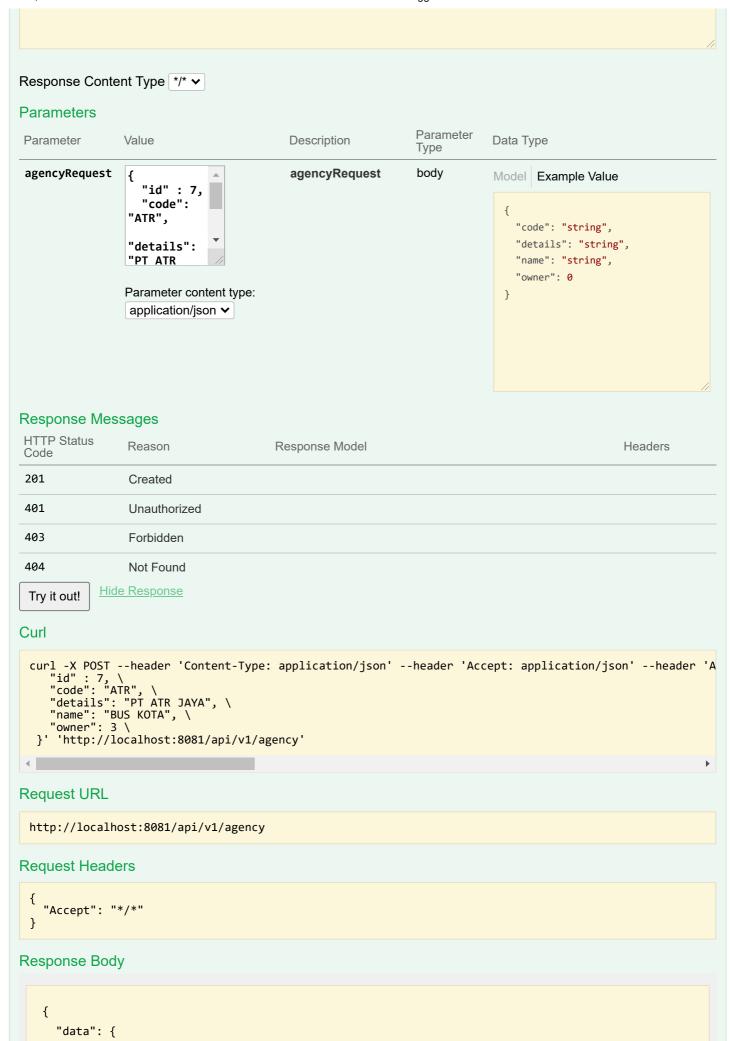| HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		
404	Not Found		

[Try it out!]   [Hide Response](#)

Curl

```
curl -X GET --header 'Accept: application/json' --header 'Authorization: Bearer eyJhbGciOiJIUzUxMiJ9.e
```

Request URL

```
http://localhost:8081/api/v1/agency
```

Request Headers

```
{
  "Accept": "*/*"
}
```

Response Body

```
              code  .  Ar ,
        "name": "BUS Bandara",
        "details": "PT Angkasa Pura",
        "owner": 3,
        "buses": [
            3
        ]
    },
    {
        "id": 3,
        "code": "BSS",
        "name": "BUS Palembang",
        "details": "PT Bintang Simpati Star",
        "owner": 2,
        "buses": [
            2
        ]
    },
    {
        "id": 4,
        "code": "APJ",
```

Response Code

```
200
```

Response Headers

```
{
  "cache-control": "no-cache, no-store, max-age=0, must-revalidate",
  "connection": "keep-alive",
  "content-type": "application/json",
  "date": "Mon, 04 Jul 2022 20:21:31 GMT",
  "expires": "0",
  "keep-alive": "timeout=60",
  "pragma": "no-cache",
  "transfer-encoding": "chunked",
  "vary": "Origin, Access-Control-Request-Method, Access-Control-Request-Headers",
  "x-content-type-options": "nosniff",
  "x-frame-options": "DENY",
  "x-xss-protection": "1; mode=block"
}
```

POST	/api/v1/agency	add new agency

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type `*/* ▾`

Parameters

Parameter	Value	Description	Parameter Type	Data Type

agencyRequest	`{`
	`  "id" : 7,`
	`  "code":`
	`"ATR",`
	`  "details":`
	`"PT ATR`
		agencyRequest	body	Model | Example Value

Parameter content type:
`application/json ▾`

Example Value
```
{
  "code": "string",
  "details": "string",
  "name": "string",
  "owner": 0
}
```

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

[Try it out!]   Hide Response

Curl

```
curl -X POST --header 'Content-Type: application/json' --header 'Accept: application/json' --header 'A
    "id" : 7, \
    "code": "ATR", \
    "details": "PT ATR JAYA", \
    "name": "BUS KOTA", \
    "owner": 3 \
 }' 'http://localhost:8081/api/v1/agency'
```

Request URL

```
http://localhost:8081/api/v1/agency
```

Request Headers

```
{
  "Accept": "*/*"
}
```

Response Body

```
{
  "data": {
```

```
      "id": 7,
      "code": "ATR",
      "name": "PT ATR JAYA",
      "details": "BUS KOTA",
      "owner": 3,
      "buses": null
    },
    "message": "success",
    "status": 200
  }
```

Response Code

```
200
```

Response Headers

```
{
  "cache-control": "no-cache, no-store, max-age=0, must-revalidate",
  "connection": "keep-alive",
  "content-type": "application/json",
  "date": "Mon, 04 Jul 2022 20:23:33 GMT",
  "expires": "0",
  "keep-alive": "timeout=60",
  "pragma": "no-cache",
  "transfer-encoding": "chunked",
  "vary": "Origin, Access-Control-Request-Method, Access-Control-Request-Headers",
  "x-content-type-options": "nosniff",
  "x-frame-options": "DENY",
  "x-xss-protection": "1; mode=block"
}
```

DELETE   /api/v1/agency/{id}   delete agency

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type */* ⌄

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	7	**id**	path	long

Response Messages

HTTP Status Code	Reason	Response Model	Headers
204	No Content		
401	Unauthorized		
403	Forbidden		

[Try it out!] Hide Response

Curl

```
curl -X DELETE --header 'Accept: text/plain' --header 'Authorization: Bearer eyJhbGciOiJIUzUxMiJ9.eyJz
```

Request URL

```
http://localhost:8081/api/v1/agency/7
```

Request Headers

```
{
  "Accept": "*/*"
}
```

Response Body

```
Success Delete Agency with Id: 7
```

Response Code

```
200
```

Response Headers

```
{
  "cache-control": "no-cache, no-store, max-age=0, must-revalidate",
  "connection": "keep-alive",
  "content-length": "32",
  "content-type": "text/plain;charset=UTF-8",
  "date": "Mon, 04 Jul 2022 20:24:45 GMT",
  "expires": "0",
  "keep-alive": "timeout=60",
  "pragma": "no-cache",
  "vary": "Origin, Access-Control-Request-Method, Access-Control-Request-Headers",
  "x-content-type-options": "nosniff",
  "x-frame-options": "DENY",
  "x-xss-protection": "1; mode=block"
}
```

GET	/api/v1/agency/{id}	get agency

Response Class (Status 200)

OK

Model | Example Value

```
{}
```

Response Content Type [*/* ∨]

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	[3]	**id**	path	long

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		
404	Not Found		

[Try it out!]   Hide Response

Curl

```
curl -X GET --header 'Accept: application/json' --header 'Authorization: Bearer eyJhbGciOiJIUzUxMiJ9.e
```

Request URL

```
http://localhost:8081/api/v1/agency/3
```

Request Headers

```
{
  "Accept": "*/*"
}
```

Response Body

```
{
  "data": {
    "id": 3,
    "code": "BSS",
    "name": "BUS Palembang",
    "details": "PT Bintang Simpati Star",
    "owner": 2,
    "buses": [
      2
    ]
  },
```
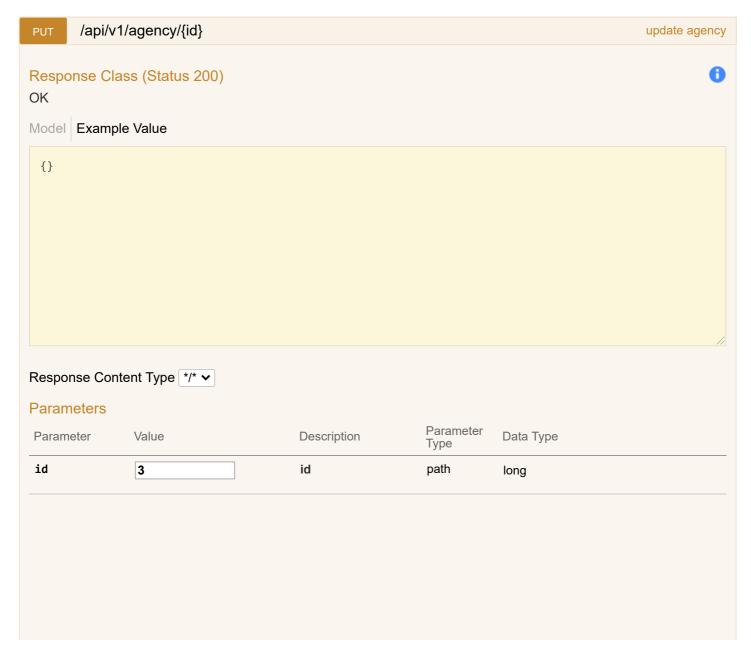
```
      "message": "success",
      "status": 200
    }
```

Response Code

```
200
```

Response Headers

```
{
  "cache-control": "no-cache, no-store, max-age=0, must-revalidate",
  "connection": "keep-alive",
  "content-type": "application/json",
  "date": "Mon, 04 Jul 2022 20:25:03 GMT",
  "expires": "0",
  "keep-alive": "timeout=60",
  "pragma": "no-cache",
  "transfer-encoding": "chunked",
  "vary": "Origin, Access-Control-Request-Method, Access-Control-Request-Headers",
  "x-content-type-options": "nosniff",
  "x-frame-options": "DENY",
  "x-xss-protection": "1; mode=block"
}
```

PUT	/api/v1/agency/{id}	update agency

Response Class (Status 200)

OK

Model | Example Value

```
{}
```

Response Content Type `*/* ▾`

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	3	**id**	path	long

Parameter	Value	Description	Parameter Type	Data Type
agencyRequest	{ "code": "BSD", "details": "PT BSD", "name":	**agencyRequest**	body	Model | Example Value

Parameter content type:

application/json ▼

Example Value:

```
{
  "code": "string",
  "details": "string",
  "name": "string",
  "owner": 0
}
```

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!   Hide Response

Curl

```
curl -X PUT --header 'Content-Type: application/json' --header 'Accept: application/json' --header 'Au
    "code": "BSD", \
    "details": "PT BSD", \
    "name": "BUS KOTA DALAM", \
    "owner": 3 \
}' 'http://localhost:8081/api/v1/agency/3'
```

Request URL

```
http://localhost:8081/api/v1/agency/3
```

Request Headers

```
{
  "Accept": "*/*"
}
```

Response Body

```
{
  "id": 3,
  "code": "BSD",
  "name": "BUS KOTA DALAM",
  "details": "PT BSD",
  "owner": 3,
  "buses": [
    2
```
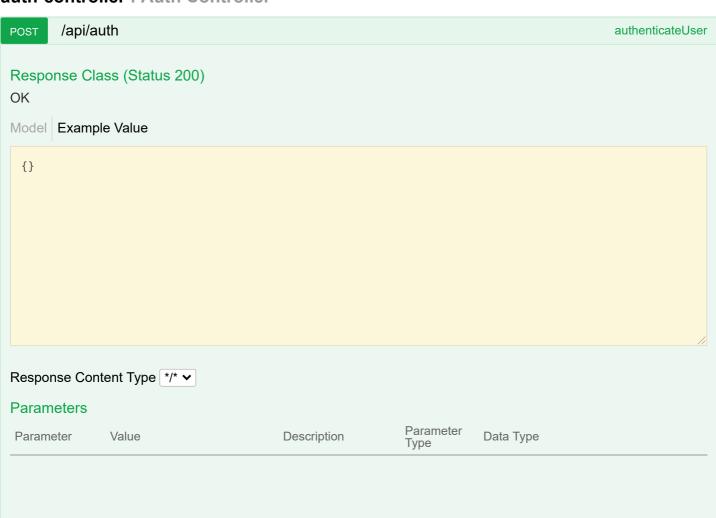
```
    ]
  }
```

Response Code
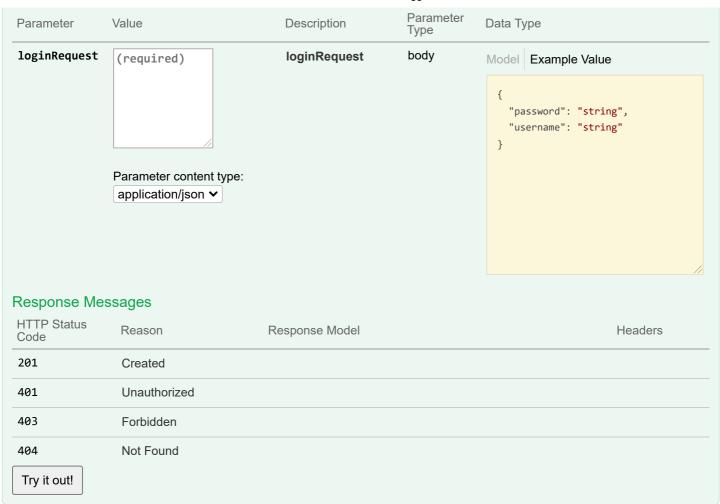
```
200
```
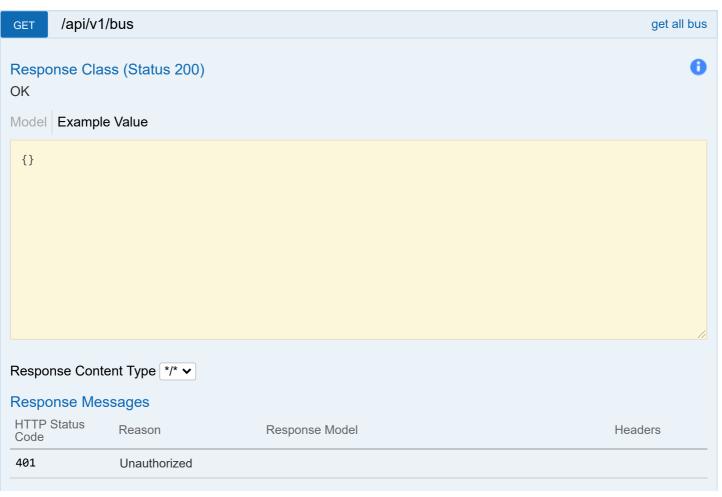
Response Headers

```
{
  "cache-control": "no-cache, no-store, max-age=0, must-revalidate",
  "connection": "keep-alive",
  "content-type": "application/json",
  "date": "Mon, 04 Jul 2022 20:26:14 GMT",
  "expires": "0",
  "keep-alive": "timeout=60",
  "pragma": "no-cache",
  "transfer-encoding": "chunked",
  "vary": "Origin, Access-Control-Request-Method, Access-Control-Request-Headers",
  "x-content-type-options": "nosniff",
  "x-frame-options": "DENY",
  "x-xss-protection": "1; mode=block"
}
```

auth-controller : Auth Controller

POST	/api/auth	authenticateUser

Response Class (Status 200)

OK

Model | Example Value

```
{}
```

Response Content Type */* ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type

Parameter	Value	Description	Parameter Type	Data Type
loginRequest	(required)	**loginRequest**	body	Model | Example Value

Parameter content type:
application/json ⌄

```
{
  "password": "string",
  "username": "string"
}
```

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

bus-controller : Bus Controller

GET	/api/v1/bus		get all bus

Response Class (Status 200)
OK

Model \| Example Value

```
{}
```

Response Content Type */* ⌄

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		

HTTP Status Code	Reason	Response Model	Headers
403	Forbidden		
404	Not Found		

Try it out!

POST	/api/v1/bus	add new bus

Response Class (Status 200)

OK

Model | Example Value

```
{}
```

Response Content Type `*/*` ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type

busRequest	(required)
	
	Parameter content type:
	application/json ▾
		busRequest	body	Model | Example Value
				
				``
				{
				  "agencyId": 0,
				  "capacity": 0,
				  "code": "string",
				  "make": "string"
				}
				``

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

DELETE   /api/v1/bus/{id}   delete bus

Response Class (Status 200)
OK

Model	Example Value

```
{}
```

Response Content Type   `*/*` ⌄

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long

Response Messages

HTTP Status Code	Reason	Response Model	Headers
204	No Content		
401	Unauthorized		
403	Forbidden		

Try it out!

GET   /api/v1/bus/{id}   get bus by id

Response Class (Status 200)
OK

Model	Example Value

```
{}
```

Response Content Type [*/* ▾]

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		
404	Not Found		

[Try it out!]

PUT	/api/v1/bus/{id}	update bus

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type [*/* ▾]

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long

Parameter	Value	Description	Parameter Type	Data Type

busRequest	(required) — Parameter content type: application/json ▾	**busRequest**	body	Model | Example Value
				{
				  "agencyId": 0,
				  "capacity": 0,
				  "code": "string",
				  "make": "string"
				}

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

---

reservation-controller : Reservation Controller

POST	/api/v1/reservation/bookticket	book new ticket

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type */* ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type

Parameter	Value	Description	Parameter Type	Data Type
ticketRequest	(required)	**ticketRequest**	body	Model | Example Value

```
{
  "journeyDate": "string",
  "tripScheduleId": 0
}
```

Parameter content type:
application/json ⌄

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

POST	/api/v1/reservation/fare		get trip by fare

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type */* ⌄

Parameters

Parameter	Value	Description	Parameter Type	Data Type

Parameter	Value	Description	Parameter Type	Data Type
lowerUpperValueRequest	(required)	**lowerUpperValueRequest**	body	Model Example Value

Parameter content type:

application/json ⌄

```
{
  "lowerValue": 0,
  "upperValue": 0
}
```

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

POST	/api/v1/reservation/journeytime			get trip by journey time

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type */* ⌄

Parameters

Parameter	Value	Description	Parameter Type	Data Type

Parameter	Value	Description	Parameter Type	Data Type

lowerUpperValueRequest	(required)
	
	Parameter content type:
	application/json ⌄
		lowerUpperValueRequest	body	Model Example Value
				
				``
				{
				  "lowerValue": 0,
				  "upperValue": 0
				}
				``

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

POST	/api/v1/reservation/stop	get trip by source - destination stop

Response Class (Status 200)
OK

Model   Example Value

```
{}
```

Response Content Type */* ⌄

Parameters

Parameter	Value	Description	Parameter Type	Data Type

Parameter	Value	Description	Parameter Type	Data Type
lowerUpperValueRequest	(required) [text box] Parameter content type: [application/json ▾]	**lowerUpperValueRequest**	body	Model | Example Value

```
{
  "lowerValue": 0,
  "upperValue": 0
}
```

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

GET	/api/v1/reservation/tripschedules	get all trip schedule

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type [*/* ▾]

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		

HTTP Status Code	Reason	Response Model	Headers
404	Not Found		

Try it out!

---

stop-controller : Stop Controller

GET	/api/v1/stop	get all stop

Response Class (Status 200) ⓘ

OK

Model | Example Value

```
{}
```

Response Content Type [*/* ▾]

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

POST	/api/v1/stop	add stop

Response Class (Status 200) ⓘ

OK

Model | Example Value

```
{}
```

Response Content Type [*/* ⌄]

Parameters

Parameter	Value	Description	Parameter Type	Data Type
stopReq	(required) Parameter content type: [application/json ⌄]	**stopReq**	body	Model | **Example Value**

```
{
  "code": "string",
  "detail": "string",
  "name": "string"
}
```

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

[Try it out!]

GET   /api/v1/stop/{code}   get stop by code

Response Class (Status 200)
OK

Model \| **Example Value**

```
{}
```

Response Content Type [*/* ⌄]

Parameters

Parameter	Value	Description	Parameter Type	Data Type
code	(required)	**code**	query	string

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

DELETE   /api/v1/stop/{id}   delete stop

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type `*/*`

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long

Response Messages

HTTP Status Code	Reason	Response Model	Headers
204	No Content		
401	Unauthorized		
403	Forbidden		

Try it out!

PUT	/api/v1/stop/{id}	update stop

Response Class (Status 200)   ℹ

OK

Model | Example Value

```
{}
```

Response Content Type */* ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long
stopReq	(required)	**stopReq**	body	Model | Example Value

Parameter content type:
application/json ▾

Model | Example Value

```
{
  "code": "string",
  "detail": "string",
  "name": "string"
}
```

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

GET	/api/v1/stop/{name}	get stop by name

Response Class (Status 200)   ℹ

OK

Model | Example Value

```
{}
```

Response Content Type `*/*  ∨`

Parameters

Parameter	Value	Description	Parameter Type	Data Type
name	(required)	**name**	query	string

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

---

ticket-controller : Ticket Controller

GET	/api/v1/ticket	get current user ticket

Response Class (Status 200)

OK

Model | Example Value

```
{}
```

Response Content Type `*/*  ∨`

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

DELETE   /api/v1/ticket/{id}   delete ticket

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type */* ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long

Response Messages

HTTP Status Code	Reason	Response Model	Headers
204	No Content		
401	Unauthorized		
403	Forbidden		

Try it out!

PUT   /api/v1/ticket/{id}   update ticket

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type `*/*` ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long
ticketReq	(required)	**ticketReq**	body	Model | Example Value

Parameter content type:
`application/json` ▾

Model | Example Value

```
{
  "journeyDate": "string",
  "tripScheduleId": 0
}
```

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

---

trip-controller : Trip Controller

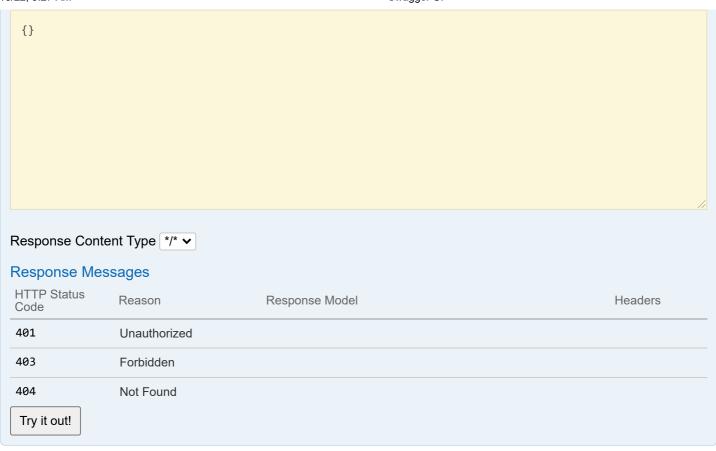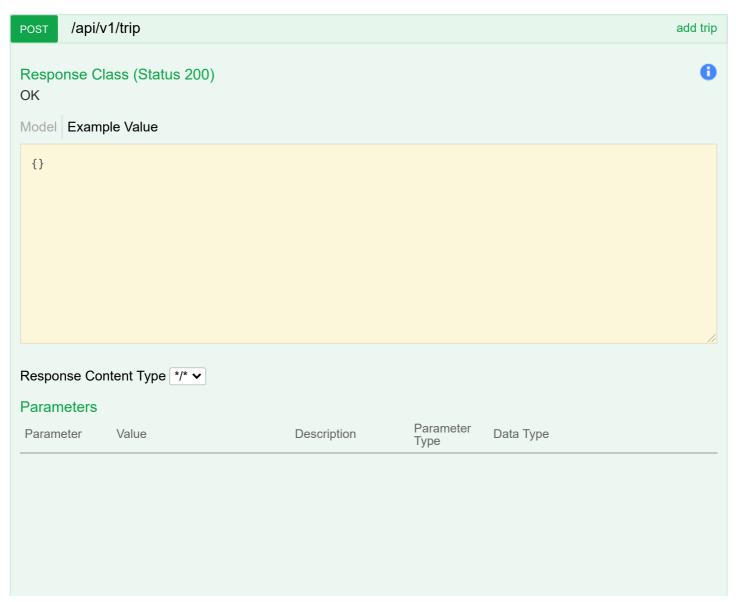| GET	/api/v1/trip	get all trip

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type `*/* ▾`

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

POST   /api/v1/trip   add trip

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type `*/* ▾`

Parameters

Parameter	Value	Description	Parameter Type	Data Type

Parameter	Value	Description	Parameter Type	Data Type
tripRequest	(required)	**tripRequest**	body	Model | Example Value

Parameter content type:
application/json ▾

```
{
    "agencyId": 0,
    "busId": 0,
    "destStopId": 0,
    "fare": 0,
    "journeyTime": 0,
    "sourceStopId": 0
}
```

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

PUT	/api/v1/trip	update trip

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type */* ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long
name	(required)	**name**	query	string

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

POST	/api/v1/trip/agency	get trip by agency

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type */* ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type
name	(required)	**name**	query	string

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

GET	/api/v1/trip/bus/{id}	get trip by bus id

Response Class (Status 200)
OK

Model	Example Value

```
{}
```

Response Content Type `*/*` ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

POST	/api/v1/trip/deststop	get trip by destination stop

Response Class (Status 200)
OK

Model	Example Value

```
{}
```

Response Content Type `*/*` ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type
name	(required)	**name**	query	string

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

POST	/api/v1/trip/sourcestop	get trip by source stop

Response Class (Status 200)

OK

Model | Example Value

```
{}
```

Response Content Type `*/*`

Parameters

Parameter	Value	Description	Parameter Type	Data Type
name	(required)	**name**	query	string

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

DELETE	/api/v1/trip/{id}	delete trip

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type */* ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long

Response Messages

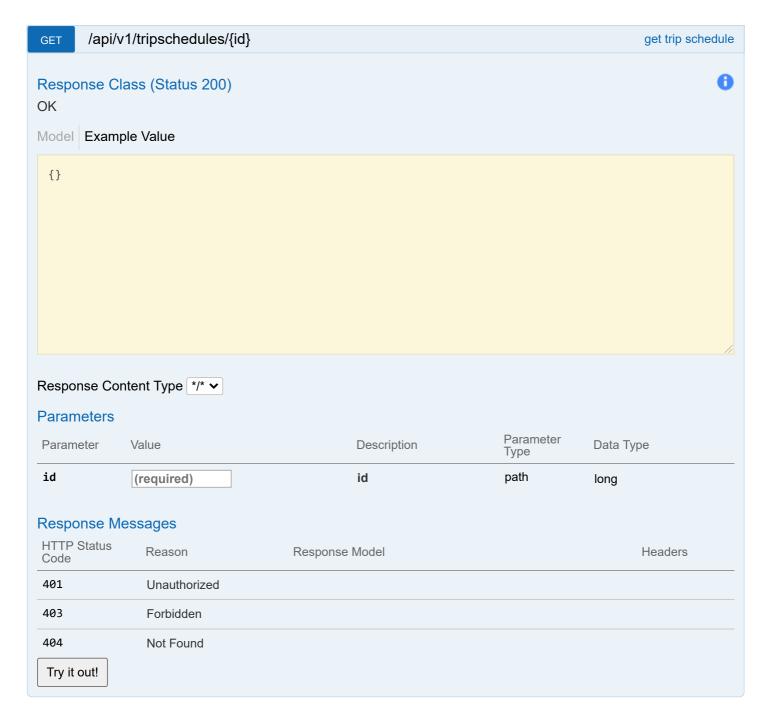| HTTP Status Code	Reason	Response Model	Headers
204	No Content		
401	Unauthorized		
403	Forbidden		

Try it out!

---

trip-schedule-controller : Trip Schedule Controller

POST	/api/v1/tripschedules	add trip schedule

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type ```*/*``` ⌄

Parameters

Parameter	Value	Description	Parameter Type	Data Type
tripScheduleRequest	(required) Parameter content type: application/json ⌄	**tripScheduleRequest**	body	Model | Example Value ``` { "availableSeats": 0, "tripDate": "string", "tripDetail": 0 } ```

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

DELETE   /api/v1/tripschedules/{id}   delete ticket

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type `*/*` ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long

Response Messages

HTTP Status Code	Reason	Response Model	Headers
204	No Content		
401	Unauthorized		
403	Forbidden		

Try it out!

GET	/api/v1/tripschedules/{id}	get trip schedule

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type `*/*` ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

PUT	/api/v1/tripschedules/{id}	update trip schedule

Response Class (Status 200)

OK

Model | Example Value

```
{}
```

Response Content Type [*/* ▾]

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long

tripScheduleRequest	(required)
	
	Parameter content type:
	[application/json ▾]
		tripScheduleRequest	body	Model | Example Value
				
				{
				  "availableSeats": 0,
				  "tripDate": "string",
				  "tripDetail": 0
				}

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

[Try it out!]

---

user-controller : User Controller

GET	/api/v1/user	get all user

Response Class (Status 200)

OK

Model | Example Value

```
{}
```

Response Content Type `*/*` ⌄

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

PUT	/api/v1/user		udpate user

Response Class (Status 200)

OK

Model | Example Value

```
{}
```

Response Content Type `*/*` ⌄

Parameters

Parameter	Value	Description	Parameter Type	Data Type

Parameter	Value	Description	Parameter Type	Data Type
userRequest	(required)	**userRequest**	body	Model │ Example Value

Parameter content type:

application/json ⌄

```
{
  "firstName": "string",
  "lastName": "string",
  "mobileNumber": "string"
}
```

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

POST	/api/v1/user/signup	register new user

Response Class (Status 200)
OK

Model │ Example Value

```
{}
```

Response Content Type */* ⌄

Parameters

Parameter	Value	Description	Parameter Type	Data Type

Parameter	Value	Description	Parameter Type	Data Type	
SignupRequest	(required)	**SignupRequest**	body	Model	Example Value

Parameter content type:
application/json ▾

```
{
  "email": "string",
  "firstName": "string",
  "lastName": "string",
  "mobileNumber": "string",
  "password": "string",
  "role": [
    "string"
  ],
  "username": "string"
}
```

Response Messages

HTTP Status Code	Reason	Response Model	Headers
201	Created		
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

DELETE /api/v1/user/{id}   delete user

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type */* ▾

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long

Response Messages

HTTP Status Code	Reason	Response Model	Headers
204	No Content		
401	Unauthorized		
403	Forbidden		

Try it out!

GET	/api/v1/user/{id}	get user by id

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type */* ⌄

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	(required)	**id**	path	long

Response Messages

HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out!

[BASE URL: / , API VERSION: 1.0]