

Operation: addWorker(name : String, id : int, bankNum : int, fullTime : boolean, globalWage : int, hourlyWage : int, dateOfStart : String, totalVacationDays : int, totalVacationDays : int)


Cross References: Use Cases: add a worker

Preconditions:

- the admin user is connected, in facade _worker is HR
- all information gathered from the user is of the correct type and legal
- the id chosen to the worker isn't in the system

Postconditions:

- the worker is in the loginInfos with his ID and name as Password
- the worker is in the list allworkers

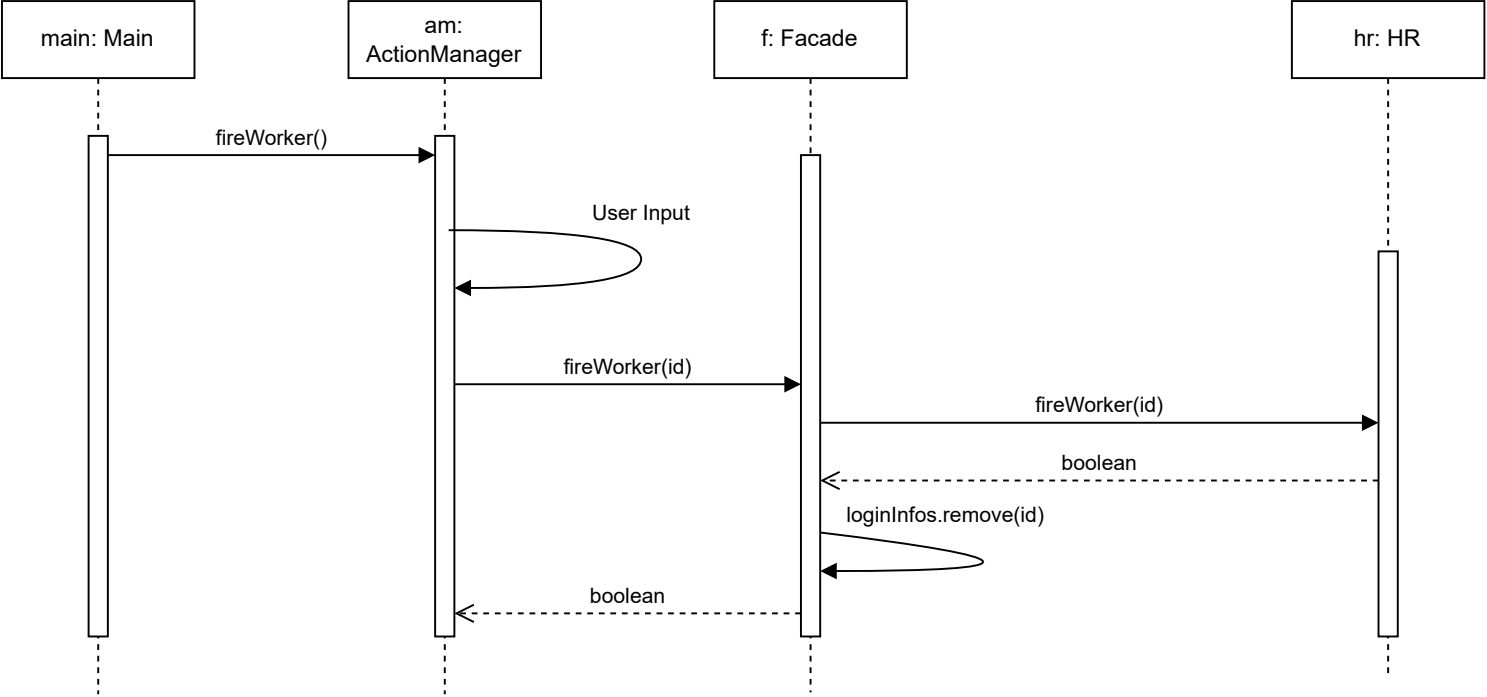

Operation: addWorker(id : int)

Cross References: Use Cases: fire a worker

Preconditions:

- the admin user is connected, in facade _worker is HR
- the collected id is in int
- the id chosen is of a worker that is in the system

Postconditions:

- the worker isn't in the loginInfos with his ID and name or Password
- the worker isn't in the list allworkers