

```
import java.sql.*;
```

```
public class Testing1{
```

```
    public static void main(String[] args) {
```

```
        try{
```

```
            Class.forName("com.mysql.cj.jdbc.Driver"); //Register
```

```
            Connection con=DriverManager.getConnection(  
                "jdbc:mysql://localhost:3306/test","root","root");
```

```
            Statement stmt=con.createStatement();
```

```
            ResultSet rs=stmt.executeQuery("select * from student");  
            // -----up to this line it contain's one table struc output
```

```
            while(rs.next()){
```

```
                System.out.println(rs.getInt(1)+" "+
```

```
                rs.getString(2)+" "+rs.getInt(3));
```

```
            }
```

```
            con.close();
```

```
        }
```


```
        catch(Exception e){
```

```
            System.out.println("Sorry for the inconvenience happened..! "  
                                + "Check the inputs properly one more time");
```

```
        }
```

}

```
*Testing.java
1 import java.sql.*;
2
3 public class Testing1{
4
5     public static void main(String[] args) {
6
7         try{
8             Class.forName("com.mysql.cj.jdbc.Driver"); //Register
9
10            Connection con=DriverManager.getConnection(
11                "jdbc:mysql://localhost:3306/test","root","root");
12
13            Statement stmt=con.createStatement();
14
15            ResultSet rs=stmt.executeQuery("select * from student");
16            // -----up to this line it contain's one table struc output
17            while(rs.next()){
18                System.out.println(rs.getInt(1)+" "+
19                    rs.getString(2)+" "+rs.getInt(3));
20            }
21            con.close();
22        }
23        catch(Exception e){
24            System.out.println("Sorry for the inconvenience happened..! "
25                + "Check the inputs properly one more time");
26        }
27    }
28 }
```

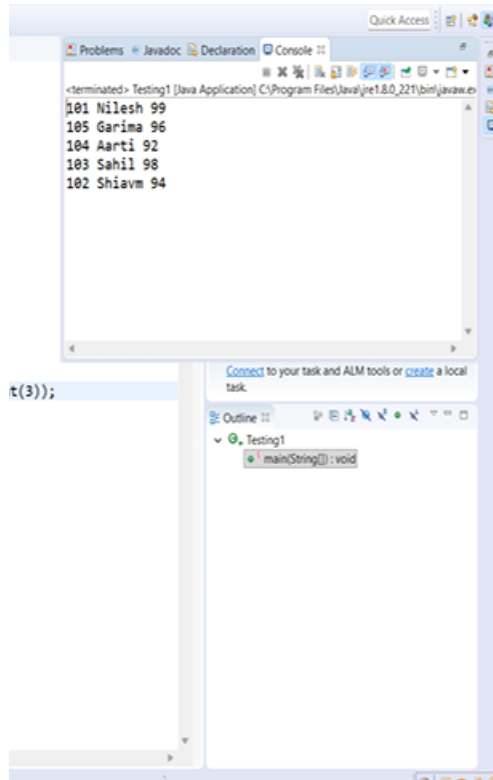

In workbench

show databases;

create database test;

use test;

create table student(sid int8, sname varchar(50), smarks int1);

insert into student values(101,"Nilesh",99);

insert into student values(102,"Shiavm",94);

insert into student values(103,"Sahil",98);

insert into student values(104,"Aarti",92);

insert into student values(105,"Garima",96);

The screenshot displays the MySQL Workbench interface. The main editor window contains the following SQL script:

```
1 • show databases;
2
3 • create database test;
4 • use test;
5 • create table student(
6   sid int8,
7   sname varchar(50),
8   smarks int1
9 );
10 • insert into student values(101,"Nilesh",99);
11 • insert into student values(102,"Shiavm",94);
12 • insert into student values(103,"Sahil",98);
13 • insert into student values(104,"Aarti",92);
14 • insert into student values(105,"Garima",96);
```

The Output window at the bottom shows the execution results of the queries:

#	Time	Action	Message	Duration / Fetch
5	18:53:58	insert into student values(101,"Nilesh",99)	1 row(s) affected	0.031 sec
6	18:54:57	insert into student values(105,"Garima",96)	1 row(s) affected	0.000 sec
7	18:55:01	insert into student values(104,"Aarti",92)	1 row(s) affected	0.000 sec
8	18:55:04	insert into student values(103,"Sahil",98)	1 row(s) affected	0.016 sec
9	18:55:07	insert into student values(102,"Shiavm",94)	1 row(s) affected	0.016 sec