EXPERIMENT 9

Design input forms that validate data and display error messages using HTML, CSS, and JavaScript.

AIM:

To design an input form that validates user data such as email and phone number and displays appropriate error messages.

PROCEDURE:

Step 1: Create and Design Form

Create an HTML file and design a form with input fields for email and phone number along with a submit button.

Step 2: Apply Styling

Apply CSS styling within the same file to improve the appearance of the form using a themed user interface.

Step 3: Add Validation

Use JavaScript and Validator.js within the same file to validate user inputs and display error messages when invalid data is entered.

PROGRAM:

```
<!DOCTYPE html>

<html>

<head>

<title>Form</title>


<style>

body {

   margin: 0;

   height: 100vh;

   display: flex;
```

```
    justify-content: center;
    align-items: center;
    font-family: 'Segoe UI';

    /* beach sky + sea */
    background: linear-gradient(to bottom, #87ceeb, #00b4d8);
}

/* main box */
.box {
    width: 300px;
    padding: 30px;
    border-radius: 20px;
    text-align: center;

    /* sand color */
    background: linear-gradient(to bottom, #fff, #fefae0);

    box-shadow: 0 10px 30px rgba(0,0,0,0.2);
}

/* title */
h2 {
    color: #0077b6;
    margin-bottom: 20px;
}

/* inputs */
```

```
input {
   width: 100%;
   padding: 12px;
   margin: 10px 0;
   border-radius: 12px;
   border: none;
   outline: none;
   background: #e0f7fa;
   font-size: 14px;
}

/* button */
button {
   width: 100%;
   padding: 12px;
   border: none;
   border-radius: 12px;
   background: linear-gradient(to right, #00b4d8, #0077b6);
   color: white;
   font-weight: bold;
   cursor: pointer;
   transition: 0.3s;
}

button:hover {
   transform: scale(1.05);
}
```

```
/* error */
small {
   color: #d00000;
   font-size: 12px;
}
</style>

</head>

<body>

<div class="box">
   <h2>Form</h2>

   <form id="form">
      <input type="text" id="email" placeholder="Enter Email">
      <small id="emailError"></small>

      <input type="text" id="phone" placeholder="Enter Phone">
      <small id="phoneError"></small>

      <button type="submit">Submit</button>
   </form>
</div>

<script
src="https://cdnjs.cloudflare.com/ajax/libs/validator/13.6.0/validator.min.js"></sc
ript>
```

```
<script>
document.getElementById("form").addEventListener("submit", function(e) {
  e.preventDefault();

  let email = document.getElementById("email").value;
  let phone = document.getElementById("phone").value;

  let emailError = document.getElementById("emailError");
  let phoneError = document.getElementById("phoneError");

  emailError.textContent = "";
  phoneError.textContent = "";

  if (!validator.isEmail(email)) {
    emailError.textContent = "Invalid email!";
  }

  if (!validator.isMobilePhone(phone, "any")) {
    phoneError.textContent = "Invalid phone!";
  }

  if (validator.isEmail(email) && validator.isMobilePhone(phone, "any")) {
    alert("Submitted Successfully");
  }
});
</script>
```

```
</body>
</html>
```

OUTPUT:

1. Form Interface:

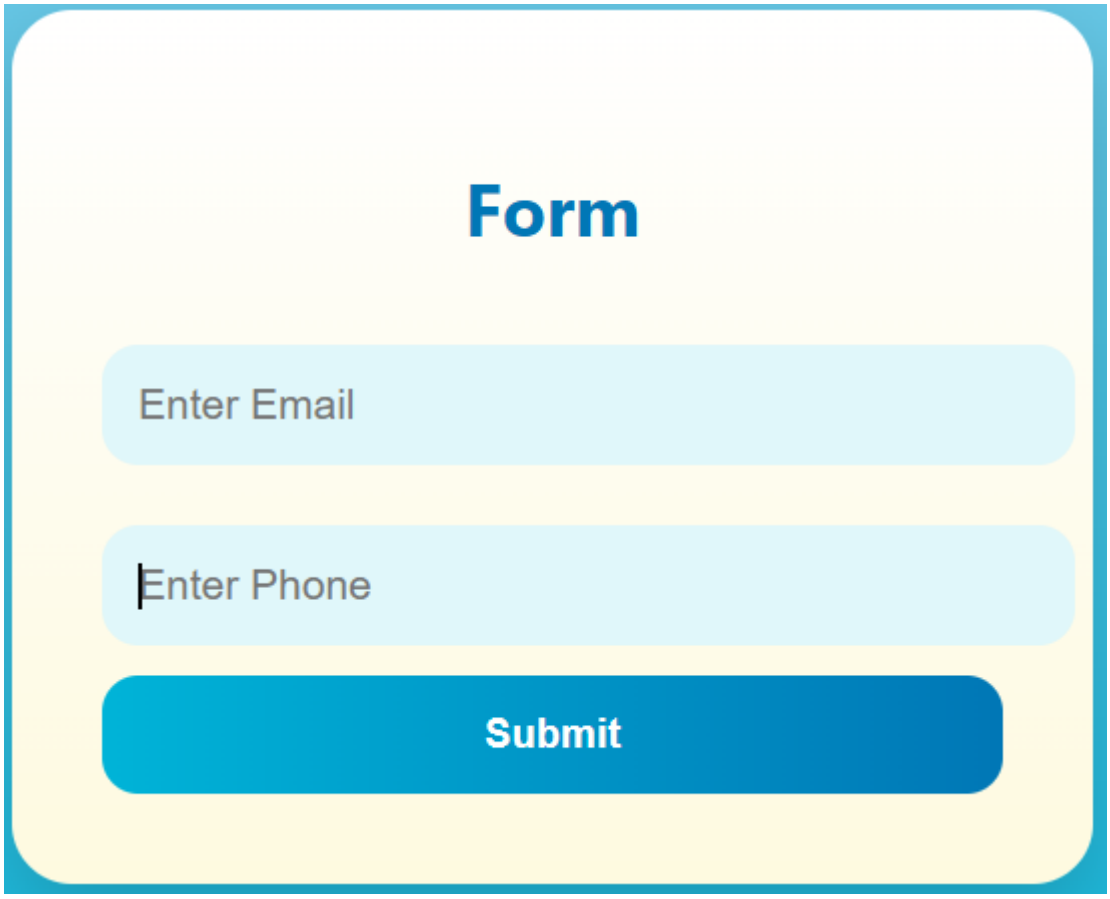

2. Valid Input:

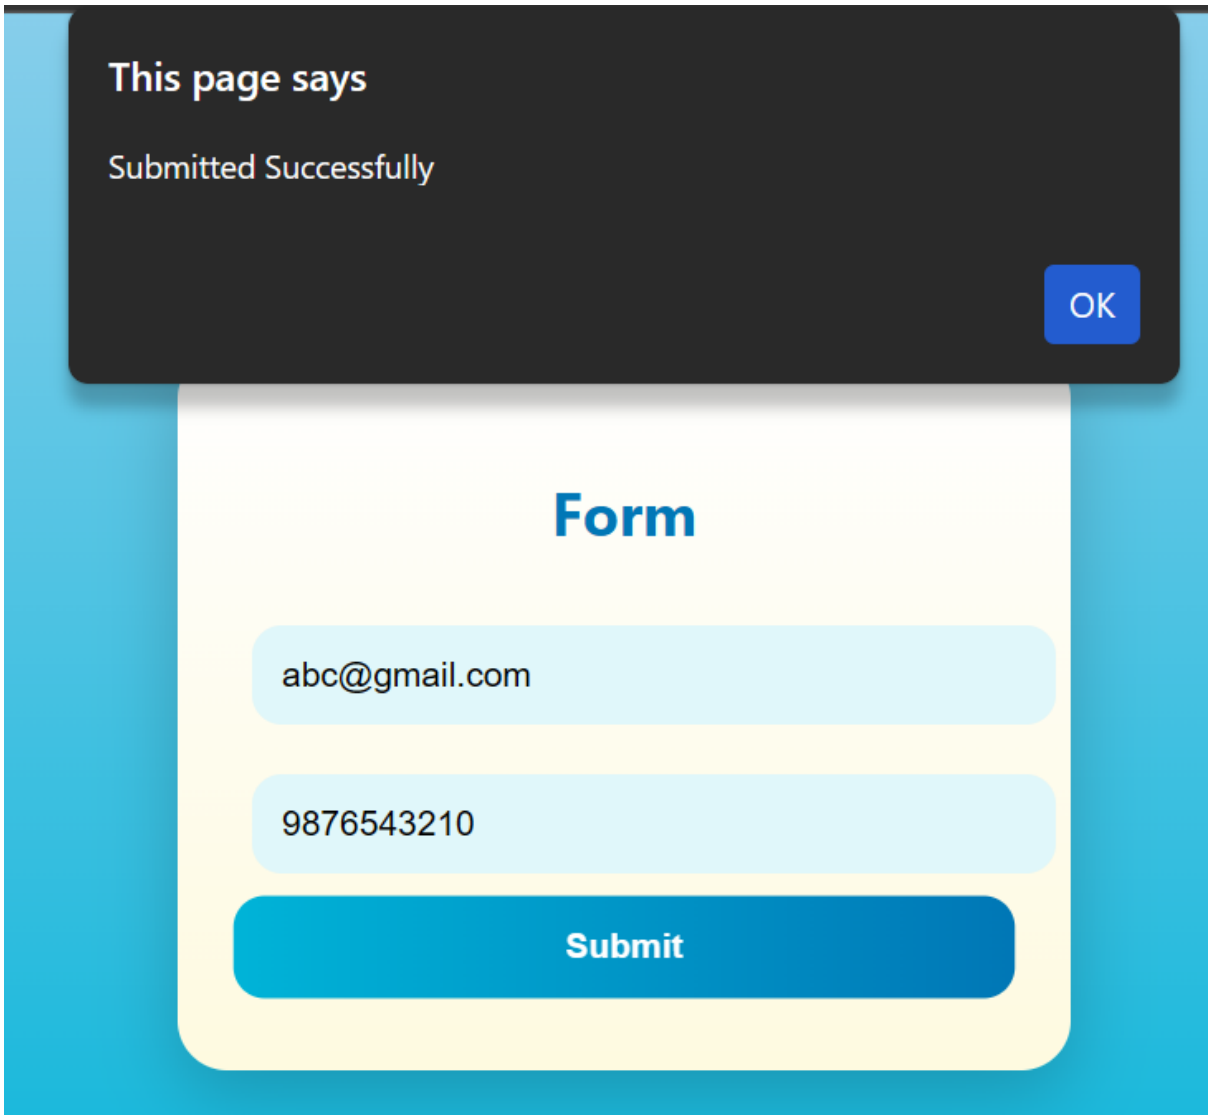

3. Invalid Email:

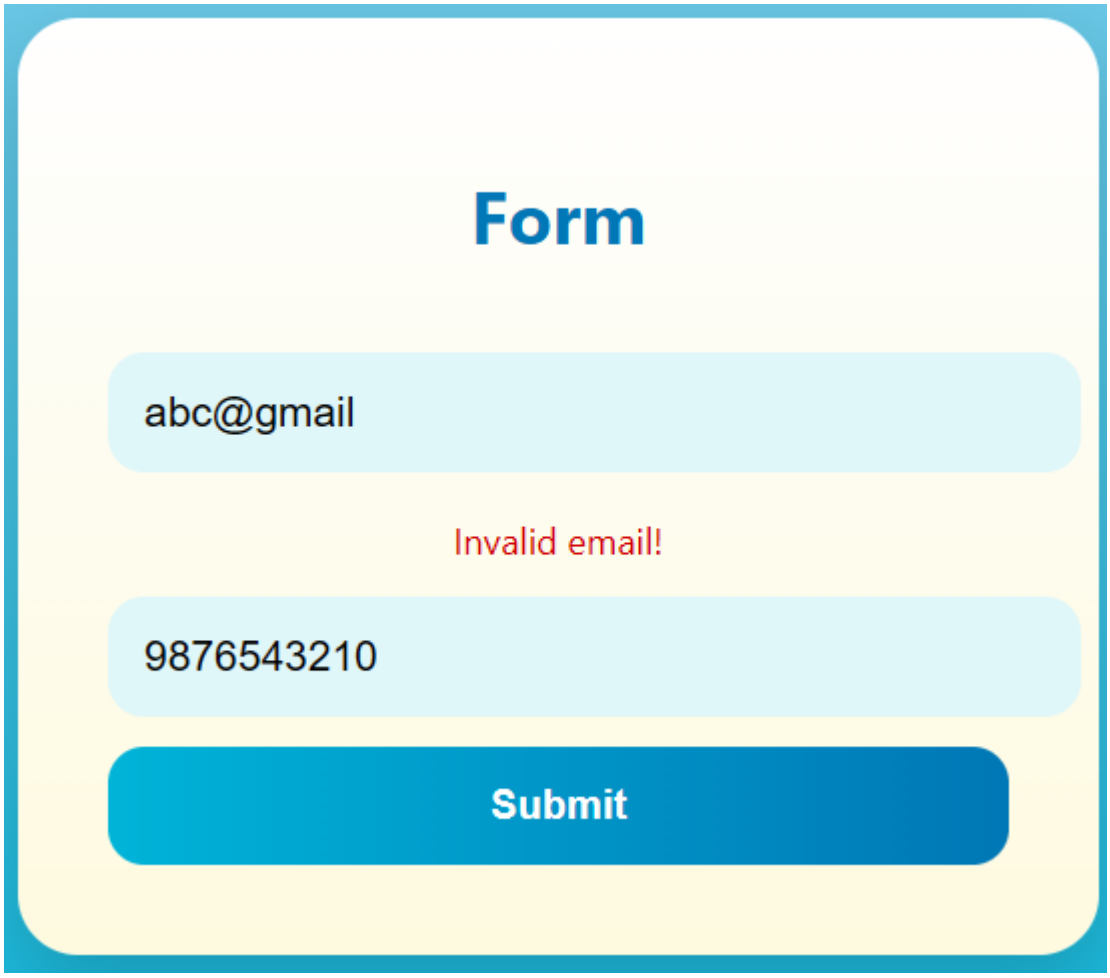

4. Invalid Phone:

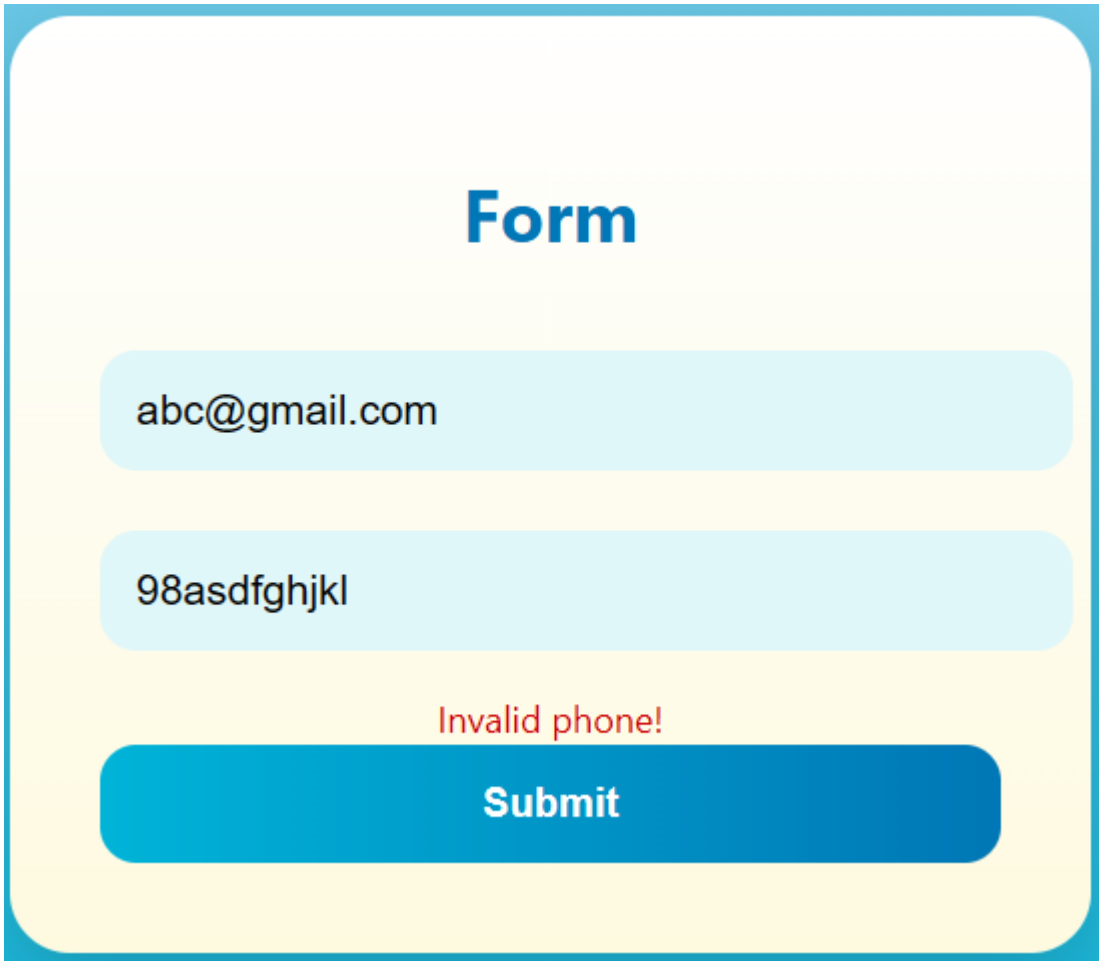

RESULT:

Thus, the input form was successfully designed using HTML, CSS, and JavaScript in a single file, and validation was performed using Validator.js to display appropriate error messages.