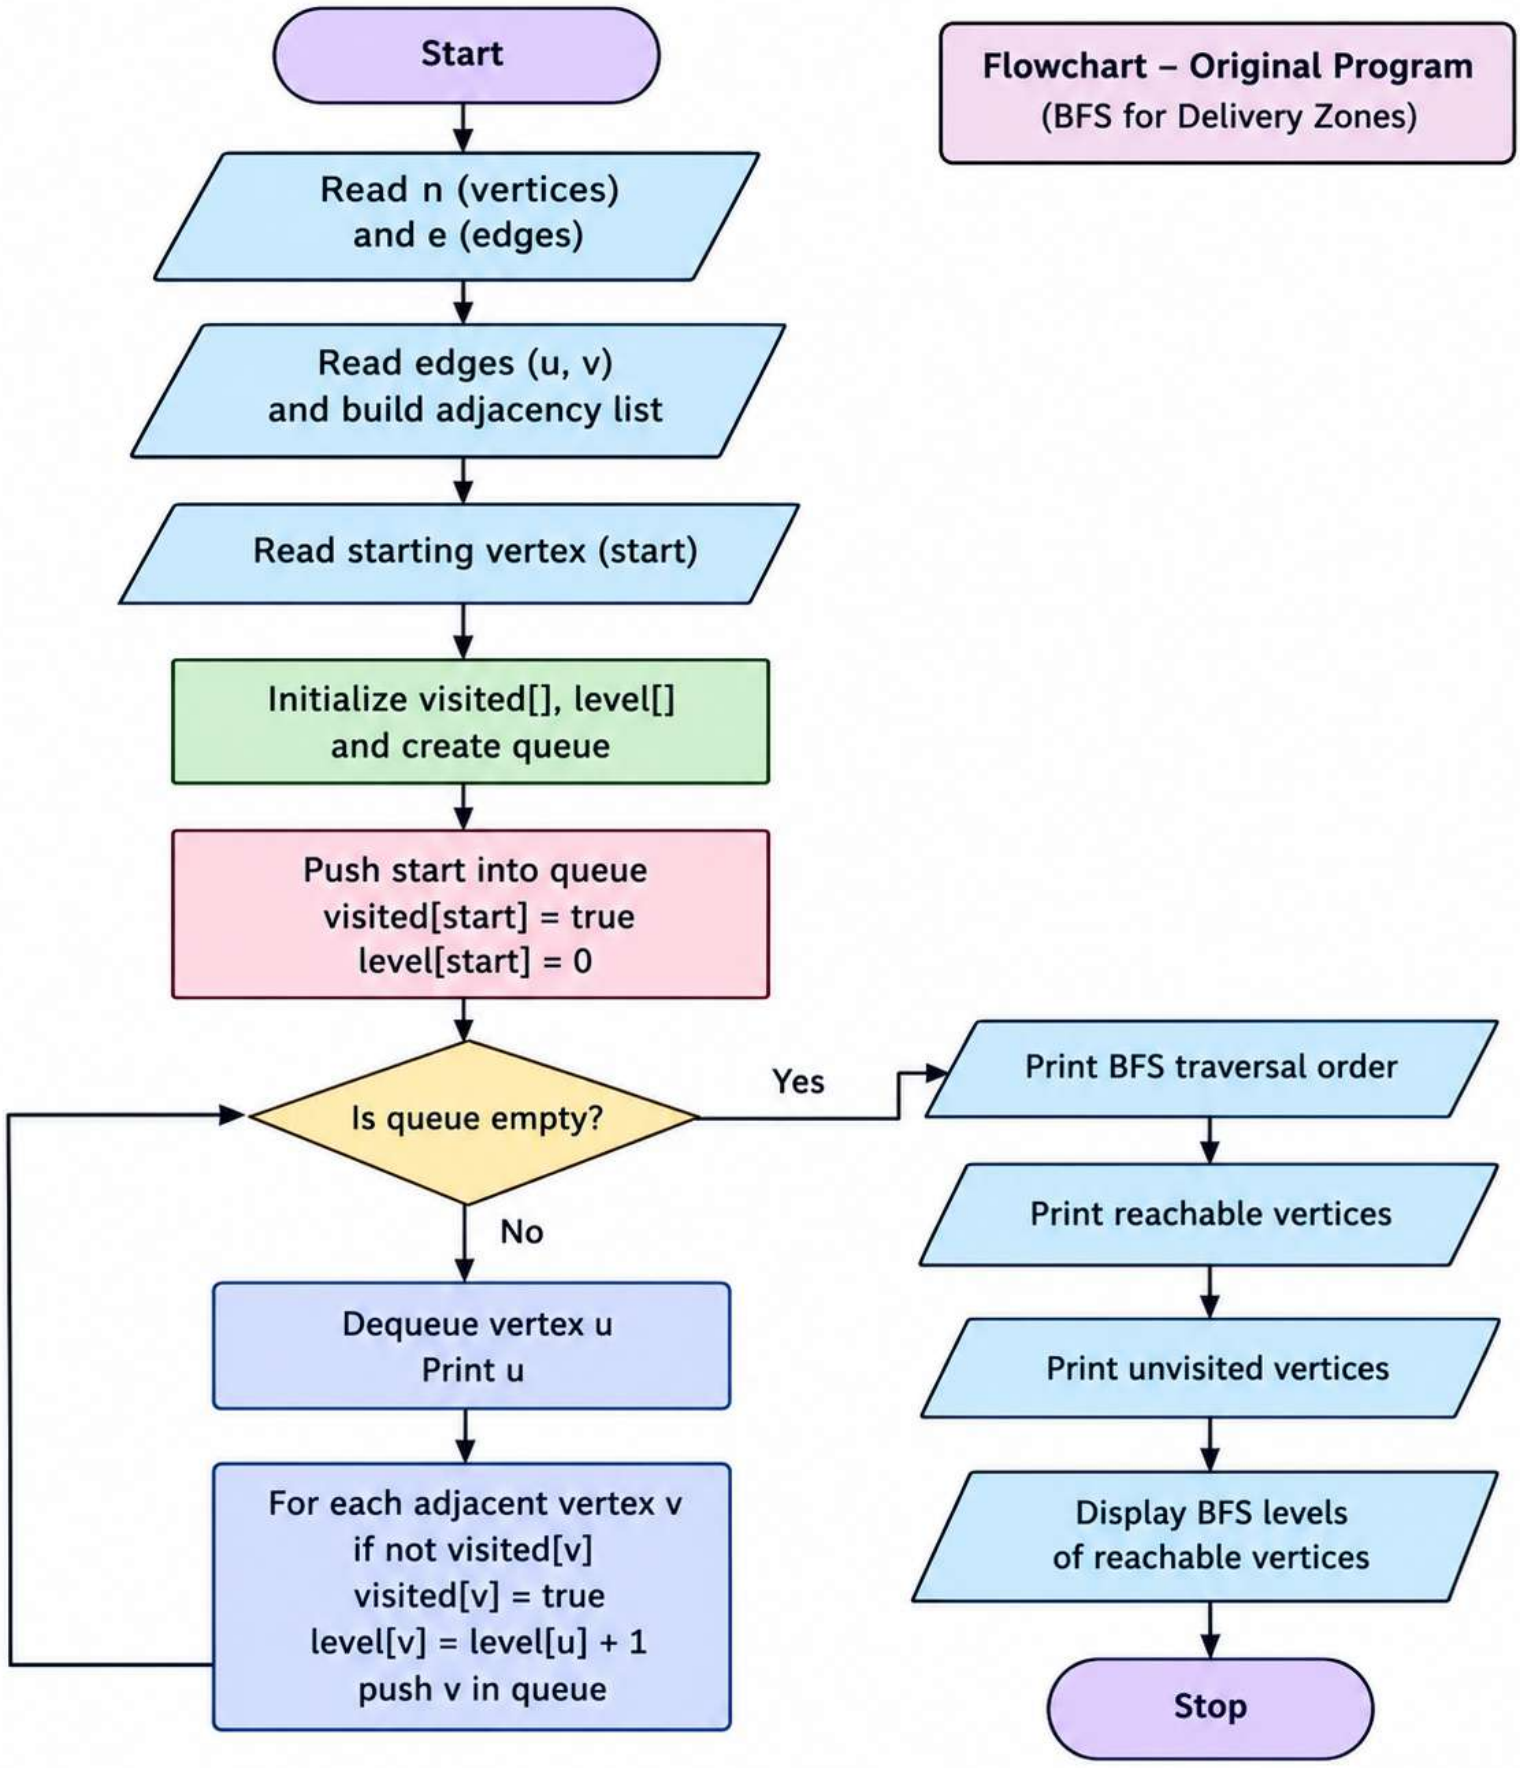

Flowchart – Original Program
(BFS for Delivery Zones)
Start
Read n (vertices)
and e (edges)
Read edges (u, v)
and build adjacency list
Read starting vertex (start)
Initialize visited[], level[]
and create queue
Push start into queue
visited[start] = true
level[start] = 0
Is queue empty?
Yes
No
Print BFS traversal order
Print reachable vertices
Print unvisited vertices
Display BFS levels
of reachable vertices
Stop
Dequeue vertex u
Print u
For each adjacent vertex v
if not visited[v]
visited[v] = true
level[v] = level[u] + 1
push v in queue