

Homework: XML Exercise

1. Objectives

- Become familiar with the DOM paradigm;
- Use an existing XML parser;
- Transform the content of an XML document into an HTML page.

2. Description

You are required to write a HTML/JavaScript program, which takes the URL of an XML document containing real estate information, parses the XML file, and extracts the list of homes, displaying them in a table. The JavaScript program will be embedded in an HTML file so that it can be executed within a browser.

- Your program should display a text box to enter the XML file name as shown below on Figure 1. On clicking the “Submit Query” button, your program should display the table as shown below, Figure 2. If the text box is left empty and Submit Query is clicked, an appropriate error message must be shown.

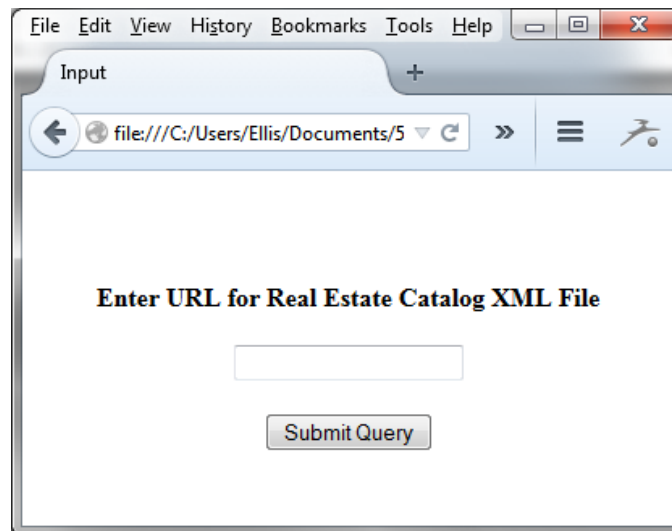


Figure 1: Initial Page

- Once the XML file downloads, a JavaScript function within the HTML file parses the XML document that was passed as an input to

the popped up window.

- After parsing the XML document, a table should be displayed consisting of the data for all homes that are contained in the XML file. For example, given the following XML document:

<http://cs-server.usc.edu:45678/hw/hw4/realestate.xml>


The first two homes in the file should be displayed as follows:

File Edit View History Bookmarks Tools Help

Real Estate Listings

file:///C:/Users/Ellis/Docume Google

Real Estate Lisings

Listing						
Location	Street	City	State	Zip	Lat	Long
	3360 Beethoven St	Los Angeles	CA	90066	34.008659	-118.447723
Details	Status	Price	Listing URL	Image		
	Active	2195000	Link to listing			


Listing						
Location	Street	City	State	Zip	Lat	Long
	8251 Billowvista Dr	Playa Del Rey	CA	90293	33.9586759	-118.440764
Details	Status	Price	Listing URL	Image		
	Active	974000	Link to listing			

Figure 2: Table Containing Two Real Estate Listings from realestate.xml

Here is a version of the realestate.xml file containing the data that is displayed above:

```

<?xml version="1.0"?>
<Listings>
  <Listing>
    <Location>
      <StreetAddress>3360 Beethoven St</StreetAddress>
      <City>Los Angeles</City>
      <State>CA</State>
      <Zip>90066</Zip>
      <Lat> 34.008659</Lat>
      <Long> -118.447723</Long>
    </Location>
    <ListingDetails>
      <Status>Active</Status>
      <Price>2195000</Price>
      <ListingUrl>http://www.realtor.com/realestateandhomes-detail/3360-Beethoven-
        St\_Los-Angeles\_CA\_90066\_M19165-13643?source=web</ListingUrl>
      <Image>beethoven.jpg</Image>
    </ListingDetails>
  </Listing>
  <Listing>
    <Location>
      <StreetAddress>8251 Billowvista Dr</StreetAddress>
      <City>Playa Del Rey</City>
      <State>CA</State>
      <Zip>90293</Zip>
      <Lat> 33.9586759</Lat>
      <Long> -118.440764</Long></Location>
    <ListingDetails>
      <Status>Active</Status>
      <Price>974000</Price>
      <ListingUrl>http://www.realtor.com/realestateandhomes-detail/8251-Billowvista-
        Dr\_Playa-Del-Rey\_CA\_90293\_M17774-85784?row=13</ListingUrl>
      <Image>billowvista.jpg</Image>
    </ListingDetails>
  </Listing>
  . . .
</Listings>

```

Note: your program should be able to handle XML files with zero, one, two or more listings; also your program can assume that every listing will have all of the tags listed in the order shown, with the same names.

3. Error Handling

In case of a parsing error, your program should show an alert box indicating an error was detected. For example if you try to load the incorrectly formatted XML file:

<http://cs-server.usc.edu:45678/hw/hw4/invalid.xml>

then you should show an alert box if the XML file is not valid, as in the following figure:

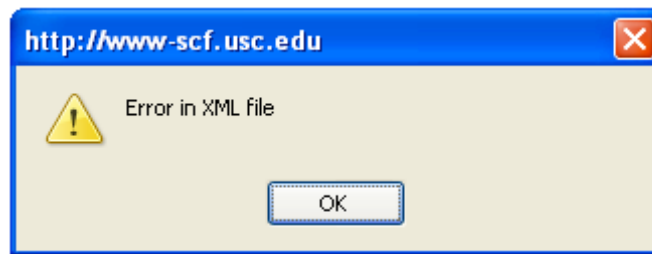


Figure 3: Error generated from invalid.xml in Firefox

Another error condition that should be checked for is an XML file containing NO real estate listings. No other error conditions need be checked. In all cases if an error is found your program should show an alert box indicating the error was detected.

4. Hints

- *Step 1: Writing Your HTML/JavaScript program - Using the DOM Parser*

Here's how you could use the Microsoft DOM API and the Mozilla DOM API (used in Firefox) to load and parse an XML document into a DOM tree, and then use the DOM API to extract information from that document.

```
<script type="text/javascript">
var xmlDoc;
function loadXML(url) {
    if (window.XMLHttpRequest)
        { // code for IE7+, Firefox, Chrome, Opera, Safari
            xmlhttp=new XMLHttpRequest();
        }
    else
        { // code for IE6, IE5
```

```

    xmlhttp=new ActiveXObject("Microsoft.XMLHTTP");
}
xmlhttp.open("GET",url,false); //open, send, responseXML are
xmlhttp.send();                //properties of XMLHttpRequest
xmlDoc=xmlhttp.responseXML;
return xmlDoc;
}
// ..... processing the document goes here
</script>

```

Now you can generate the HTML table from the DOM tree. You can assume that every xml file will have identical tag names. However, the real estate entries may occur in any order.

Your task is to write a program that transforms this type of XML file into the table as shown above.

For example you can access the child nodes of the documents as follows:

```

    footb = xmlDoc.documentElement.childNodes;

```

Note that unlike the Java-based DOM, which provides methods such as `getChildNodes()` and `getNodeType()` that return respectively a node list of children of a current node and the type of a node, with the DOM you have to access the element properties directly, as in:

```

    footbNodeList = footb.item(i).childNodes;
    if (footbNodeList.item(j).nodeType == ELEMENT_NODE)

```

Below is the link to the web page that demonstrates how to handle white spaces in Mozilla:

http://developer.mozilla.org/en/docs/Whitespace_in_the_DOM

- *Step 2: Display the Resulting HTML Document*

You should use the DOM `document.write` method to output the required HTML.

- *Step 3: Use JavaScript control syntax*

The only program control statements that you will need to use for this exercise are the “if” and the “for” statements. The syntax of both statements is practically identical to the syntax of the corresponding statement in the C, C++ and Java languages, as in:

```
if (footbNodeList.item(j).nodeName=="image") {  
    // do stuff  
}  
for (j=0;j<footbNodeList.length;j++) {  
    // do more stuff  
}
```

Please make a note of the following issue:

Cross-Site Scripting (XSS):

JavaScript cannot call the resources from another domain. This is called cross side scripting which is not allowed in browsers. Therefore, you must put your XML files and your script in the same domain. Please make sure, when you are testing your implementation, to place both the HTML file and the XML file on your local machine IN THE SAME FOLDER. The files can be copied from here:

<http://cs-server.usc.edu:45678/hw/hw4/invalid.xml>

<http://cs-server.usc.edu:45678/hw/hw4/realestate.xml>

Window.open() method must be used to pop up a new window which would display the final widget.

Image files can be either local or remote, as these files do not exhibit the cross-site scripting issue.

6. Material You Need to Submit

On your course homework page, your link for this homework should go to a page that looks like the one displayed in the Figure on page 1. This page should include your entire JavaScript/HTML program in a single file. Also you should submit your source code electronically to the csci571 account so that it can be graded and compared to all other students' code via the MOSS code comparison tool.