



Compute-performance distribution of H65/BMCR routes

(a) All measured operating points

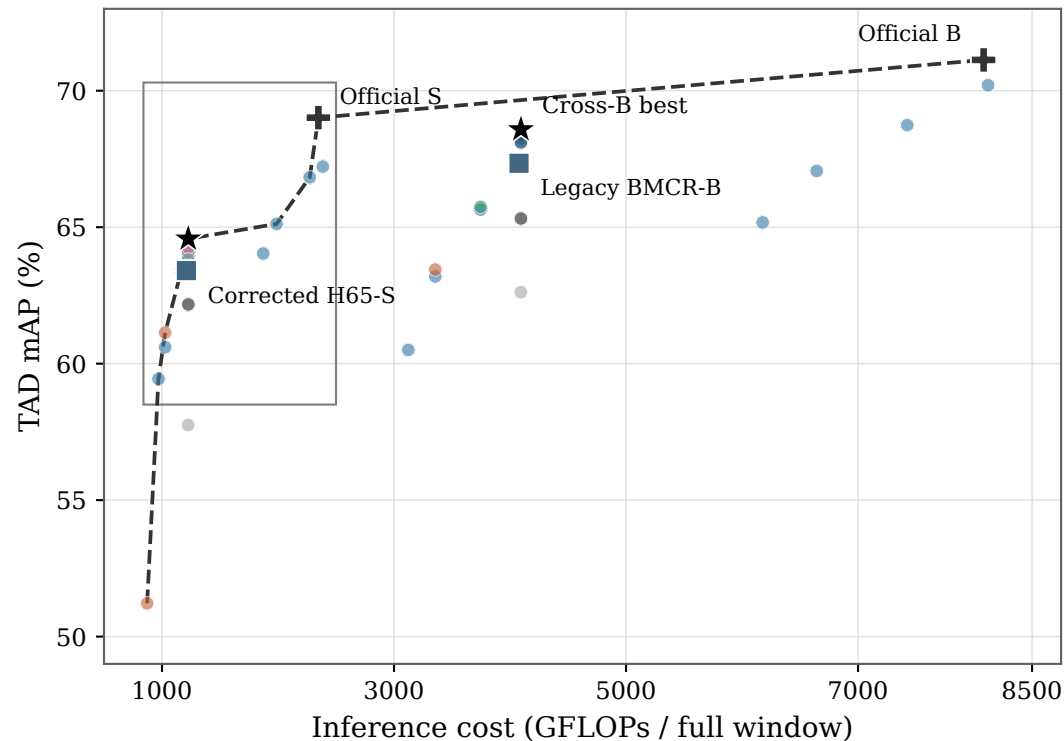

(b) Lower-compute region

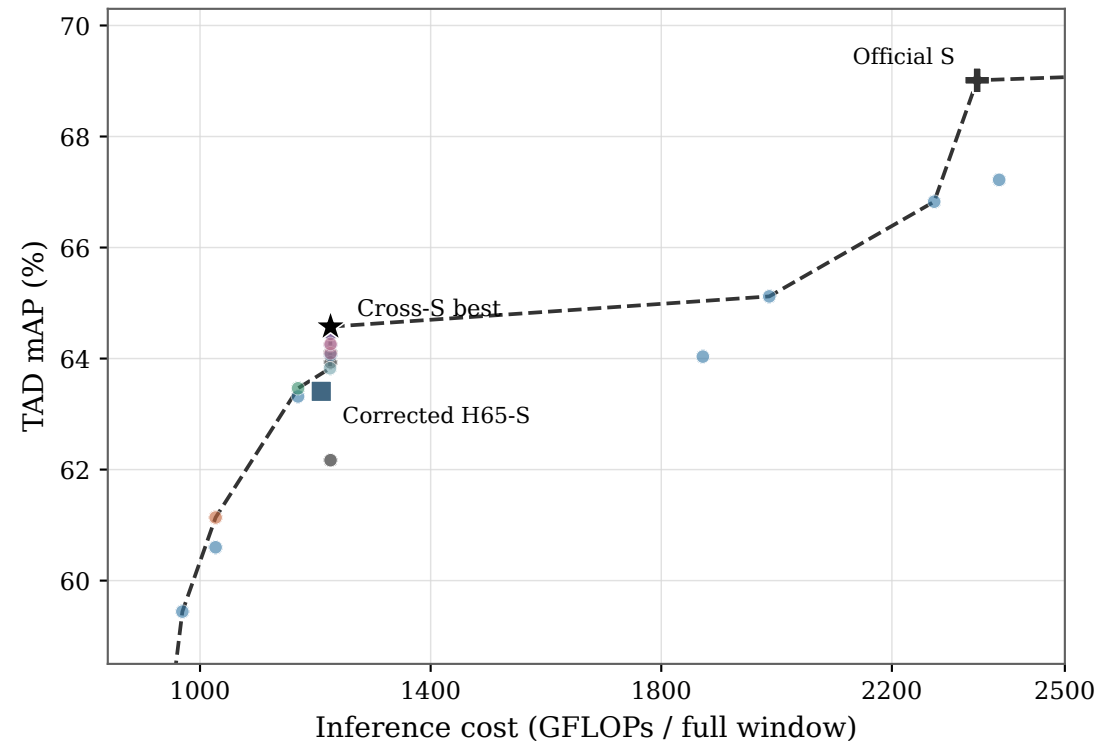


- Cross
 ● Spatial
 ● Interpolation / controls
 - - - Observed envelope*
 ★ Best measured Cross EMA
- Joint T/D/S
 ● TCN
 ● Original-head control
- Depth
 ● Feature loss


47 complete evaluations + 4 fixed references; THUMOS14, 211 videos / 792 windows, mAP@0.3:0.1:0.7.
 FLOPs: full-window operator profiles (2 MAC), not video totals. *Envelope mixes models/checkpoints; no fitted points.

Measured budget curves from the same checkpoint

(a) VideoMAE-S - J01, epoch 5 EMA

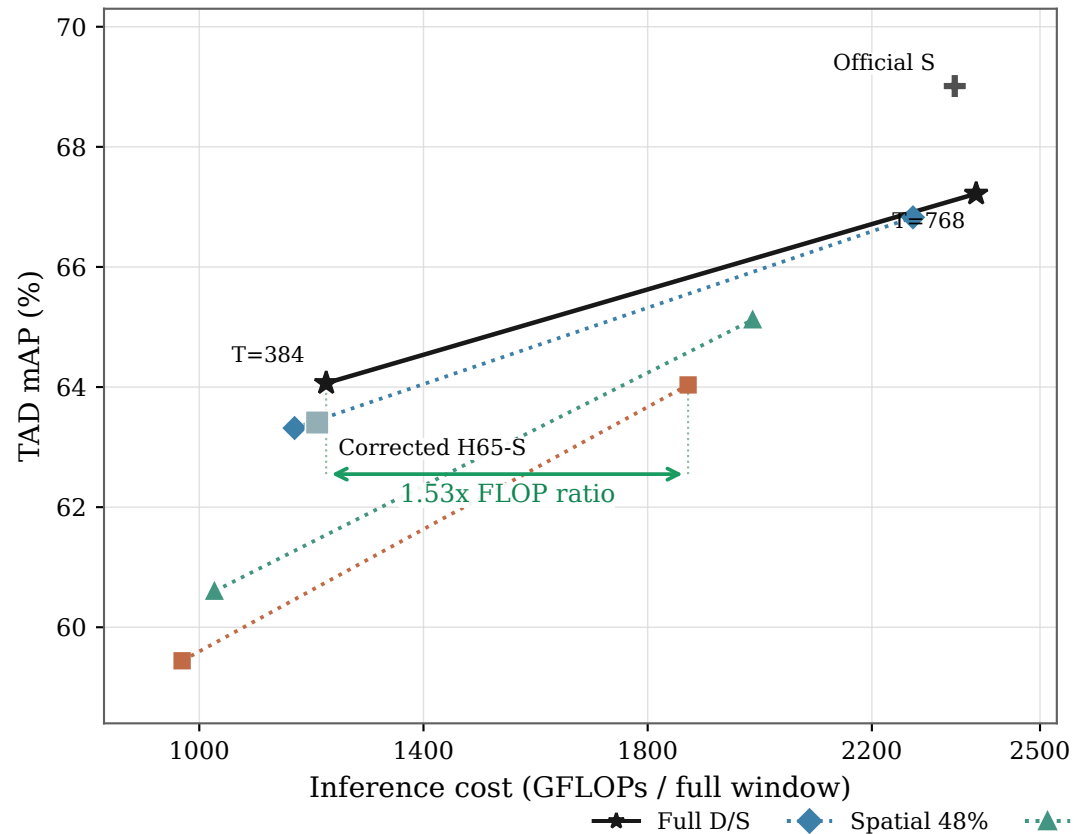


(b) VideoMAE-B - J01, epoch 5 EMA

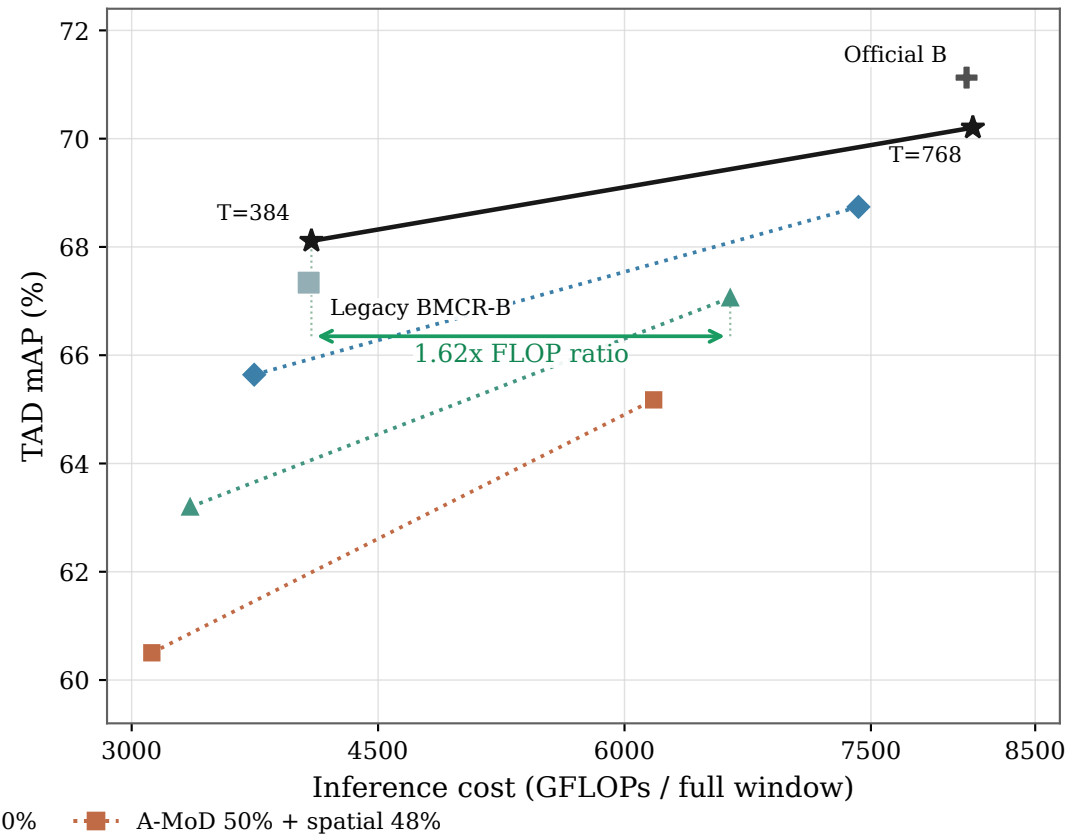


Each backbone uses one checkpoint and all 8 measured T/D/S settings; each curve changes T only (384 -> 768).
Segments connect observations; no fitted or extrapolated points. Green brackets compare measured FLOPs, not runtime speed.

Performance spread across checkpoints at fixed computation

(a) VideoMAE-S

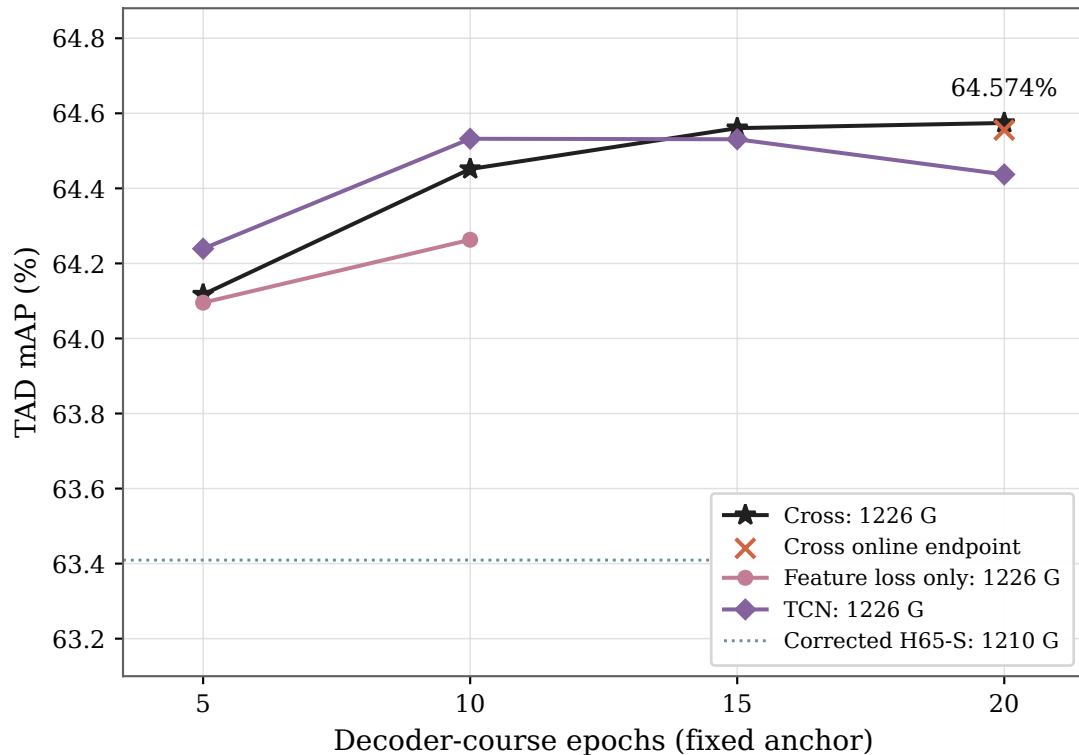

(b) VideoMAE-B

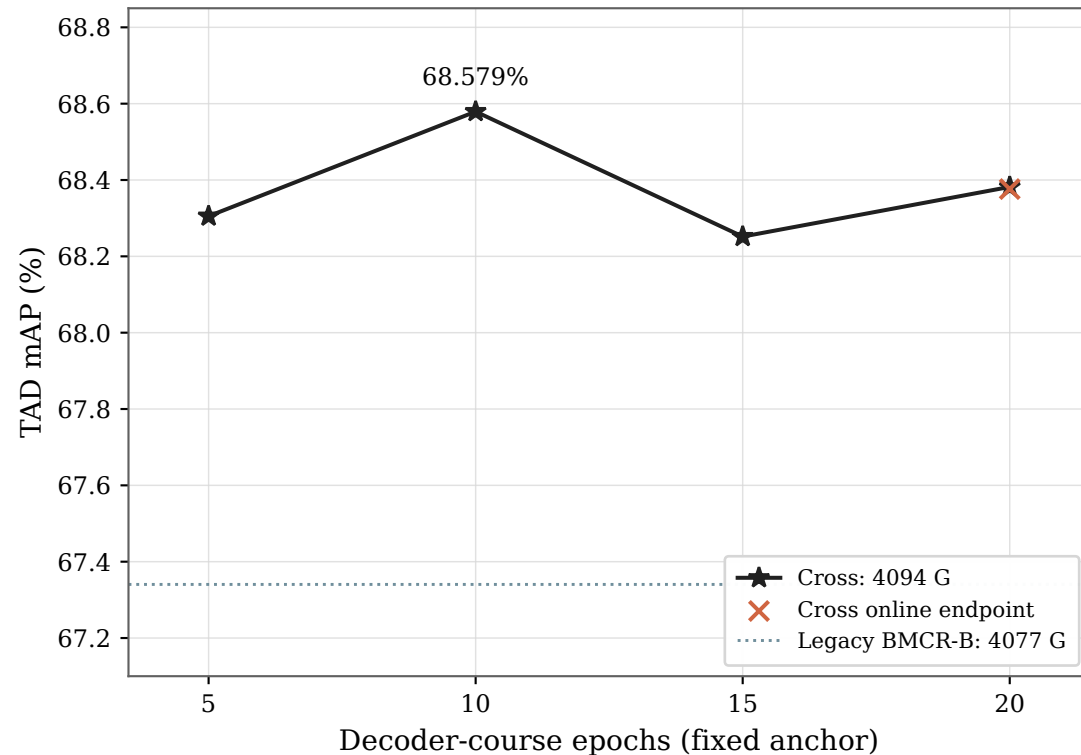

Fixed-compute checkpoint trajectories, not budget curves or confidence intervals; GFLOPs are shown in the legends.
Feature-loss-only retains GT boundary weighting. Epochs denote additional decoder training on a fixed anchor.