

1. Créer un dossier appelé learn_git.

```
learn_git — -zsh — 80x18
[7maksacodpc@7MAKSACODs-MacBook-Pro desktop % mkdir learn_git]
```

2. Cd (changer de répertoire) dans le dossier learn_git.

```
[7maksacodpc@7MAKSACODs-MacBook-Pro desktop % cd learn_git]
```

3. Créer un fichier appelé third.txt.

```
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % touch third.txt]
```

4. Initialiser un dépôt git vide.

```
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % git init]
Initialized empty Git repository in /Users/7maksacodpc/Desktop/learn_git/.git/
```

5. Ajouter third.txt à la staging area.

```
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % git add third.txt]
```

6. Commiter avec le message "adding third.txt".

```
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % git commit -m "adding third.txt"]
[master (root-commit) 6fde1c5] adding third.txt
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 third.txt
```

7. Vérifiez votre validation avec git log.

```
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % git log  
commit 6fde1c5ec3e101ff5306146b60ed5dd17b97307b (HEAD -> master)  
Author: Yves Placide <kouamekoffiyves57@gmail.com>  
Date: Sat Nov 30 17:03:36 2024 +0000  
  
    adding third.txt
```

8. Créez un autre fichier appelé fourth.txt.

```
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % touch fourth.txt
```

9. Ajoutez fourth.txt à la staging area.

```
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % git add fourth.txt
```

10. Effectuez un commit avec le message "adding fourth.txt".

```
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % git commit -m "adding fourth.txt"]  
  
[master cac6e92] adding fourth.txt  
1 file changed, 0 insertions(+), 0 deletions(-)  
create mode 100644 fourth.txt
```

11. Enlevez le fichier third.txt.

```
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % rm -rf third.txt
```


12. Ajoutez cette modification à la staging area. (En utilisant la commande "git add .")

```
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % git add .
```

13. Commiter avec le message "removing third.txt".

```
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % git commit -m "removing third.txt"]
"
[master fdae5] removing third.txt
1 file changed, 0 insertions(+), 0 deletions(-)
delete mode 100644 third.txt
```

14. Vérifiez vos commits en utilisant git log.

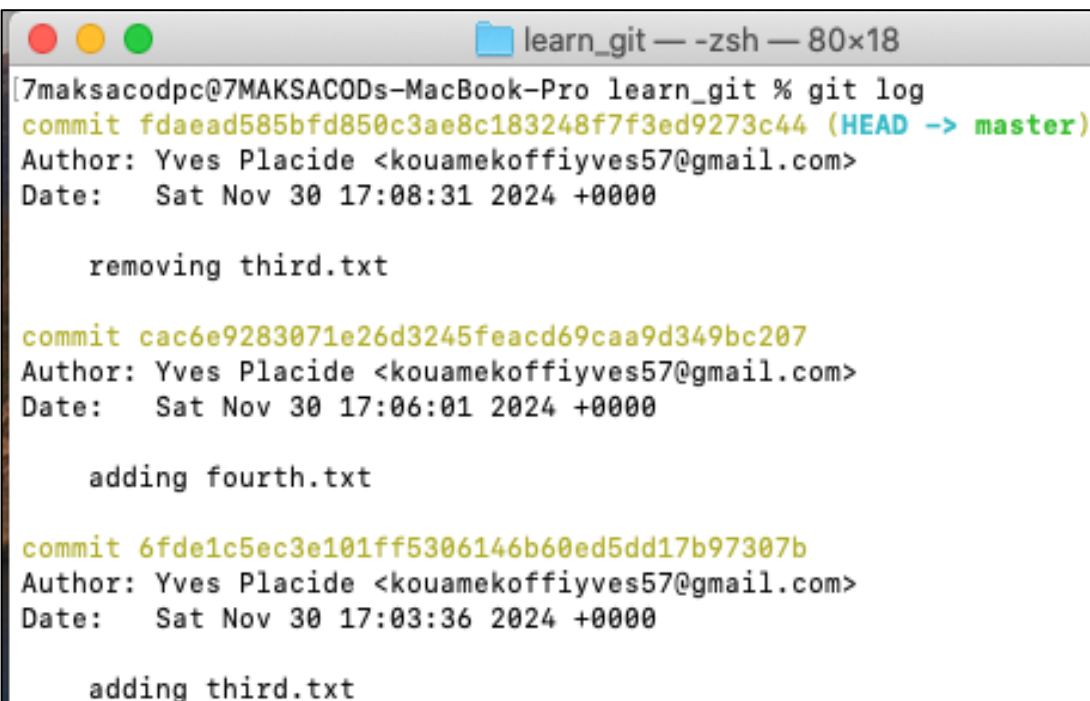A terminal window titled 'learn_git — -zsh — 80x18' showing the output of the 'git log' command. The output lists three commits in reverse chronological order. The first commit (top) is 'commit fdae585bfd850c3ae8c183248f7f3ed9273c44 (HEAD -> master)' with the message 'removing third.txt'. The second commit is 'commit cac6e9283071e26d3245feacd69caa9d349bc207' with the message 'adding fourth.txt'. The third commit (bottom) is 'commit 6fde1c5ec3e101ff5306146b60ed5dd17b97307b' with the message 'adding third.txt'. All commits are by 'Yves Placide <kouamekoffiyves57@gmail.com>' and dated 'Sat Nov 30 17:08:31 2024 +0000', 'Sat Nov 30 17:06:01 2024 +0000', and 'Sat Nov 30 17:03:36 2024 +0000' respectively.

```
learn_git — -zsh — 80x18
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % git log
commit fdae585bfd850c3ae8c183248f7f3ed9273c44 (HEAD -> master)
Author: Yves Placide <kouamekoffiyves57@gmail.com>
Date: Sat Nov 30 17:08:31 2024 +0000

    removing third.txt

commit cac6e9283071e26d3245feacd69caa9d349bc207
Author: Yves Placide <kouamekoffiyves57@gmail.com>
Date: Sat Nov 30 17:06:01 2024 +0000

    adding fourth.txt

commit 6fde1c5ec3e101ff5306146b60ed5dd17b97307b
Author: Yves Placide <kouamekoffiyves57@gmail.com>
Date: Sat Nov 30 17:03:36 2024 +0000

    adding third.txt
```


15. Changez vos paramètres globaux pour core.pager=cat - vous pouvez en savoir plus [ici](#).

```
7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % git config --global core.pager ca
t
```

16. Écrivez la commande appropriée pour lister toutes les configurations globales pour git sur votre machine.

```
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % git config --list
credential.helper=osxkeychain
filter.lfs.clean=git-lfs clean -- %f
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
user.name=Yves Placide
user.email=kouamekoffiyves57@gmail.com
core.pager=cat
core.repositoryformatversion=0
core.filemode=true
core.bare=false
core.logallrefupdates=true
core.ignorecase=true
core.precomposeunicode=true
7maksacodpc@7MAKSACODs-MacBook-Pro learn_git %
```

17. Vous pouvez taper `git config --global` pour savoir comment faire.

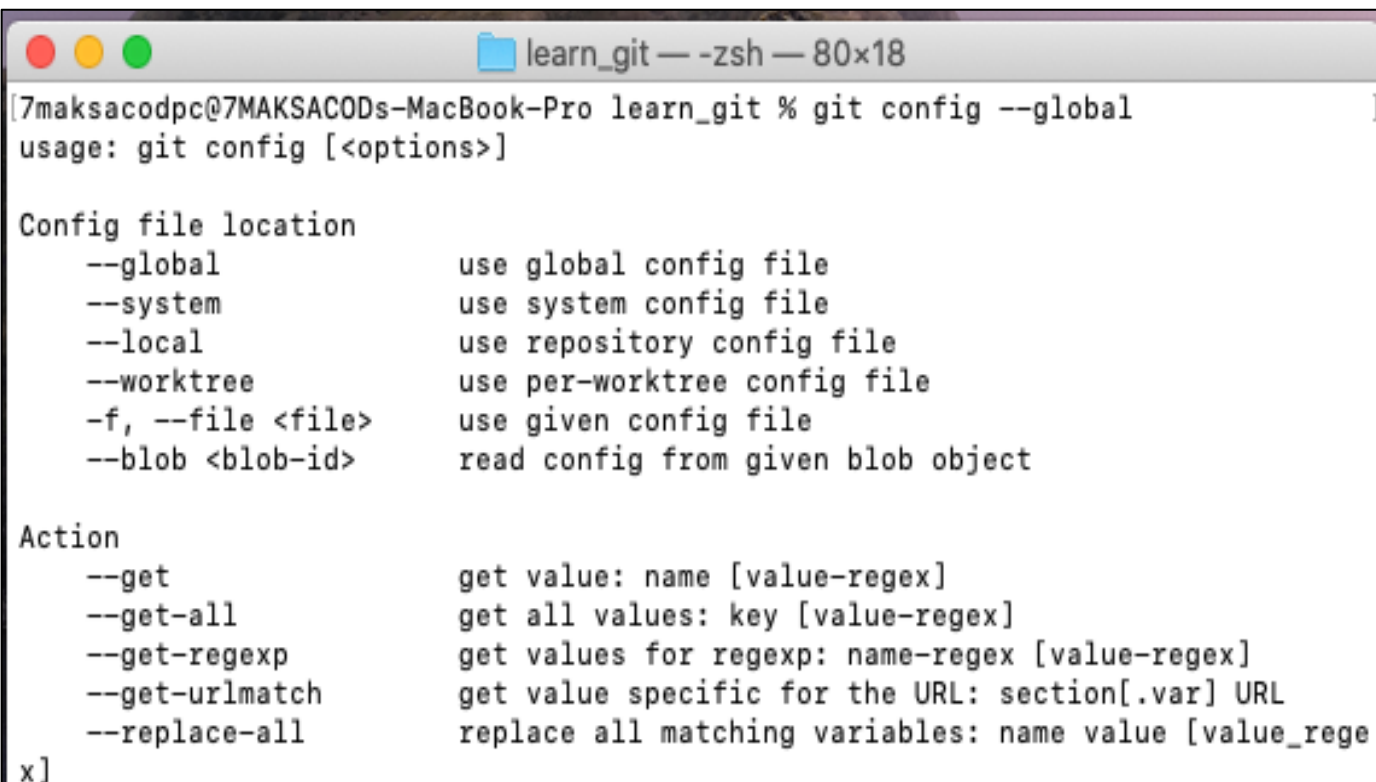

```
learn_git — -zsh — 80x18
[7maksacodpc@7MAKSACODs-MacBook-Pro learn_git % git config --global
usage: git config [<options>]

Config file location
  --global          use global config file
  --system          use system config file
  --local           use repository config file
  --worktree        use per-worktree config file
  -f, --file <file> use given config file
  --blob <blob-id>  read config from given blob object

Action
  --get             get value: name [value-regex]
  --get-all        get all values: key [value-regex]
  --get-regexp      get values for regexp: name-regex [value-regex]
  --get-urlmatch    get value specific for the URL: section[.var] URL
  --replace-all    replace all matching variables: name value [value_regex]
```