
High-level architecture

Devices are peers; one elected peer coordinates.

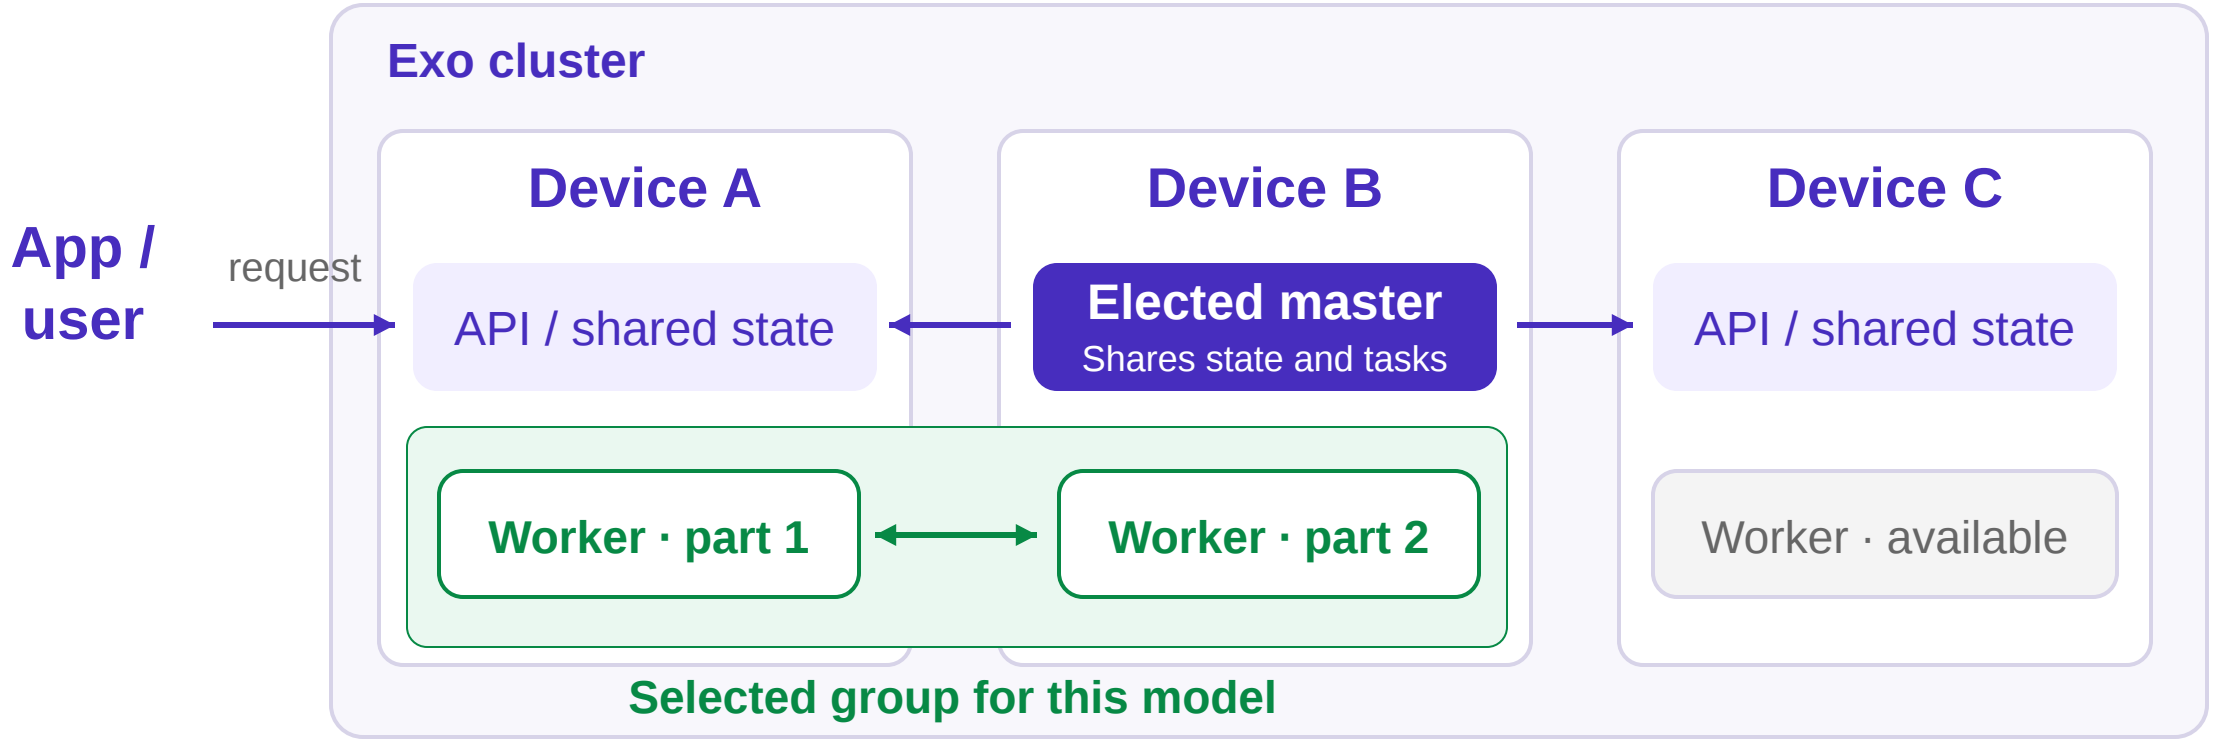

A model can use a subset of the wider cluster.