

RecruitSync: Frontend Prototype, Git Workflow & Deployment

A full walkthrough of building a React CRM prototype with fake data, version-controlling it with Git, and deploying it to GitHub Pages via GitHub Actions.

Yu Yu Hlaing

July 2026

AI Bootcamp

RecruitSync CRM

 [Live Demo — yyhalice.github.io/recruit_sync](https://yyhalice.github.io/recruit_sync)

1 Project Overview

RecruitSync is an internal recruitment CRM designed for agencies that place international candidates into Japanese companies. This assignment covers the frontend-only prototype phase — built entirely with fake (mock) data, no backend connection required.

The prototype demonstrates the core user journey: **Dashboard** → **Client List** → **Client Detail** → **Job List** → **Job Detail** → **Pipeline Board**. Every page is clickable and navigable. The kanban pipeline board supports drag-and-drop reordering of candidates across pipeline stages.

2 Technology Stack

React 18 + TypeScript

UI framework & type safety

Vite 5

Build tool & dev server

Tailwind CSS 3

Utility-first styling

React Router v6

Client-side routing

@dnd-kit

GitHub Actions

3 Fake Data (Mock Data)

All data lives in `src/data/mockData.ts` — a single TypeScript file exported as constants. No API calls, no database. The prototype renders entirely from these in-memory arrays.

5

Client Companies

16

Job Positions

97

Candidates

Clients (5)	Nexus Systems, Atlas Fintech, Toyota IT, Mitsubishi Trading, SoftBank Robotics — each with industry, contact, last-contact date
Jobs (16)	Distributed across clients with title, salary range (JPY), required skills, Japanese/English level, status (active / on-hold / closed)
Candidates (97)	Each has a pipeline stage: <code>sourced</code> <code>screening</code> <code>interview</code> <code>offered</code> <code>placed</code> <code>rejected</code> — plus last activity date and reminder status
Activity Logs	24 log entries (calls, emails, meetings) linked to clients and jobs
StatusDot logic	Reference date 2026-07-01. <7 days → green, 7–14 days → amber, ≥14 days or overdue → red

4 Pages & Components Built

Dashboard	4 metric cards, candidates-by-stage bar chart, due-today reminders panel, recent placements table, active jobs by client
Client List	Searchable/filterable table with status dots, industry badges, active job counts
Client Detail	Company info, tabbed view: job list + activity log

Job List	Full job table with salary, skills, candidate counts, status badges, closing-date urgency colors
Job Detail	Job info, candidate list by stage, activity log tab
Pipeline Board	Kanban board with 6 columns (DnD Kit), drag-and-drop candidate cards, recruiter filter, DragOverlay

5 Git Workflow

The project started with no version control. Git was initialized, files were staged, and commits were pushed to GitHub.

1 `git init`

Initialize an empty Git repository in the project root.

2 `Create .gitignore`

Exclude `node_modules/`, `dist/`, and AI assistant internals (`.claude/`) from version control.

3 `git add . && git commit`

Stage all project files (38 files, 14,528 insertions) and create the initial commit.

4 `git remote add origin <url>`

Link the local repo to the GitHub remote at `github.com/yyhAlice/recruit_sync`.

5 `git push -u origin master`

Push all commits to GitHub. The `-u` flag sets the upstream so future pushes need only `git push`.

COMMIT HISTORY (FINAL)

```
1cac4ca Switch to HashRouter for reliable GitHub Pages routing
bb6738e Fix: restore missing script entry point in index.html
3e1c759 Fix GitHub Pages deployment
e81755c Restructure: move frontend/ to project root
b4917e6 Add UI screenshots and pdf_gen utility script
3454c4a Initial commit: RecruitSync prototype with fake data
```

6 Build Process

Vite compiles the TypeScript + React source into optimized static files ready for deployment. Running `npm run build` produces the `dist/` folder.

VITE.CONFIG.TS

```
export default defineConfig({
  plugins: [react()],
  base: '/recruit_sync/', // required for GitHub Pages subdirectory
})
```


BUILD OUTPUT

```
dist/index.html          1.04 kB
dist/assets/index.css    19.54 kB (gzip: 4.24 kB)
dist/assets/index.js     299.37 kB (gzip: 86.17 kB)
✓ built in 1.59s
```

The `base: '/recruit_sync/'` setting tells Vite to prefix all asset URLs with the repository path, so CSS and JS load correctly when hosted at a subdirectory on GitHub Pages.

7 Deployment — GitHub Actions + GitHub Pages

Every push to `master` triggers an automated CI/CD pipeline via GitHub Actions that builds the project and deploys it to GitHub Pages.

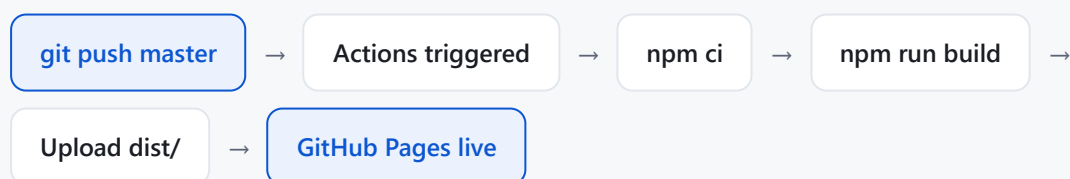

.GITHUB/WORKFLOWS/DEPLOY.YML (SIMPLIFIED)

```
on:
  push:
    branches: [master]

jobs:
  build:
    runs-on: ubuntu-latest
    steps:
      - uses: actions/checkout@v4
      - uses: actions/setup-node@v4
```

```
    with: { node-version: '20' }
  - run: npm ci
  - run: npm run build
  - uses: actions/upload-pages-artifact@v3
    with: { path: './dist' }

deploy:
  needs: build
  uses: actions/deploy-pages@v4
```

8 Errors Encountered & How They Were Fixed

Four distinct problems were encountered and resolved during the deployment process:

Blank page — assets not loading

Fixed

Cause: Vite loads assets from / by default, but GitHub Pages hosts the site at /recruit_sync/. The browser requested /assets/index.js instead of /recruit_sync/assets/index.js — file not found.

FIX

```
// vite.config.ts
base: '/recruit_sync/'
```

GitHub Actions build failing — wrong working directory

Fixed

Cause: The original deploy.yml was written when source code was inside frontend/. After restructuring to root, the workflow still pointed to working-directory: ./frontend and path: './frontend/dist' — neither of which existed.

FIX

```
# Removed working-directory from all steps
# Changed artifact path:
path: './dist' # was: './frontend/dist'
```

Empty JavaScript bundle — app not rendering

Fixed

Cause: A remote commit (019f1bc) removed the `<script type="module" src="/src/main.tsx">` entry point from `index.html`, mistakenly thinking Vite injects it automatically. Without this tag, Vite has no entry point and produces an empty bundle — the page loads but React never starts.

FIX

```
←!— Restored to index.html →  
<script type="module" src="/src/main.tsx"></script>
```

Direct URL navigation returns 404 (e.g. /dashboard)

Fixed

Cause: `BrowserRouter` uses real URL paths (`/dashboard`, `/clients`). GitHub Pages is a static file server — it has no `/recruit_sync/dashboard` file, so it returns a 404. A `404.html` redirect workaround was attempted but proved unreliable in the subdirectory setup.

FIX — SWITCH TO HASHROUTER

```
// src/main.tsx  
// BrowserRouter → HashRouter  
// URLs: /dashboard becomes /#/dashboard  
// Hash-based routes are never sent to the server,  
// so GitHub Pages never returns 404.  
<HashRouter>  
  <App />  
</HashRouter>
```