

Ex. 2

A114290003

2026-10-03

```
print(uuid::UUIDgenerate())
```

```
## [1] "cbc8127d-5c96-46ec-b768-ada9efe869fd"
```

```
##Q1
```

```
commute <- c(18, 25, 32, 41, 27, 35, 22, 19, 45, 38, 29, 24,  
            31, 36, 40, 26, 33, 28, 21, 44, 30, 37, 23, 39)
```

```
max(commute);min(commute)
```

```
## [1] 45
```

```
## [1] 18
```

```
(45 - 18)/5
```

```
## [1] 5.4
```

```
table(cut(commute,5))
```

```
##
```


```
## (18,23.4] (23.4,28.8] (28.8,34.2] (34.2,39.6] (39.6,45]  
##      5      5      5      5      4
```

```
##Q2
```

```
library(ggplot2)
```

```
#Draw histogram
```

```
ggplot(data.frame(commute),aes(x=commute))+  
  geom_histogram(binwidth=5)
```

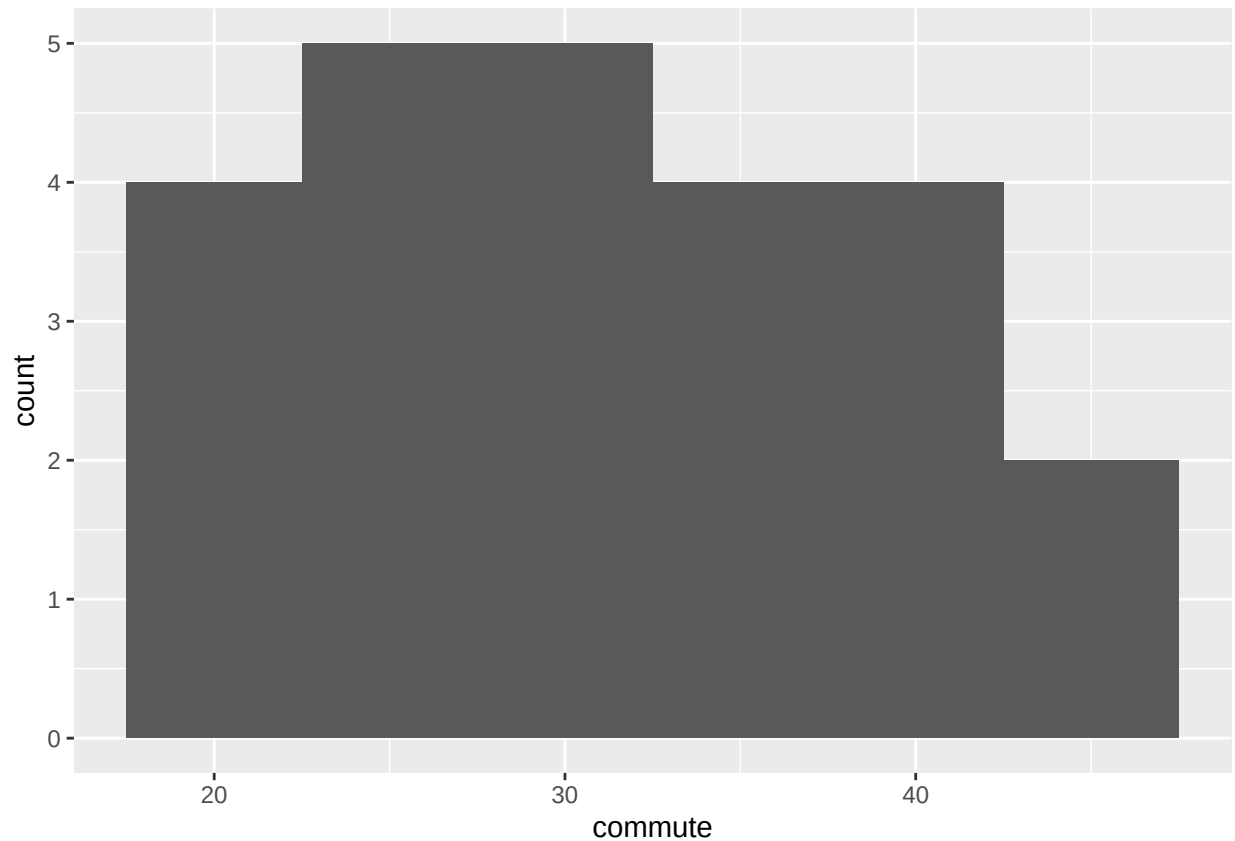

##Q3

```
# Drive into 5 classes
a <- cut(commute, 5)
# Frequency
freq <- table(a)
# Cumulative frequency
cum_freq <- cumsum(freq)
# Upper class boundaries
upper_boundaries <- c(23.4, 28.8, 34.2, 39.6, 45)
# Create data frame
ogive_data <- data.frame(
  upper_boundary = upper_boundaries,
  cumulative_frequency = cum_freq)
#Draw ogive
library(ggplot2)
ggplot(ogive_data, aes(x = upper_boundaries, y = cumulative_frequency)) +
  geom_line() +
  geom_point()
```

