

Ex.2

A114290005

2026-10-06

```
print(uuid::UUIDgenerate())
```

```
## [1] "89c40008-9f32-4e2d-b7bc-67944ab5534d"
```

Q1

```
commute <- c(18, 25, 32, 41, 27, 35, 22, 19, 45, 38, 29, 24,  
            31, 36, 40, 26, 33, 28, 21, 44, 30, 37, 23, 39)
```

```
max(commute);min(commute)
```

```
## [1] 45
```

```
## [1] 18
```

```
(45-18/5)
```


```
## [1] 41.4
```

```
table(cut(commute,5))
```

```
##  
## (18,23.4] (23.4,28.8] (28.8,34.2] (34.2,39.6] (39.6,45]  
##          5          5          5          5          4
```

Q2

```
library(ggplot2)  
#Draw histogram  
ggplot(data.frame(commute),aes(x=commute))+  
  geom_histogram(binwidth=5)
```

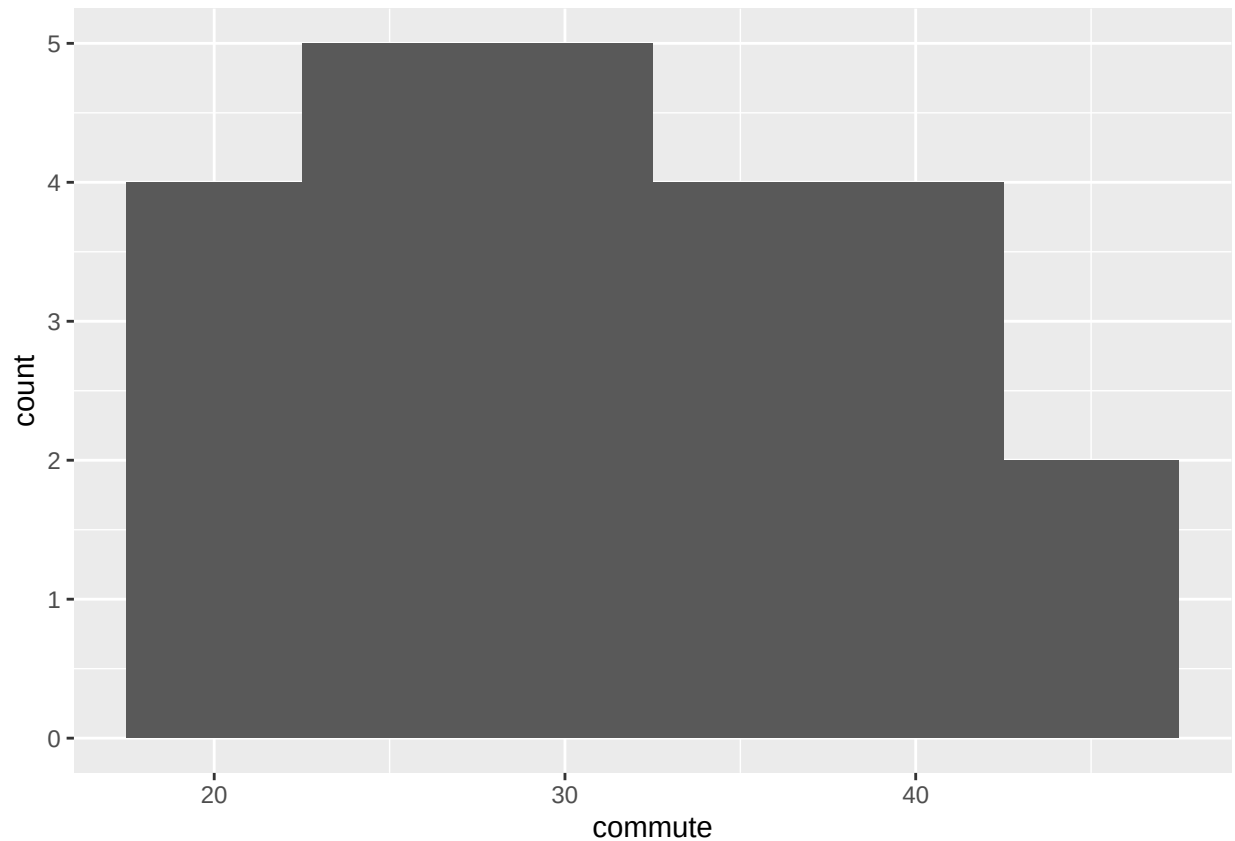

Q3

```
#Drive into 5 classes
a <- cut(commute,5)
#Frequence
freq <- table(a)
#Cumulative frequence
cum_freq <- cumsum(freq)
#Upper class boundaries
upper_boundaries <- c(23.4, 28.8, 34.2, 39.6, 45)
#Creat data frame
ogive_data <- data.frame(
  upper_boundary=upper_boundaries,
  cumulative_frequency = cum_freq
)

#Draw ogive
ggplot(ogive_data, aes(x = upper_boundaries, y = cumulative_frequency))+
  geom_line()+
  geom_point()
```

