

Maze Escape: Human vs Monster AI Survival Game

Group Number: XX

Member 1	Member 2	Member 3
Member 4	Member 5	Member 6

June 2026

Course Code: SOF106

Course Name: Principles of Artificial Intelligence

Academic Session: 202604

Assessment Title: Final Assessment Group Project

Contents


1	Introduction	3
2	Project Objectives	4
3	Methodology	5
3.1	Genetic Algorithm for Map Generation	5
3.2	Human AI Algorithm (BFS)	6
3.3	Monster AI Algorithms	6
3.3.1	Greedy Search	6
3.3.2	Minimax	6
3.3.3	Simulated Annealing	6
3.3.4	A* Algorithm	7
3.4	Item System	8
4	Implementation	8
5	Validation and Verification	8
5.1	Map Generation and Spawn Test	8
5.2	Boundary Test	9
5.3	Algorithm Comparison	9
6	Results and Discussion	9
7	Conclusion	9

Abstract

Our project is a survival game called **Maze Escape**. The goal of the project is to show the practical use of artificial intelligence search algorithms and machine learning. The game simulates humans being chased by monsters on a 30×30 toroidal grid map (wrapping edges). The system uses and compares five AI search strategies: **A* pathfinding**, **Greedy Algorithm**, **breadth-first search (BFS)**, **Minimax Algorithm**, and **Simulated Annealing Algorithm**. The maze is generated by a **Genetic Algorithm (GA)**. The GA improves map connectivity, wall density, path diversity, and branch structure through multi-generation evolution.

This project shows how artificial intelligence behaves under limited, competitive, and real-time conditions. It also shows how different search strategies change the difficulty of the game and affect the player experience. The A* algorithm creates the most direct pursuit path. The greedy algorithm gives fast performance with low computing cost. The simulated annealing algorithm adds controlled randomness and makes monster movement less predictable. The genetic algorithm keeps generating connected and navigable maps to maintain gameplay quality. With the addition of machine learning, interceptors can scroll to predict the position of the next three human steps, thus blocking possible escape routes.

1 Introduction

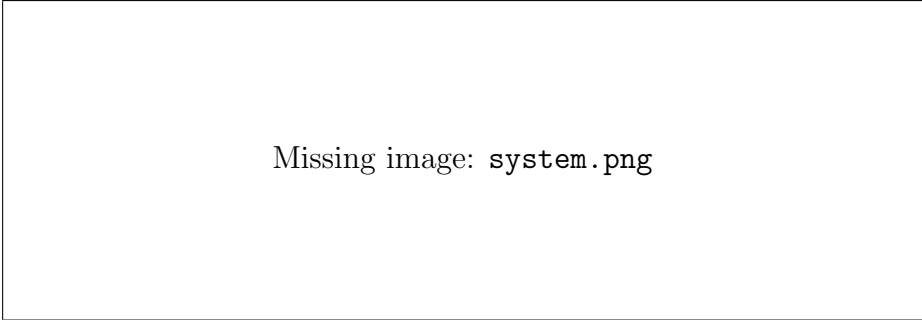

Missing image: `system.png`

Figure 1: Game System

In the course “Principles of Artificial Intelligence,” we studied a variety of search, planning, and optimization algorithms. Based on these core methodologies, our Maze Escape project extends static, single-agent pathfinding into dynamic, multi-dimensional adversarial scenarios. To achieve this transition, we introduce randomly generated maze maps based on genetic algorithms, expand the dimensional space, and a two-way tracking mechanism enhanced by predictive machine learning has been realized.

In order to comprehensively evaluate these algorithms, we have designed two complementary game modes: escape mode and chase mode. In the chase mode, the actions of human characters are driven by evasion algorithms based on Breadth-First Search (BFS). For the core task of predators pursuing prey, the project adopts four distinct intelligent strategies and combined with machine learning-driven interception mechanism:

- **A* Search Algorithm:** In single-monster mode, the algorithm calculates the shortest path to the player. In dual-monster mode, monsters are divided into two

types: direct pursuers and interceptors. The interceptors predict the player’s next move and block potential escape routes.

- **Greedy Algorithm:** It calculates a distance field centered at the player’s current position, causing monsters to always move toward the nearest neighboring node. This pursuit method is highly efficient and requires low computational resources.
- **Minimax Decision Tree:** This strategy treats the pursuit process as a two-player zero-sum game. The algorithm combines α - β pruning with a transposition table to predict subsequent moves. The monster aims to minimize the player’s safety score during the game, while simultaneously simulating the player’s efforts to maximize it, thereby enabling efficient pursuit from both perspectives.
- **Simulated Annealing Algorithm:** The algorithm first generates an initial movement path and then randomly adjusts it through repeated iterations. Following the cooling schedule, the system accepts suboptimal moves with a certain probability, making the monster’s actions more stochastic and harder to predict.
- **Machine Learning:** Based on spatial characteristics (the relative position of humans relative to monsters, local wall obstacles and the direction of movement of the first two steps), we have trained a random forest model to predict the next move of human players, and predict the position of the next three steps by rolling, so as to achieve effective blockade.

The core environment of our project is a 30×30 toroidal grid map, where the maze layouts are generated by a highly customized Genetic Algorithm (GA). The algorithm maintains a population of candidate maps and evolves them for more than 20 generations. The fitness function balances several critical factors, including strong floor connectivity, approximately 28% wall density, a high number of three-way and four-way junctions, and an average BFS path length close to 20 steps between randomly selected positions. The system also utilizes tournament selection, row-and-column crossover, and bit-flip mutation. These methods effectively assist the algorithm in generating maps with high accessibility, spatial diversity, and appropriate difficulty.

The following sections of this report will introduce the design and specific implementation methods of each component in detail, quantitatively analyze the algorithmic characteristics of each AI strategy along with its impact on gameplay, and reflect on their respective advantages and limitations observed during the development process.

2 Project Objectives

The main objectives of this project are:

- To develop a playable human versus monster survival game.
- To apply artificial intelligence algorithms in a game environment.
- To generate playable maps using a Genetic Algorithm.
- To implement different monster AI strategies.
- To compare the behavior and performance of different algorithms.

3 Methodology

3.1 Genetic Algorithm for Map Generation

The map generation module uses a genetic algorithm to automatically generate the game map. The aim of this part is not just to place walls randomly, but to create a 30×30 map that is connected, playable, and suitable for the chase mechanism in this game. In this project, the map structure directly affects the game balance. If the map is too open, monsters may chase the human too easily. If there are too many walls, the movement of both the human and monsters may become restricted, and they may even be separated into unreachable areas. For this reason, the map generation process needs to balance randomness and playability.

The map is represented as a 30×30 two-dimensional grid. Each cell is stored as a binary value. The value 0 represents walkable ground, while the value 1 represents a wall or obstacle. The human and monsters can only move on walkable cells. The map also uses a wrap-around boundary mechanism, which means that when a character moves out of one side of the map, it will appear from the opposite side. Because of this design, modulus operation is used when calculating neighbouring cells, and Breadth-First Search (BFS) can be applied on this wrap-around map structure for connectivity and path distance checking.

In the genetic algorithm, each map is regarded as a chromosome, while a group of maps forms a population. The initial population is generated randomly, where each cell is assigned as either walkable ground or obstacle according to a fixed wall probability. In this implementation, the target wall ratio is set to around 0.28, which means that about 28% of the map is expected to be walls. This value is used to avoid maps that are either too empty or too crowded.

After the initial maps are generated, each candidate map is evaluated by a fitness function. The fitness function mainly considers four factors: reachability, wall ratio, junction complexity, and path distance. The final fitness score can be expressed as:

$$\text{Fitness} = S_{\text{reachability}} + S_{\text{wall ratio}} + S_{\text{junction}} + S_{\text{path distance}} - P_{\text{dead-end}} \quad (1)$$

Reachability is used to check whether most walkable cells are connected. Wall ratio controls the proportion of walls and compares it with the target value of 0.28. Junction complexity measures the number of branches and intersections, which can provide more possible route choices during the chase. Path distance is used to evaluate whether the average BFS path length in the map is suitable for the survival chase setting. The dead-end penalty is added to reduce the number of cells with very few exits, because too many dead ends may make the map unfair or less playable.

During each generation, the generator calculates the fitness score of every map in the current population. Then, maps with better scores are selected as parents through tournament selection. The crossover operation combines partial structures from two parent maps to generate offspring maps. The mutation operation randomly changes a small number of cells with a low probability, such as changing walkable ground into walls or changing walls into walkable ground. After several generations of selection, crossover, and mutation, the system gradually evolves maps that are more suitable for the game environment.

At the end, the map with the highest fitness score is saved as a text file. The map file uses a space-separated 0 and 1 format, where each line corresponds to one row of the

map. This format is simple, readable, and easy for both Python and C++ game modules to load. Apart from the map grid itself, the system also validates the spawn points of the human and monsters. The spawn points must be located on walkable cells, and the human and monster spawn points cannot overlap. The system also checks the BFS path distance between them. In this implementation, the valid starting distance is set between 10 and 25 BFS steps, so that the monster is not placed too close or too far away from the human at the beginning of the game.

3.2 Human AI Algorithm (BFS)

When the user plays the role of monster, a Breadth-First Search(BFS)-based system is used to control the human character. Generally, the objective of the human character is to keep as far away from the monster as possible. Therefore, every time when the Human AI needs to decide its move direction, we run BFS starting from the monster's current position. This creates a distance map over the whole maze, where each reachable cell stores how many steps the monster would need to reach it. Since the maze is an unweighted grid, BFS gives the shortest path distance correctly.

After building this distance map, the Human AI checks the four possible next positions of the human: up, down, left, and right. It chooses the move with the largest BFS distance from the monster, meaning the human tries to move to the neighboring cell that is farthest away in terms of actual maze path distance.

3.3 Monster AI Algorithms

Several AI algorithms are used for monster movement.

3.3.1 Greedy Search

3.3.2 Minimax

3.3.3 Simulated Annealing

In the third difficulty, we use Simulated Annealing to plan the route for the monster AI. Although Simulated Annealing can not guarantee finding the shortest path, it can still be used to obtain a near-optimal path, which is sufficient for our Monster AI.

Initially, the initial state is built by greedy search with toroidal Manhattan distance as its heuristic function. However, after some tests, we found that in some cases, greedy search might fail to reach the target, causing the entire simulated annealing process to fail. Therefore, we used Depth-First Search(DFS) to generate the initial state. The DFS prefers moves that are closer to the human using toroidal Manhattan distance, but it also shuffles candidates so the path is not completely deterministic. Several tests proved that this metric is effective enough to ensure reaching the target state, and the time complexity is also acceptable because of its preference for smaller Manhattan distance.

The Simulated Annealing generates neighbour solution by cutting the current path at a random point and trying to rebuild the remaining path from that cut point to the human. The cost of each state is calculated by the following function:

$$E(P) = Cost(P) - J(P) + Repeat(P) + \Delta(P).$$

The first term is the chase cost:

$$Cost(P) = |P| + 3D_M(p_{\text{move}}, h) + 0.5D_M(p_{\text{end}}, h).$$

Here, $|P|$ keeps the planned path short, p_{move} is the position reached after the monster's two actual movement steps, and p_{end} is the last point of the planned path. $D_M(\cdot, h)$ is the toroidal Manhattan distance to the human. $D_M(p_{\text{move}}, h)$ is added to encourage the monster to move towards the human, while $D_M(p_{\text{end}}, h)$ is added to penalize routes that fail to reach the target. Since only the first two steps of the planned route are used in each round, the second term is given a larger weight than the third term.

The second term rewards junction control:

$$J(P) = \min \left(6, \sum_i j_i \right), \quad j_i = \begin{cases} 2.0, & \deg(p_i) \geq 3 \text{ and } i < 6, \\ 0.5, & \deg(p_i) \geq 3 \text{ and } i \geq 6, \\ 0, & \text{otherwise,} \end{cases}$$

where $\deg(p_i)$ is the number of walkable neighboring cells. Since $J(P)$ is also subtracted, the monster is encouraged to pass through junctions, which gives it more possible future routes and makes its movement harder for the player to predict.

The third term uses the previous SA move:

$$Repeat(P) = 10I(p_{\text{move}} = p_{\text{prev}, \text{start}}).$$

This term penalizes immediately moving back to the previous starting cell. It adds a small amount of cross-turn variation.

Finally, the fourth term adds small route variation:

$$\Delta(P) = 2 \cdot \frac{1}{k} \sum_{i=0}^{k-1} \delta(p_i), \quad k = \min(|P|, 6),$$

where $\delta(p_i) \in [-1, 1]$ is a random cell cost generated once at the start of the current SA run. This term is applied only to the first six cells because the monster only moves two steps after planning, so early route variation matters more than changes near the end of the path.

Overall, the objective still minimizes path length and strongly prefers paths that move toward the human. The random, junction, and previous-move terms are deliberately smaller, so they mainly act as tie breakers between similar chase paths rather than making the monster wander randomly.

3.3.4 A* Algorithm

A* is a heuristic graph search algorithm. It finds the shortest path between two nodes by adding the cost of the lined path to the residual cost estimate of reaching the target node. The cost of each node is calculated by the following function:

$$f(n) = g(n) + h(n)$$

In the process of the monster moving to the player in each round, the map grid is regarded as an untitled map, thus calculating the path cost. Due to randomly generated roadblocks, each walkable grid cell has up to four neighbors, which can be reached by

moving up, down, left or right. When calculating heuristic functions, we use the Manhattan distance between the current cell and the player’s location. In addition, because the map has a ring structure, we will apply modular operations to the row index and column index every time we expand the neighbor. This allows movement to cross the grid boundary. After the algorithm is executed, the core function `astar(grid, start, goal)` will return the full path from the current position of the monster to the player. With each move of the player, the Astar algorithm will calculate the corresponding optimal path. If there is no path (for example, the player is completely surrounded by a wall), the monster will stay in place.

3.4 Item System

Items are generated after a fixed number of human steps. For example, new items may appear every 10 human steps. Unused items remain on the map. Items can affect the movement and strategy of the game, such as giving the human a speed boost or temporarily stopping the monster.

4 Implementation

The project is divided into several modules. The AI folder stores the algorithm implementations, including Genetic Algorithm, BFS, Greedy Search, A*, Minimax, and Simulated Annealing. The game folder stores the main game logic, including map handling, player movement, monster movement, item logic, collision checking, and scoring.

The Genetic Algorithm module outputs a text file containing the generated map. The game system can then load this map and use it during gameplay.

5 Validation and Verification

Several tests are used to validate the project.

5.1 Map Generation and Spawn Test

The map generation module is tested through several validation steps. First, the program checks whether the generated map size is exactly 30×30 and whether all cell values are strictly either 0 or 1. This step ensures that the generated map follows the correct format before it is used by the main game program.

Second, BFS-based connectivity checking is used to evaluate whether the walkable cells are sufficiently connected. This helps prevent the map from being divided into isolated regions where the human and monsters cannot reach each other. Since the game uses a wrap-around boundary, BFS is performed based on the same neighbour calculation used in the game movement logic.

Third, the wall density is checked against the target wall ratio. In this project, the target wall ratio is around 0.28. A map with too few walls may make the chase too direct, while a map with too many walls may block movement and reduce playability. Therefore, the wall ratio is included in the fitness function to keep the map at a balanced level.

The spawn points are also validated before the map is used. The human and monsters must start on valid walkable cells, and their positions cannot be the same. The distance

between the human and monster spawn points is checked by BFS path distance instead of simple Manhattan distance, because the map contains walls and uses wrap-around boundaries. In the final implementation, the spawn distance is controlled between 10 and 25 BFS steps. This makes the starting positions more suitable for a chase game, because the monster will not catch the human immediately, but it will also not start too far away.

Finally, the generated map is saved as `map/generated_map.txt` and loaded into the main game program. If the main system can correctly load the map and complete human movement, monster chasing, and collision detection, then the map generation module can be considered successfully integrated with the game system. With these checks, the generated map is more than a purely random result, since it satisfies the basic requirements for movement, chasing, and integration with the main game system.

5.2 Boundary Test

The wrap-around boundary is tested by moving characters across the edges of the map. Moving left from column 0 should move the character to column 29. Moving up from row 0 should move the character to row 29.

5.3 Algorithm Comparison

The monster AI algorithms can be compared using capture steps, runtime, and behavior. Greedy Search is simple and fast. A* is more stable for pathfinding. Minimax can predict future movement but requires more computation. Simulated Annealing provides more random behavior.

6 Results and Discussion

The project successfully generates playable maps and supports AI-based monster chasing behavior. The Genetic Algorithm improves map quality compared with purely random map generation. BFS can support human escape planning. A* provides more reliable chasing behavior than Greedy Search when obstacles exist.

The project also shows that different algorithms have different strengths and weaknesses. Simple algorithms are easier to run but may perform poorly in complex maps. More advanced algorithms can make better decisions but may require more computation.

7 Conclusion

In conclusion, this project demonstrates how artificial intelligence algorithms can be applied in an interactive survival chase game. The Genetic Algorithm is used for map generation, BFS is used for human path searching, and several monster AI algorithms are used for chasing behavior. Through this project, the team gained practical experience in AI search algorithms, optimization, game logic, and system integration.

Future improvements may include better multi-agent monster cooperation, more advanced item effects, improved user interface design, and reinforcement learning-based monster behavior.