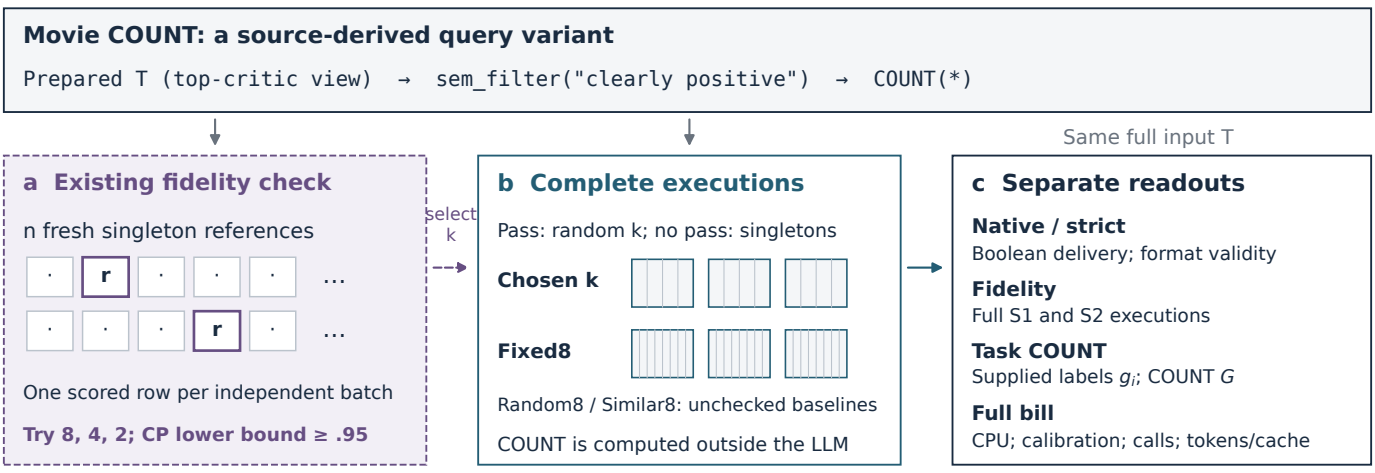
Movie COUNT: a source-derived query variant
Prepared T (top-critic view) → sem_filter("clearly positive") → COUNT(*)
a Existing fidelity check
n fresh singleton references
r
r
One scored row per independent batch
Try 8, 4, 2; CP lower bound ≥ .95
select k
b Complete executions
Pass: random k; no pass: singletons
Chosen k
Fixed8
Random8 / Similar8: unchecked baselines
COUNT is computed outside the LLM
Same full input T
c Separate readouts
Native / strict
Boolean delivery; format validity
Fidelity
Full S1 and S2 executions
Task COUNT
Supplied labels g_i; COUNT G
Full bill
CPU; calibration; calls; tokens/cache