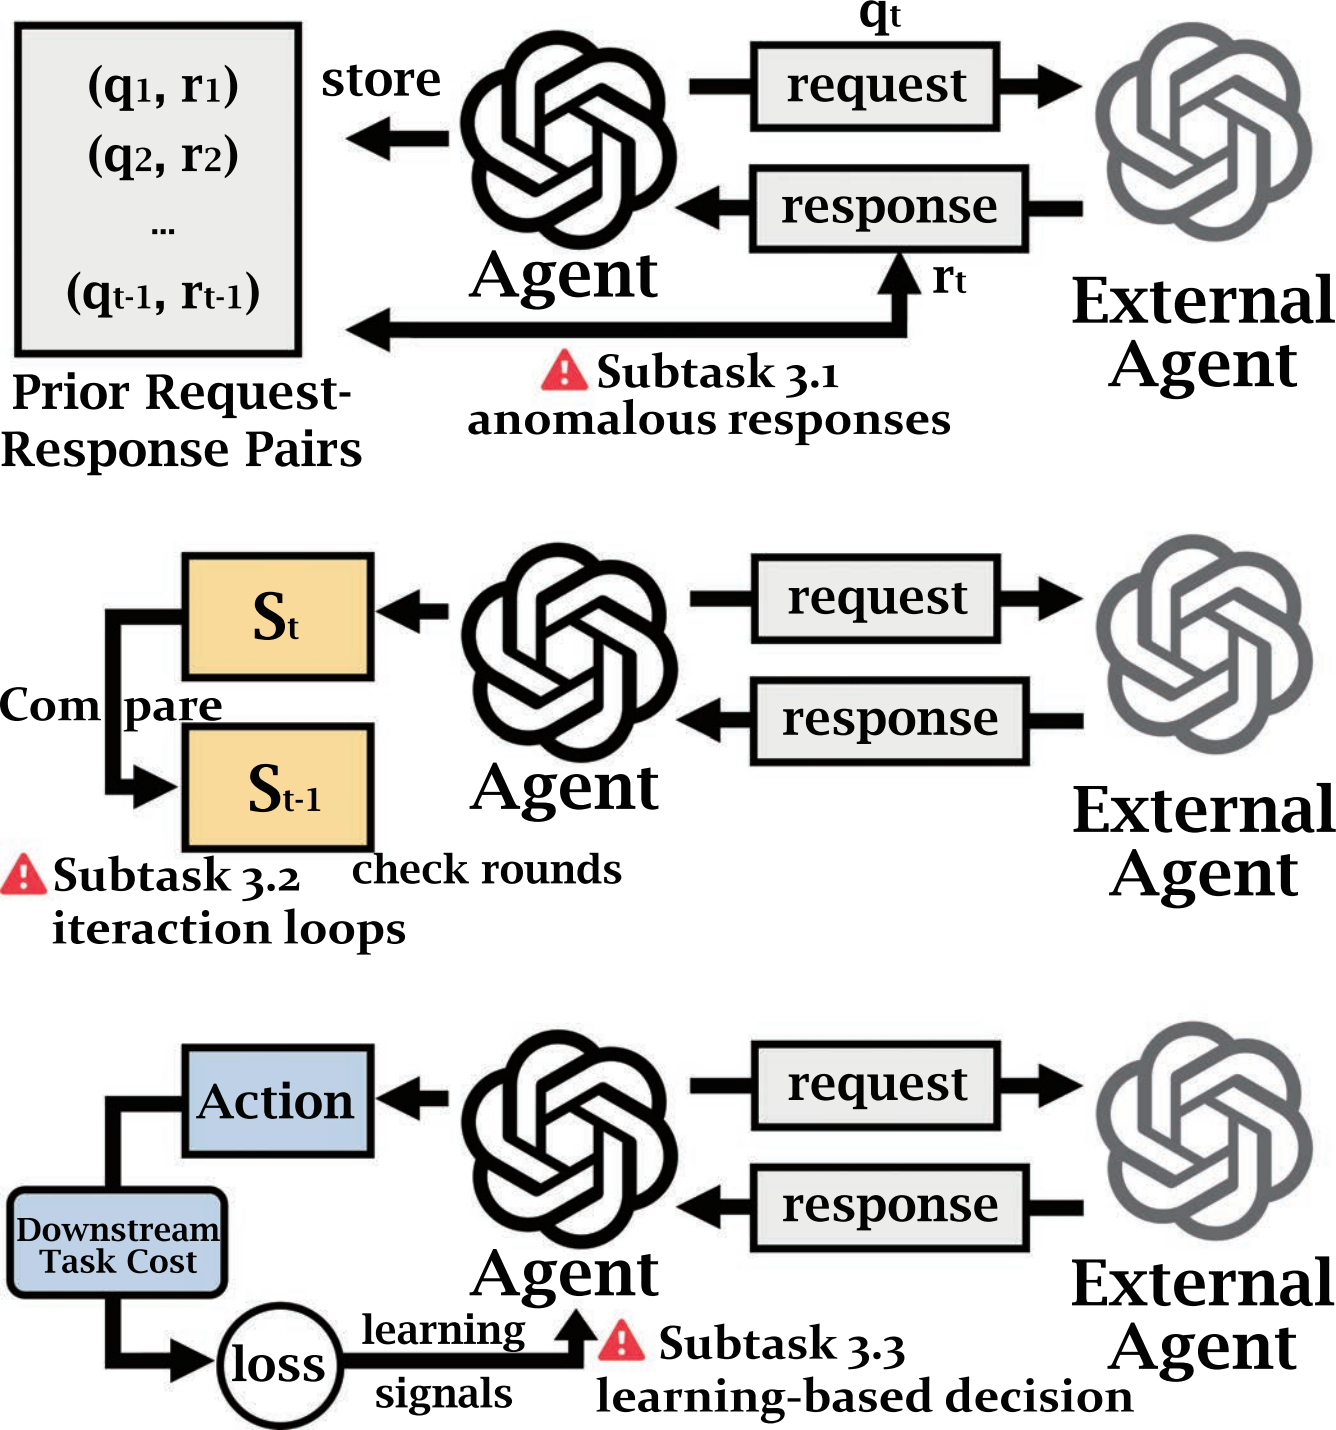
(q_1, r_1)
(q_2, r_2)
...
(q_{t-1}, r_{t-1})
Prior Request-Response Pairs
store
Agent
q_t
request
response
r_t
External Agent
Subtask 3.1
anomalous responses
S_t
S_{t-1}
Compare
check rounds
Subtask 3.2
iteraction loops
Action
Downstream Task Cost
loss
learning signals
Subtask 3.3
learning-based decision