


PL056GE300K Planetary Gearbox

● General Information

- Ring material: Metal
- Max. Backlash at no-load: $\leq 2.0^\circ$
- Radial play of shaft: $\leq 0.08\text{mm}$
- Axial play of shaft: $\leq 0.4\text{mm}$
- Permissible Load Range: 3.0Nm~30.0Nm

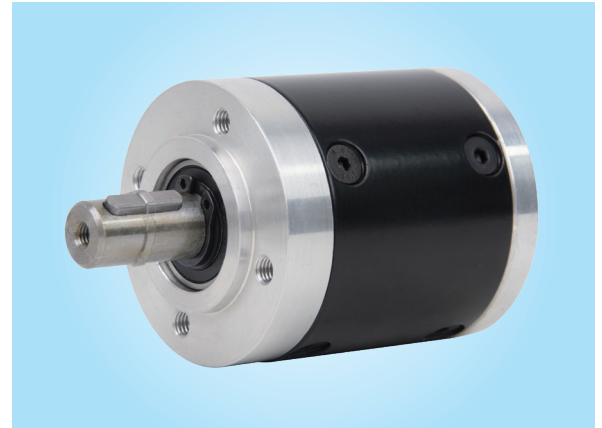

● Specification

	Unit	PL056GE300K-1S	PL056GE300K-2S	PL056GE300K-3S
Frame size	mm	$\phi 56$	$\phi 56$	$\phi 56$
Reduction ratio		1/4.5, 1/6.25, 1/8	1/20, 1/28, 1/36 1/50, 1/64	1/91, 1/127, 1/162, 1/225 1/313, 1/400
Efficiency	%	90	81	73
Number of stages		1	2	3
Rated Continuous torque	Nm	3	15	30
Max. Momentary torque	Nm	6	30	60
Max. Radial load(10mm from flange)	N	400	400	400
Max. Axial load	N	120	120	120
Max. Shaft press fit force	N	300	300	300
Gearbox Length	mm	50.6	66	81.4
Weight	g	550	720	930
Max. Backlash at no-load	$^\circ$	2.0	2.0	2.0
Operating Temperature	$^\circ\text{C}$	-15 ~ +80		
Recommend input speed	rpm	<6000		

● Mechanical

