
1.In your Mysql Database, import the sql file.

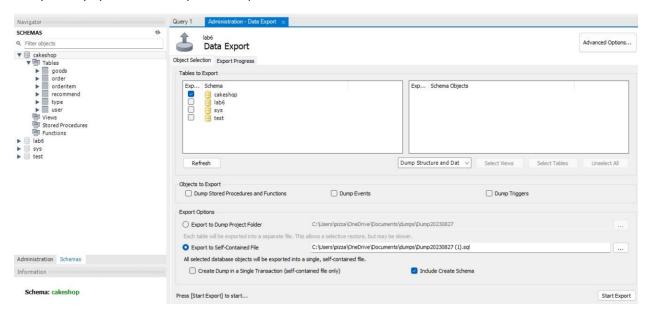

2. In the java Resources/src folder, config the c3p0-config.xml to connect to your local database. The project will be ready to run. Admin account name is admin and password is admin.

```
E 🕏 🍞 🐌 🖁 🗖 🔲 🚨 c3p0-config.xml ×
Project Explorer X
                                             <?xml version="1.0" encoding="UTF-8"?>
Servers
Shop
                                             <!-- setup the database connection here-->
> 🛅 Deployment Descriptor: Shop
                                             Bind to grammar/schema...
> A JAX-WS Web Services
                                         i 4⊖ <c3p0-config>

→ 

B

Java Resources

  <default-config>
    > 🖶 dao
                                                     cproperty name="driverClass">com.mysql.jdbc.Driver/property>
                                                      property name="jdbcUrl">
    > H filter
                                           70
                                                         <![CDATA[jdbc:mysql://127.0.0.1:3306/cakeshop?useSSL=true]]>
    > 🌐 listener
                                           8
                                           9
                                                     </property>
    > H model
                                                     root
    > 🔠 service
                                                     cproperty name="password">4413</property>
    > # servlet
                                                 </default-config>
    > de utils
                                          13 </c3p0-config>
      x c3p0-config.xml
  > N Libraries
```