


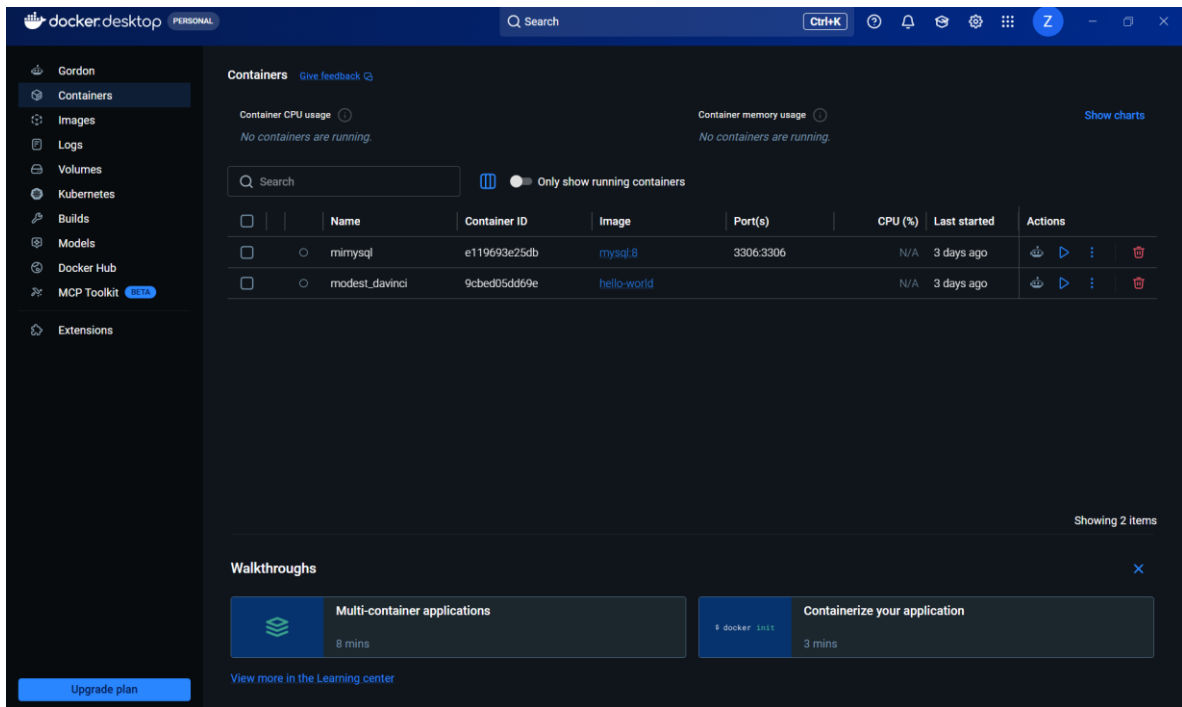


Borramos el contenedor

```

Windows PowerShell
PS C:\WINDOWS\System32> docker ps -a
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS        PORTS
e119693e25db   mysql:8        "docker-entrypoint.s..." 3 days ago    Exited (255) 43 minutes ago    0.0.0.0:3306->3306/tcp,
33060/tcp     mimysql
9cbcd05dd69e   hello-world    "/hello"                 3 days ago    Exited (0) 3 days ago
modest_davinci
PS C:\WINDOWS\System32> docker rm e119693e25db
e119693e25db
PS C:\WINDOWS\System32>

```

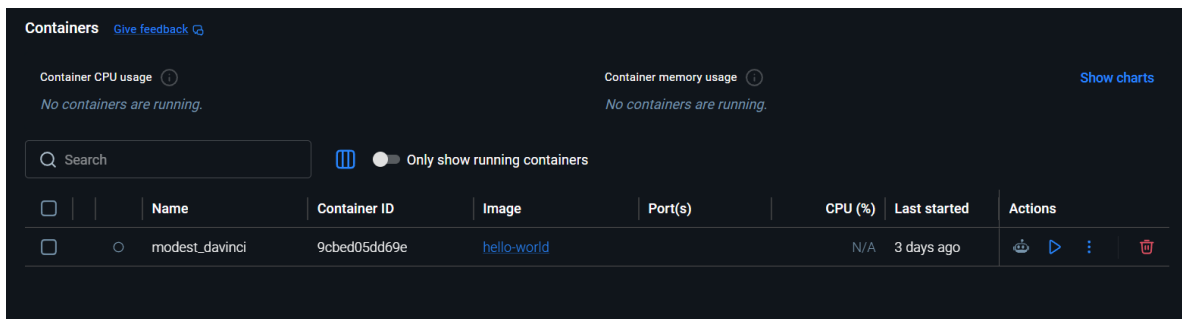

Creamos un contenedor para MySQL

```

Windows PowerShell
PS C:\WINDOWS\System32> docker run --name mi-mysql -v data:/var/lib/mysql -e MYSQL_ROOT_PASSWORD=root -d mysql:8
96b2c22882114c777ea45dc99b36fe6bd7f1700ceabb9efd93f2be8839205051
PS C:\WINDOWS\System32> docker ps
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS        PORTS        NAMES
96b2c2288211   mysql:8        "docker-entrypoint.s..." 53 seconds ago Up 52 seconds 3306/tcp, 33060/tcp    mi-mysql

```

Accedemos al contenedor

```
PS C:\WINDOWS\System32> docker exec -it mi-mysql mysql -u root -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 8
Server version: 8.4.11 MySQL Community Server - GPL

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> |
```

Creamos la base de datos

```
mysql> Create database biblioteca;
Query OK, 1 row affected (0.00 sec)

mysql> |
```

Entramos y creamos las tablas

```
mysql> use biblioteca;
Database changed
mysql> CREATE TABLE usuarios (
  ->     id_usuario INT AUTO_INCREMENT PRIMARY KEY,
  ->     nombreUsuario VARCHAR(255),
  ->     email VARCHAR(255)
  -> );
Query OK, 0 rows affected (0.01 sec)

mysql>
mysql> CREATE TABLE libros (
  ->     id_libro INT AUTO_INCREMENT PRIMARY KEY,
  ->     titulo VARCHAR(255),
  ->     autor VARCHAR(255)
  -> );
Query OK, 0 rows affected (0.01 sec)
```

```
mysql>
mysql> CREATE TABLE prestamos (
  ->     id_prestamo INT AUTO_INCREMENT PRIMARY KEY,
  ->     id_usuario INT,
  ->     id_libro INT,
  ->     fechaPrestamo TIMESTAMP,
  ->     FOREIGN KEY (id_usuario) REFERENCES usuarios(id_usuario),
  ->     FOREIGN KEY (id_libro) REFERENCES libros(id_libro)
  -> );
Query OK, 0 rows affected (0.02 sec)

mysql> show tables;
+-----+
| Tables_in_biblioteca |
+-----+
| libros                |
| prestamos             |
| usuarios              |
+-----+
3 rows in set (0.00 sec)
```

Insertamos datos

```
mysql> INSERT INTO usuarios (id_usuario, nombreUsuario, email) VALUES
  -> (1, 'Ana Gmez', 'ana@email.com'),
  -> (2, 'Carlos Ruz', 'carlos@email.com');
Query OK, 2 rows affected (0.01 sec)
Records: 2  Duplicates: 0  Warnings: 0

mysql>
mysql> -- LIBROS
Query OK, 0 rows affected (0.00 sec)

mysql> INSERT INTO libros (id_libro, titulo, autor) VALUES
  -> (1, 'El Principito', 'Antoine de Saint-Exupry'),
  -> (2, 'Cien Años de Soledad', 'Gabriel Garcia Marquez');
Query OK, 2 rows affected (0.00 sec)
Records: 2  Duplicates: 0  Warnings: 0

mysql>
mysql> -- PRESTAMOS
Query OK, 0 rows affected (0.00 sec)

mysql> INSERT INTO prestamos (id_prestamo, id_usuario, id_libro, fechaPrestamo) VALUES
  -> (5001, 1, 1, '2026-03-01'),
  -> (5002, 2, 2, '2026-03-02'),
  -> (5003, 1, 2, '2026-03-05');
Query OK, 3 rows affected (0.01 sec)
```

Mostramos los usuarios

```
mysql> SELECT * FROM usuarios;
+-----+-----+-----+
| id_usuario | nombreUsuario | email          |
+-----+-----+-----+
|          1 | Ana Gmez      | ana@email.com  |
|          2 | Carlos Ruz    | carlos@email.com |
+-----+-----+-----+
2 rows in set (0.00 sec)
```