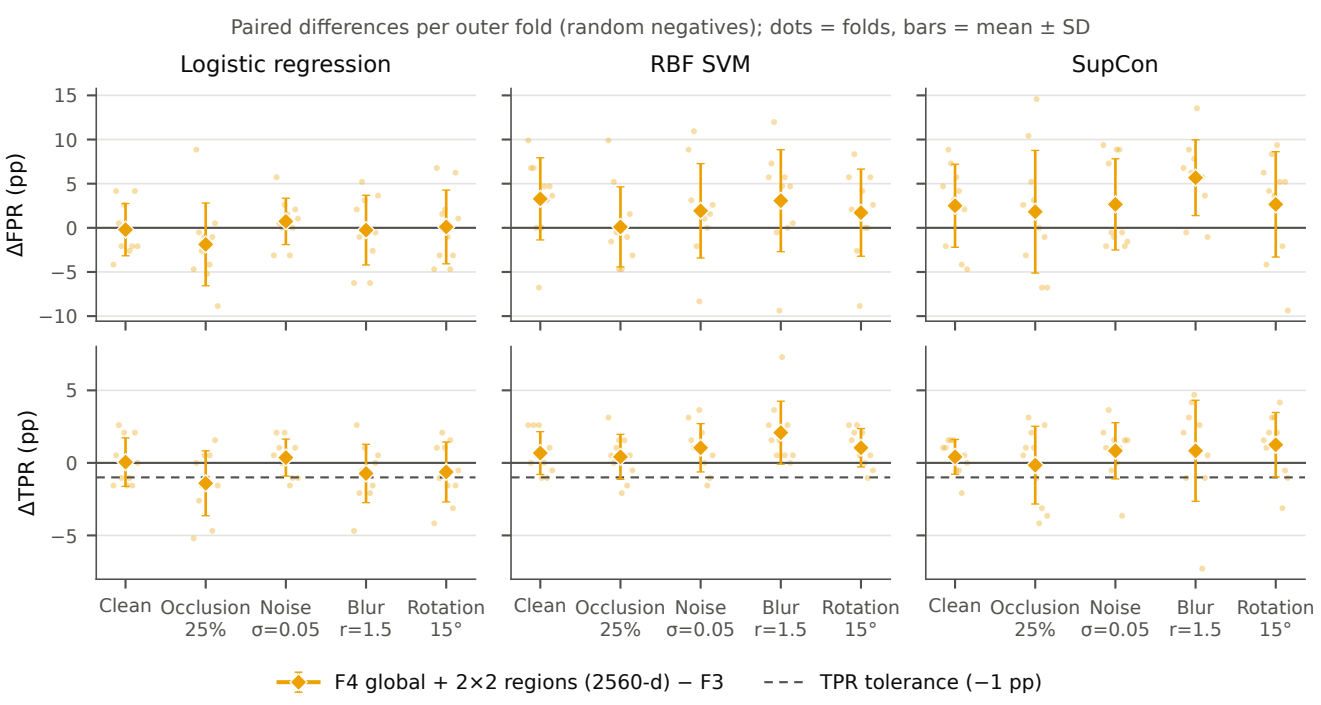
Paired differences per outer fold (random negatives); dots = folds, bars = mean ± SD
Logistic regression
RBF SVM
SupCon
ΔFPR (pp)
ΔTPR (pp)
15
10
5
0
−5
−10
Clean
Occlusion 25%
Noise σ=0.05
Blur r=1.5
Rotation 15°
F4 global + 2×2 regions (2560-d) − F3
TPR tolerance (−1 pp)