
Notebook

Sign Up

LLD: Concurrency Control

"Concept && Coding" YT Video Notes

Scenario: Many concurrent request tries to book same Movie theatre Seat

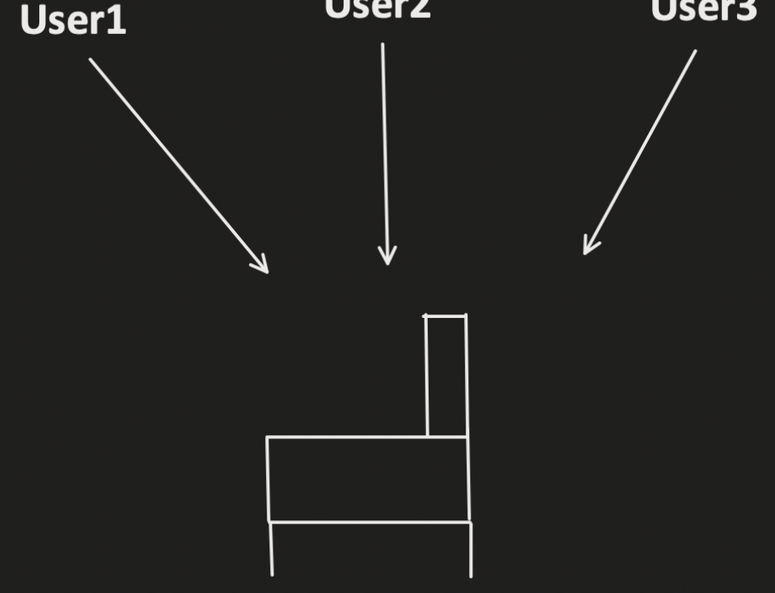

ID	Status
10	FREE

```
{
    Read Seat Row with ID: 10
    If Free:
        Logic to Change the Status from Free to Booked
        Update the DB
}
```

1. Using "SYNCHRONIZED" for the Critical Section:

```
synchronized ()
{
    Read Seat Row with ID: 10
    If Free:
        Logic to Change the Status from Free to Booked;
        Update the DB;
}
```

ID	Status
10	FREE

Will this solution works for Distributed System?

2. Using Distributed Concurrency Control

- Optimistic Concurrency Control (OCC)
- Pessimistic Concurrency Control (PCC)

But before we learning this, we MUST know below IMPORTANT things first.

1. What is the usage of **Transaction**?
2. What is **DB Locking**?
3. What are the **Isolation Level present**?

Report Abuse