Notebook

Sign Up

Two Phase Locking (2PL)

"Concept && Coding" YT Video Notes

Before this video, do checkout the previous ***"Distributed Concurrency"*** video in this ***HLD*** playlist....


Basic Two Phase Locking:

Phase1: Growing Phase

- Txn request for the lock by Lock manager.
- Lock Manager either grant or denied the lock request *(denied if other txn has placed the locked on it already)*

Phase2: Shrinking Phase

- Txn can not acquire any new locks.
- Txn is only allowed to release the lock which is taken previously.

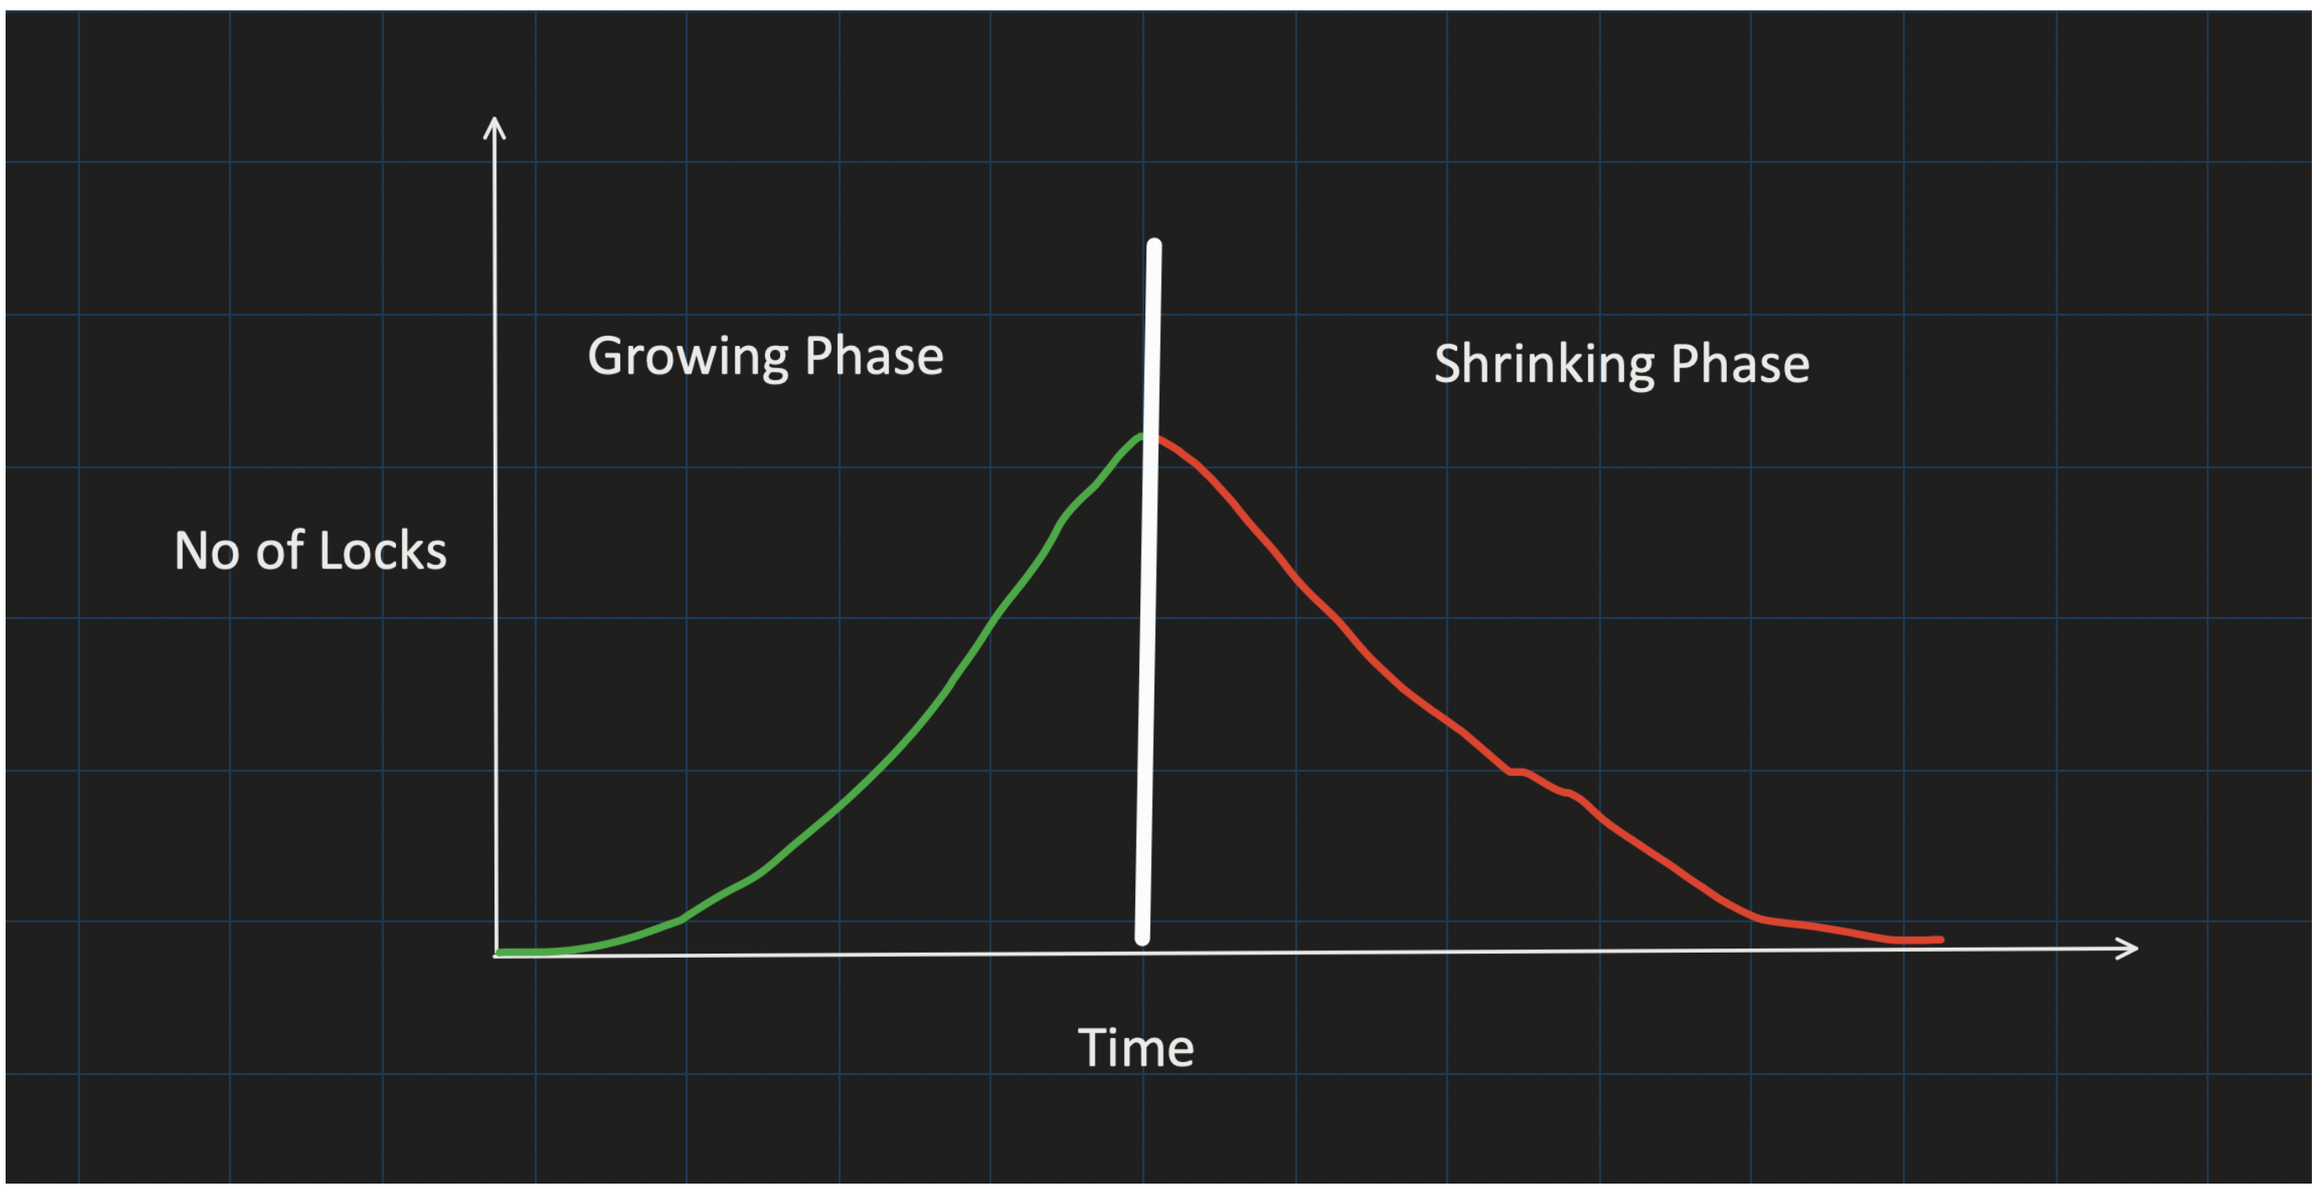

Time	Transaction 1	Transaction2
t0	BEGIN TXN	
t1	X(A)	
t2	X(B)	
t3	process some work	
t4	Unlock (A)	BEGIN TXN
t5	Unlock (B)	X(B)
t6	COMMIT	X(A)
t7		COMMIT

(commit will unlock A and B internally)

Report Abuse