rdtsc → time on... edx:eax

↳ zeros or maybe-other bits

is # of s since process or was last reset

```
shl rdx, 0x20
or  rax, rdx
mov rcx, rax
```

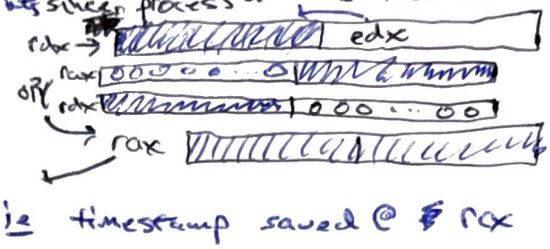

ie timestamp saved @ rcx

```
rdtsc
shl   rdx, 0x20
or    rax, rdx
```

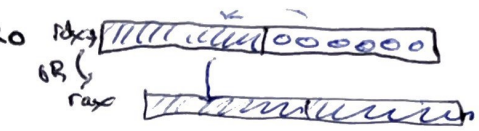

ie timestamp saved to rax

```
cmp   rcx, rax
```

gives interval of time t between these 2 calls

```
rdtsc
shl     rdx,0x20
or      rax,rdx
mov     rcx,rax

rdtsc
shl     rdx,0x20
or      rax,rdx

cmp     rcx,rax
```

← "Art of Chupacy"

explain: this is used to maybe see if the is normal

ELSE packer knew a debugger is running

[0x18]