start of displacement...

call .skip → rsp -= 8 := add. of

stack grows

{db 'hello world!', 0}

.skip:

call print_str

add rsp, 8 — discarding the byte stored here???

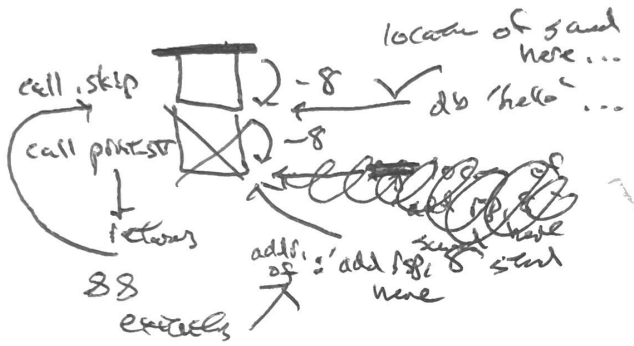

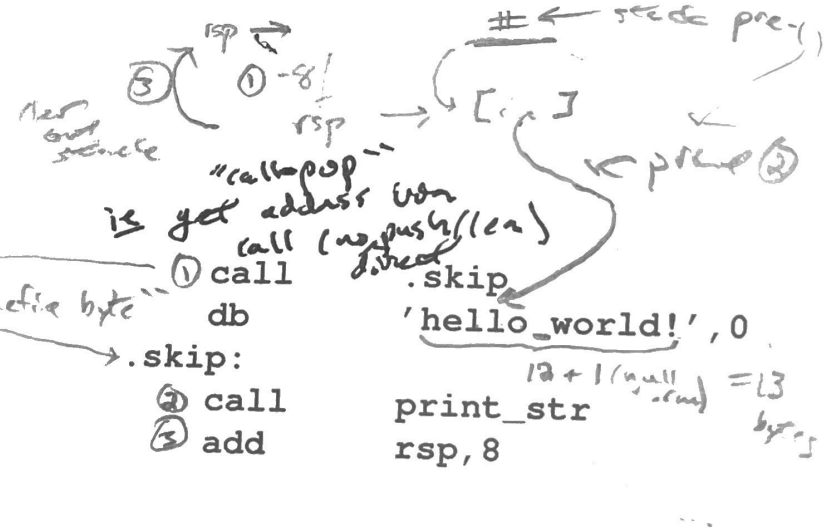

realization:

a call fn can implicitly push data onto stack

~~the stack to skip lines of code??~~