"call-pop"

ie move address of a label (.next) → register (rax)

```
①      call      .next
   .next:
②      pop       rax
```

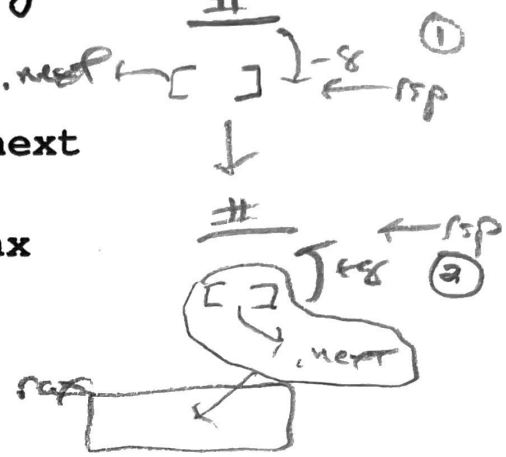

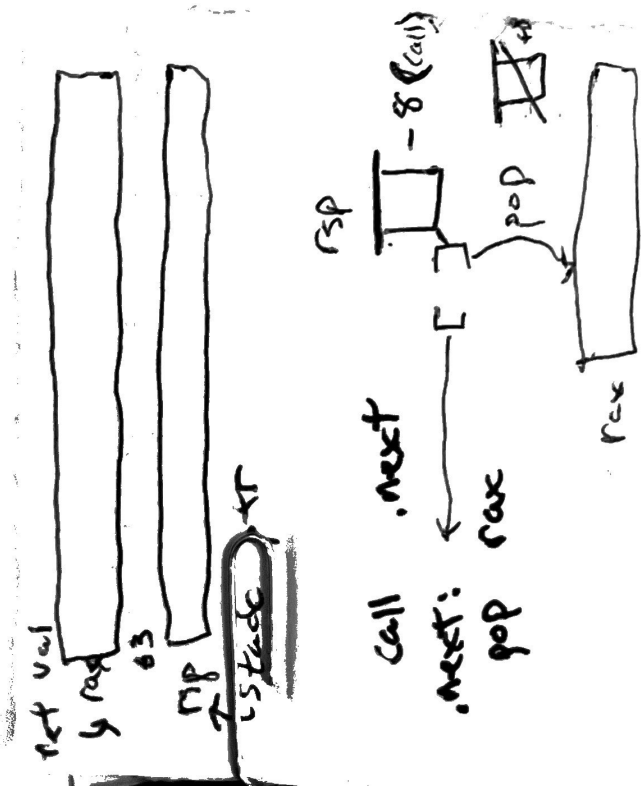

ie move address of a label into a register