



Test 4 – curl comparisons

- a. Test Input – *curl https://google.com/*
Base Case

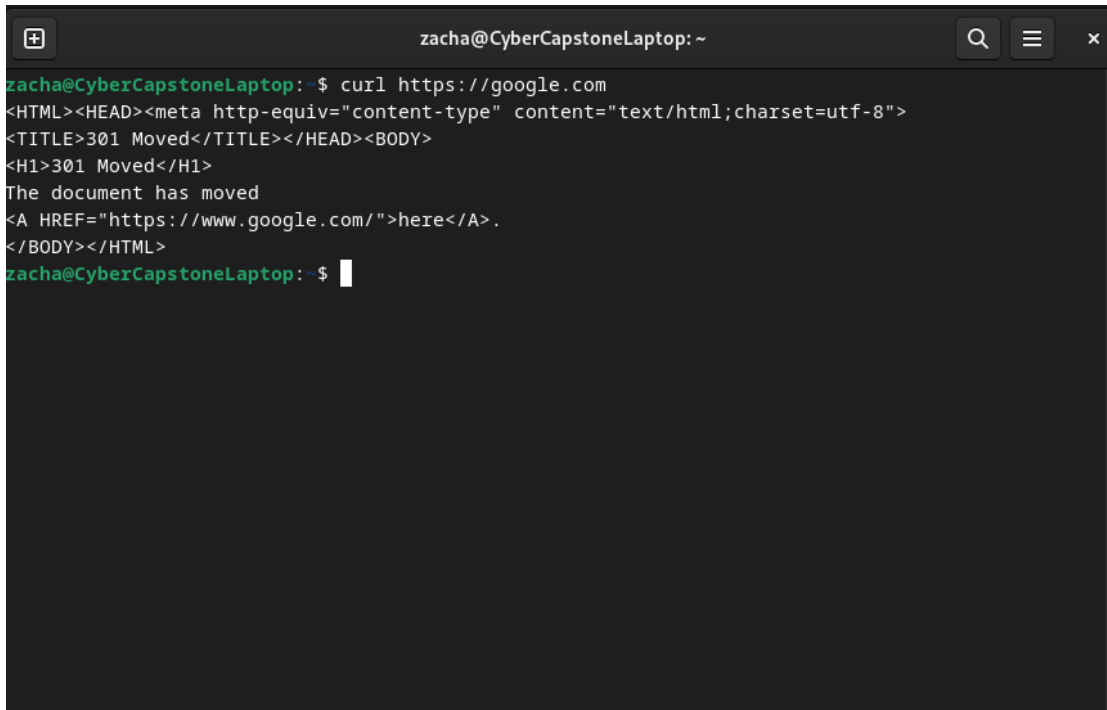


```
zacha@CyberCapstoneLaptop: ~  
zacha@CyberCapstoneLaptop:~$ curl https://google.com  
<HTML><HEAD><meta http-equiv="content-type" content="text/html; charset=utf-8">  
<TITLE>301 Moved</TITLE></HEAD><BODY>  
<H1>301 Moved</H1>  
The document has moved  
<A HREF="https://www.google.com/">here</A>.  
</BODY></HTML>  
zacha@CyberCapstoneLaptop:~$
```

Test Case

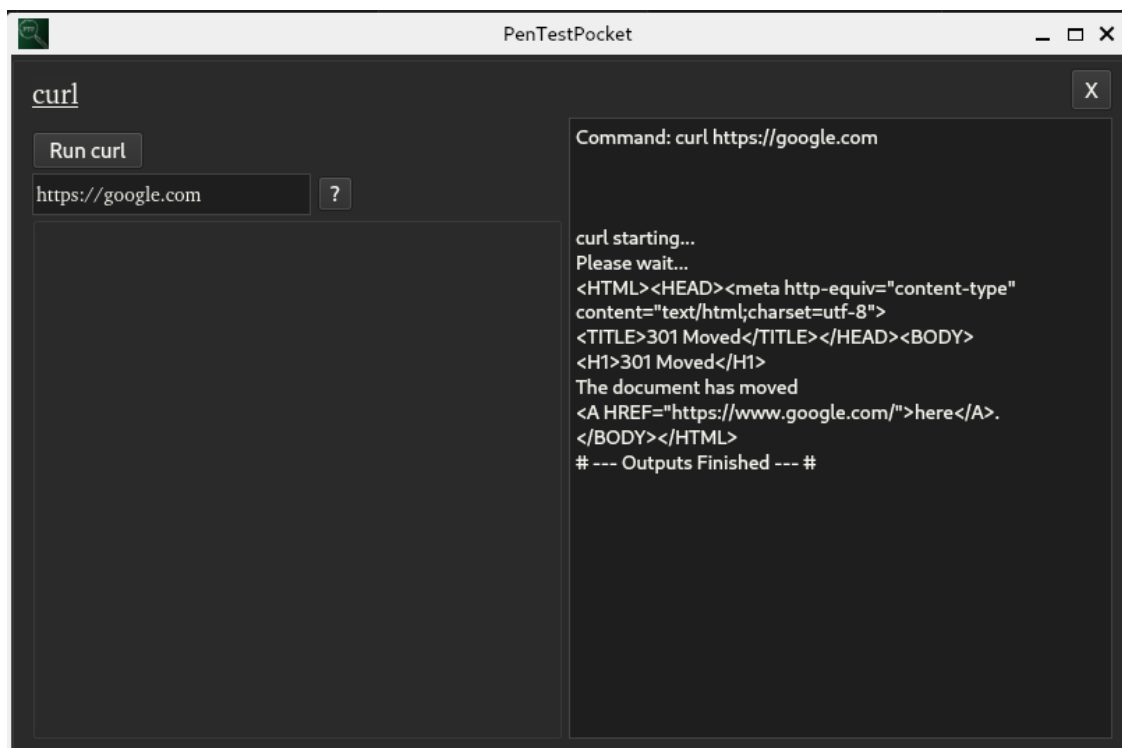


```
PenTestPocket  
curl  
Run curl  
https://google.com ?  
Command: curl https://google.com  
curl starting...  
Please wait...  
<HTML><HEAD><meta http-equiv="content-type"  
content="text/html; charset=utf-8">  
<TITLE>301 Moved</TITLE></HEAD><BODY>  
<H1>301 Moved</H1>  
The document has moved  
<A HREF="https://www.google.com/">here</A>.  
</BODY></HTML>  
# --- Outputs Finished --- #
```

- b. Test Input – *curl https://bing.com/*
Base Case

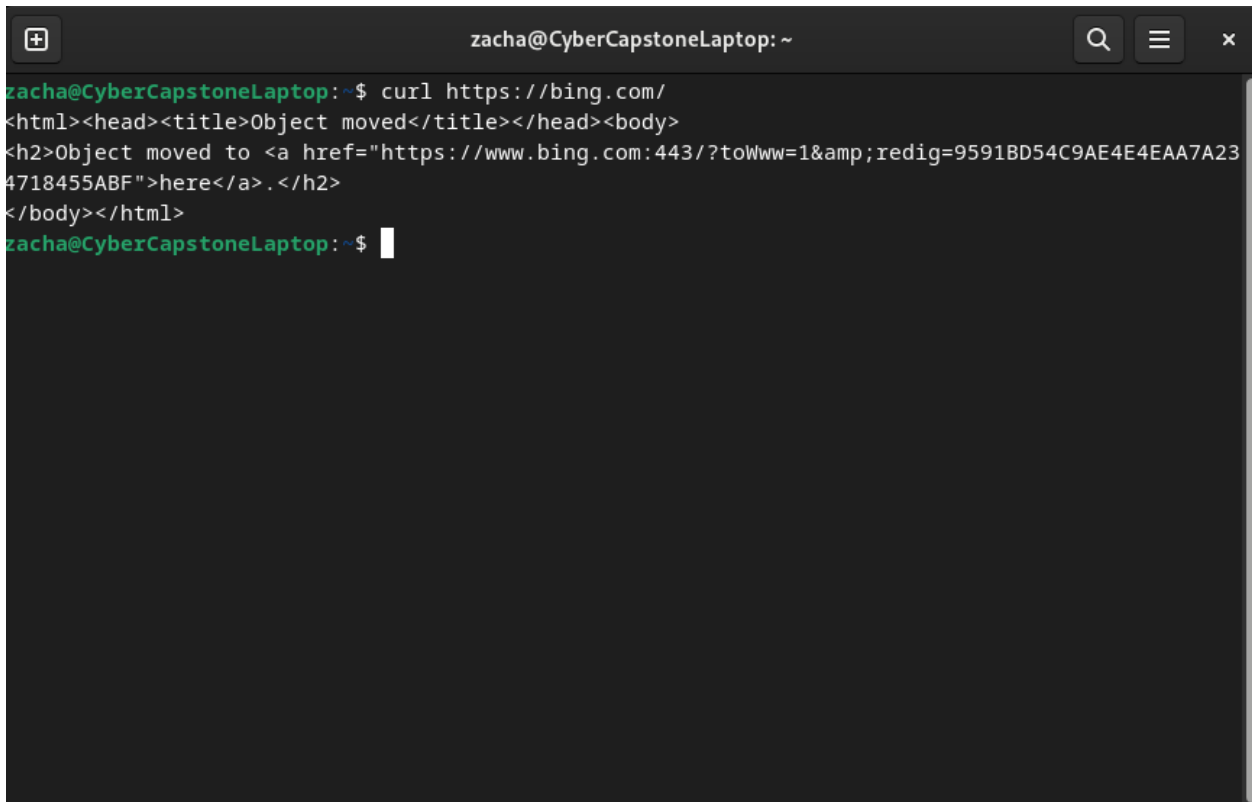

```
zacha@CyberCapstoneLaptop: ~  
zacha@CyberCapstoneLaptop:~$ curl https://bing.com/  
<html><head><title>Object moved</title></head><body>  
<h2>Object moved to <a href="https://www.bing.com:443/?toWww=1&redig=9591BD54C9AE4E4EAA7A234718455ABF">here</a>.</h2>  
</body></html>  
zacha@CyberCapstoneLaptop:~$
```

Test Case

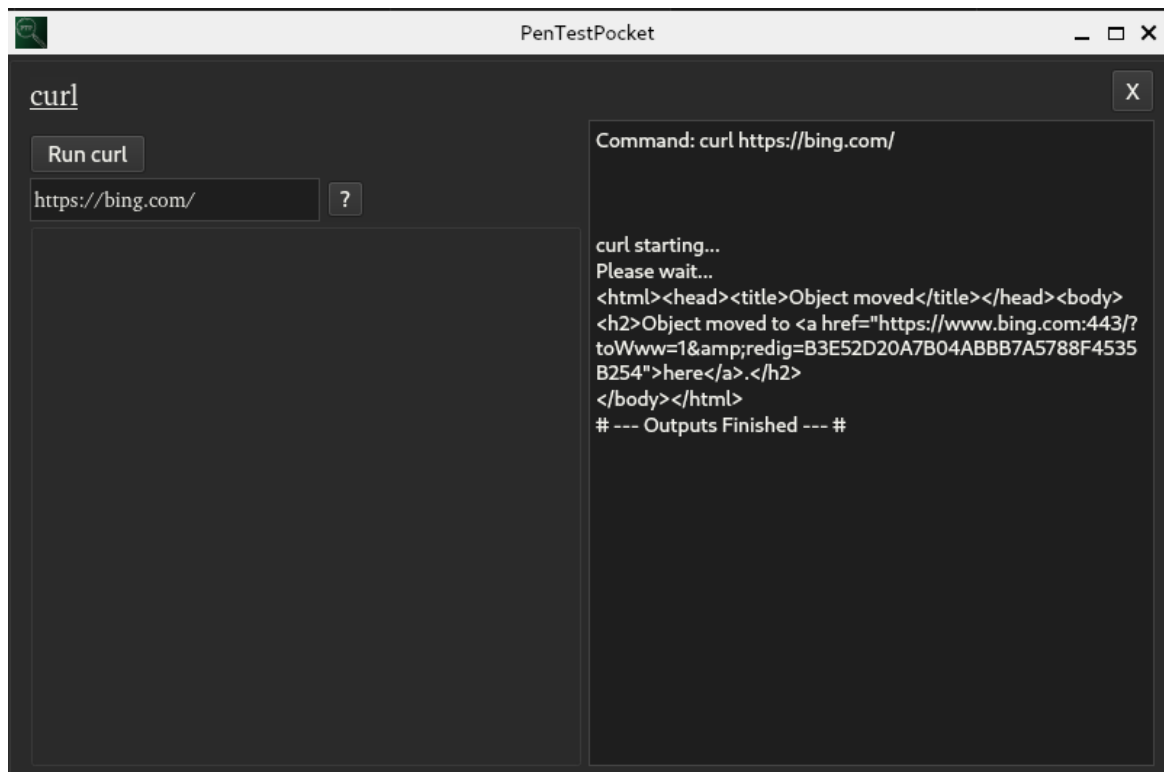

PenTestPocket

curl


Run curl

https://bing.com/ ?

Command: curl https://bing.com/

curl starting...
Please wait...
<html><head><title>Object moved</title></head><body>
<h2>Object moved to here.</h2>
</body></html>
--- Outputs Finished ---


c. Test Input – *curl https://yahoo.com/*
Base Case

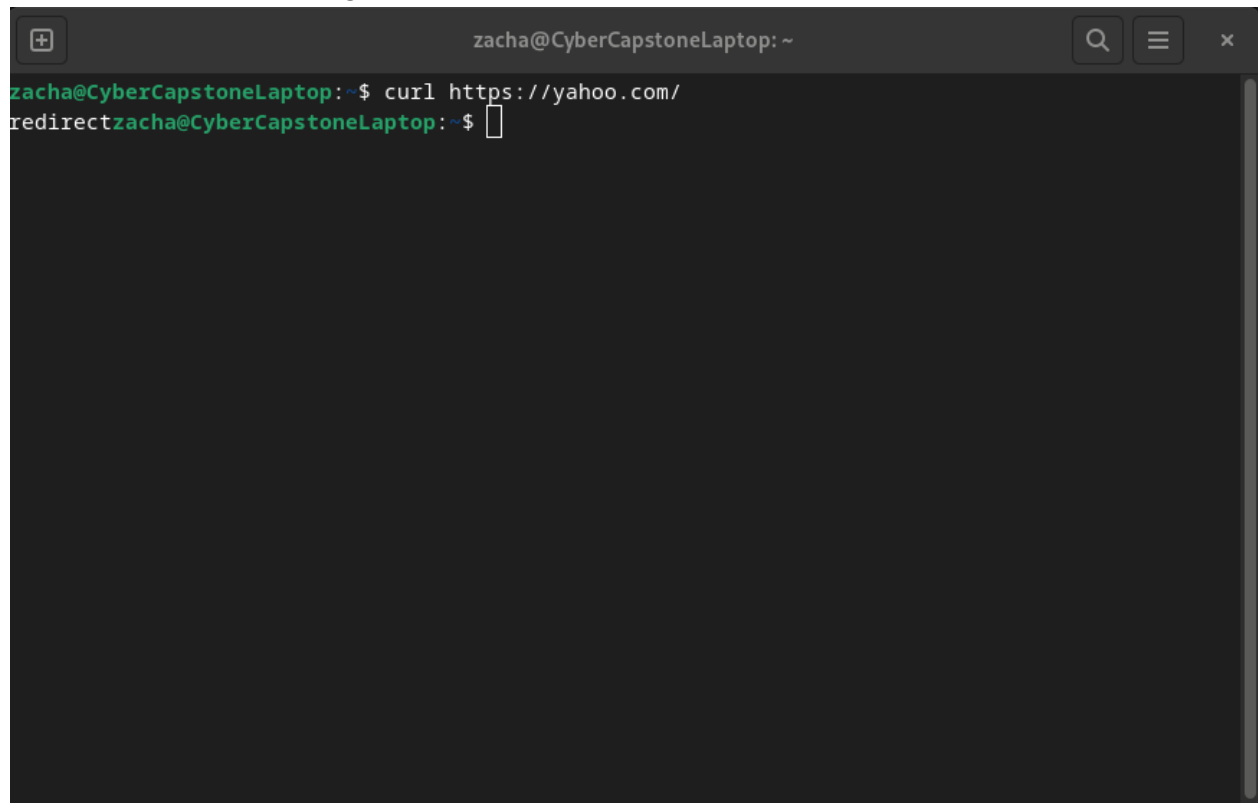

A terminal window titled 'zacha@CyberCapstoneLaptop: ~' with search, menu, and close icons in the title bar. The terminal shows a green prompt 'zacha@CyberCapstoneLaptop:~\$' followed by the command 'curl https://yahoo.com/'. The output is 'redirect' followed by another green prompt 'zacha@CyberCapstoneLaptop:~\$'.

```
zacha@CyberCapstoneLaptop:~$ curl https://yahoo.com/
redirectzacha@CyberCapstoneLaptop:~$
```

Test Case

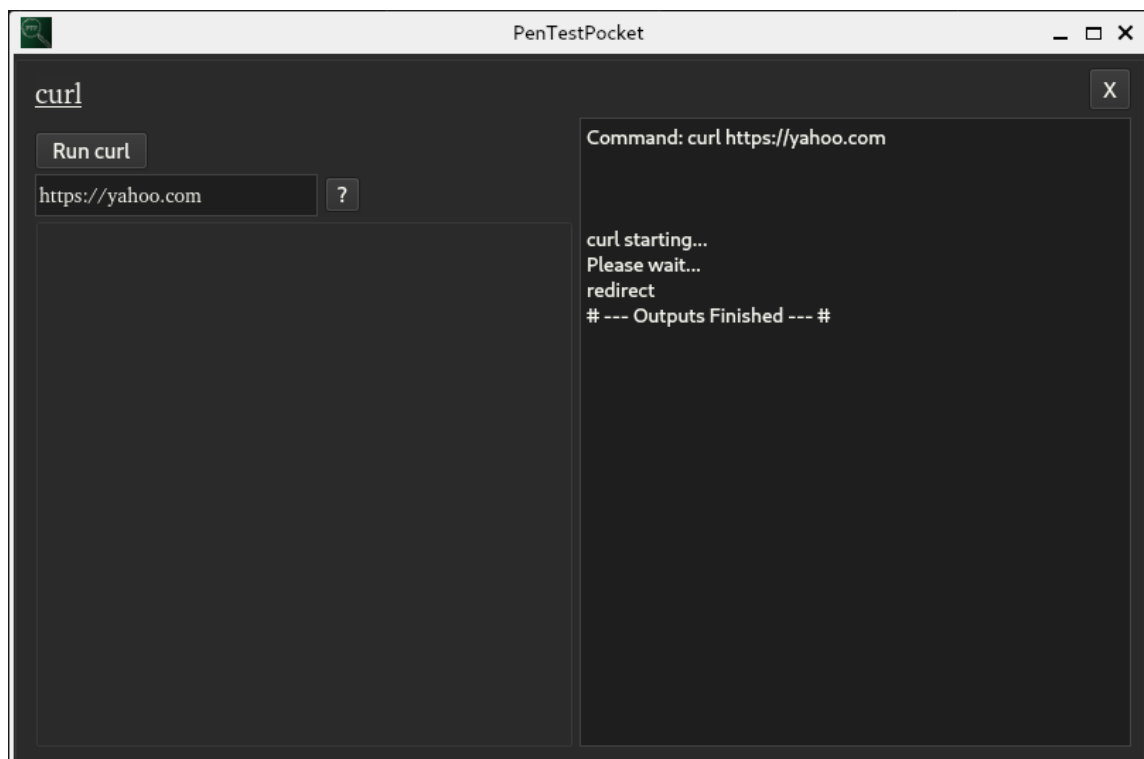

Test 5 – Data conversion comparisons

- a. Test Input – *Decimal -> Hexadecimal 3*
Base Case

Decimal to Hexadecimal Converter

To use this **decimal to hex converter** tool, you have to type a decimal value like 79 into the left field below, and then hit the Convert button. Therefore, you can convert up to 19 decimal characters (max. value of 9223372036854775807) to hex.

[Facebook](#) [Twitter](#)

Decimal Value (max: 9223372036854775807)	Hexadecimal Value
321 Convert	141
swap conversion: Hex to Decimal	

Decimal to hex conversion result in base numbers

$(321)_{10} = (141)_{16}$

Test Case


PenTestPocket

Decimal -> Hexadecimal


Command: Decimal -> Hexadecimal
Target: 321

141
--- Outputs Finished ---

- b. Test Input – *Binary -> Text* 01001000 01100101 01101100 01101100
01101111 00100000 01000011 01100001 01110000 01110011 01110100
01101111 01101110 01100101
Base Case

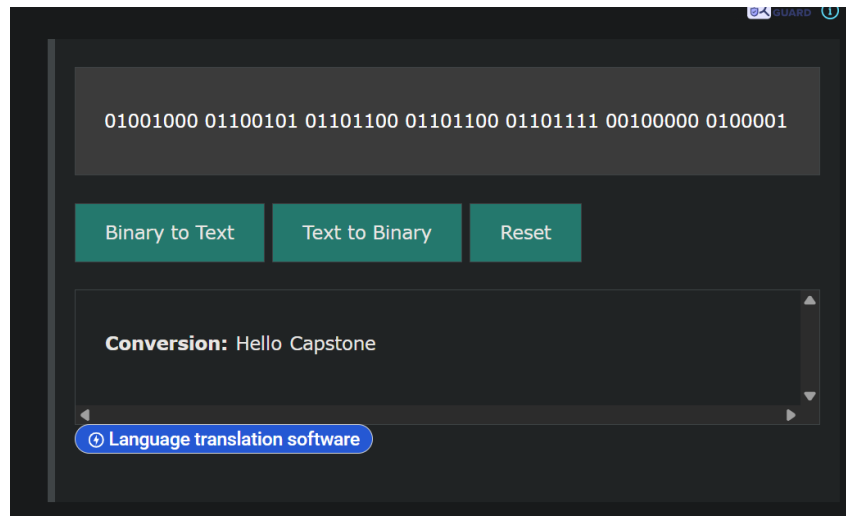

Test Case

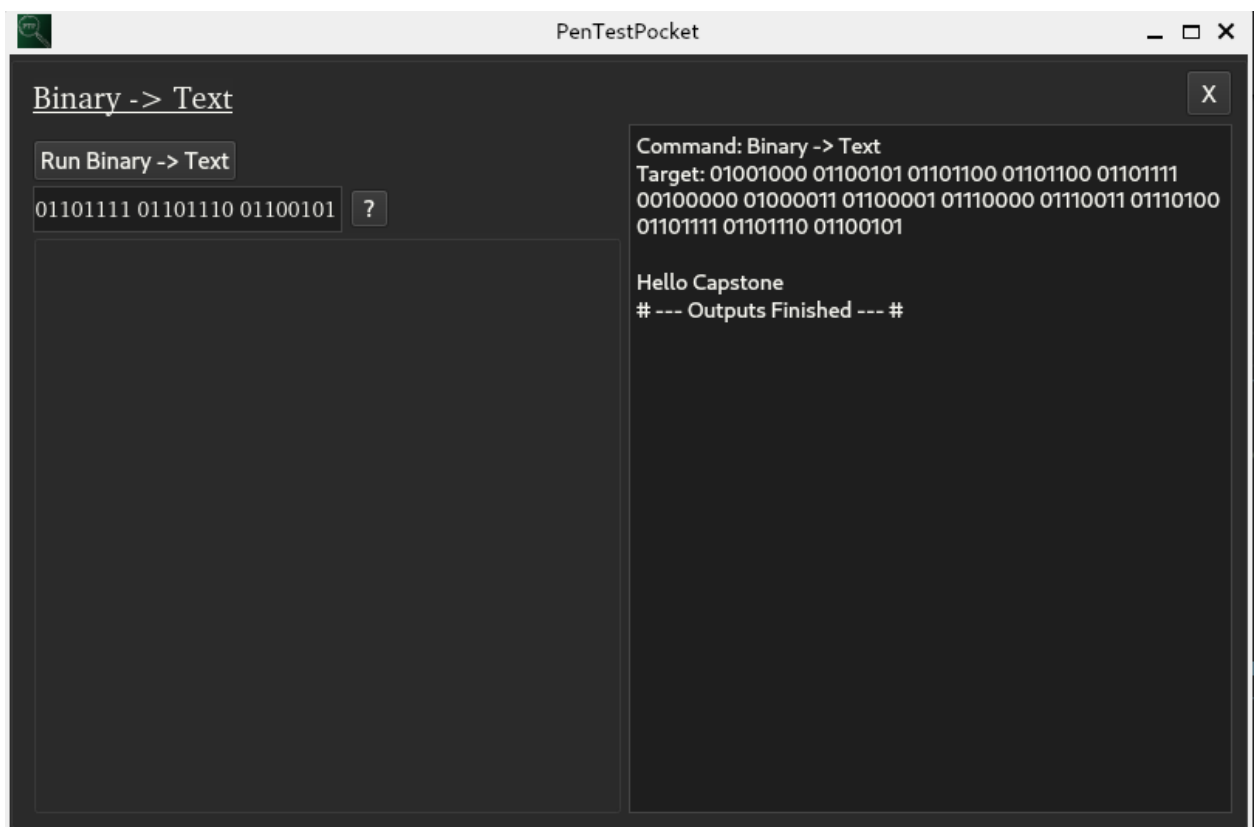

c. Test Input – Text -> *Base64 Goodnight Capstone*
Base Case

Text*

copy

clear

download

Goodnight Capstone

Encode Text to Base64

Base64

copy

clear

download

R29vZG5pZ2h0IENhcHN0b251

The result of Base64 encoding will appear here

Test Case

```
zacha@CyberCapstoneLaptop:~/Capstone/Adelson_Senior_Capstone/PenTestPocket$ python3 pentestpocket.py
File "/home/zacha/Capstone/Adelson_Senior_Capstone/PenTestPocket/pentestpocket.py", line 964, in callTool
    self.textToBase64.runBinaryEncoding(commandList, "text")
AttributeError: 'encodeToBase64' object has no attribute 'runBinaryEncoding'. Did you mean: 'runBase64Encoding'?
Aborted
```

Test 6 – Hashing comparisons

- a. Test Input – *SHA-1 Hello Capstone*
Base Case

[Home Page](#) | [SHA1 in JAVA](#) | [Secure password generator](#) | [Linux](#) | [Privacy Policy](#)

SHA1 and other hash functions online generator

▾

Result for

sha1: 1faad82cd306df2ee688064bbb64f7cc74d45244

Test Case

PenTestPocket

SHA-1

Command: SHA-1
Target: Hello Capstone

1faad82cd306df2ee688064bbb64f7cc74d45244
--- Outputs Finished ---

- b. Test Input – MD5 Hello Capstone
Base Case

Home Page | [SHA1 in JAVA](#) | [Secure password generator](#) | [Linux](#) | [Privacy Policy](#)

SHA1 and other hash functions online generator

▾

Result for md5: **326807331020eb4117af455c74846a23**

Test Case

PenTestPocket

MD5

Command: MD5
Target: Hello Capstone

326807331020eb4117af455c74846a23
--- Outputs Finished ---

c. Test Input – *Shake256 Hello Capstone*
Base Case

SHAKE256

This SHAKE256 online tool helps you calculate hashes from strings. You can input UTF-8, UTF-16, Hex, Base64, or other encodings.

Settings

Hash

☒ Auto Update

☐ Remember Input

Input Encoding

UTF-8

Output Encoding

Hex (Upper Case)

Output Bits

512

Input

Hello Capstone

Output

CD22ACD2F9210E66B7D5BE6CA5B8ADC14A3B5DE13C7A81C8E7A4CC92A70DFC83E66F33DC0844543DAFEDF481F4FBFAB418CB508E0E52714AEA24A322A3AEE2CA

Share Link

Test Case

Shake256

Run Shake256

Hello Capstone

Command: Shake256

Target: Hello Capstone

CD22ACD2F9210E66B7D5BE6CA5B8ADC14A3B5DE13C7A81C8E7A4CC92A70DFC83

--- Outputs Finished ---