KP Kongossa Pay

USER GUIDE

Mobile Money & the Developer Sandbox

How customers top up their wallet with M-Pesa, Airtel Money, MTN MoMo, and Orange Money — and how the Flutter development partner gets a documented, isolated API to build against.

Prepared	Covers	Audience
September 13, 2026	**Wallet mobile money + Sandbox API**	**End users, admins & the mobile developer**

What's inside

Two features, already live in production, covered end to end with real screenshots from a working build.

PART 1 — MOBILE MONEY (WALLET)

1. The Wallet page p.4
2. Adding a mobile money account p.5
3. Redirect-style providers p.6
4. Topping up — phone-prompt style p.7
5. Topping up — redirect style p.8
6. Your saved accounts p.9

PART 2 — SANDBOX API FOR DEVELOPERS

7. What the sandbox is for p.11
8. Browsing the API docs p.12
9. Trying an endpoint p.13
10. Logging in (OTP-gated) p.14
11. Reading mail in the sandbox inbox p.15
12. Generating a Dart client p.16

PART 1 OF 2


Mobile Money in the Wallet

Five mobile money networks are wired directly into the wallet — customers link an account once, then top up in their own local currency any time.

01 The Wallet page

Every customer's wallet, balance, and payment methods live on one page.

1. Open **Wallet** from the main navigation.
2. The balance card shows available funds, this month's activity, and currency.
3. **Add Money** tops up an existing saved account; **Withdraw** pays out; **Add Payment Method** links a new one.
4. Below that: platform balance and transaction-fee summaries, then the customer's own saved payment methods.

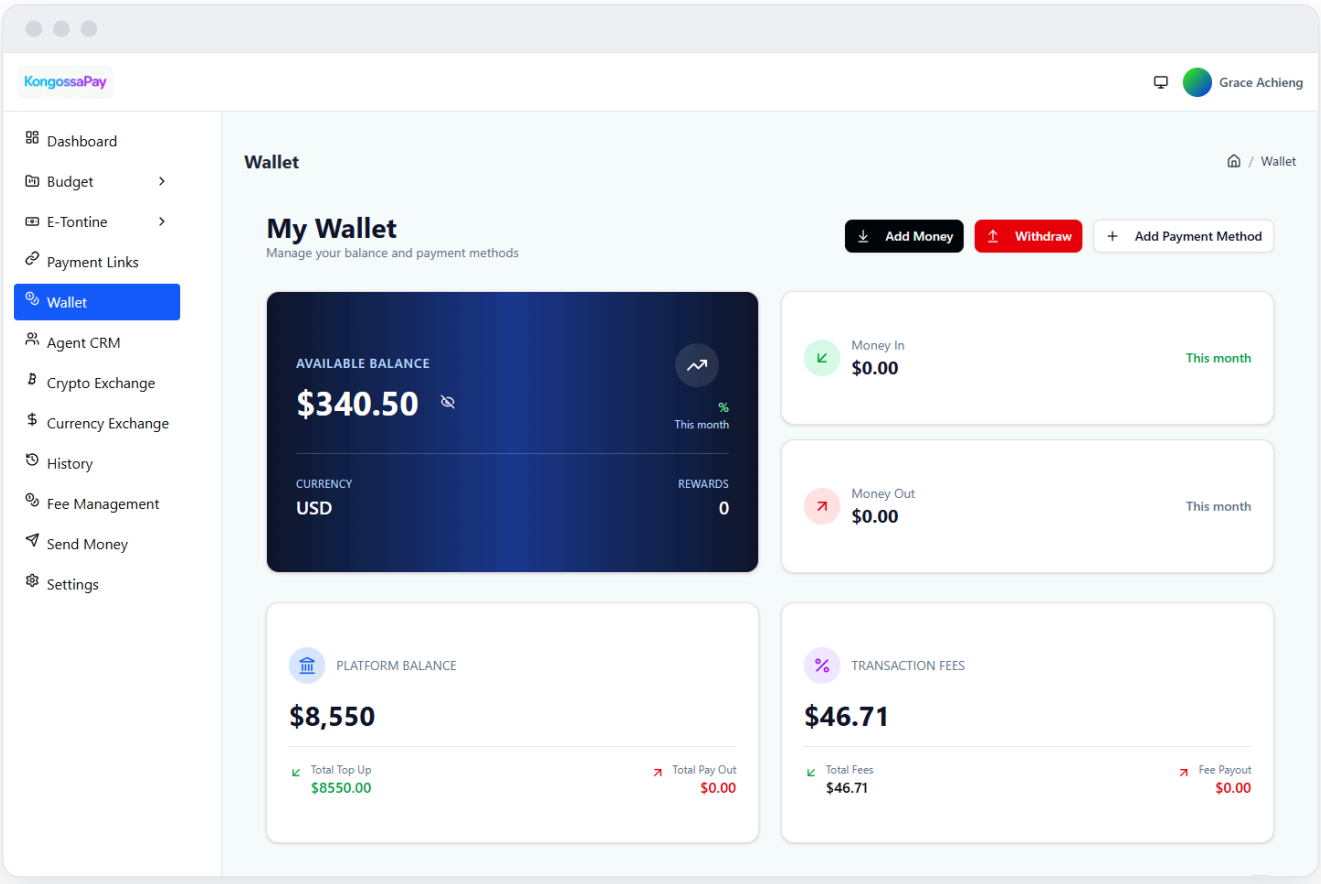


02 Adding a mobile money account

One form, eight tabs — a customer picks their network and enters the phone number that account is registered to.

1. Tap **Add Payment Method** on the Wallet page.
2. Choose a tab: **MTN**, **Orange**, **Zamtel**, **M-Pesa**, or **Airtel** — alongside Card, Paystack, and Flutterwave for non-mobile-money options.
3. Enter the account holder's name, phone number, and country (each provider only lists the countries it actually supports).
4. Save. The account appears immediately in the Payment Methods list below.

A customer can save more than one — different networks for different countries, all under the same wallet.

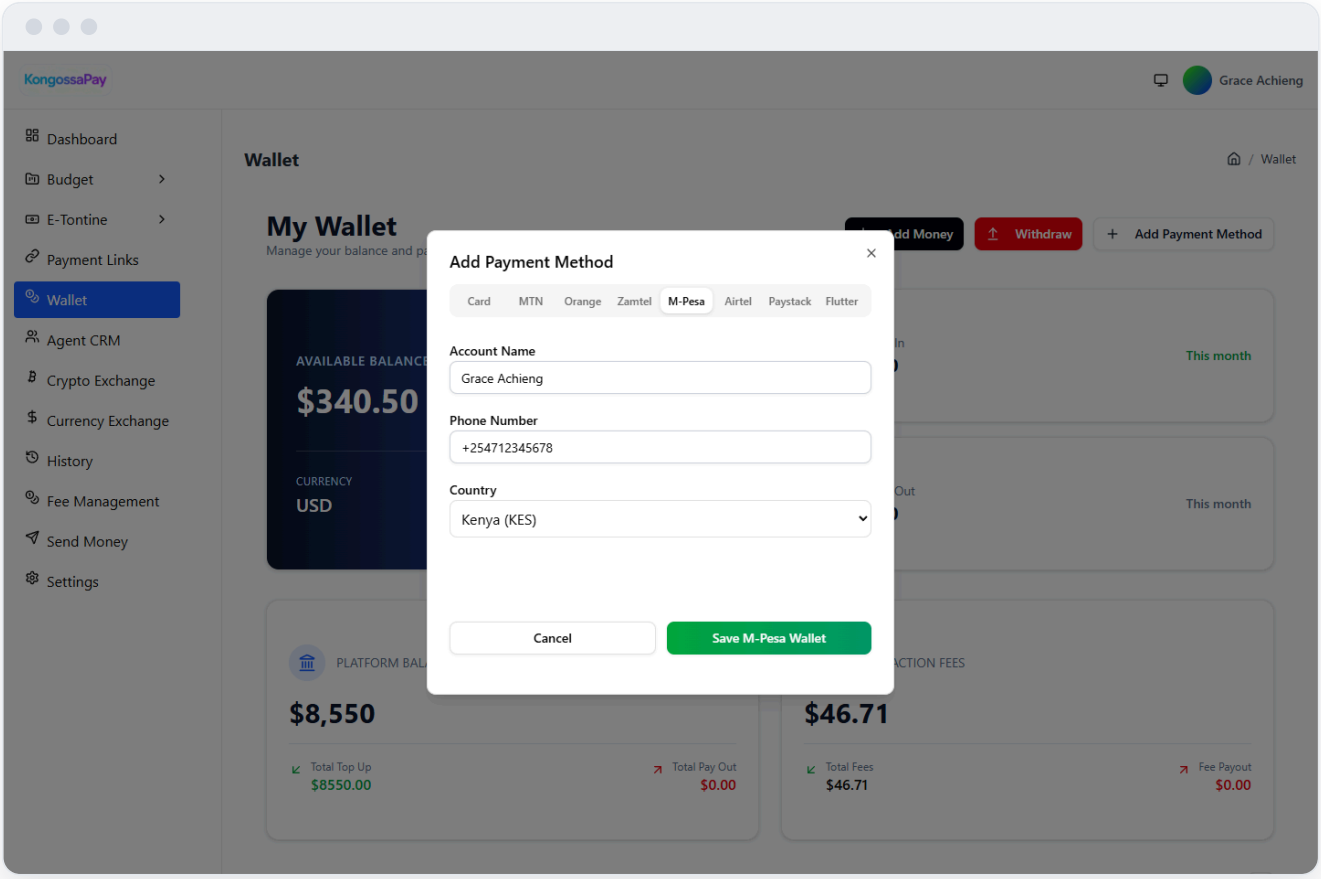


03 Redirect-style providers

Not every network works the same way. Orange Money and Zamtel hand the customer off to the provider's own payment page instead of prompting their phone directly.

1. The same "Add Payment Method" form covers these too — just a different tab.
2. Orange Money supports twelve countries (Mali, Cameroon, Côte d'Ivoire, Senegal, Madagascar, and more) — the country selector narrows the currency automatically.
3. Zamtel is Zambia-only, so its country field is fixed.


The difference only shows up at top-up time — see step 5.

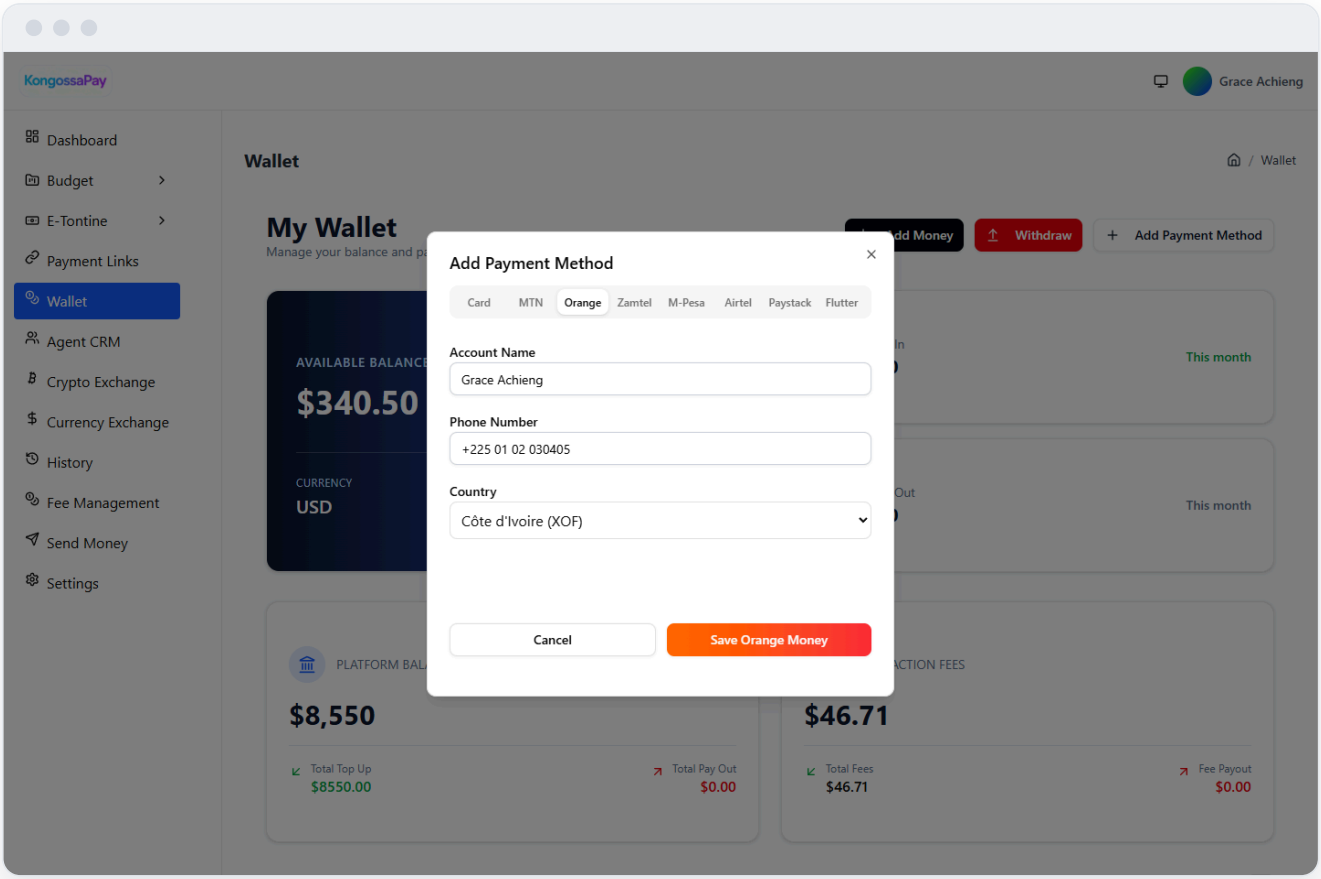

04 Topping up — phone-prompt style

M-Pesa, Airtel Money, and MTN MoMo all work the way customers already expect from mobile money: enter an amount, approve a prompt on your own phone.


1. On the saved account's card, tap **Top Up**.
2. Enter the amount in the account's own local currency — a live USD estimate shows underneath as they type.
3. Tap **Top Up with M-Pesa** (or Airtel / MoMo). A payment prompt is sent straight to their phone.
4. The app polls automatically and confirms the moment the customer approves — no page reload needed.

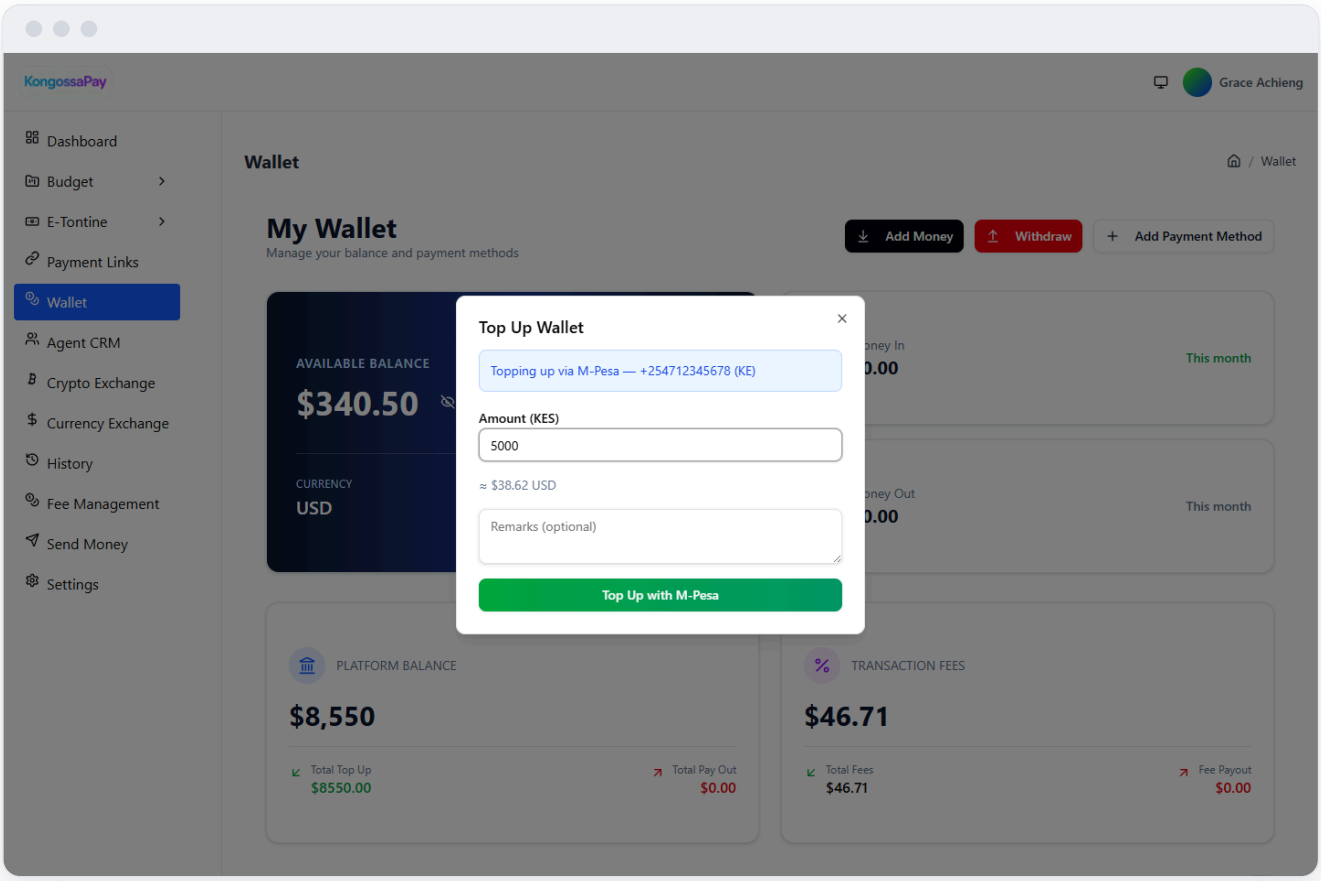

05 Topping up — redirect style

Orange Money and Zamtel confirm payment on the provider's own page rather than a phone prompt.

1. Same starting point — tap **Top Up** on the saved account, enter an amount.
2. Tap **Pay with Orange Money** (or Zamtel). The customer is taken to that provider's own secure payment page.
3. After they complete payment there, they land back in the wallet with the balance already updated.

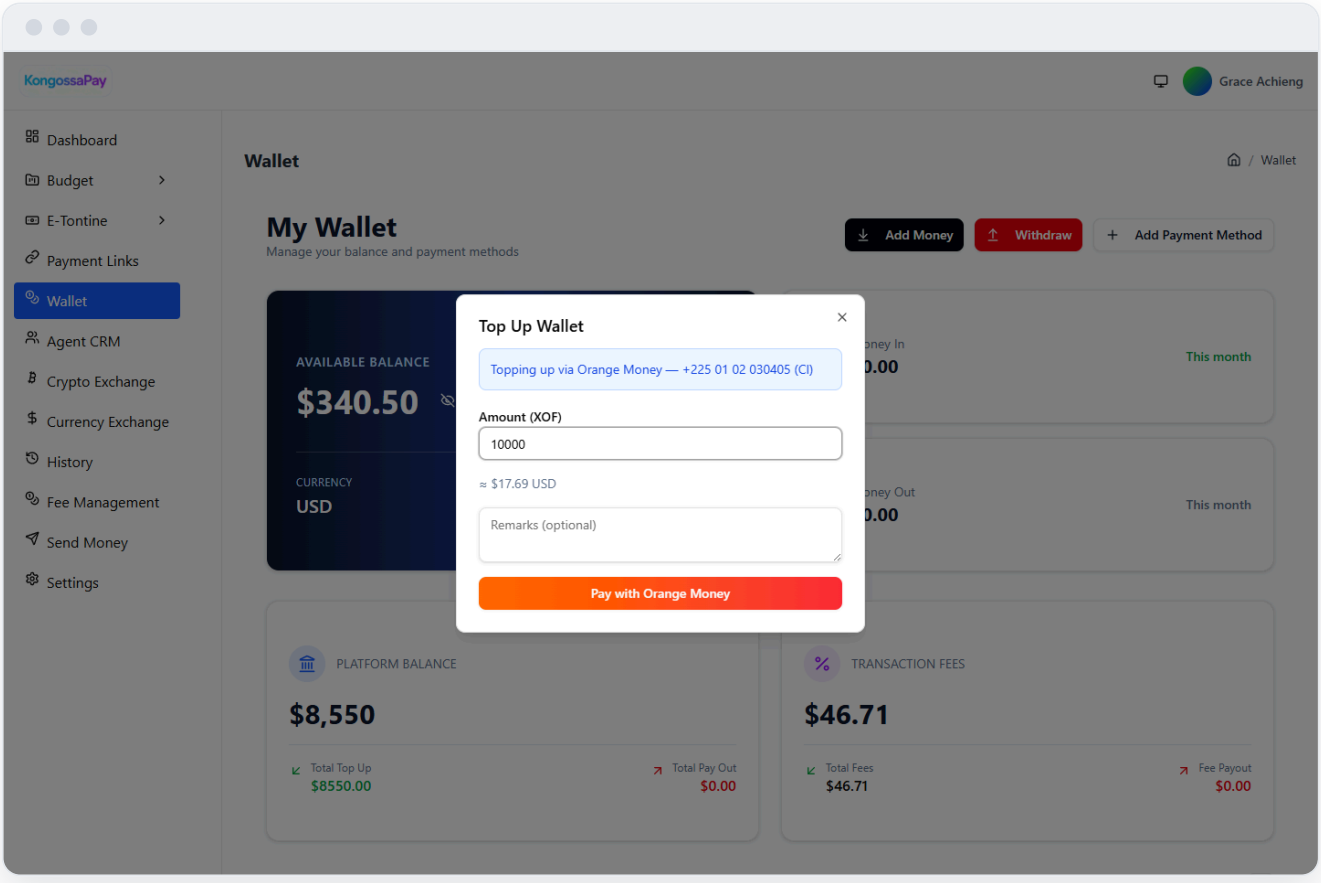


06 Your saved accounts

Every linked mobile money account shows as its own card — name, number, country, and verification status all visible at a glance.

M-Pesa	Airtel Money	MTN MoMo	Orange Money	Zamtel
Kenya, Tanzania +4	Uganda, Kenya +6	Ghana +16	Côte d'Ivoire +11	Zambia

Any account can be topped up or removed independently — deleting one never touches the others.

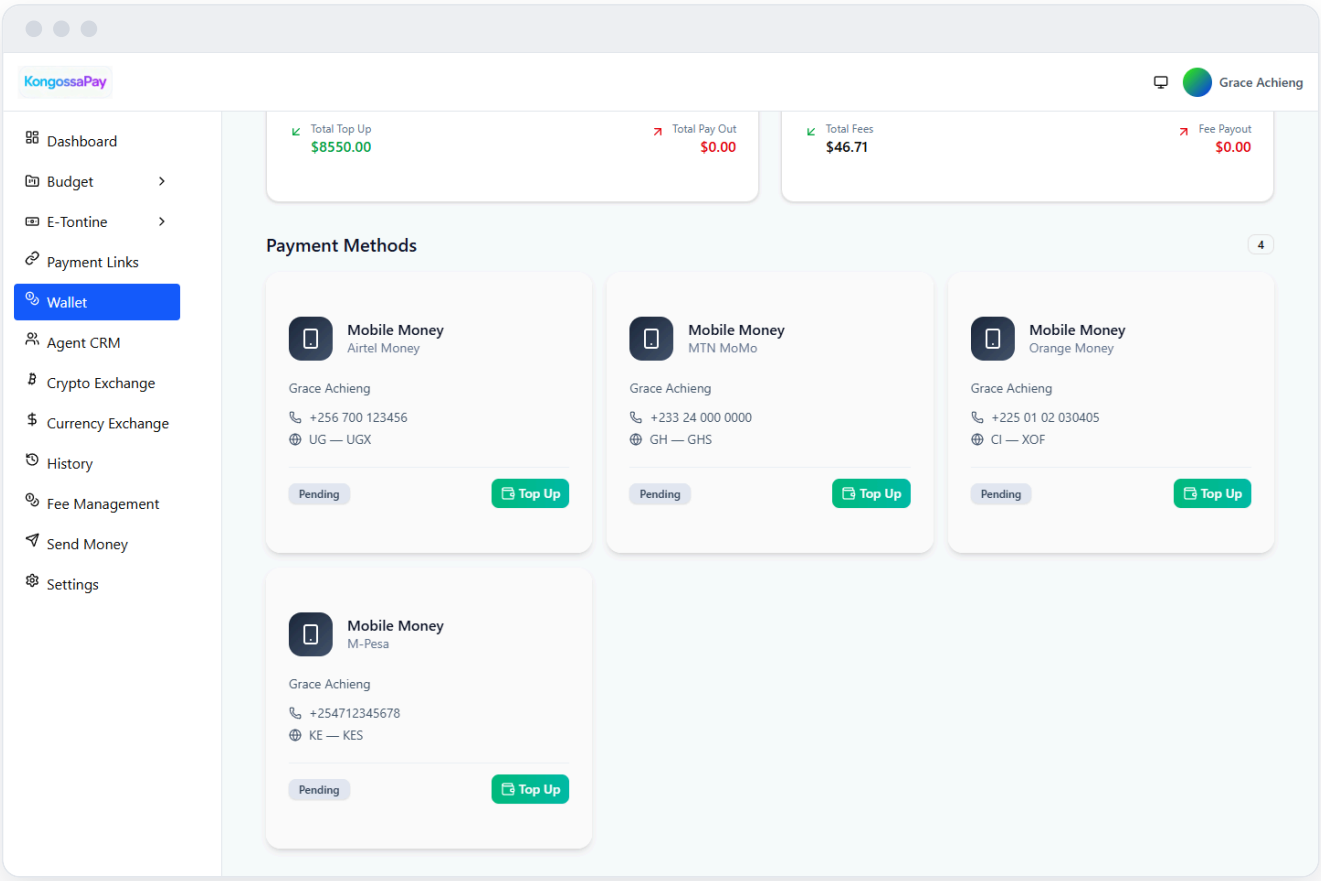

PART 2 OF 2

The Sandbox API

Everything the Flutter development partner needs to build against Kongossa Pay — without ever touching production data or credentials.

07 What the sandbox is for

A fully isolated copy of the platform, built specifically so an external developer can integrate safely.


1. Its own database, seeded with realistic-but-fake data — never a copy of real customer records.
2. Its own login secrets, so a sandbox session token is rejected by production and vice versa.
3. Payment providers run in **test mode** only — Stripe test cards, no real money ever moves.
4. One base URL for everything: `https://sandbox-api.kongossapay.com`

Production is never shared with the developer — no URL, no credentials, no database access, no source code.

08 Browsing the API docs

Every endpoint, fully documented and generated straight from the actual code — never hand-written, so it can't drift out of date.


1. Open `https://sandbox-api.kongossapay.com/api-docs` — the browser prompts for a username and password given separately.
2. Endpoints are grouped by feature (Agents, Auth, Wallet, Tontines, Payment Links, and more).
3. A machine-readable version lives at `/api-docs-json` — feed that straight into a code generator (see step 12).

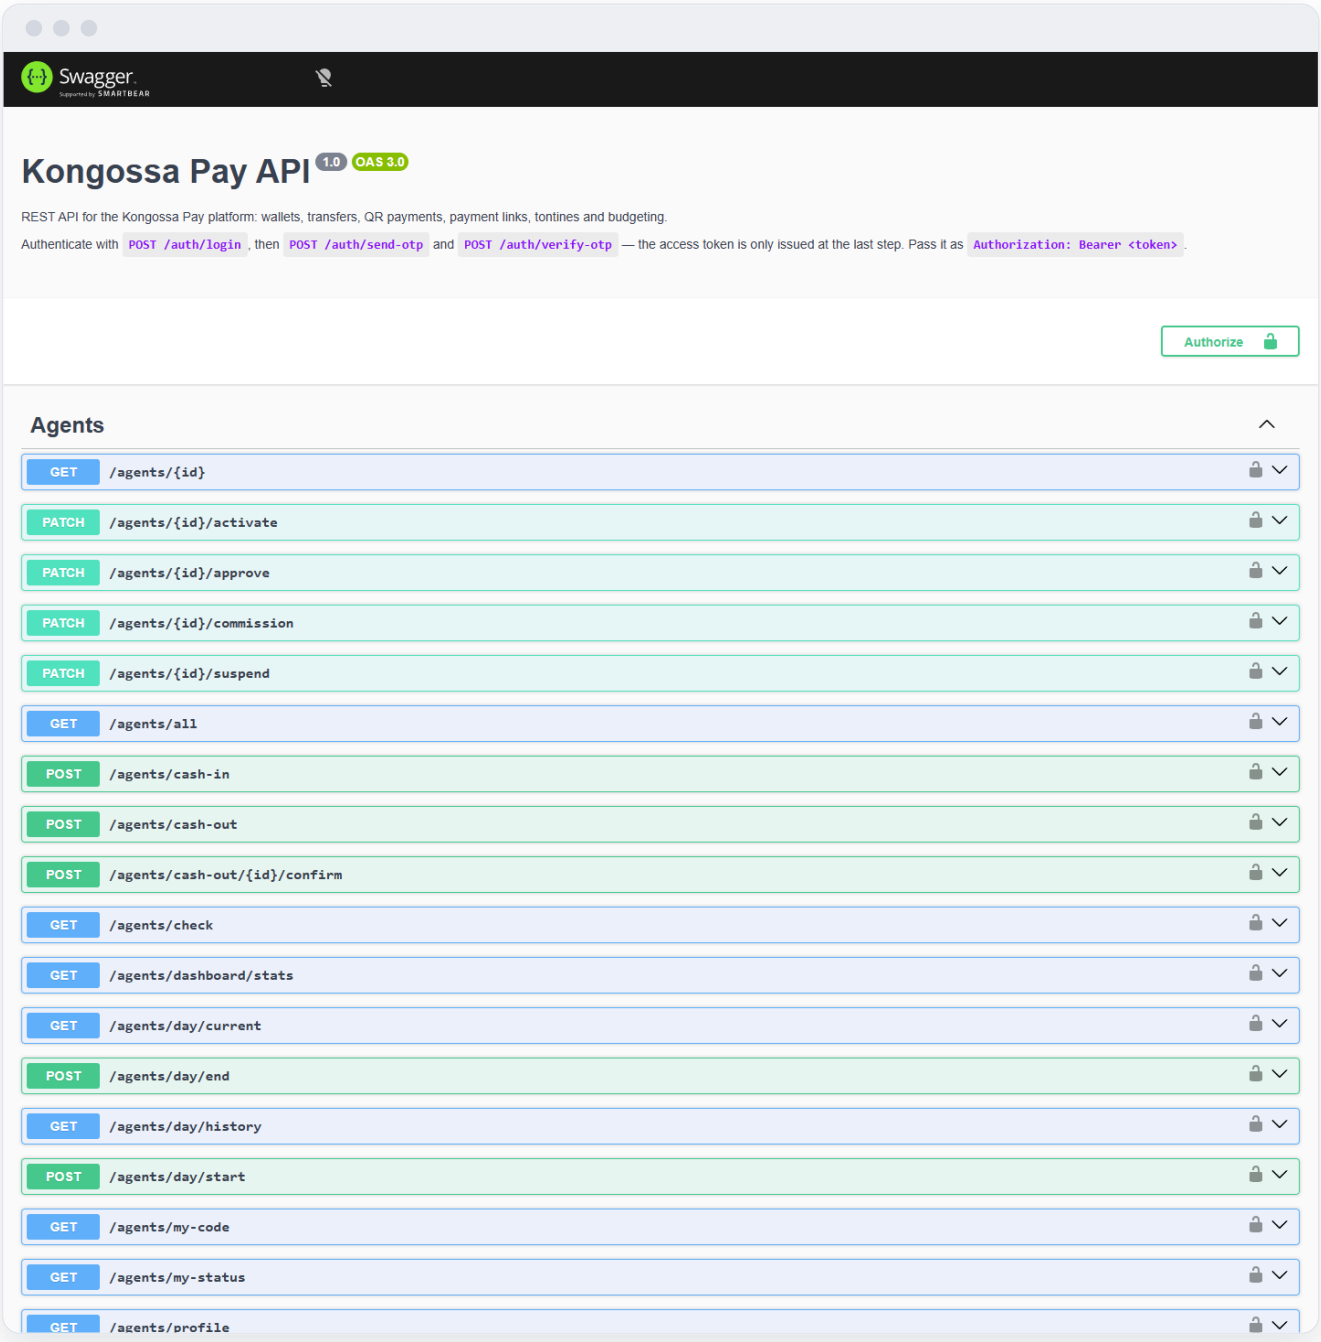

09 Trying an endpoint

The docs aren't just reference material — every endpoint can be called directly from the browser.

1. Click any endpoint to expand it — request body, an example payload, and every possible response are all shown.
2. Click **Try it out**, edit the example values, and send a real request straight to the sandbox.
3. The exact response — status code and body — comes back inline, right below the request.

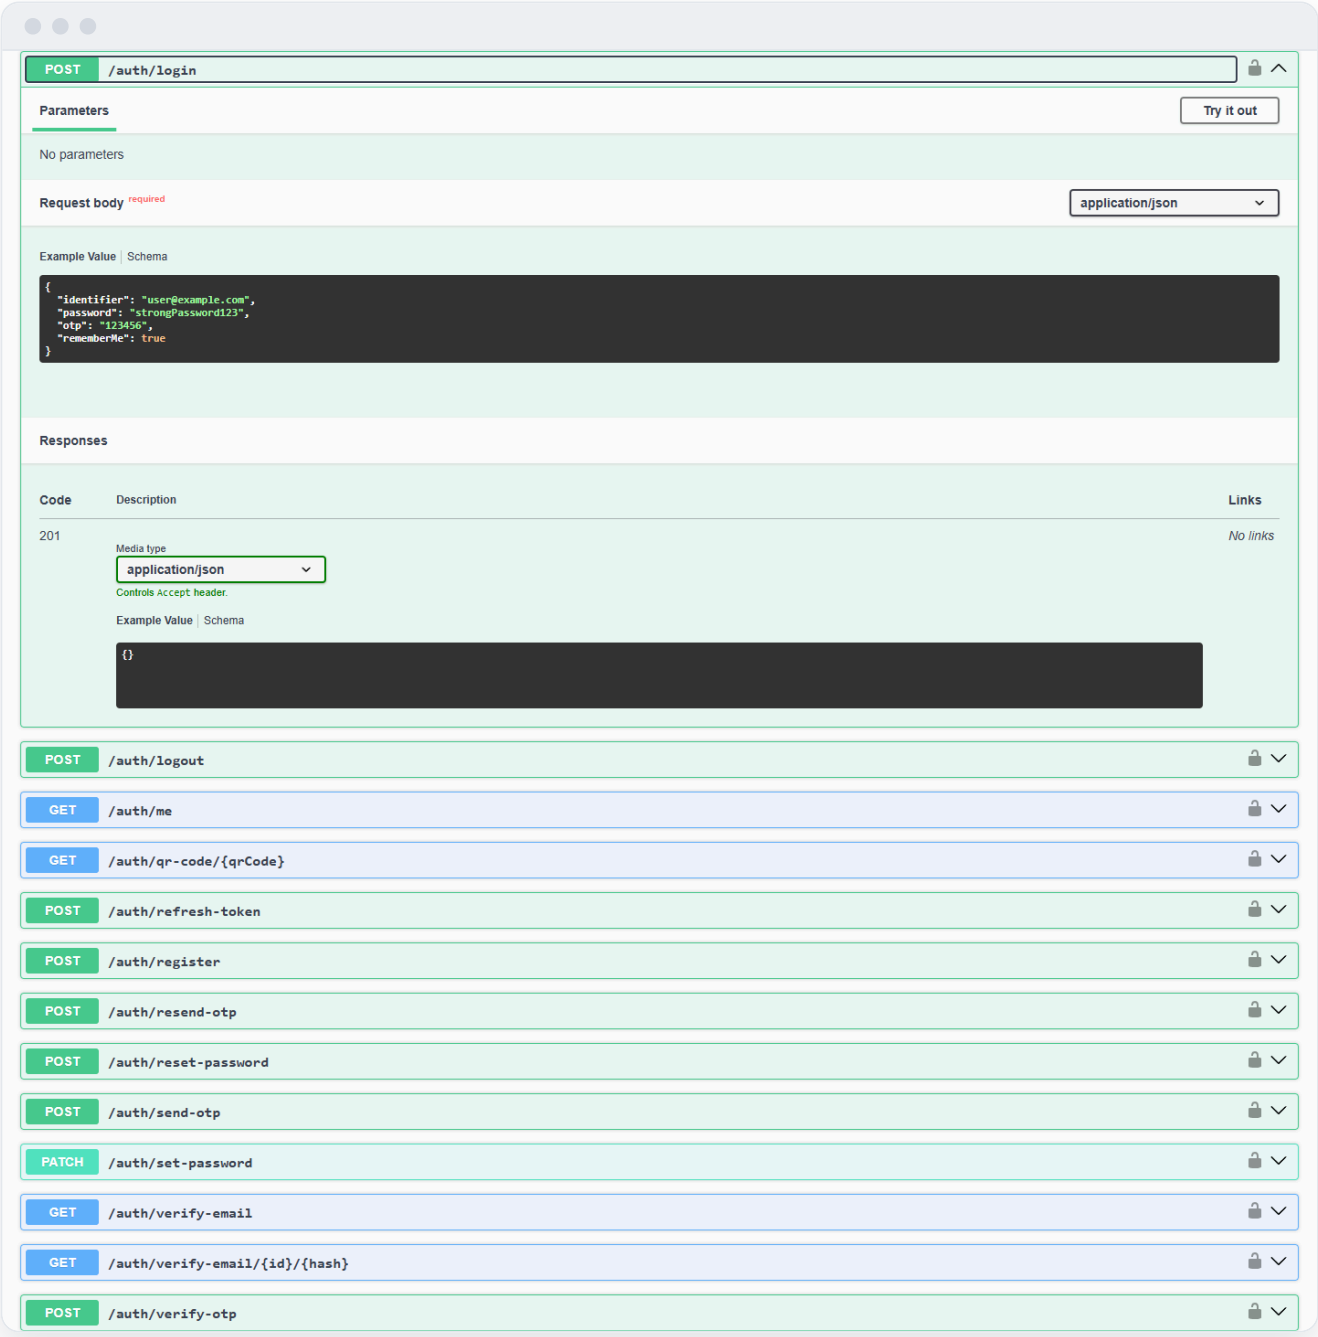

10 Logging in (OTP-gated)

Authentication takes three calls — a token is only ever handed back on the last one.

```
1. POST /auth/login
   { "identifier": "dev@sandbox.test", "password": "••••••••" }

2. POST /auth/send-otp
   { "email": "dev@sandbox.test", "purpose": "login" }

3. POST /auth/verify-otp
   { "email": "dev@sandbox.test", "code": "123456", "purpose": "login" }
   → returns accessToken
```

Send every later request with `Authorization: Bearer <accessToken>`. When it expires, call `/auth/refresh-token`.

11 Reading mail in the sandbox inbox

Step 3 above needs a real code — and the sandbox sends real emails, just not to a real mailbox.

1. Every email the sandbox ever sends — OTP codes, receipts, notifications — lands at `https://sandbox-api.kongossapay.com/mailpit/`, and nowhere else.
2. Same username and password as the API docs.
3. Open the inbox, find the latest message to the test account's email address, and copy the code into `/auth/verify-otp`.

> This is a sandbox: data can be wiped and reseeded at any time. Never treat a record here as permanent, and never load anything that resembles a real customer's information.

12 Generating a Dart client

The whole API surface can be turned into ready-to-use Dart code in one command — no manual model-writing.

```
openapi-generator generate \
  -i https://sandbox-api.kongossapay.com/api-docs-json \
  -g dart-dio \
  -o ./lib/api
```

Re-run it any time the API changes — the generated client always matches exactly what's documented, because it's built from the same source.