

RGS1 expression · HNSC, LIHC and LUAD · OS

The forest shows RGS1 expression in every cohort with a test; the rows below show the cohorts drawn on its splicing pages

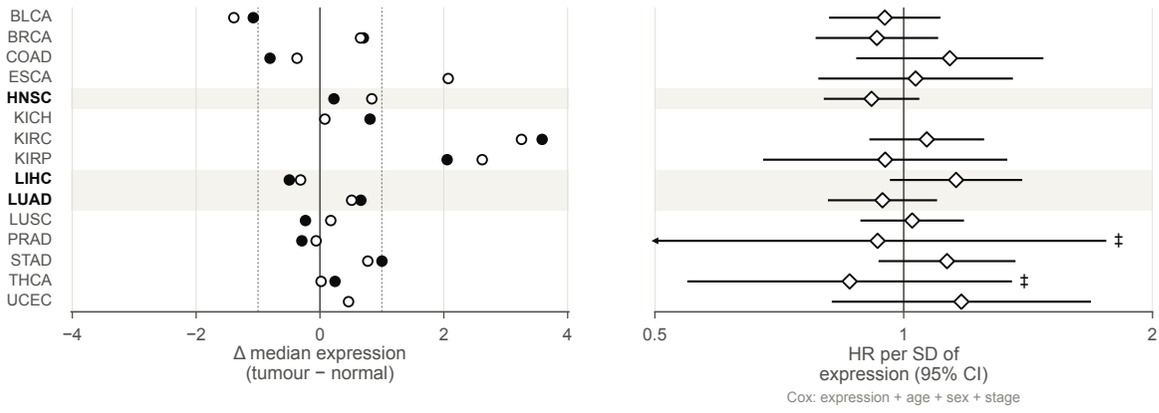


Host-gene expression · RGS1 itself: tumour vs normal, a KM split at its median, and Cox on expression + age + sex + stage

HNSC · RGS1 expression

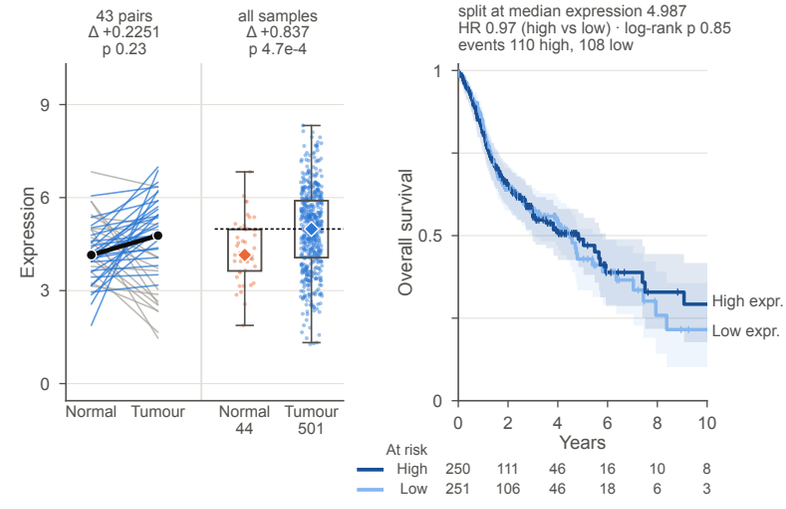


Cox model · 501 patients, 218 events

expression + age + sex + stage (stage Stage IVC merged into Stage IVA (3 patients, 3 events); stage baseline I absent; Stage IVA+Stage IVC used)

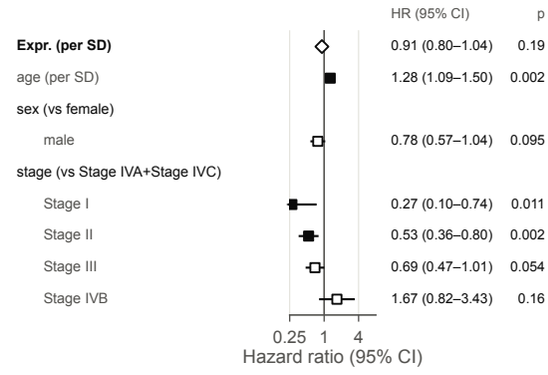


LIHC · RGS1 expression

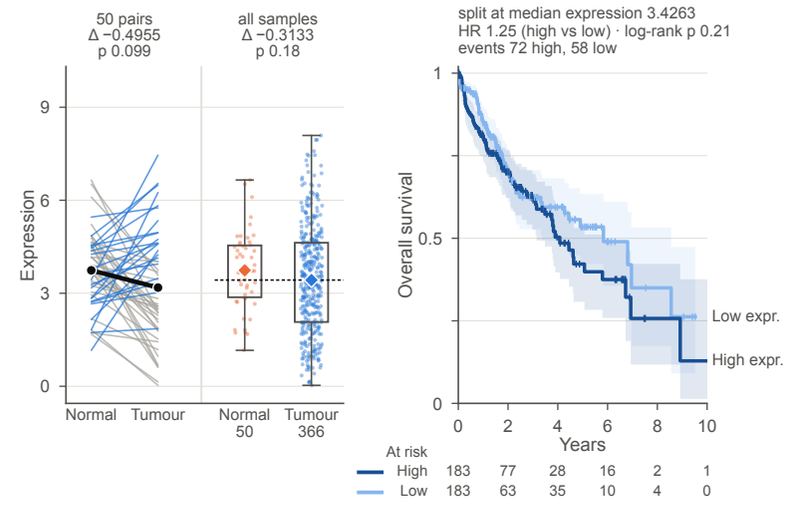


Cox model · 343 patients, 116 events

expression + age + sex + stage (stage Stage III, Stage IIIB, Stage IIIC, Stage IV, Stage IVA, Stage IVB merged into Stage I (25 patients, 14 events); stage baseline I absent; Stage I+Stage III+Stage IIIB+Stage IIIC+Stage IV+Stage …

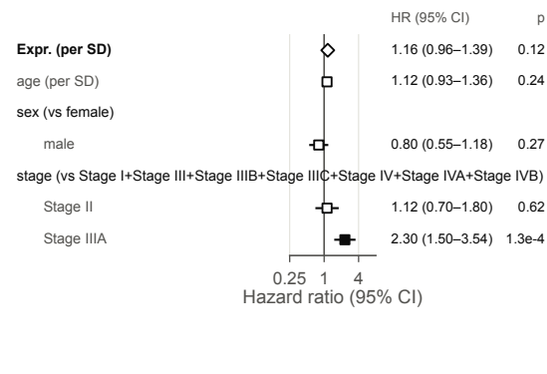


LUAD · RGS1 expression

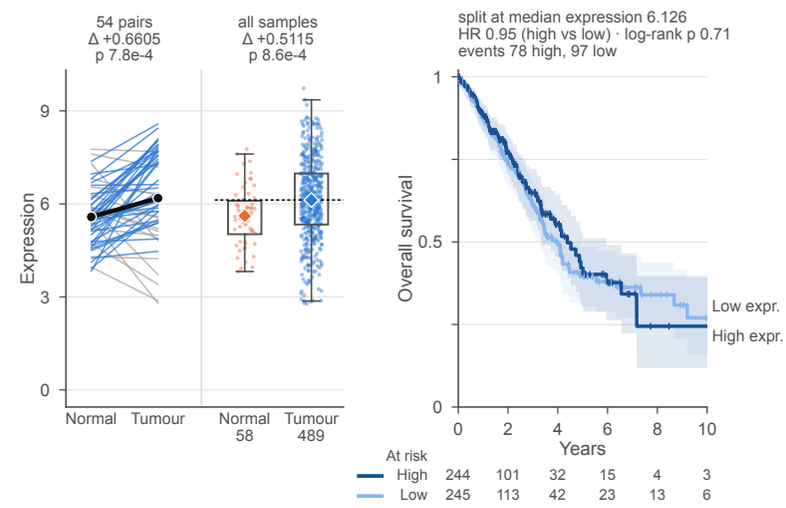

Cox model · 483 patients, 174 events

expression + age + sex + stage (stage Stage I, Stage II merged into Stage IB (6 patients, 2 events); stage baseline I absent; Stage IB+Stage I+Stage II used; non-proportional hazards: sex male (p 0.038), stage Stage IIA (p 0.026), stage …

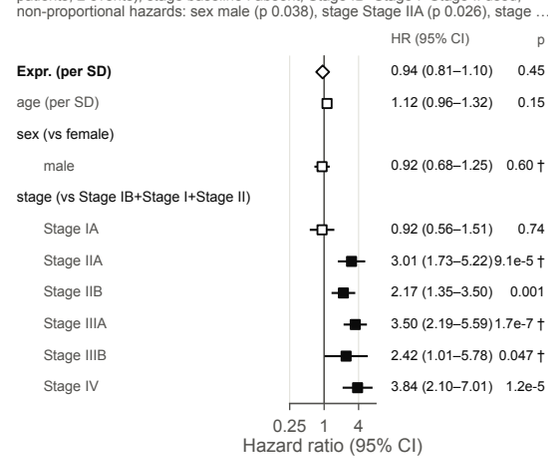

Higher in tumour · Lower in tumour · KM split · Paired Δ · Unpaired Δ · Cox p < 0.05 · Cox p ≥ 0.05
Cohort drawn below · Model term p < 0.05 · p ≥ 0.05 · † non-proportional hazards (p < 0.05) · ‡ fewer than 20 events: low power

Host-gene expression of RGS1 on the expression table's scale; not adjusted for multiple testing. A tumour–normal hit needs p < 0.05 and |Δ median| > 1. The HR is per SD of expression in each cohort, with age, sex, stage.