


Main() Start Group 3 Names: User inputs name of config file Ashley White Zach McKenzie Parker Kevin read config file Use config data to access layout file read layout into vector of If sufficient goods and workers Νo Adjust available workers and goods

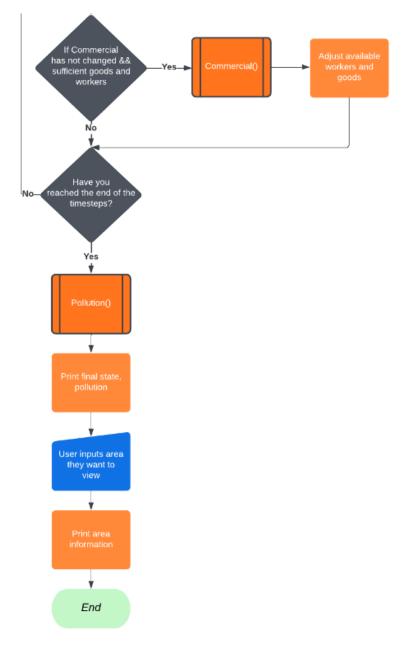


Pollution()

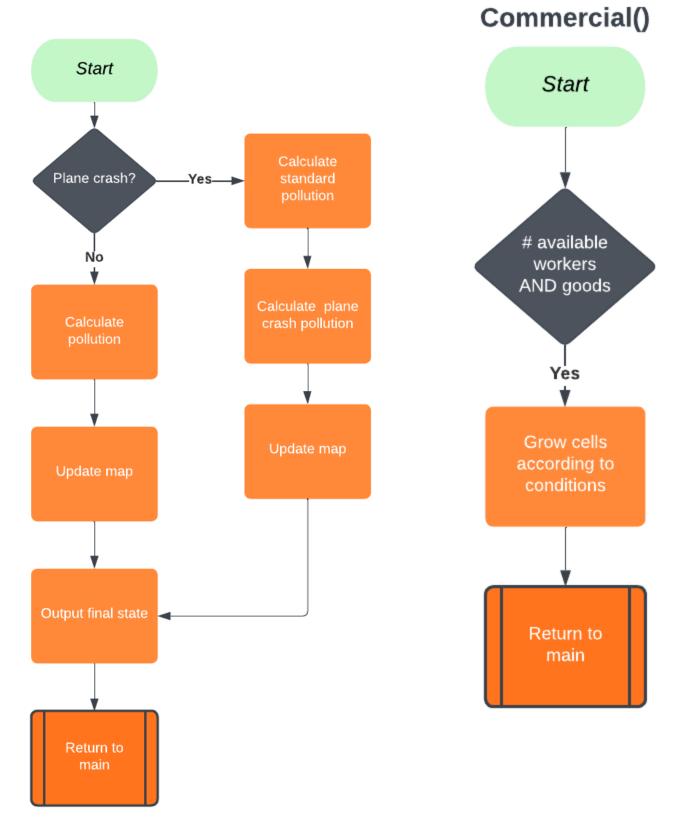

Industrial()

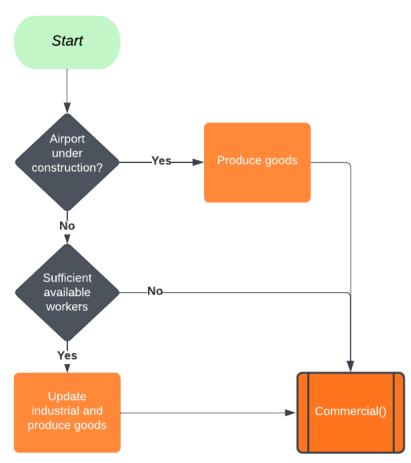

Residential()

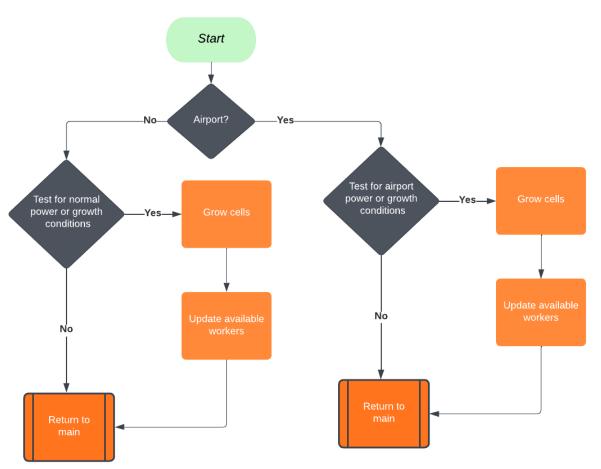

Airport()

