

ZE AWESOME FRENCH AUDIO RESEARCHER (ZAFAR)

Zafar Rafii

PhD in Electrical Engineering & Computer Science
zafarrafi@gmail.com

ABSTRACT

We present Zafar, Ze Awesome French Audio Researcher. The proposed researcher has a PhD in electrical engineering and computer science from Northwestern University, with a focus on audio signal analysis. He has over 30 publications, including conference papers, journal articles, and patents, with 1,500 citations overall. He is actively involved within the research community, as a reviewer for numerous conferences and journals, a member of the IEEE audio and acoustic signal processing technical committee, and an organizer of networking meetups in the San Francisco Bay Area. He is currently a research engineer manager at Gracenote, where he is working on a number of projects involving, among others, audio recognition, audio separation, and audio classification.

Index Terms— Research, audio signal analysis, separation, recognition, classification

1. INTRODUCTION

The proposed researcher is named Zafar Rafii. He received a PhD in electrical engineering and computer science from [Northwestern University](#) in 2014. He was with the [Interactive Audio Lab](#) under the supervision of professor Bryan Pardo. Prior to that, he was a research engineer at Audionamix, in France. He is now a research engineer manager in the Applied Research group at [Gracenote](#).



Fig. 1. Overview of the proposed researcher.

The proposed researcher has interest and expertise in audio signal analysis. He has worked on a number of projects,

including:

- Blind source separation
- Spatial source separation
- Digital audio effects
- Audio fingerprinting
- Cover song identification
- Audio encoding analysis
- Audio beamforming
- Audio watermarking
- Audio/video segmentation
- Audio classification

For more information on the proposed researcher, the reader is referred to the following materials:

- [CV](#)
- [GitHub](#)
- [LinkedIn](#)
- [Google Scholar](#)

For other relevant information related to the proposed researcher, such as the meetups he organizes, the mentoring program he is involved in, or the audio dataset he created, the reader is referred to the following links:

- [SF-BISH Bash meetup](#)
- [SF-BISH Bash YouTube channel](#)
- [Women in Music Information Retrieval](#)
- [MUSDB18 dataset](#)

The rest of the website is organized as follows. In [Section 2](#), we present a selection of projects the proposed researcher has worked on. In [Section 3](#), we introduce his PhD thesis work on the REpeating Pattern Extraction Technique (REPET) for blind source separation. In [Section 4](#), we share links to his GitHub repositories where some of his source codes reside. In [Section 5](#), we provide references to all of his publications, presentations, and other materials.

2. RESEARCH

2.1. Adaptive Reverberation Tool (2008)

People often think about sound in terms of subjective concepts which do not necessarily have known mappings onto the controls of existing audio tools. For example, a bass player may wish to use a reverberation effect to make her/his bass sound more "boomy", but unfortunately there is no "boomy"

knob to be found. We developed a system that can quickly learn an audio concept from a user (e.g., a "boomy" effect) and generate a simple controller than can manipulate sounds in terms of that audio concept (e.g., make a sound more "boomy"), bypassing the bottleneck of technical knowledge of complex interfaces and individual differences in subjective terms.

For this study, we focused on reverberation effects. We developed a digital reverberator, mapping the parameters of the digital filters to measures of the reverberation effect, so that the reverberator can be controlled through meaningful descriptors such as "reverberation time" or "spectral centroid." In the learning process, a sound is first modified by a series of reverberation settings using the reverberator. The user then listens and rates each modified sound as to how well it fits the audio concept she/he has in mind. The ratings are finally mapped onto the controls of the reverberator and a simple controller is built with which the user is able to manipulate the degree of her/his audio concept on a sound. Several experiments conducted on human subjects showed that the system learns quickly (under 3 minutes), predicts user responses well (mean correlation of 0.75), and meets users' expectations (average human rating of 7.4 out of 10).

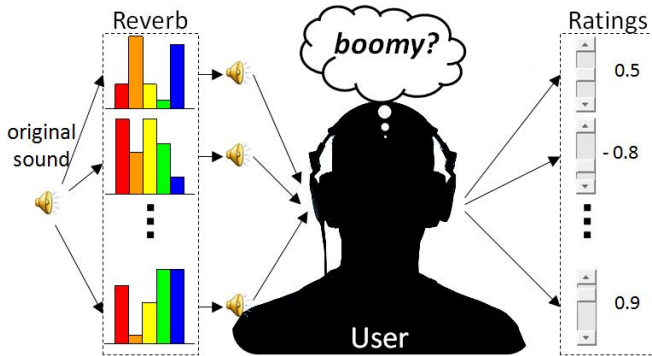


Fig. 2. A listener rating a sound modified by a series of reverberation settings as to how well it fits the audio concept of "boomy" they have in mind.

For more information about this project, the reader is referred to ...

2.2. DUET using the CQT (2011)

The Degenerate Unmixing Estimation Technique (DUET) is a blind source separation method that can separate an arbitrary number of unknown sources using a single stereo mixture. DUET builds a two-dimensional histogram from the amplitude ratio and phase difference between channels, where each peak indicates a source, with peak location corresponding to the mixing parameters associated with that source. Provided that the time-frequency bins of the sources do not overlap too much - an assumption generally validated by speech

mixtures, DUET partitions the time-frequency representation of the mixture by assigning each bin to the source with the closest mixing parameters. However, when time-frequency bins of the sources start to overlap more - as generally seen in music mixtures when using the common short-time Fourier transform (STFT), peaks start to fuse in the 2d histogram and DUET cannot perform separation effectively.

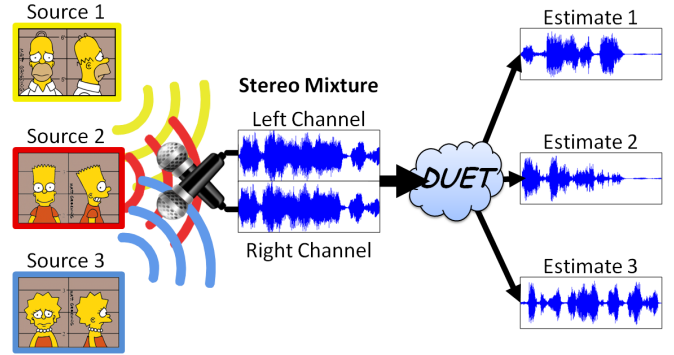


Fig. 3. Blind source separation of a stereo recording of Homer, Bart, and Lisa using DUET.

We proposed to improve peak/source separation in DUET by building the 2d histogram from an alternative time-frequency representation based on the constant-Q transform (CQT). Unlike the Fourier transform, the CQT has a logarithmic frequency resolution, mirroring the human auditory system and matching the geometrically spaced frequencies of the Western music scale, therefore better adapted to music mixtures. We also proposed other contributions to enhance DUET, such as adaptive boundaries for the 2d histogram to improve peak resolving when sources are spatially too close to each other, and Wiener filtering to improve source reconstruction. Experiments on mixtures of piano notes and harmonic sources showed that peak/source separation is overall improved, especially at low octaves (under 200 Hz) and for small mixing angles (under $\pi/6$ rad).

Unlike the classic DUET based on the Fourier transform, DUET combined with the CQT can resolve adjacent pitches in low octaves as well as in high octaves thanks to the log frequency resolution of the CQT:

- Mixture of 3 piano notes
- Estimated A2
- Estimated Bb2
- Estimated B2
- Original A2
- Original Bb2
- Original B2

For more information about this project, the reader is referred to ...

3. REPET

4. CODES

5. REFERENCES

5.1. Patents

- [1] M. Cremer, R. Coover, Z. Rafii, A. Vartakavi, A. Schmidt, and T. Hodges, “Methods and Apparatus to Control Lighting Effects,” 16/698,697, May 2021.
- [2] Z. Rafii, “Methods and Apparatus to Extract a Pitch-independent Timbre Attribute from a Media Signal,” 16/698,697, May 2021.
- [3] M. Cremer, Z. Rafii, R. Coover, and P. Seetharaman, “Automated Cover Song Identification,” 17/065,479, Feb. 2021.
- [4] Z. Rafii, M. Cremer, and B. Kim, “Methods, Apparatus and Articles of Manufacture to Identify Sources of Network Streaming Services,” 16/984,091, Jan. 2021.
- [5] Z. Rafii, “Methods and Apparatus to Improve Detection of Audio Signatures,” 16/455,025, Dec. 2020.
- [6] Z. Rafii and P. Seetharaman, “Audio Identification based on Data Structure,” 16/927,577, Oct. 2020.
- [7] Z. Rafii, “Audio Matching based on Harmonogram,” 16/913,162, Oct. 2020.
- [8] —, “Methods and Apparatus to Perform Windowed Sliding Transforms,” 15/899,220, Jul. 2020.
- [9] Z. Rafii, M. Cremer, and B. Kim, “Methods and Apparatus to Identify Sources of Network Streaming Services using Windowed Sliding Transforms,” 16/843,582, Jul. 2020.
- [10] R. Coover and Z. Rafii, “Methods and Apparatus to Fingerprint an Audio Signal via Normalization,” 16/453,654, Mar. 2020.
- [11] B. Pardo and Z. Rafii, “Audio Separation System and Method,” 13/612,413, Jul. 2015.

5.2. Journal Articles

- [12] Z. Rafii, “Sliding Discrete Fourier Transform with Kernel Windowing,” *IEEE Signal Processing Magazine*, vol. 35, no. 6, Nov. 2018.
- [13] Z. Rafii, A. Liutkus, F.-R. Stöter, D. F. Stylianos Ioannis Mimilakis, and B. Pardo, “An Overview of Lead and Accompaniment Separation in Music,” *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 26, no. 26, Aug. 2018.

- [14] Z. Rafii, Z. Duan, and B. Pardo, “Combining Rhythm-based and Pitch-based Methods for Background and Melody Separation,” *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 22, no. 12, Dec. 2014.
- [15] A. Liutkus, D. FitzGerald, Z. Rafii, B. Pardo, and L. Daudet, “Kernel Additive Models for Source Separation,” *IEEE Transactions on Signal Processing*, vol. 62, no. 16, Aug. 2014.
- [16] Z. Rafii and B. Pardo, “REpeating Pattern Extraction Technique (REPET): A Simple Method for Music/Voice Separation,” *IEEE Transactions on Audio, Speech, and Language Processing*, vol. 21, no. 1, Jan. 2013.
- [17] A. T. Sabin, Z. Rafii, and B. Pardo, “Weighting-Function-Based Rapid Mapping of Descriptors to Audio Processing Parameters,” *Journal of the Audio Engineering Society*, vol. 59, no. 6, Jun. 2011.

5.3. Conference Proceedings

- [18] A. Vartakavi, A. Garg, and Z. Rafii, “Audio Summarization for Podcasts,” in *29th European Signal Processing Conference*, Dublin, Ireland, Aug. 2021, (poster).
- [19] B. Kim and Z. Rafii, “Lossy Audio Compression Identification,” in *26th European Signal Processing Conference*, Rome, Italy, Sep. 2018, (poster).
- [20] P. Seetharaman and Z. Rafii, “Cover Song Identification with 2d Fourier Transform Sequences,” in *42nd IEEE International Conference on Acoustics, Speech and Signal Processing*, New Orleans, LA, USA, Mar. 2017, (poster).
- [21] D. FitzGerald, Z. Rafii, and A. Liutkus, “User Assisted Separation of Repeating Patterns in Time and Frequency using Magnitude Projections,” in *42nd IEEE International Conference on Acoustics, Speech and Signal Processing*, New Orleans, LA, USA, Mar. 2017, (poster).
- [22] A. Liutkus, F.-R. Stöter, Z. Rafii, *et al.*, “The 2016 Signal Separation Evaluation Campaign,” in *13th International Conference on Latent Variable Analysis and Signal Separation*, Grenoble, France, Feb. 2017.
- [23] N. Ono, Z. Rafii, D. Kitamura, N. Ito, and A. Liutkus, “The 2015 Signal Separation Evaluation Campaign,” in *12th International Conference on Latent Variable Analysis and Signal Separation*, Liberec, Czech Republic, Aug. 2015.

- [24] Z. Rafii, A. Liutkus, and B. Pardo, “A Simple User Interface System for Recovering Patterns Repeating in Time and Frequency in Mixtures of Sounds,” in *40th IEEE International Conference on Acoustics, Speech and Signal Processing*, Brisbane, QLD, Australia, Apr. 2015, (poster).
 - [25] A. Liutkus, D. FitzGerald, and Z. Rafii, “Scalable Audio Separation with Light Kernel Additive Modelling,” in *40th IEEE International Conference on Acoustics, Speech and Signal Processing*, Brisbane, QLD, Australia, Apr. 2015, (slides).
 - [26] D. FitzGerald, A. Liutkus, Z. Rafii, B. Pardo, and L. Daudet, “Harmonic/Percussive Separation using Kernel Additive Modelling,” in *25th IET Irish Signals and Systems Conference*, Limerick, Ireland, Jun. 2014.
 - [27] A. Liutkus, Z. Rafii, B. Pardo, D. FitzGerald, and L. Daudet, “Kernel Spectrogram Models for Source Separation,” in *4th Joint Workshop on Hands-free Speech Communication Microphone Arrays*, Nancy, France, May 2014, (slides).
 - [28] Z. Rafii, B. Coover, and J. Han, “An Audio Fingerprinting System for Live Version Identification using Image Processing Techniques,” in *39th IEEE International Conference on Acoustics, Speech and Signal Processing*, Florence, Italy, May 2014, (poster).
 - [29] Z. Rafii, F. G. Germain, D. L. Sun, and G. J. Mysore, “Combining Modeling of Singing Voice and Background Music for Automatic Separation of Musical Mixtures,” in *14th International Society for Music Information Retrieval*, Curitiba, PR, Brazil, Nov. 2013, (poster).
 - [30] Z. Rafii and B. Pardo, “Online REPET-SIM for Real-time Speech Enhancement,” in *38th IEEE International Conference on Acoustics, Speech and Signal Processing*, Vancouver, BC, Canada, May 2013, (poster).
 - [31] —, “Music/Voice Separation using the Similarity Matrix,” in *13th International Society for Music Information Retrieval*, Porto, Portugal, Oct. 2012, (slides).
 - [32] A. Liutkus, Z. Rafii, R. Badeau, B. Pardo, and G. Richard, “Adaptive Filtering for Music/Voice Separation Exploiting the Repeating Musical Structure,” in *37th IEEE International Conference on Acoustics, Speech and Signal Processing*, Kyoto, Japan, Mar. 2012, (slides).
 - [33] M. Cartwright, Z. Rafii, J. Han, and B. Pardo, “Making Searchable Melodies: Human vs. Machine,” in *3rd Human Computation Workshop*, San Francisco, CA, Aug. 2011, (poster).
 - [34] Z. Rafii and B. Pardo, “A Simple Music/Voice Separation Method based on the Extraction of the Repeating Musical Structure,” in *36th IEEE International Conference on Acoustics, Speech and Signal Processing*, Prague, Czech Republic, May 2011, (poster).
 - [35] —, “Degenerate Unmixing Estimation Technique using the Constant Q Transform,” in *36th IEEE International Conference on Acoustics, Speech and Signal Processing*, Prague, Czech Republic, May 2011, (poster).
 - [36] —, “Learning to control a Reverberator using Subjective Perceptual Descriptors,” in *10th International Society for Music Information Retrieval*, Kobe, Japan, Oct. 2009, (poster).
- #### 5.4. Book Chapters
- [37] B. Pardo, Z. Rafii, and Z. Duan, “Audio Source Separation in a Musical Context,” in *Handbook of Systematic Musicology*, H. Springer Berlin, Ed. 2018.
 - [38] A. L. Zafar Rafii and B. Pardo, “REPET for Background/Foreground Separation in Audio,” in *Blind Source Separation*, H. Springer Berlin, Ed. 2014.
- #### 5.5. Technical Reports
- [39] Z. Rafii and B. Pardo, “A Digital Reverberator controlled through Measures of the Reverberation,” Northwestern University, 2009.
- #### 5.6. Talks
- [40] J. McDermott, B. Pardo, and Z. Rafii, *Leveraging Repetition to Parse the Auditory Scene*, 13th International Society for Music Information Retrieval, Porto, Portugal, 2012.
- #### 5.7. Data Sets
- [41] Z. Rafii, A. Liutkus, F.-R. Stöter, S. I. Mimilakis, and R. Bittner. “MUSDB18-HQ – an uncompressed version of MUSDB18.” (2019).
 - [42] —, “The MUSDB18 corpus for music separation.” (2019).