PRACTICAL LAB: JAVASCRIPT OPERATORS MASTERY

Course: DFK20013 Web Design Technology

Topic: 3.1.1 Variables, Data Types, and Operators

Duration: 60 – 90 Minutes

Student Name	**WAN ARIQ ZAFRAN BIN ARMIZAN**
Registration No	**10DIT25F1033**
Date	**02/03/2026**

---

1. Learning Outcomes

By the end of this lab, students should be able to:

- Implement **Arithmetic Operators** for calculations.
- Use **Assignment Operators** to update values efficiently.
- Control application states using **Increment/Decrement**.
- Validate user access using **Relational** and **Logical** operators.

---

2. Practical Task: The All-in-One Operator Workshop

Create a file named lab_operators.html. Copy and complete the coding below.

HTML

```
<!DOCTYPE html>

<html lang="en">

<head>

    <meta charset="UTF-8">

    <title>DFK20013: JS Operators Workshop</title>

    <style>

        body { font-family: 'Segoe UI', sans-serif; max-width: 850px;
margin: 2rem auto; background-color: #f0f2f5; padding: 20px; color: #333;
}

        section { background: white; padding: 25px; border-radius: 12px;
margin-bottom: 25px; box-shadow: 0 4px 6px rgba(0,0,0,0.1); }

        h2 { color: #2c3e50; border-left: 5px solid #3498db; padding-
left: 10px; margin-top: 0; }

        .output-box { background: #2c3e50; color: #27ae60; padding: 15px;
border-radius: 6px; font-family: 'Courier New', monospace; margin-top:
10px; }
```

```
        .short-note { background: #fff3cd; color: #856404; padding: 15px;
border-radius: 6px; margin-top: 15px; border-left: 5px solid #ffc107;
display: none; font-size: 0.9rem; }

        input { padding: 8px; width: 100px; border-radius: 4px; border:
1px solid #ccc; }

        button { padding: 8px 20px; background: #3498db; color: white;
border: none; border-radius: 4px; cursor: pointer; font-weight: bold; }

        button:hover { background: #2980b9; }

        code { background: #eee; padding: 2px 4px; border-radius: 3px;
font-weight: bold; color: #d63384; }

    </style>

</head>
```

```
<body>



    <header style="text-align: center; margin-bottom: 30px;">

        <h1>JavaScript Operators Mastery</h1>

        <p>Follow the steps and observe the Console and UI outputs.</p>

    </header>
```

```
    <section>

        <h2>Task 1: Basic Arithmetic (Check Console)</h2>

        <p>This task demonstrates background calculations using
<code>+</code>, <code>-</code>, <code>*</code>, <code>/</code>,
<code>**</code>, and <code>%</code>.</p>

        <button onclick="runTask1()">Run Console Logic</button>

    </section>
```

```
    <section>

        <h2>Task 2: POS System (Arithmetic & Assignment)</h2>

        <p>Price: RM 50.00. <strong>Promo:</strong> Buy > 4 units to get
RM 20.00 discount.</p>

        Quantity: <input type="number" id="qty" value="1">

        <button onclick="runTask2()">Calculate Total</button>

        <div id="outPOS" class="output-box">Final Total: RM 0.00</div>

        <div id="notePOS" class="short-note"></div>

    </section>
```

```
    <section>

        <h2>Task 3: Stock Control (Increment & Decrement)</h2>
```

```
        <p>Simulating inventory updates.</p>

        Stock Level: <span id="stockVal" style="font-size: 1.5rem; font-
weight: bold;">10</span><br><br>

        <button onclick="runTask3('inc')">Add (+)</button>

        <button onclick="runTask3('dec')"
style="background:#6c757d;">Remove (-)</button>

        <div id="noteStock" class="short-note"></div>

    </section>
```

```
    <section>

        <h2>Task 4: Gate Access (Relational & Logical)</h2>

        <p>Rules: Age 18+ OR (Age 13+ AND Parent present).</p>

        Age: <input type="number" id="age" placeholder="Age">

        <label><input type="checkbox" id="parent"> With
Parent?</label><br><br>

        <button onclick="runTask4()" style="background:#27ae60;">Verify
Entry</button>

        <div id="outSecurity" class="output-box">Status: Waiting...</div>

        <div id="noteSecurity" class="short-note"></div>

    </section>
```

Inside the <script> tag, type all the following code:

JAVASCRIPT:

1.

```
<script>
    // Helper to show explanations
    function showNote(id, text) {
        const noteDiv = document.getElementById(id);
        noteDiv.style.display = 'block';
        noteDiv.innerHTML = text;
    }
```

2.

```
// --- TASK 1: ARITHMETIC (BASIC) ---
function runTask1() {
    console.log("--- Task 1: Arithmetic Operations ---");
    let students = 31;
    students = students + 1;   // Addition
    students = students - 2;   // Subtraction
    students = students * 2;   // Multiplication
    students = students / 2;   // Division
    let power = 10 ** 2;       // Exponentiation (100)
    let remainder = 31 % 2;    // Modulus (1 - Odd)

    console.log("Final Student Count: " + students);
    console.log("10 to the power of 2: " + power);
    console.log("Remainder of 31/2: " + remainder);
    alert("Check Browser Console (F12) for results!");
}
```

3.

```
// --- TASK 2: POS SYSTEM (ARITHMETIC & ASSIGNMENT) ---
function runTask2() {
    let price = 50;
    let qty = parseInt(document.getElementById('qty').value);

    // a. Arithmetic Operator (*)
    let total = price * qty;
    let note = "<b>Subtopic (a) Arithmetic:</b> <code>*</
    code> multiplied " + price + " by " + qty + ".<br>";

    // b. Assignment Operator (-=)
    if (qty > 4) {
        total -= 20; // Shorthand for total = total - 20
        note += "<b>Subtopic (b) Assignment:</b> <code>-=</
        code> updated the total by subtracting the discount.";
    }

    document.getElementById('outPOS').textContent = "Final
    Total: RM " + total.toFixed(2);
    showNote('notePOS', note);
}
```

4.

```
// --- TASK 3: INCREMENT & DECREMENT ---
let stock = 10;
function runTask3(type) {
    let note = "";
    if (type === 'inc') {
        stock++; // (c) Increment
        note = "<b>Subtopic (c) Increment:</b> <code>++</
        code> increased the stock by 1.";
    } else {
        stock--; // (c) Decrement
        note = "<b>Subtopic (c) Decrement:</b> <code>--</
        code> decreased the stock by 1.";
    }
    document.getElementById('stockVal').textContent = stock;
    showNote('noteStock', note);
}
```

5.

```
    // --- TASK 4: RELATIONAL & LOGICAL ---
    function runTask4() {
        let age = parseInt(document.getElementById('age').value);
        let hasParent = document.getElementById('parent').checked;
        let status = document.getElementById('outSecurity');

        if (isNaN(age)) return alert("Please enter a valid age.");

        // d. Relational: >=
        // e. Logical: || (OR), && (AND)
        let isEligible = (age >= 18) || (age >= 13 && hasParent);

        status.textContent = isEligible ? "Status: ACCESS GRANTED
        ✅" : "Status: ACCESS DENIED ❌";
        status.style.color = isEligible ? "#27ae60" : "#ff4d4d";

        let note = "<b>Subtopic (d) Relational:</b> <code>>=</
        code> compared Age (" + age + ") to the limit.<br>";
        note += "<b>Subtopic (e) Logical:</b> Used <code>||</
        code> (OR) and <code>&&</code> (AND) to combine rules.";
        showNote('noteSecurity', note);
    }
</script>
```

Capture a screenshot of the output from the previous steps. **Observe** the results and **explain** your understanding of the process.

1.	**Screenshot of the output** 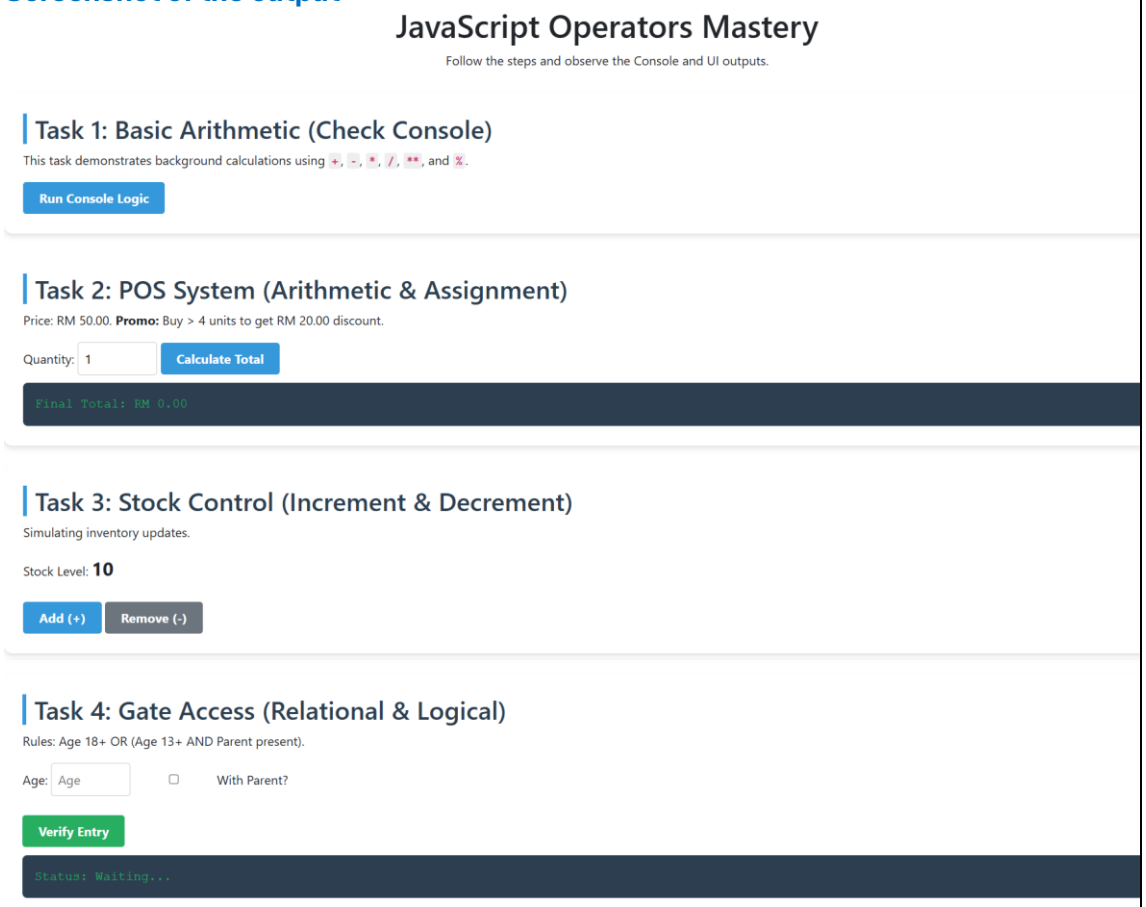
	Explanation **demonstrates how JavaScript operators process data across different scenarios. It covers basic arithmetic for calculations, comparison and assignment for business logic like discounts, increment/decrement for inventory tracking, and logical operators for complex conditional access rules. Together, these tools enable a program to transform user inputs into functional UI updates.**

2.	**Screenshot of the output**
	Explanation

3.	**Screenshot of the output**

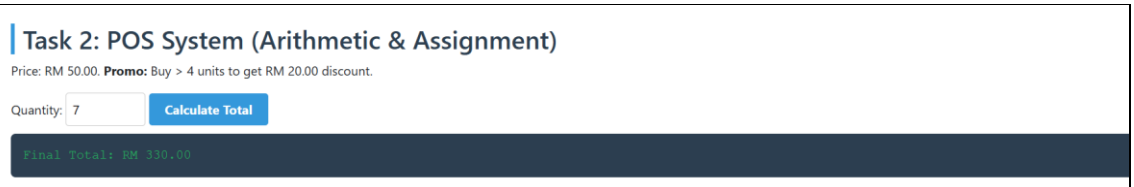

Explanation

The image illustrates a POS system's logic where arithmetic and comparison operators automate pricing. It calculates a subtotal by multiplying price and quantity applies a conditional discount using a relational operator and performs subtraction to assign and display the Final Total

4 .

Screenshot of the output

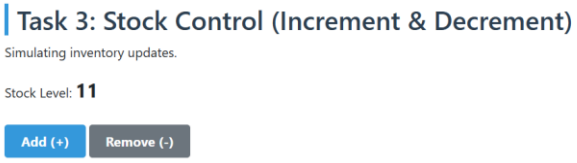

Explanation

The image shows a stock control simulation using increment and decrement operators. The Add button increases the stock level by one, while the Remove button decreases it by one. This process demonstrates how unary operators efficiently update a variable's state to reflect real-time inventory changes in a user interface.

5 .

Screenshot of the output

Explanation

The image demonstrates a conditional validation process using relational and logical operators to determine entry. Since the input Age (15) fails the "18+" rule but satisfies the "13+ AND Parent present" rule, the system evaluates the OR logic as true. This results in the final output of "Status: ACCESS GRANTED."

3. Quick Check (Reflection)

Instruction: Answer the following questions based on your coding results.

1. **Modulus Utility:** Based on Task 1, if students % 2 returns 0, is the number even or odd?
2. **Shorthand Power:** In Task 2, rewrite total -= 20 using the standard assignment method.
3. **Logical Priority:** In Task 4, why did we put (age >= 13 && hasParent) in parentheses?
4. **Time Calculation:** (Extra Challenge) If a variable totalMinutes = 130, write the formula to find the remaining minutes after converting to hours using the **Modulus** operator.