

Sync between Data Interfaces

07:51 AM

SQL SELECT vs QLIK LOAD

SELECT	LOAD
col1,	col1,
col2	col2
FROM	FROM
DB.TABLE	DATASOURCE
WHERE	WHERE
X=Y	X=Y
;	;

LOAD

ID,
Name,
Sex,
"Age"

FROM

[lib://datasets/athlete_events.csv]
(txt, codepage is 28591, embedded
labels, delimiter is ',', msq)

;

◀ LOAD statement header

◀ List of columns or calculations

◀ FROM statement header

◀ Data source string

◀ Properties (data source specific)

◀ End statement with semicolon


Column Alias

LOAD

ID as CUST_ID

FROM

[Customers.csv];

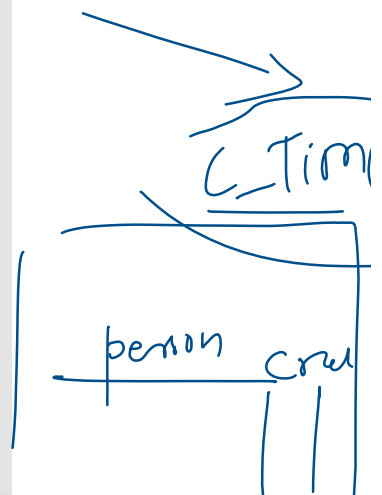

✓ Methods For Not Joining



Alias column name ✓



✓ Remove from LOAD statement ✓



✓ Comment column from LOAD statement //

Load