```html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <h1>Hello</h1>

    <ul>
        <li><a href="{% url 'one' %}">Show One</a></li>
        <li><a href="{% url 'edit' %}">Edit One</a></li>
        <li><a href="{% url 'delete' %}">Delete One</a></li>
        <li><a href="{% url 'var' %}">Variables</a></li>
        <li><a href=""></a></li>
    </ul>
</body>
</html>
```

```html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <h1>delete One</h1>
</body>
</html>
```

```html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <!-- <h1>Hello {{name}}</h1>
    <h1>you are {{age}}</h1> -->
    {% for i in data %}
    {% if i.age > 20 %}
    <p>{{i.name}} is bigger than 20</p>
    {% elif i.age < 20 %}
    <p>{{i.name}} is smaller than 20</p>
    {% else %}
    <p>{{i.name}} is 20</p>
    {% endif %}
    {% endfor %}

</body>
</html>
```

```html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <h1>Show One</h1>
</body>
</html>
```

```python
from django.shortcuts import render

# Create your views here.
def index(request):
    return render(request,'index.html')

def one(request):
    return render(request,'showone.html')

def edit(request):
    return render(request,'edit.html')

def delete(request):
    return render(request,'delete.html')

def var(request):
    data=[
        {"name":"Ali","age":25,},
        {"name":"Ahmed","age":17,},
        {"name":"Nader","age":20,},
        {"name":"Saleh","age":50,},
    ]
    return render(request,'var.html',{"data":data})
```

```html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <h1>edit One</h1>
</body>
</html>
```

```python
from django.urls import path
from . import views

urlpatterns=[
    path('',views.index,name='index'),
    path('getone/',views.one,name='one'),
    path('edit/',views.edit,name='edit'),
    path('delete/',views.delete,name='delete'),
    path('var/',views.var,name='var'),
]
```
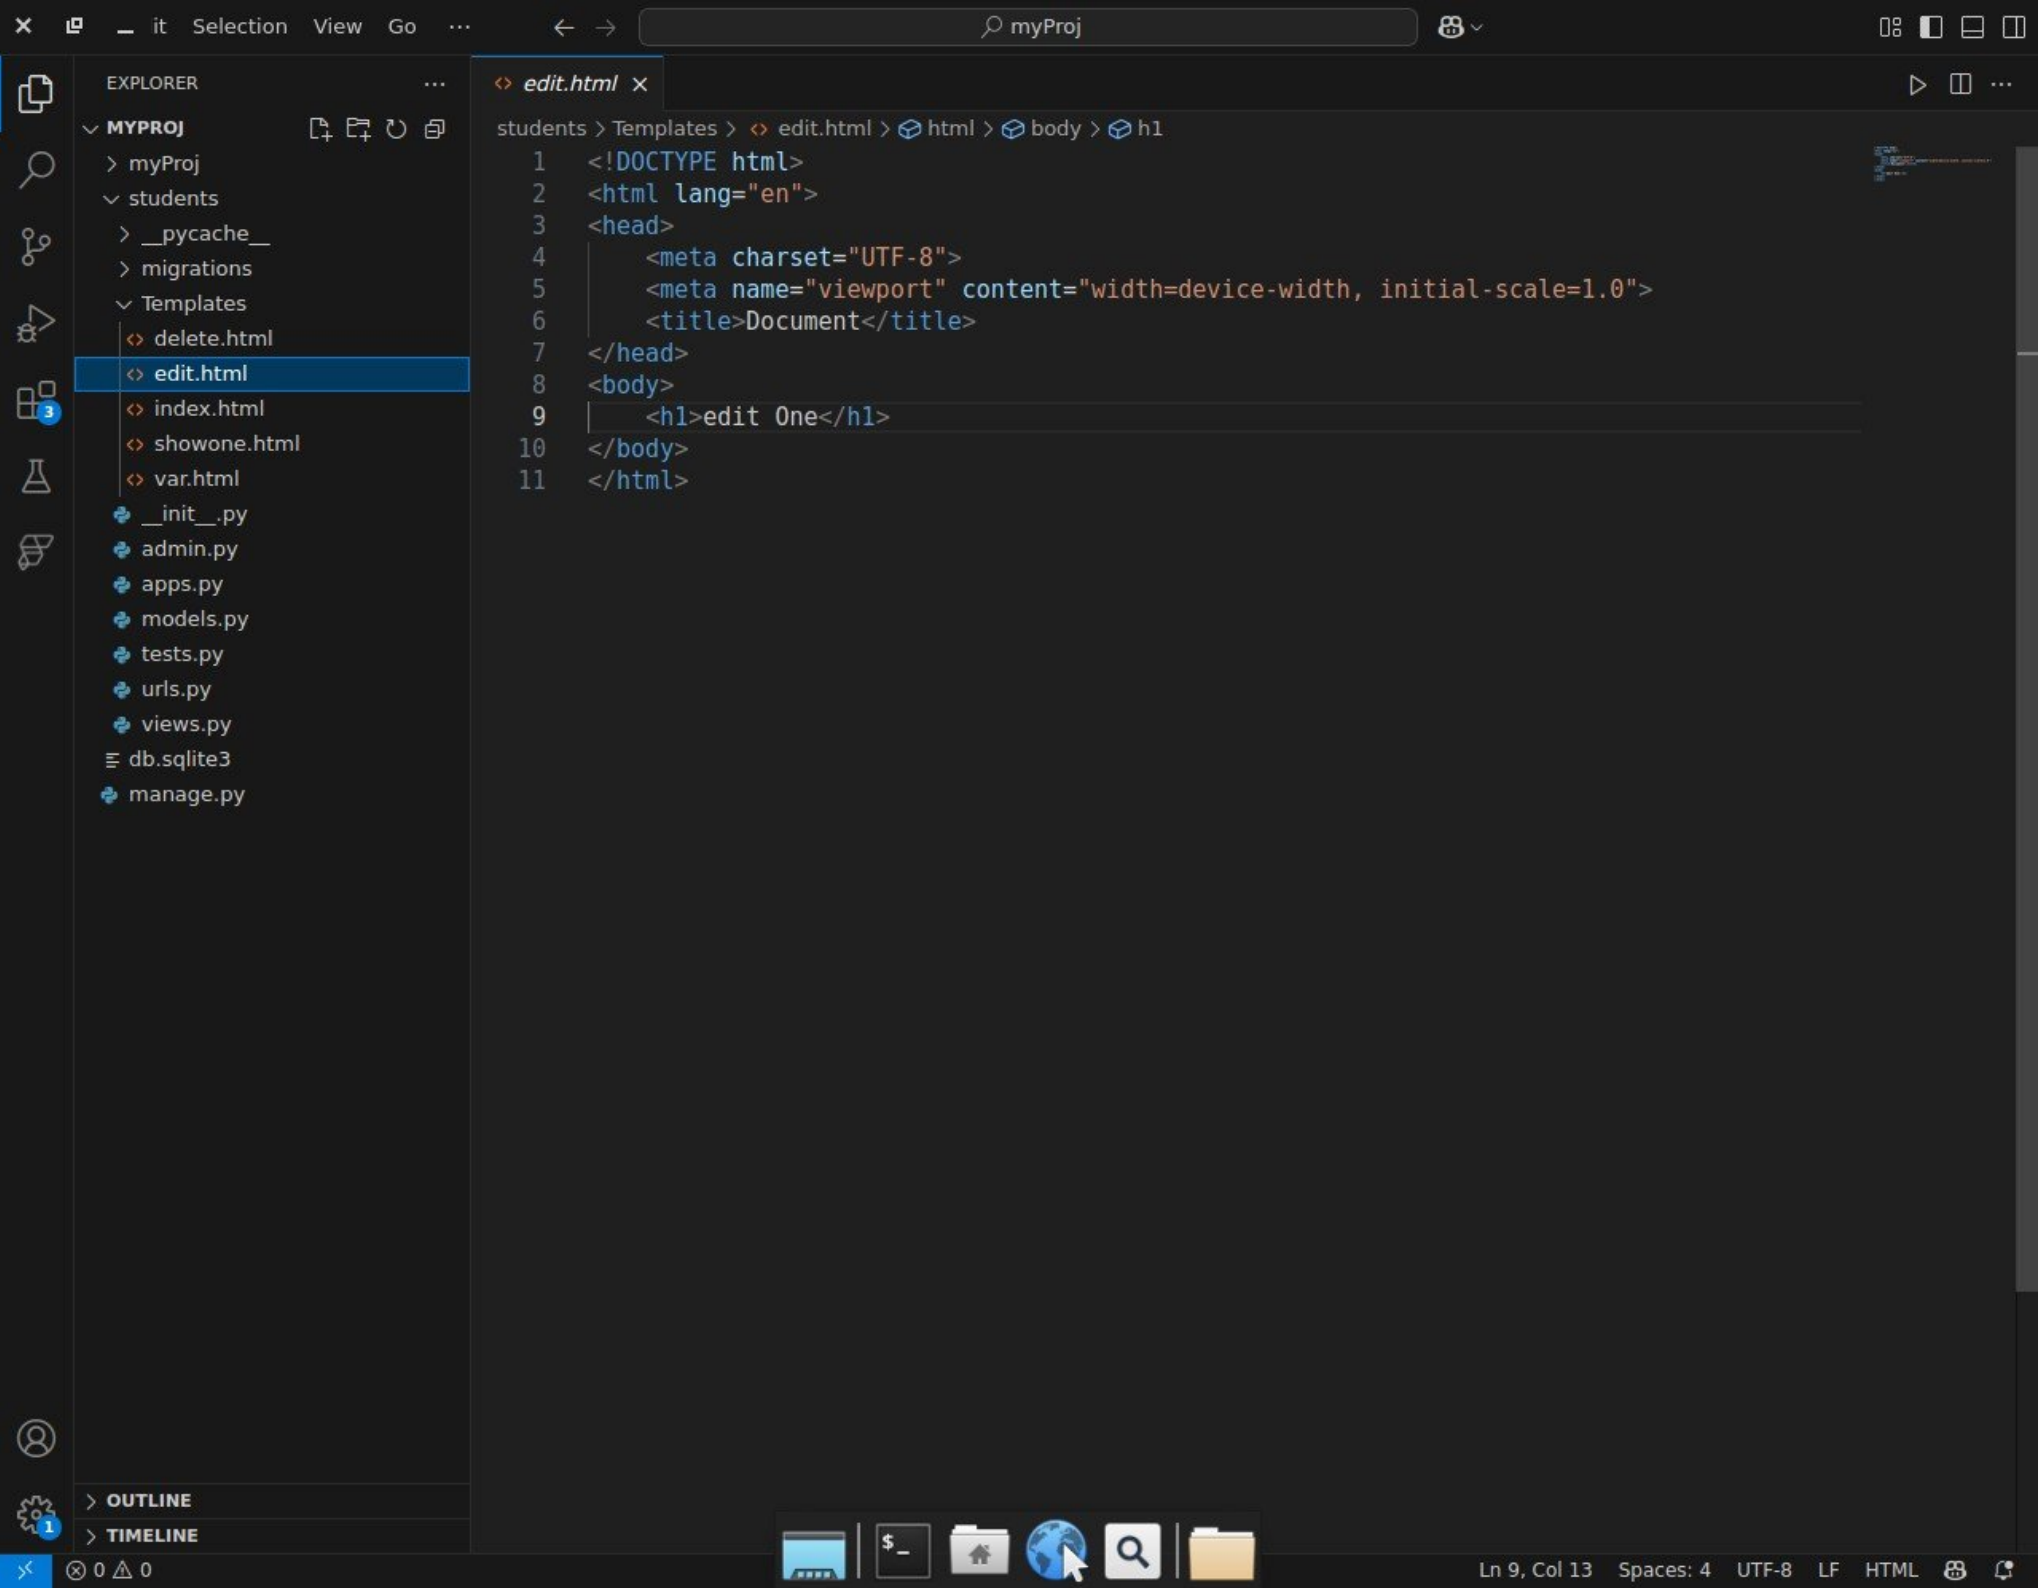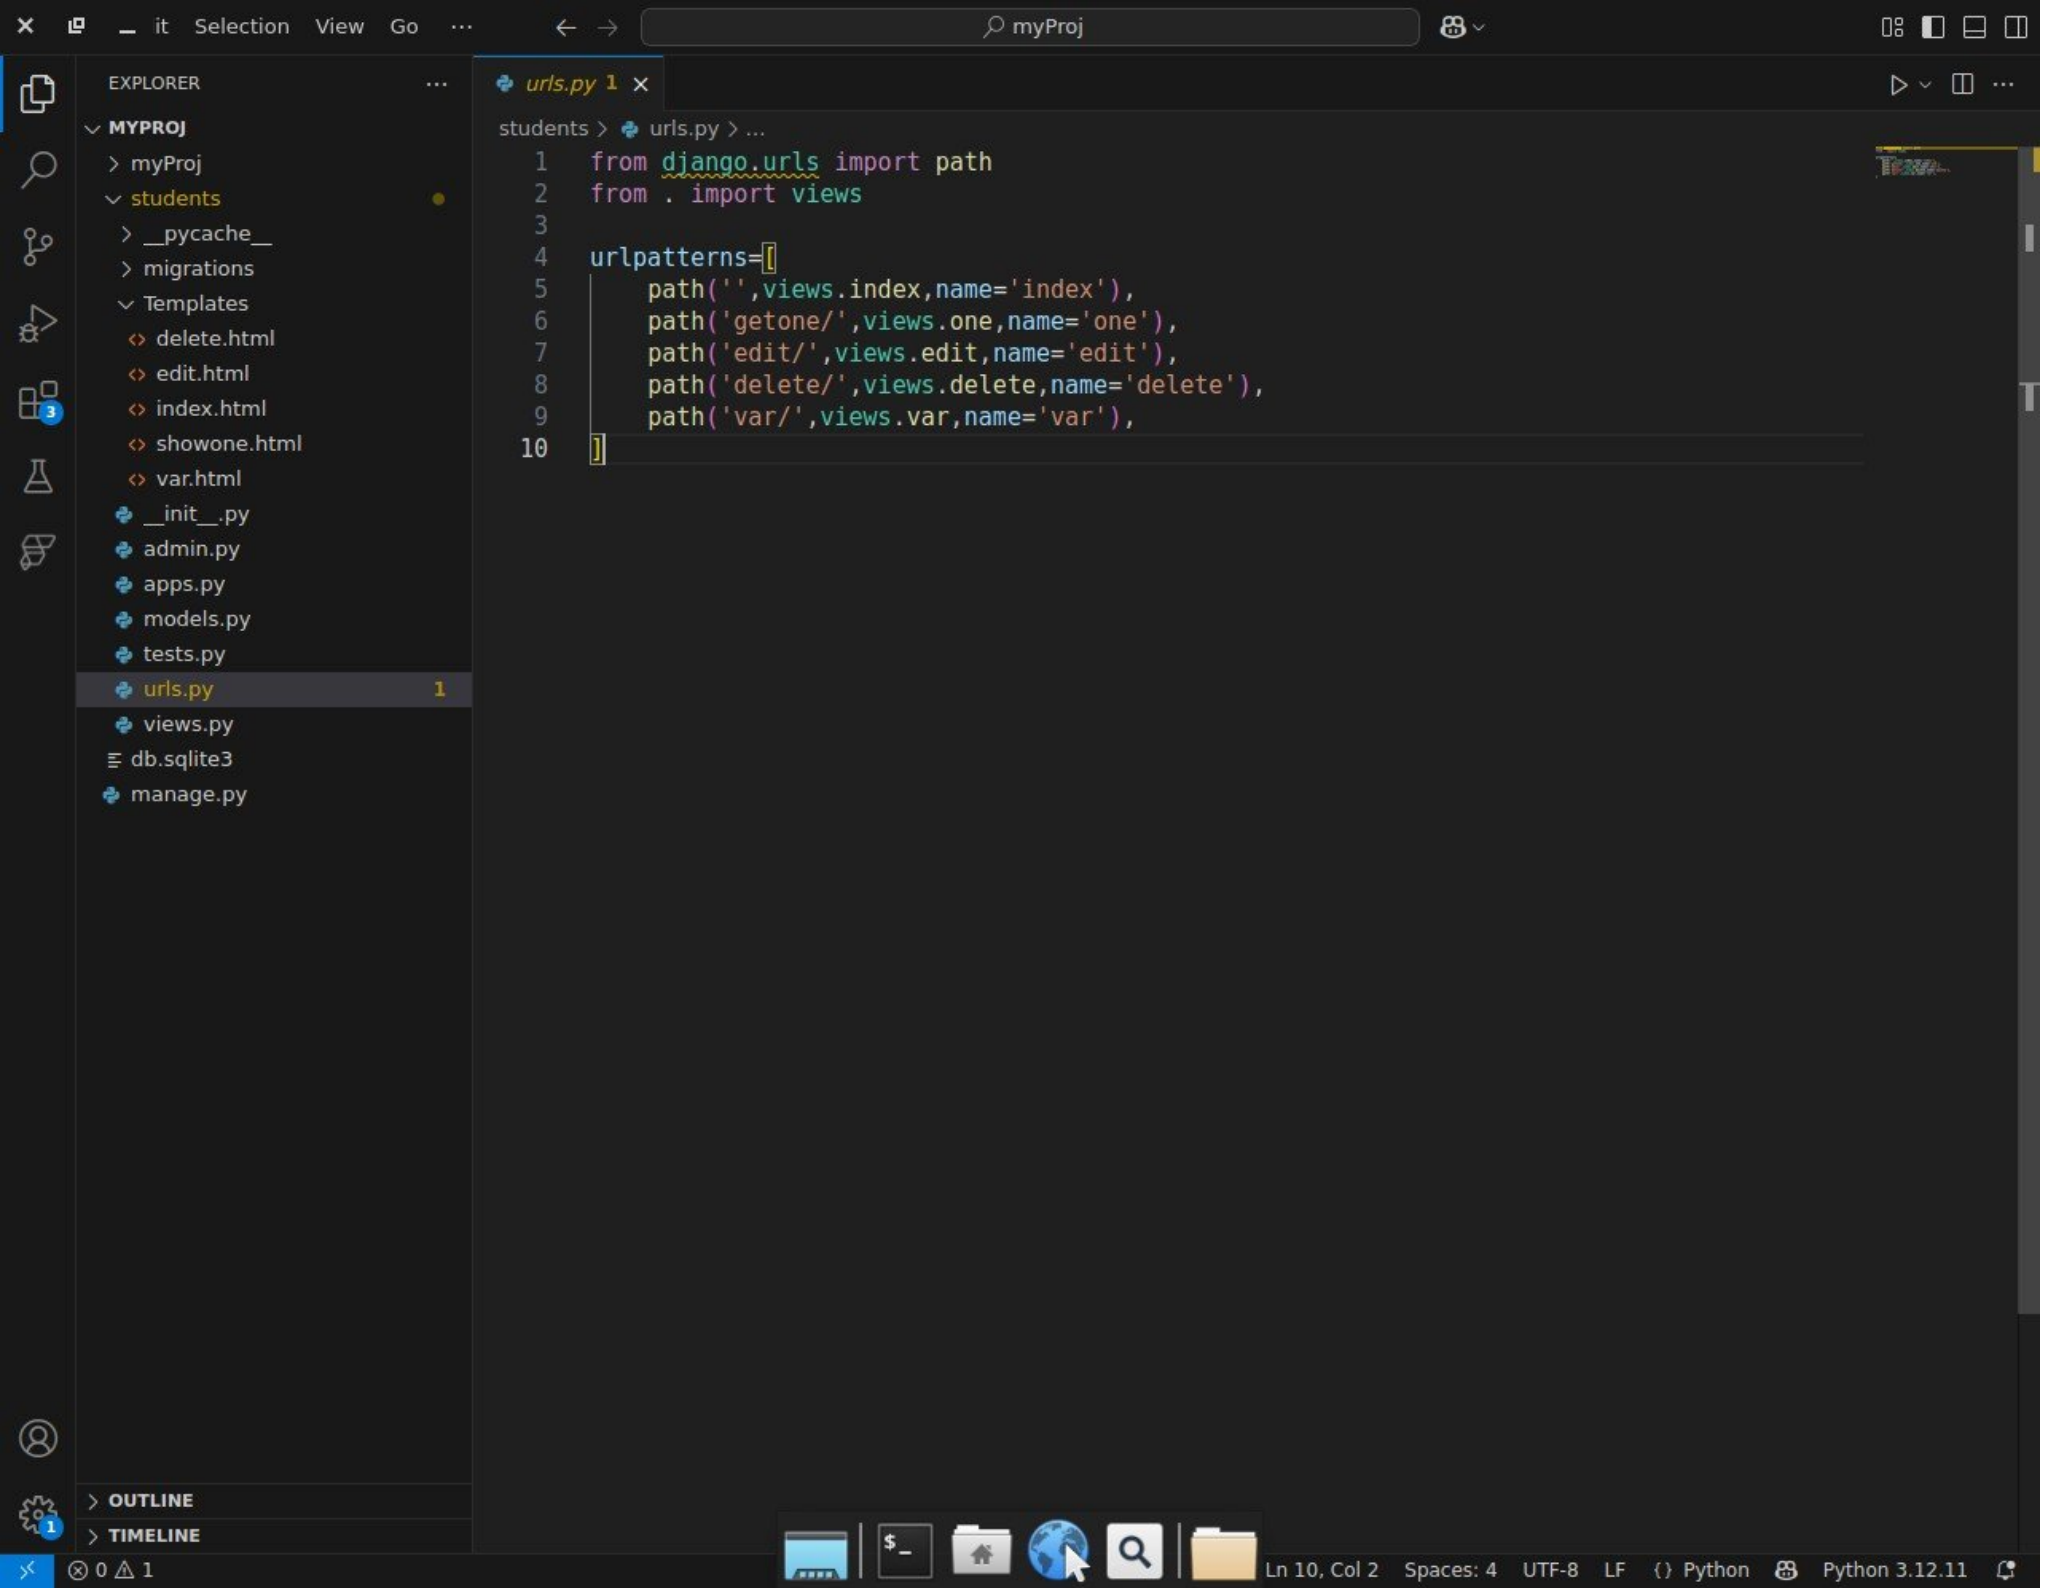
# delete One

# edit One

Ali is bigger than 20

Ahmed is smaller than 20

Nader is 20

Saleh is bigger than 20

# Show One

# edit One

# Hello

- [Show One](#)
- [Edit One](#)
- [Delete One](#)
- [Variables](#)
-