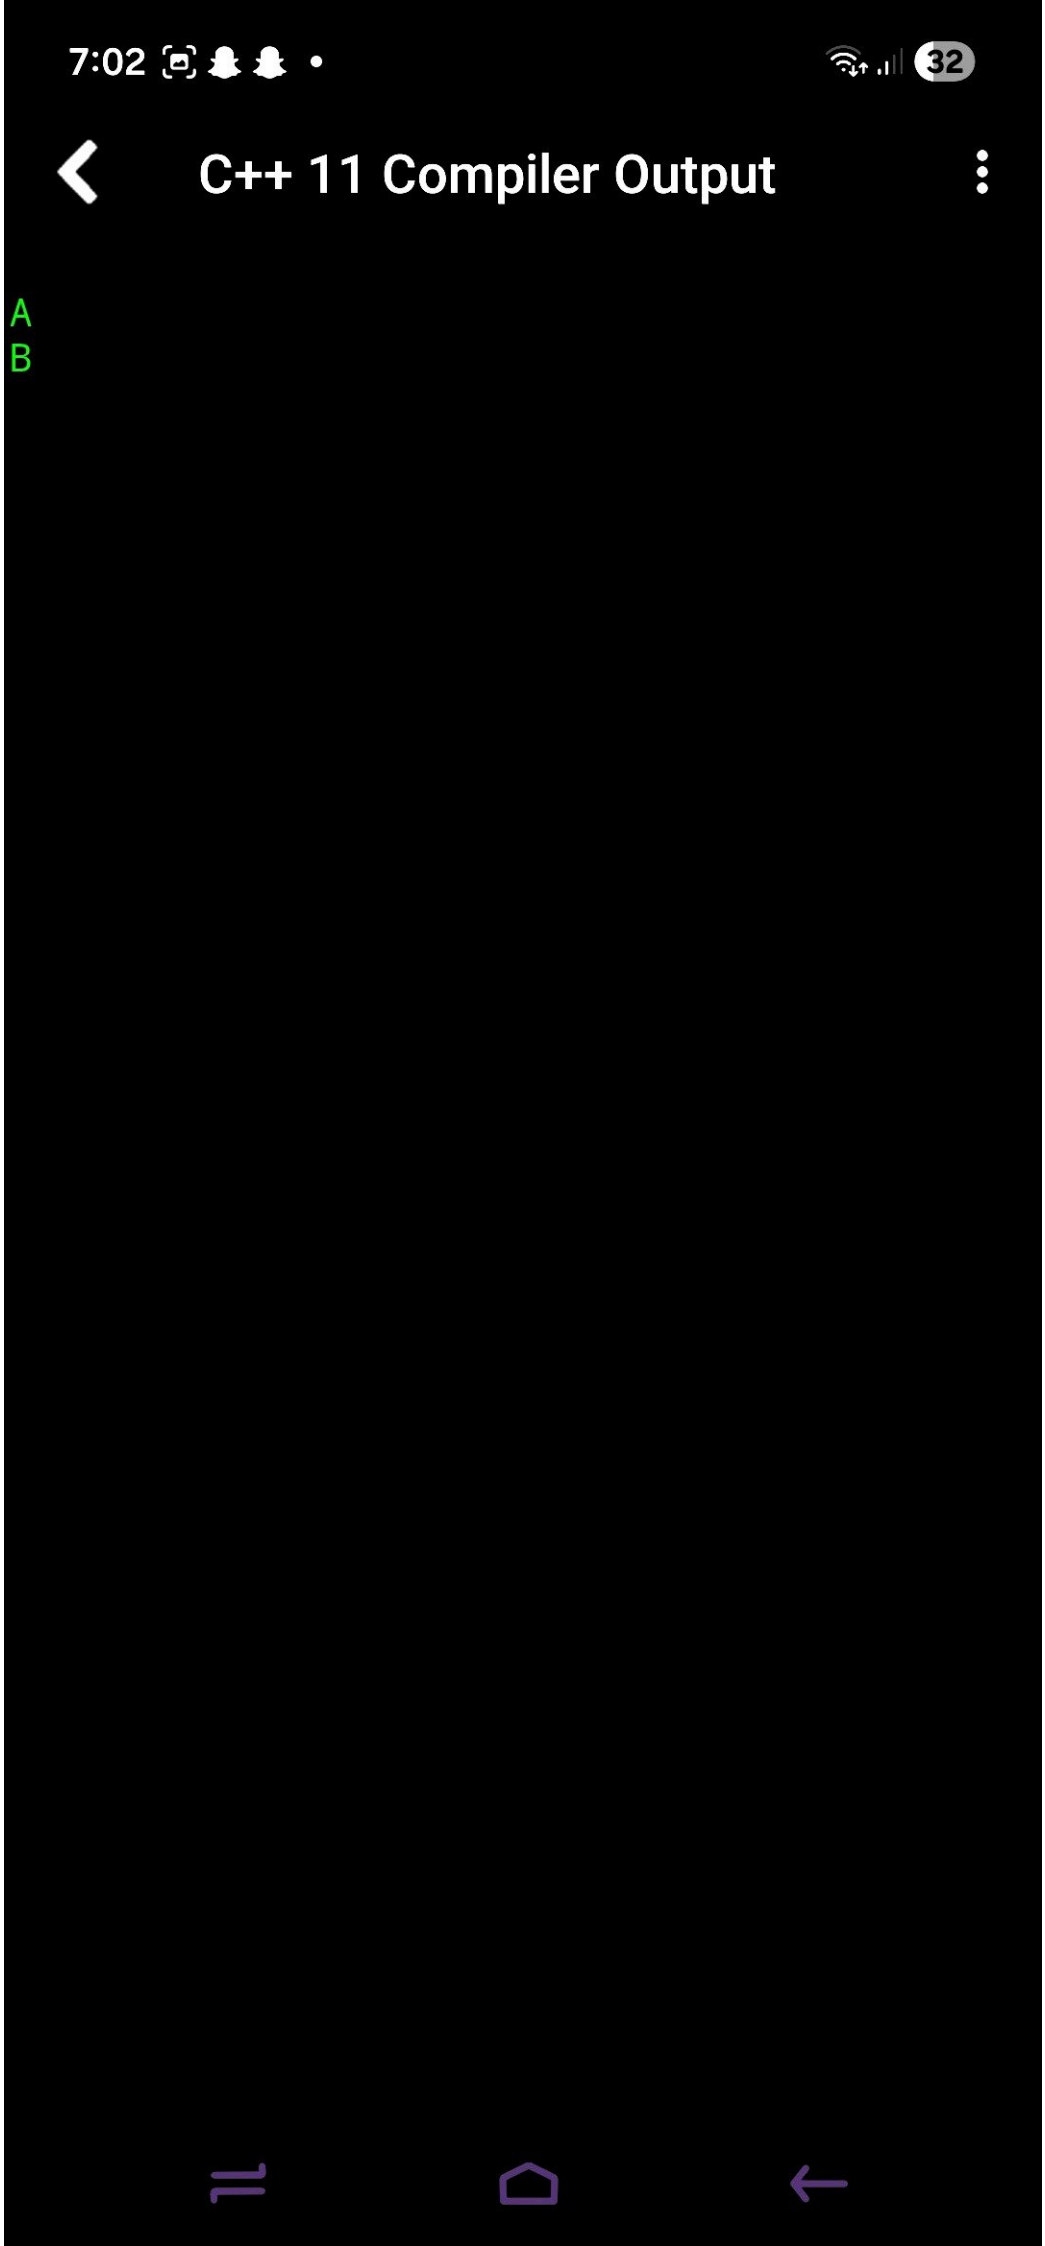

7:02
32
C++ 11 Compiler Output
A
B


7:02
32
Sample Source
#include <iostream>
using namespace std;
int main ()
{
char letter;
letter='A';
cout<<letter<<'\n';
letter='B';
cout<<letter<<'\n';
cin>>letter;
return 0;
}
{ } ' " , . ; : = < >
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
!#1
English (UK)

Zainab Rashid

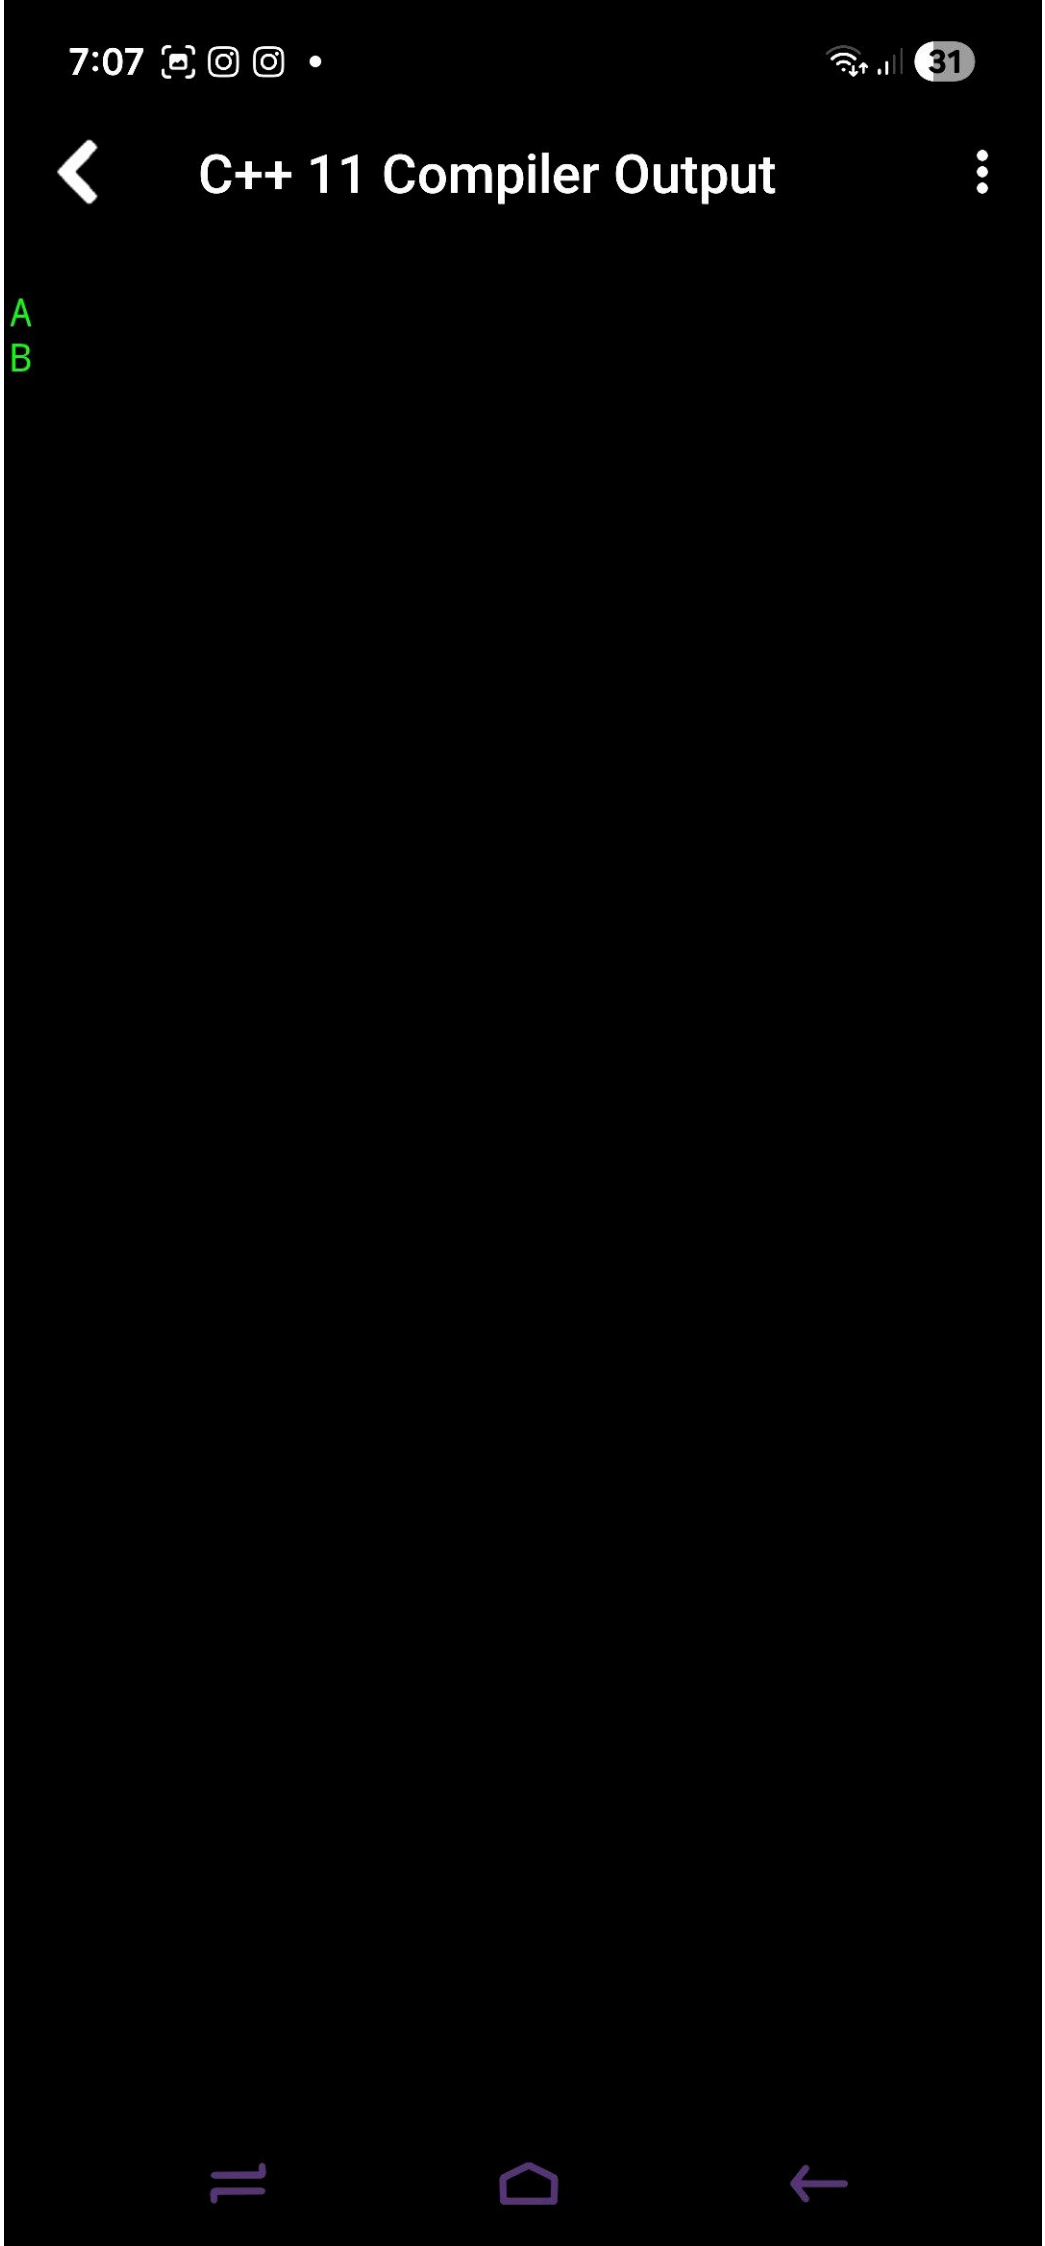
Date: computer Science Secti

Task 1

```
#include <iostream>
using namespace std;
 int main ()
{
 char letter;
 letter='A';
cout<<letter<<'\n';
 letter='B';
cout<<letter<<'\n';
 cin>>letter;
 return 0;
}
```

Output

```
A
B
```


7:07
31
C++ 11 Compiler Output
A
B


7:07
31
Sample Source
#include <iostream>
using namespace std;
int main ()
{
char letter;
letter=65;
cout<<letter<<'\n';
letter=66;
cout<<letter<<'\n';
cin>>letter;
return 0;
}
{ } ' " , . ; : = < >
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
!#1
English (UK)

```
#include <iostream>
using namespace std;
int main()
{
char letter;
letter=65;
cout<<letter<<'\n';
letter=66;
cout<<letter<<'\n';
cin>>letter;
return 0;
}
```

Output

```
A
B
```

7:17 • 30

C++ 11 Compiler Output

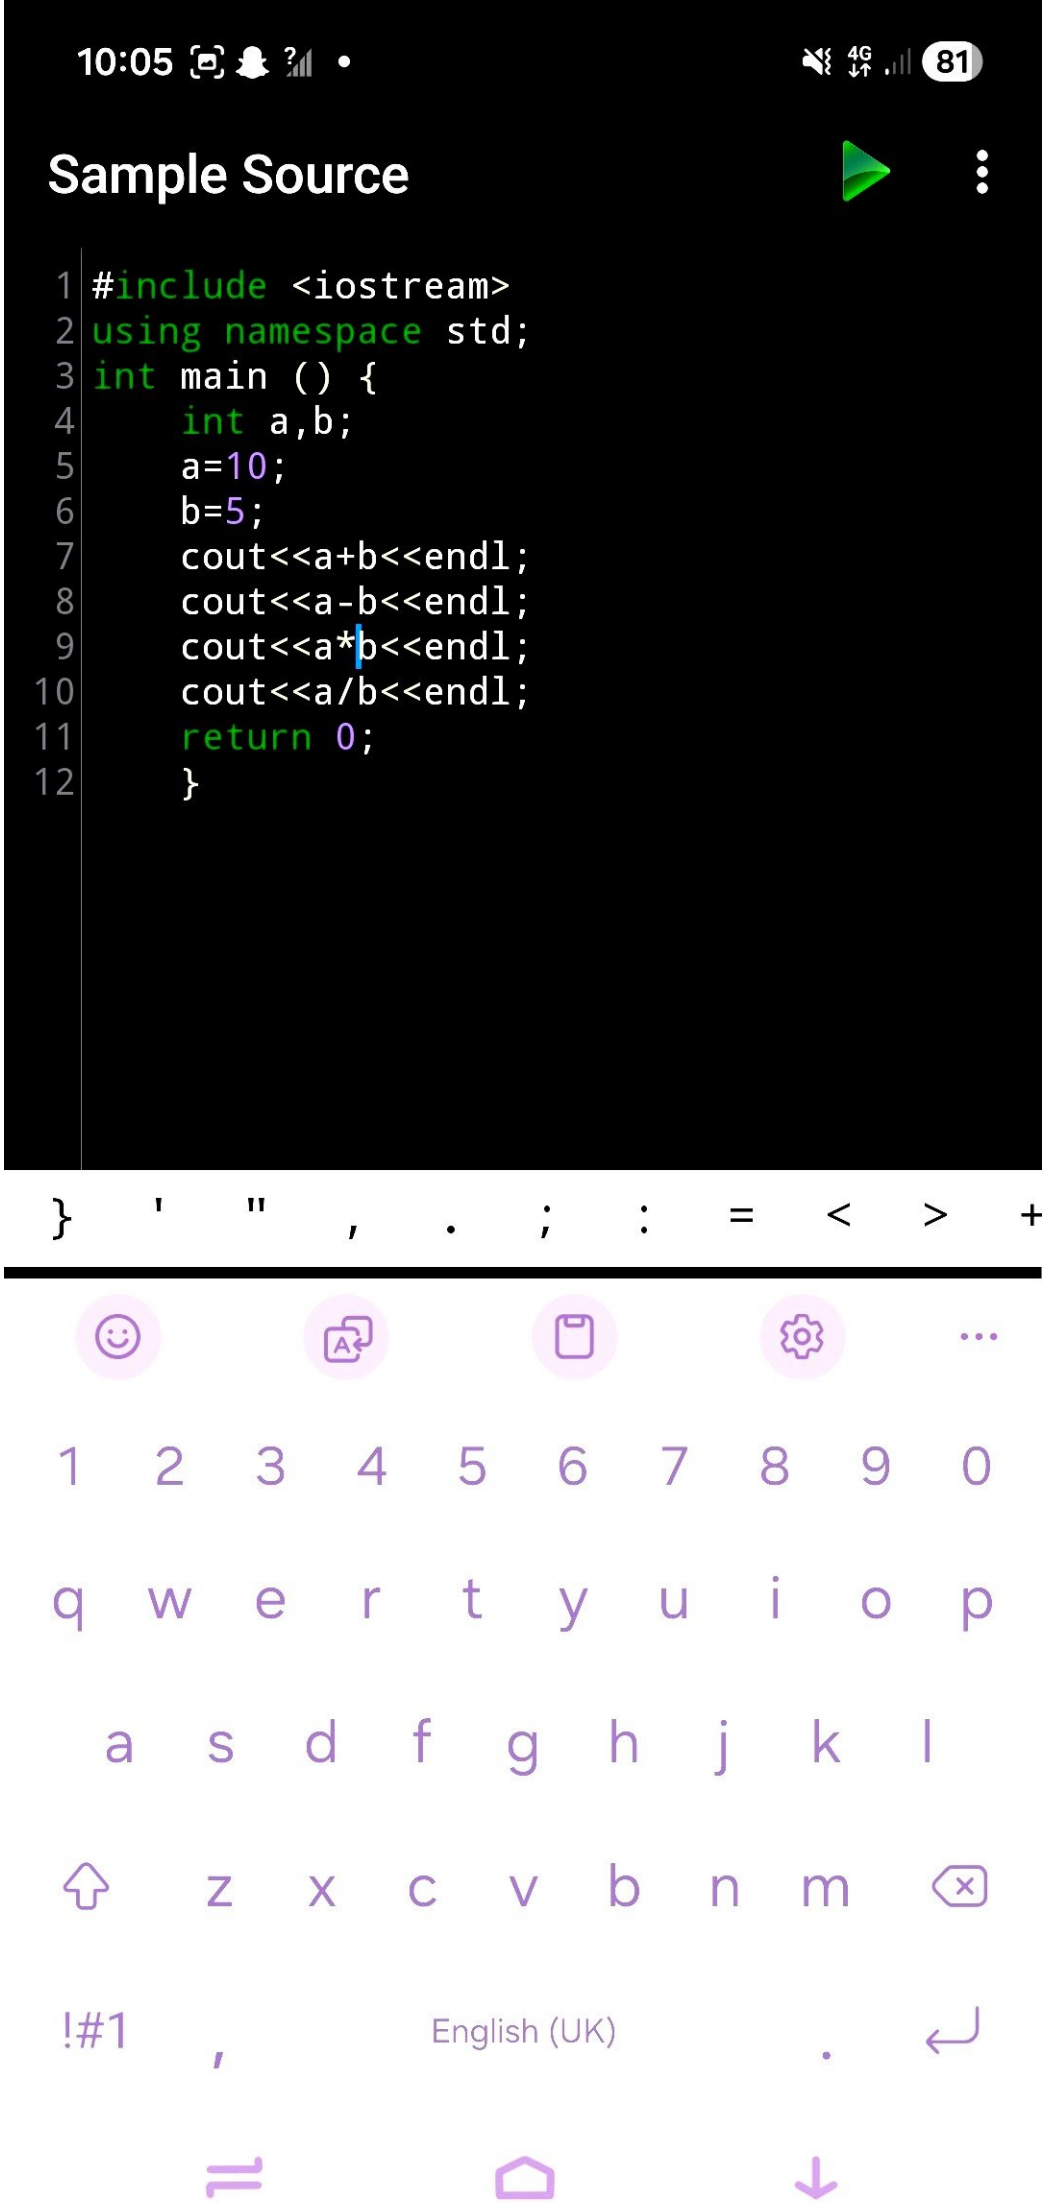
```
65
66
```


7:17
30
Sample Source
#include <iostream>
using namespace std;
int main ()
{
int letter;
letter='A';
cout<<letter<<'\n';
letter='B';
cout<<letter<<'\n';
cin>>letter;
return 0;
}
{ } ' " , . ; : = < >
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
!#1
English (UK)

```
#include <iostream>
using namespace std;
int main()
{
  int letter;
  letter='A';
cout<<letter<<'\n';
  letter='B';
cout<<letter<<'\n';
cin>>letter;
  return 0;
}
```

Output

```
65
66
```


10:05
81
Sample Source
#include <iostream>
using namespace std;
int main () {
int a,b;
a=10;
b=5;
cout<<a+b<<endl;
cout<<a-b<<endl;
cout<<a*b<<endl;
cout<<a/b<<endl;
return 0;
}
} ' " , . ; : = < > +
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
!#1
English (UK)

```
15
5
50
2
```

Task 2

```
am>
std:
#include <iostream>
using namespace std;
 int main( ){
   int a,b;
    a=10;
    b=5;
 cout<<"Jama: "<<a+b<<endl
cout<<"Tafreeq: "<<a-b<<endl;
cout<<"Zarb: "<<a * b <<endl;
cout<<"Takseem: "<< a /b<<endl;
 return 0;
}
```

Output

```
Jama: 15
Tafreeq: 5
Zarb : 50
Takseem: 2
```

1:48 • 49

Cpp code

```cpp
#include <iostream>
using namespace std;
int main(){
 int val10;
 int val20;
 int val30;
 cout<<"Please enter "
     <<"your 3 numbers=";
 cin>>val10>>val20>>val30;
 cout<<"your output is="
     <<endl;
 cout<<val10<<"\n"
     <<val20<<"\n"
     <<val30<<"\n";
 cout<<val30<<"\n"
     <<val20<<"\n"
     <<val10<<"\n";
 return 0;
}
```

1:49 • 49

code

```
Please enter your 3 numbers=
your output is=
10
20
30
30
20
10
```

Date: _____

Task#03

```
#include <iostream>
using namespace std;
int main ( ){
 int val 10;
 int val 20;
 int val 30;
cout << "Please enter your 3numbers=
 cin >>val 10 >>val20 >>val30;
 cout<<"your output is = "<<endl;
 cout<<val10<<"\n"<<val20<<"\n"<<
  val 30<<"\n";
 cout <<val30<<"\n"<<-val20<<"\n<<
    val10<<"\n";
  return 0;
  }
```

Outputput:

```
please enter your 3numbers=
30
20
30
```

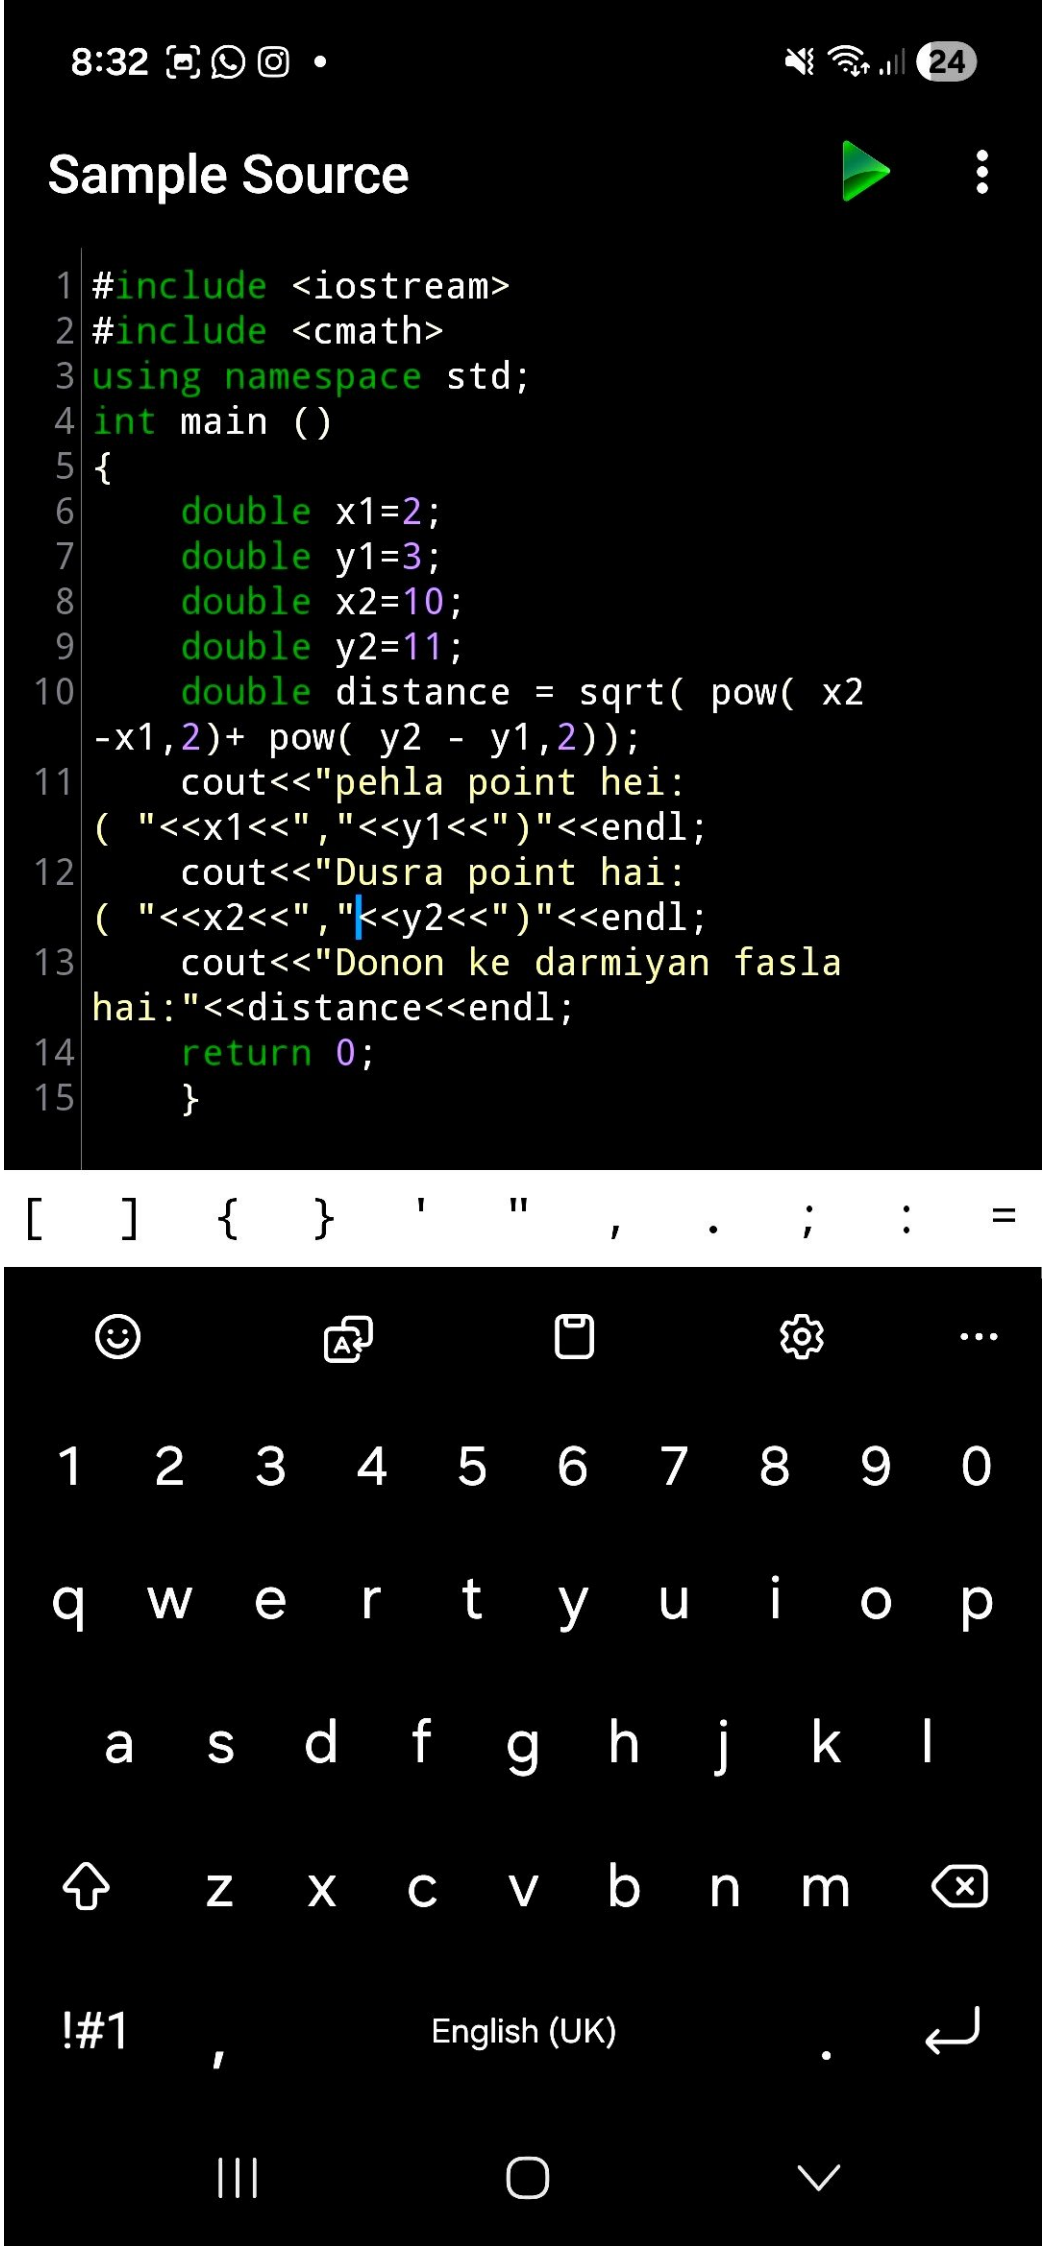
```
you output is =
10
20
30
30
20
10
```

PC

8:32 • 24

C++ 11 Compiler Output

```
pehla point hei:( 2,3)
Dusra point hai:( 10,11)
Donon ke darmiyan fasla hai:11.3137
```


8:32
24
Sample Source
#include <iostream>
#include <cmath>
using namespace std;
int main ()
{
double x1=2;
double y1=3;
double x2=10;
double y2=11;
double distance = sqrt(pow(x2 -x1,2)+ pow(y2 - y1,2));
cout<<"pehla point hei: ("<<x1<<","<<y1<<")"<<endl;
cout<<"Dusra point hai: ("<<x2<<","<<y2<<")"<<endl;
cout<<"Donon ke darmiyan fasla hai:"<<distance<<endl;
return 0;
}
[ ] { } ' " , . ; : =
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
!#1
English (UK)

Date: _____

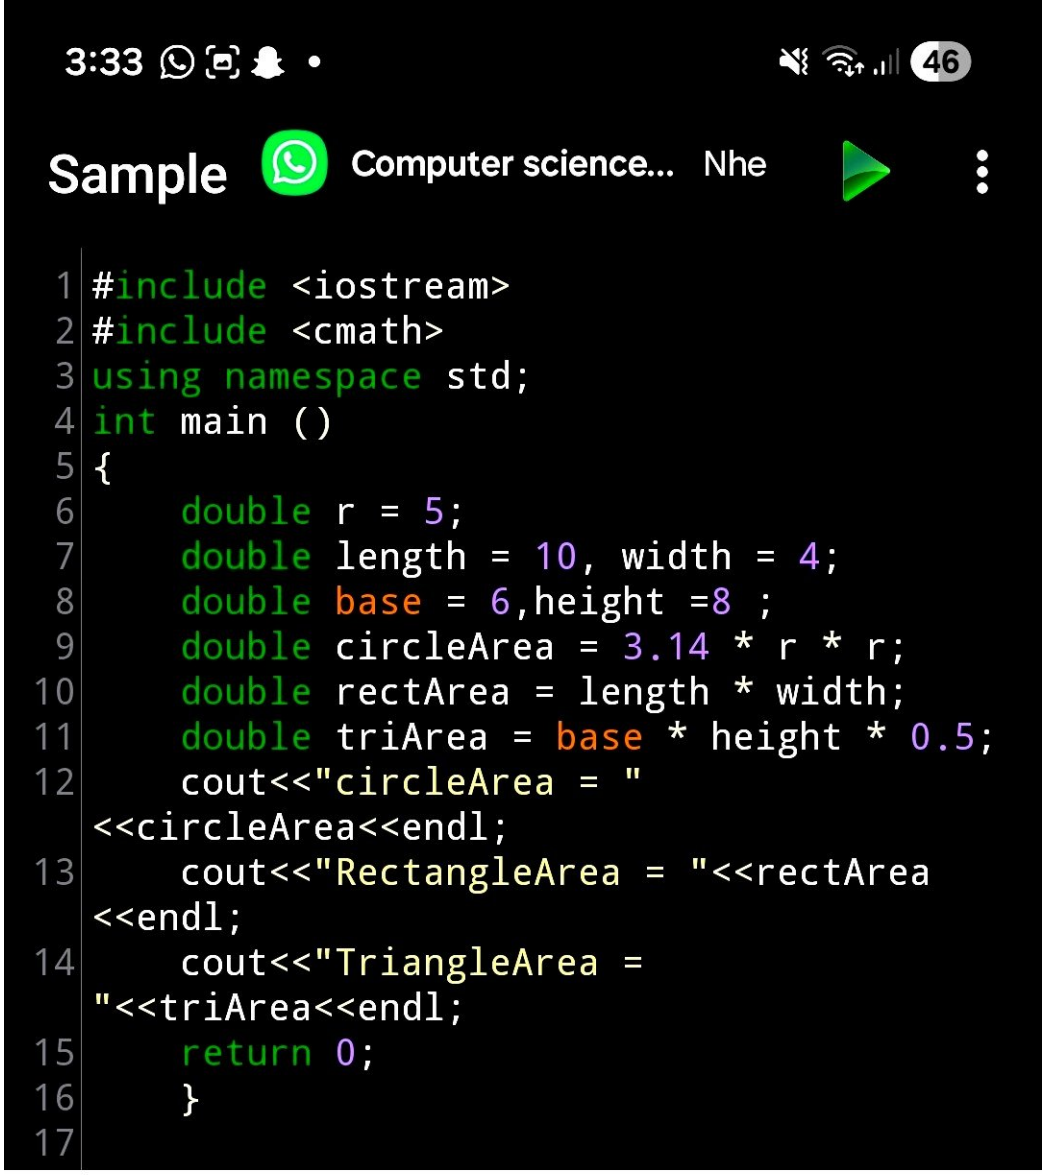
Task 04

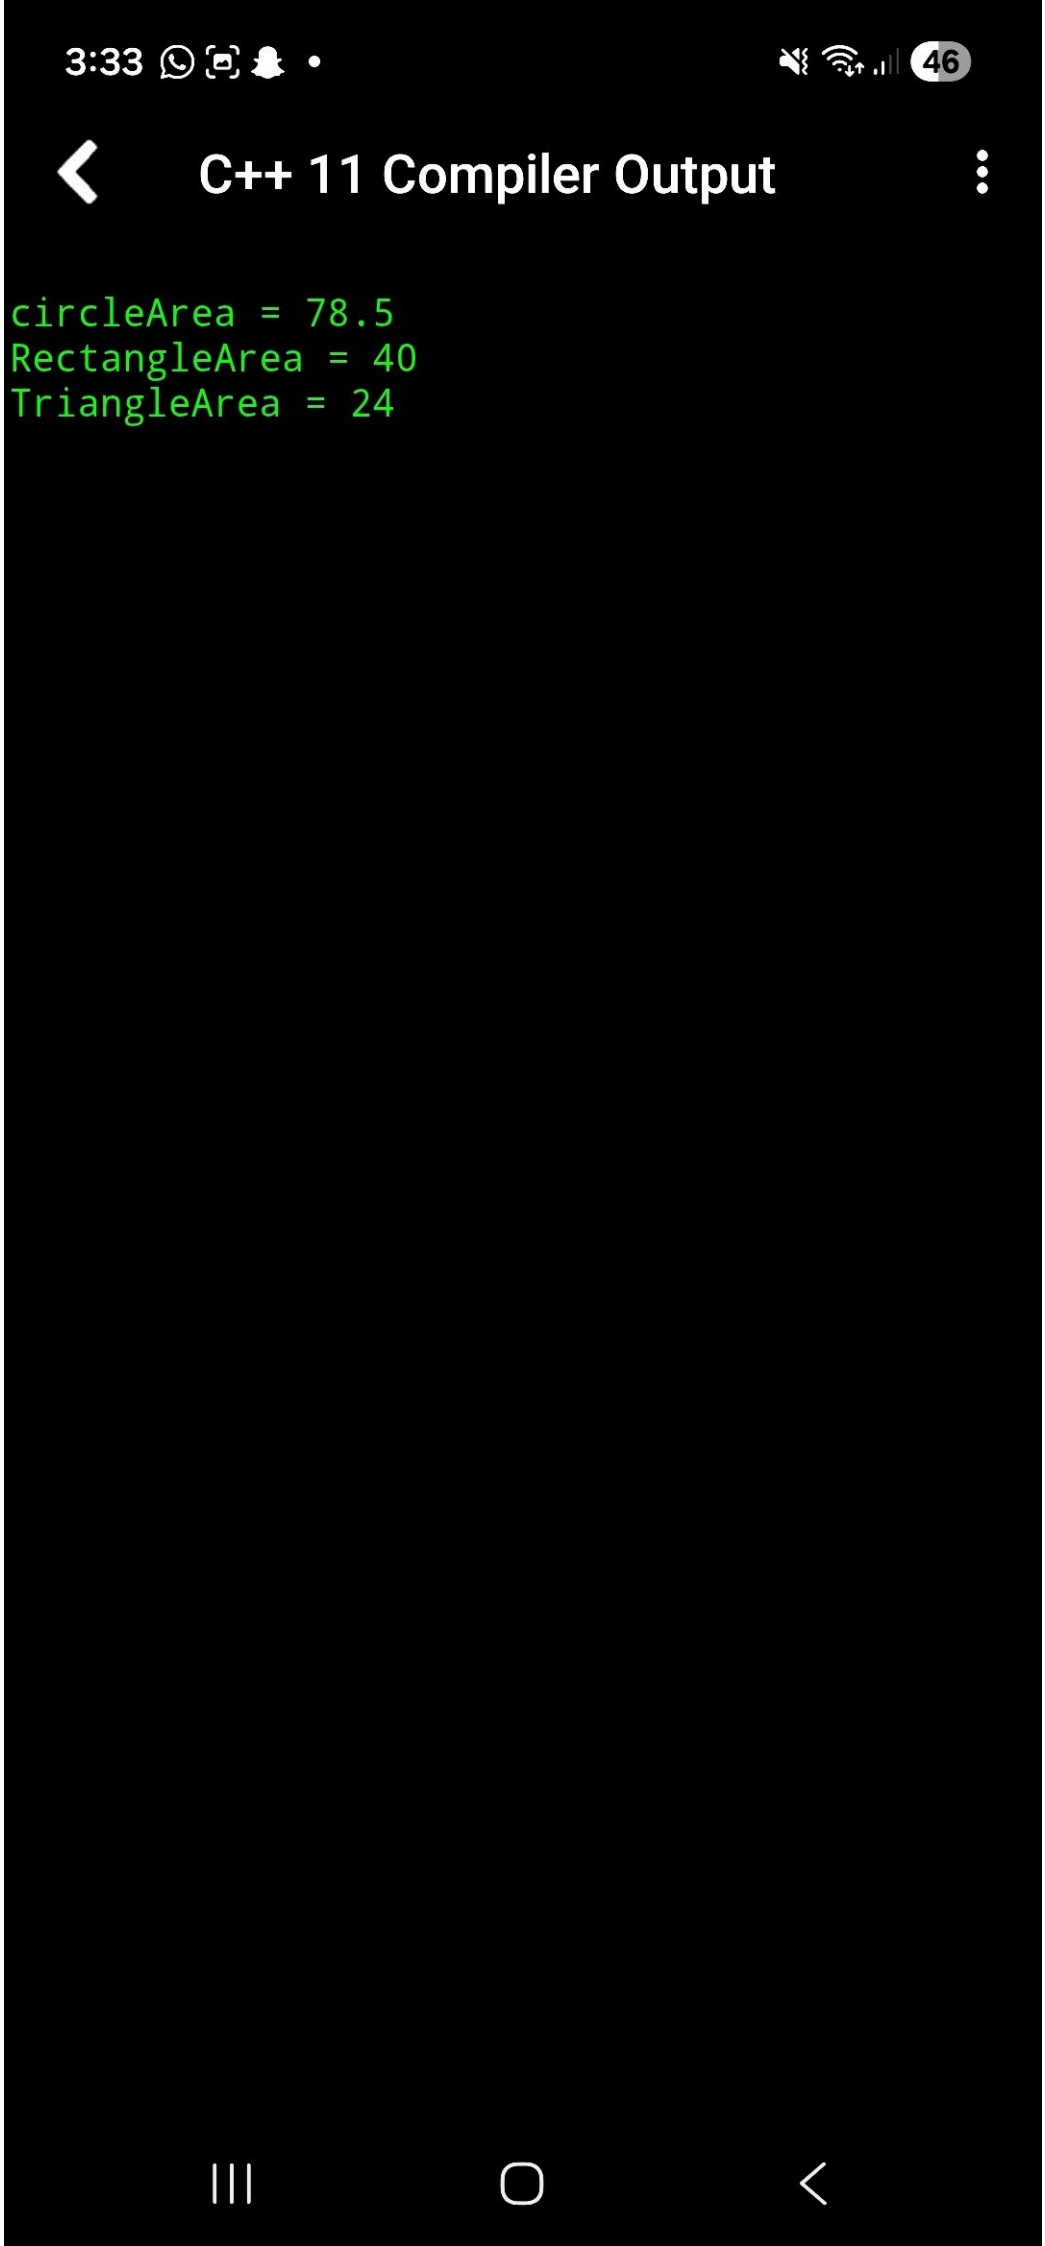
```
#include <iostream>
#include <cmath>
using namespace std;
 int main ()
{
    double x1=2;
    double y1=3;
    double x2 =10;
    double y2 = 11;
double distance = sqrt(pow x2 - x1,2) +pow
 (y2 - y1, 2));
    cout<<" Pehla point hai:
("<<x1<<", "<<y2<<")"<<endl;
    cout<<"Dusra point hai:
("<<x2<<", "<<y2<<")"<<endl;
    cout <<" Donon ke darmiyan fasla
hai : "<< distance<<endl;
    return 0;
}
```

Output:

```
pehla point hei: (2,
Dusra point hei: ( 10,
Donon ke darmiyo
fasla hai : 11.313
```

PC


3:33
46
Sample
Computer science... Nhe
#include <iostream>
#include <cmath>
using namespace std;
int main ()
{
double r = 5;
double length = 10, width = 4;
double base = 6,height =8 ;
double circleArea = 3.14 * r * r;
double rectArea = length * width;
double triArea = base * height * 0.5;
cout<<"circleArea = "
<<circleArea<<endl;
cout<<"RectangleArea = "<<rectArea
<<endl;
cout<<"TriangleArea =
"<<triArea<<endl;
return 0;
}
' " , . ; : = < > + -
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
!#1
English (UK)


3:33
46
C++ 11 Compiler Output
circleArea = 78.5
RectangleArea = 40
TriangleArea = 24

Date: _____

Task #5

```
#include <iostream>
#include <cmath>
using namespace std;
int main ()
{
double r =5;
double length = 10, width =4;
double base =6, height =8;
double circleArea =3.14* r* r;
double rectArea =length * width;
double triArea =base* height * 0.5;
cout <<" Triangle Area = " <<
circleArea<<endl;
cout <<"Rectangle Area ="
<< rectArea << endl;
cout<<"Triangle Area ="
<< triArea<<endl;
return 0;
}
```

Output:

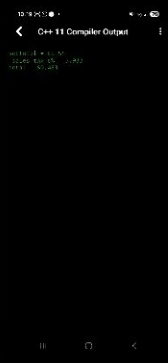
Circle ~~Triangle~~ Area =78.
Rectangle Area =4
Triangle Area =2

10:19 76

Sample Source

```cpp
#include <iostream>
#include <cmath>
using namespace std;
int main ()
{
    double item1 = 12.95;
    double item2 = 13.78;
    double item3 = 7.95;
    double item4 = 14.95;
    double item5 = 15.92;
    double subtotal = item1 + item2 +
item3  + item4 + item5;
    double tax = subtotal * 0.06;
    double total = subtotal + tax;
    cout<<"subtotal = "<< subtotal <<endl;
    cout<<" sales tax 6% = "<< tax <<endl;
    cout<<"total = "<< total <<endl;
    return 0;
    }

```



10:19 • 76

C++ 11 Compiler Output

```
subtotal = 65.55
 sales tax 6% = 3.933
total = 69.483
```

Date: _____

Task 6

```
#include <iostream>
#include <cmath>
using namespace std;
 int main()
{
   double item1 = 12.95;
   double item2 = 13.78;
   double item3 = 7.95;
   double item4 = 14.95;
   double item5 = 15.92;
double subtotal = item1 + item2 + item3
  + item4 + item5;
double tax = subtotal * 0.06;
double total = subtotal + tax;
cout<<"subtotal = "<<subtotal<<endl;
cout<<"sales tax 6% = "<< tax <<endl
cout<<"total = "<<total <<endl;
return 0;
}
```

Output:

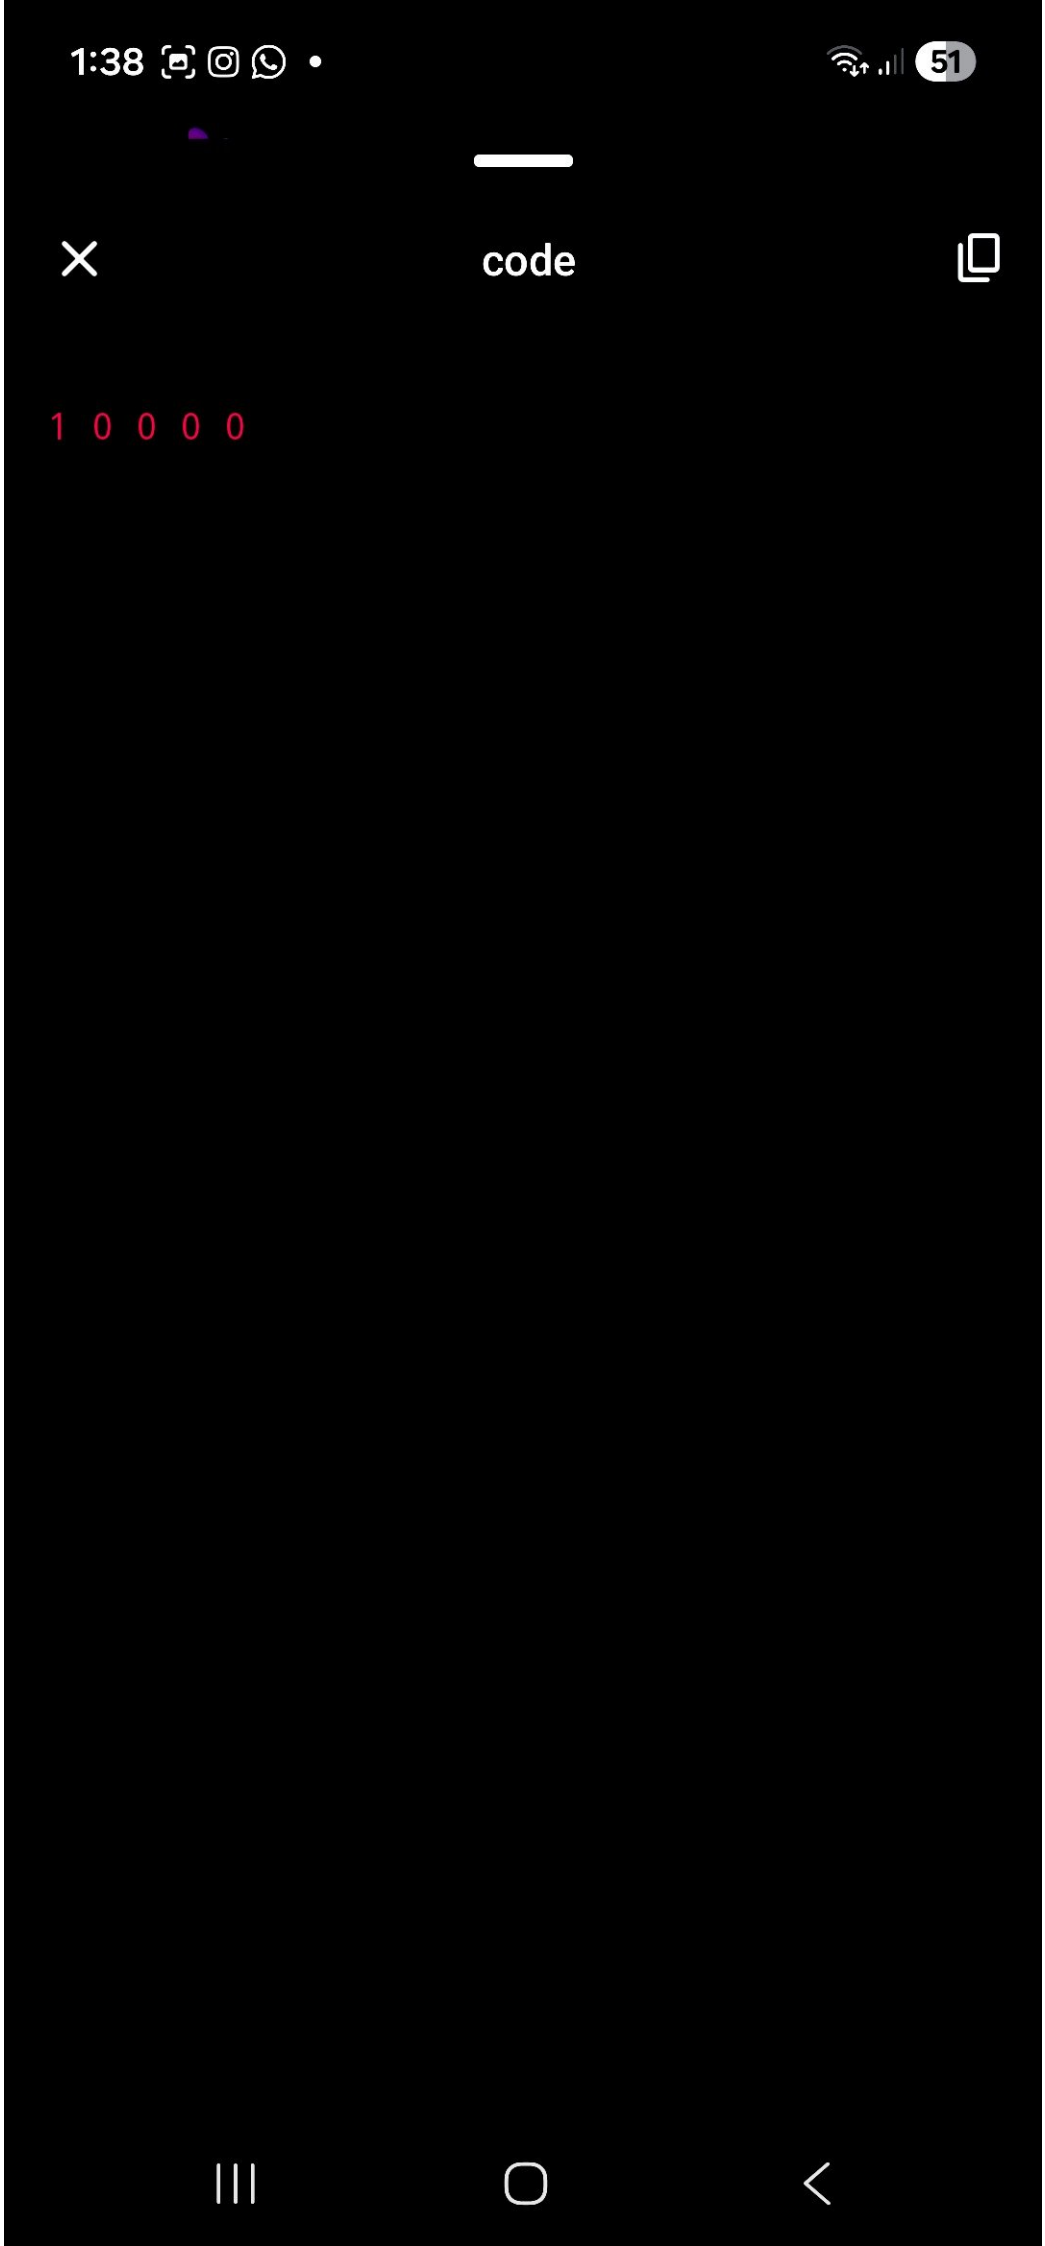
```
subtotal = 65.55
sales tax 6% = 3.933
total = 69.483
```

PC

1:38 • 51

Cpp code

```cpp
#include <iostream>
using namespace std;
int main(){
 int num;
 cout<<"5 hindson ka "
     <<"number dalein: ";
 cin>>num;
 int a=num/10000;
 int b=(num/1000)%10;
 int c=(num/100)%10;
 int d=(num/10)%10;
 int e=num%10;
 cout<<a<<" "<<b<<" "
     <<c<<" "<<d<<" "
     <<e<<endl;
 return 0;
}
```


1:38
51
code
1 0 0 0 0

Date: _____

Bonus Task

```
#include <iostream>
#include <cmath>
using namespace std;
int main () {
    int num;
  cout << "5 hindson ka number dalein: ";
    cin >> num;
  int a = num / 10000;
  int b = (num / 1000) % 10;
  int c = (num / 100) % 10;
  int d = (num / 10) % 10;
  int e = num % 10;
   cout << a << " " << b << " " << c << " " << d << " " << e << endl;
    return 0;
}
```

Output:

5 hindso ka number dalein: 0 0 0 0 7

PC

1:36 • 51

Cpp code

```cpp
#include <iostream>
using namespace std;
int main(){
 int var1=10;
 int var2=20;
 cout<<"pehle var1 = "
     <<var1<<" var2 = "
     <<var2<<endl;
 int temp=var1;
 var1=var2;
 var2=temp;
 cout<<"Badalne ke baad\n"
     <<"var1 = "<<var1
     <<" var2 = "<<var2
     <<endl;
 return 0;
}
```

1:36 51

code

```
pehle var1 = 10 var2 = 20
Badalne ke baad
var1 = 20 var2 = 10
```

Date:

Hometask 1

```
#include <iostream>
using namespace std;
 int main( ) {
  int var1 = 10;
  int var2 = 20;
cout << " pehle var1 = " << var1 << "
 var 2 = " << var 2 << endl;
  int temp = var1;
  var1 = var2;
  var2 = temp;
cout << "Badaine ke baad var1 ="
 << var1 << " var2 =" << var 2 <<endl;
  return 0;
}
```

Output

pehle var1 = 10 var2 = 20
Badaine ke baad var1 = 20 var2 = 10

PC


5:51
38
Sample Source
#include <iostream>
#include <cmath>
using namespace std;
int main() {
char ch1 = 'a';
char ch2 = 'b';
char capital1 = ch1 - 32;
char capital2 = ch2 - 32;
cout << "Chota "<< ch1 << " ka bara = " << capital1 <<endl;
cout << "Chota "<< ch2 << " ka bara = " <<capital2 <<endl;
return 0;
}
} ' " , . ; : = < > +
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
!#1
English (UK)

5:51 38

C++ 11 Compiler Output

```
Chota a ka bara = A
Chota b ka bara = B
```

Date:

Home Task 2

```
#include <iostream>
#include <cmath>
using namespace std;
 int main () {
char ch1 = 'a';
char ch2 = 'b';
char capital1 = ch1 - 32;
char capital2 = ch2 -32;
cout << "chota " << ch1 << "ka bara = " <<
capital1 <<endl;
cout << "chota " << ch2 << "ka bara= "
 return 0;
}
```

Output

```
chotaa ka bara =A
chotab ka bara =B
```