FAIR assessment

F-UJI version 4.0.1: the F-UJI website now uses software version 4.0.1 and metric v0.8. More information about the changes and their effects can be found on Zenodo and on GitHub.

Disclaimer: the test results shown here are based on preliminary data and code which still is under development. F-UJI is rapidly evolving and not yet available in a productive environment.

Assessment Results — Evaluated Resource


Study of ML models for Racing LLM Appliances (racing_f1_data.zip)

https://doi.org/10.5281/zenodo.23416916

FAIR level	**moderate** (84.6%)
Resource PID/URL	https://doi.org/10.5281/zenodo.23416916
Role in this project	The group's raw archive racing_f1_data.zip deposited on Zenodo (DOI, published 16 Oct 2026; byte-identical to data/source, checksum verified)
DataCite support	enabled
Metric Version	0.8
Metric Specification	https://doi.org/10.5281/zenodo.15045911
Software version	4.0.1
Evaluated at (UTC)	2026-11-11T20:10:49+00:00

Scores are taken from the group's F-UJI 4.0.1 assessment run (metrics v0.8) of 11 November 2026; the printed F-UJI website report of the Zenodo record (17 October 2026) is used as the layout reference.

Summary

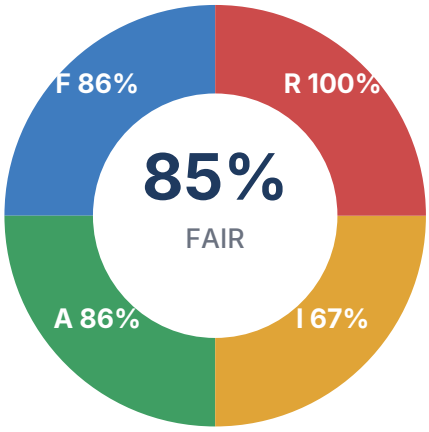

	Score earned	FAIR level
Findable	6 of 7	advanced
Accessible	6 of 7	moderate
Interoperable	4 of 6	moderate
Reusable	6 of 6	moderate
Overall	**84.6%**	**moderate**

The summary donut shows the percentage score of each FAIR principle; the table lists the score earned per principle and the resulting FAIR level (incomplete / initial / moderate / advanced).

Report

Findable

✓	FsF-F1-01MD — Metadata and data are assigned a globally unique identifier.	Score: 1 of 1 FAIR level: 3 of 3 · advanced
✓	FsF-F1-02MD — Metadata and data are assigned a persistent identifier.	Score: 1 of 1 FAIR level: 3 of 3 · advanced
!	FsF-F2-01M — Metadata includes descriptive core elements (creator, title, data identifier, publisher, publication date, summary and keywords) to support data findability.	Score: 1 of 2 FAIR level: 2 of 3 · moderate
✓	FsF-F3-01M — Metadata includes the identifier of the data it describes.	Score: 1 of 1 FAIR level: 3 of 3 · advanced
✓	FsF-F4-01M — Metadata is offered in such a way that it can be registered or indexed by search engines.	Score: 2 of 2 FAIR level: 3 of 3 · advanced

Accessible

✗	FsF-A1-01M — Metadata contains access level and access conditions of the data.	Score: 0 of 1 FAIR level: 0 of 3 · incomplete
✓	FsF-A1-02MD — Metadata and data are retrievable by their identifier	Score: 2 of 2 FAIR level: 3 of 3 · advanced
✓	FsF-A1.1-01MD — A standardized communication protocol is used to access metadata and data.	Score: 2 of 2 FAIR level: 3 of 3 · advanced

✓	FsF-A1.2-01MD — Metadata and data are accessible through a standardized communication protocol which supports authentication.	Score: 2 of 2 FAIR level: 3 of 3 · advanced

Interoperable

✓	FsF-I1-01M — Metadata is represented using a formal knowledge representation language.	Score: 2 of 2 FAIR level: 3 of 3 · advanced
✗	FsF-I2-01M — Metadata uses registered semantic resources	Score: 0 of 2 FAIR level: 0 of 3 · incomplete
✓	FsF-I3-01M — Metadata includes qualified references between the data and its related entities.	Score: 2 of 2 FAIR level: 3 of 3 · advanced

Reusable

✓	FsF-R1-01M — Metadata specifies the content of the data.	Score: 2 of 2 FAIR level: 3 of 3 · advanced
✓	FsF-R1.1-01M — Metadata includes license information under which data can be reused.	Score: 1 of 1 FAIR level: 3 of 3 · advanced
✓	FsF-R1.2-01M — Metadata includes provenance information about data creation or generation.	Score: 1 of 1 FAIR level: 2 of 3 · moderate
✓	FsF-R1.3-01M — Metadata follows a standard recommended by the target research community of the data.	Score: 1 of 1 FAIR level: 1 of 3 · initial
✓	FsF-R1.3-02D — Data is available in a file format recommended by the target research community.	Score: 1 of 1 FAIR level: 3 of 3 · advanced

Findings and FAIR gaps

• The only one of the four locations with a persistent identifier: DOI 10.5281/zenodo.23416916 (published 16 Oct 2026). DataCite metadata is harvested by F-UJI, lifting Findable to 85.7% and Reusable to 100%.

• FsF-A1-01M fails: access level and access conditions are not exposed in machine-readable metadata.

• FsF-I2-01M fails: the metadata does not use registered semantic resources (no vocabulary or namespace URIs).

• The record declares CC BY 4.0, which drops the non-commercial and share-alike conditions of the source licence (Jolpica-F1: CC BY-NC-SA 4.0). It is to be corrected to CC BY-NC-SA 4.0 — a metadata edit only; the DOI does not change. F-UJI scores a licence as present, not as compatible.

• The deposited archive is byte-identical to data/source/racing_f1_data.zip (size and MD5 checked) and is cited as IsDerivedFrom by the curated package's DataCite record and PROV-O graph.

Detailed gap analysis with RDA indicator mapping is maintained in the group's Component A fair_gaps.md (gaps G1–G7).

Sources

1. F-UJI — Automated FAIR Data Assessment Tool — https://f-uji.net/index.php
2. Evaluated resource — https://doi.org/10.5281/zenodo.23416916
3. FsF metric specification v0.8 — https://doi.org/10.5281/zenodo.15045911
4. Group project repository — https://github.com/zalkimanohar/DataManagement