FAIR assessment

F-UJI version 4.0.1: the F-UJI website now uses software version 4.0.1 and metric v0.8. More information about the changes and their effects can be found on Zenodo and on GitHub.

Disclaimer: the test results shown here are based on preliminary data and code which still is under development. F-UJI is rapidly evolving and not yet available in a productive environment.

Assessment Results — Evaluated Resource


zalkimanohar/Formula1-Racing-Analytics (GitHub)

https://github.com/zalkimanohar/Formula1-Racing-Analytics

FAIR level	**initial** (42.3%)
Resource PID/URL	https://github.com/zalkimanohar/Formula1-Racing-Analytics
Role in this project	Where the group's raw archive racing_f1_data.zip is published
DataCite support	disabled
Metric Version	0.8
Metric Specification	https://doi.org/10.5281/zenodo.15045911
Software version	4.0.1
Evaluated at (UTC)	2026-11-11T20:10:11+00:00

Scores are taken from the group's F-UJI 4.0.1 assessment run (metrics v0.8) of 11 November 2026; the printed F-UJI website report of the Zenodo record (17 October 2026) is used as the layout reference.

Summary

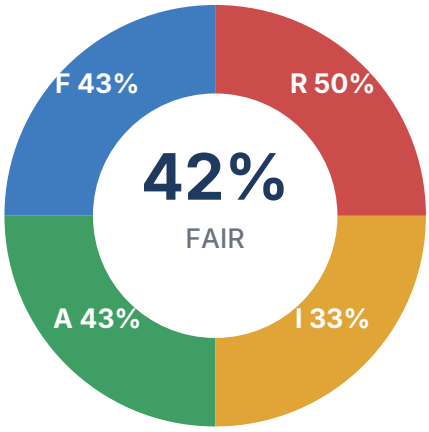

	Score earned	FAIR level
Findable	3 of 7	initial
Accessible	3 of 7	moderate
Interoperable	2 of 6	initial
Reusable	3 of 6	initial
Overall	**42.3%**	**initial**

The summary donut shows the percentage score of each FAIR principle; the table lists the score earned per principle and the resulting FAIR level (incomplete / initial / moderate / advanced).

Report

Findable

✓	FsF-F1-01MD — Metadata and data are assigned a globally unique identifier.	Score: 1 of 1 FAIR level: 3 of 3 · advanced
✗	FsF-F1-02MD — Metadata and data are assigned a persistent identifier.	Score: 0 of 1 FAIR level: 0 of 3 · incomplete
✗	FsF-F2-01M — Metadata includes descriptive core elements (creator, title, data identifier, publisher, publication date, summary and keywords) to support data findability.	Score: 0 of 2 FAIR level: 0 of 3 · incomplete
✗	FsF-F3-01M — Metadata includes the identifier of the data it describes.	Score: 0 of 1 FAIR level: 0 of 3 · incomplete
✓	FsF-F4-01M — Metadata is offered in such a way that it can be registered or indexed by search engines.	Score: 2 of 2 FAIR level: 3 of 3 · advanced

Accessible

✗	FsF-A1-01M — Metadata contains access level and access conditions of the data.	Score: 0 of 1 FAIR level: 0 of 3 · incomplete
?	FsF-A1-02MD — Metadata and data are retrievable by their identifier	Score: 1 of 2 FAIR level: 3 of 3 · advanced
?	FsF-A1.1-01MD — A standardized communication protocol is used to access metadata and data.	Score: 1 of 2 FAIR level: 3 of 3 · advanced

⚠	FsF-A1.2-01MD — Metadata and data are accessible through a standardized communication protocol which supports authentication.	Score: 1 of 2 FAIR level: 3 of 3 · advanced

Interoperable

✓	FsF-I1-01M — Metadata is represented using a formal knowledge representation language.	Score: 2 of 2 FAIR level: 2 of 3 · moderate
✗	FsF-I2-01M — Metadata uses registered semantic resources	Score: 0 of 2 FAIR level: 0 of 3 · incomplete
✗	FsF-I3-01M — Metadata includes qualified references between the data and its related entities.	Score: 0 of 2 FAIR level: 0 of 3 · incomplete

Reusable

⚠	FsF-R1-01M — Metadata specifies the content of the data.	Score: 1 of 2 FAIR level: 1 of 3 · initial
✗	FsF-R1.1-01M — Metadata includes license information under which data can be reused.	Score: 0 of 1 FAIR level: 0 of 3 · incomplete
✓	FsF-R1.2-01M — Metadata includes provenance information about data creation or generation.	Score: 1 of 1 FAIR level: 2 of 3 · moderate
✓	FsF-R1.3-01M — Metadata follows a standard recommended by the target research community of the data.	Score: 1 of 1 FAIR level: 1 of 3 · initial
✗	FsF-R1.3-02D — Data is available in a file format recommended by the target research community.	Score: 0 of 1 FAIR level: 0 of 3 · incomplete

Findings and FAIR gaps

• The raw archive is published as a zip without any identifier (FsF-F1-02MD = 0); only the GitHub landing page makes it findable (FsF-F4-01M passes).

• No machine-readable metadata: all Interoperable metrics fail (FsF-I1-01M, I2-01M, I3-01M = 0); a pipeline README is the only documentation.

• The README declares 'MIT License' for the whole project, which conflicts with the data's CC BY-NC-SA 4.0 obligation (FsF-R1.1-01M = 0).

• FsF-R1.3-02D fails: a raw zip is not a file format recommended by the target research community.

• Resolution implemented by the group: deposit the archive on Zenodo with a DOI, ship a DataCite 4.5 record, schema.org Dataset JSON-LD and a Frictionless Data Package, add LICENSE-DATA (SPDX CC-BY-NC-SA-4.0), keep MIT for code only, and record provenance in PROV-O with SHA-256 checksums.

Detailed gap analysis with RDA indicator mapping is maintained in the group's Component A fair_gaps.md (gaps G1–G7).

Sources

1. F-UJI — Automated FAIR Data Assessment Tool — https://f-uji.net/index.php

2. Evaluated resource — https://github.com/zalkimanohar/Formula1-Racing-Analytics

3. FsF metric specification v0.8 — https://doi.org/10.5281/zenodo.15045911

4. Group project repository — https://github.com/zalkimanohar/DataManagement