FAIR assessment

F-UJI version 4.0.1: the F-UJI website now uses software version 4.0.1 and metric v0.8. More information about the changes and their effects can be found on Zenodo and on GitHub.

Disclaimer: the test results shown here are based on preliminary data and code which still is under development. F-UJI is rapidly evolving and not yet available in a productive environment.

Assessment Results — Evaluated Resource


Jolpica-Ergast F1 API (Ergast-compatible endpoint)

http://api.jolpi.ca/ergast/f1/

FAIR level	**incomplete** (11.5%)
Resource PID/URL	http://api.jolpi.ca/ergast/f1/
Role in this project	API the raw data was downloaded from (Ergast-compatible endpoint)
DataCite support	disabled
Metric Version	0.8
Metric Specification	https://doi.org/10.5281/zenodo.15045911
Software version	4.0.1
Evaluated at (UTC)	2026-11-11T20:10:15+00:00

Scores are taken from the group's F-UJI 4.0.1 assessment run (metrics v0.8) of 11 November 2026; the printed F-UJI website report of the Zenodo record (17 October 2026) is used as the layout reference.

Summary

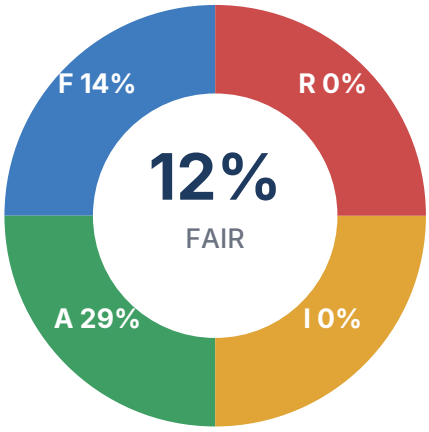

	Score earned	FAIR level
Findable	1 of 7	initial
Accessible	2 of 7	moderate
Interoperable	0 of 6	incomplete
Reusable	0 of 6	incomplete
Overall	**11.5%**	**incomplete**

The summary donut shows the percentage score of each FAIR principle; the table lists the score earned per principle and the resulting FAIR level (incomplete / initial / moderate / advanced).

Report

Findable

✓	FsF-F1-01MD — Metadata and data are assigned a globally unique identifier.	Score: 1 of 1 FAIR level: 3 of 3 · advanced
✗	FsF-F1-02MD — Metadata and data are assigned a persistent identifier.	Score: 0 of 1 FAIR level: 0 of 3 · incomplete
✗	FsF-F2-01M — Metadata includes descriptive core elements (creator, title, data identifier, publisher, publication date, summary and keywords) to support data findability.	Score: 0 of 2 FAIR level: 0 of 3 · incomplete
✗	FsF-F3-01M — Metadata includes the identifier of the data it describes.	Score: 0 of 1 FAIR level: 0 of 3 · incomplete
✗	FsF-F4-01M — Metadata is offered in such a way that it can be registered or indexed by search engines.	Score: 0 of 2 FAIR level: 0 of 3 · incomplete

Accessible

✗	FsF-A1-01M — Metadata contains access level and access conditions of the data.	Score: 0 of 1 FAIR level: 0 of 3 · incomplete
✗	FsF-A1-02MD — Metadata and data are retrievable by their identifier	Score: 0 of 2 FAIR level: 0 of 3 · incomplete
?	FsF-A1.1-01MD — A standardized communication protocol is used to access metadata and data.	Score: 1 of 2 FAIR level: 3 of 3 · advanced

⚠	FsF-A1.2-01MD — Metadata and data are accessible through a standardized communication protocol which supports authentication.	Score: 1 of 2 FAIR level: 3 of 3 · advanced

Interoperable

✗	FsF-I1-01M — Metadata is represented using a formal knowledge representation language.	Score: 0 of 2 FAIR level: 0 of 3 · incomplete
✗	FsF-I2-01M — Metadata uses registered semantic resources	Score: 0 of 2 FAIR level: 0 of 3 · incomplete
✗	FsF-I3-01M — Metadata includes qualified references between the data and its related entities.	Score: 0 of 2 FAIR level: 0 of 3 · incomplete

Reusable

✗	FsF-R1-01M — Metadata specifies the content of the data.	Score: 0 of 2 FAIR level: 0 of 3 · incomplete
✗	FsF-R1.1-01M — Metadata includes license information under which data can be reused.	Score: 0 of 1 FAIR level: 0 of 3 · incomplete
✗	FsF-R1.2-01M — Metadata includes provenance information about data creation or generation.	Score: 0 of 1 FAIR level: 0 of 3 · incomplete
✗	FsF-R1.3-01M — Metadata follows a standard recommended by the target research community of the data.	Score: 0 of 1 FAIR level: 0 of 3 · incomplete
✗	FsF-R1.3-02D — Data is available in a file format recommended by the target research community.	Score: 0 of 1 FAIR level: 0 of 3 · incomplete

Findings and FAIR gaps

• Lowest score of the four locations: only the standardized-protocol metrics (FsF-A1.1-01MD, FsF-A1.2-01MD) pass; every metric that examines metadata content fails.

• No persistent identifier, no machine-readable metadata, and no licence or provenance information exposed (Interoperable and Reusable both 0%).

• The API is a volunteer-run successor to the shut-down Ergast API and states that it does not guarantee uptime; the original Ergast terms page now returns 404.

• Jolpica-F1's TERMS.md (updated 27 Aug 2025) licenses the data CC BY-NC-SA 4.0 (non-commercial use), but this is not exposed in a machine-readable form the assessment can see.

Detailed gap analysis with RDA indicator mapping is maintained in the group's Component A fair_gaps.md (gaps G1–G7).

Sources

1. F-UJI — Automated FAIR Data Assessment Tool — https://f-uji.net/index.php

2. Evaluated resource — http://api.jolpi.ca/ergast/f1/

3. FsF metric specification v0.8 — https://doi.org/10.5281/zenodo.15045911

4. Group project repository — https://github.com/zalkimanohar/DataManagement