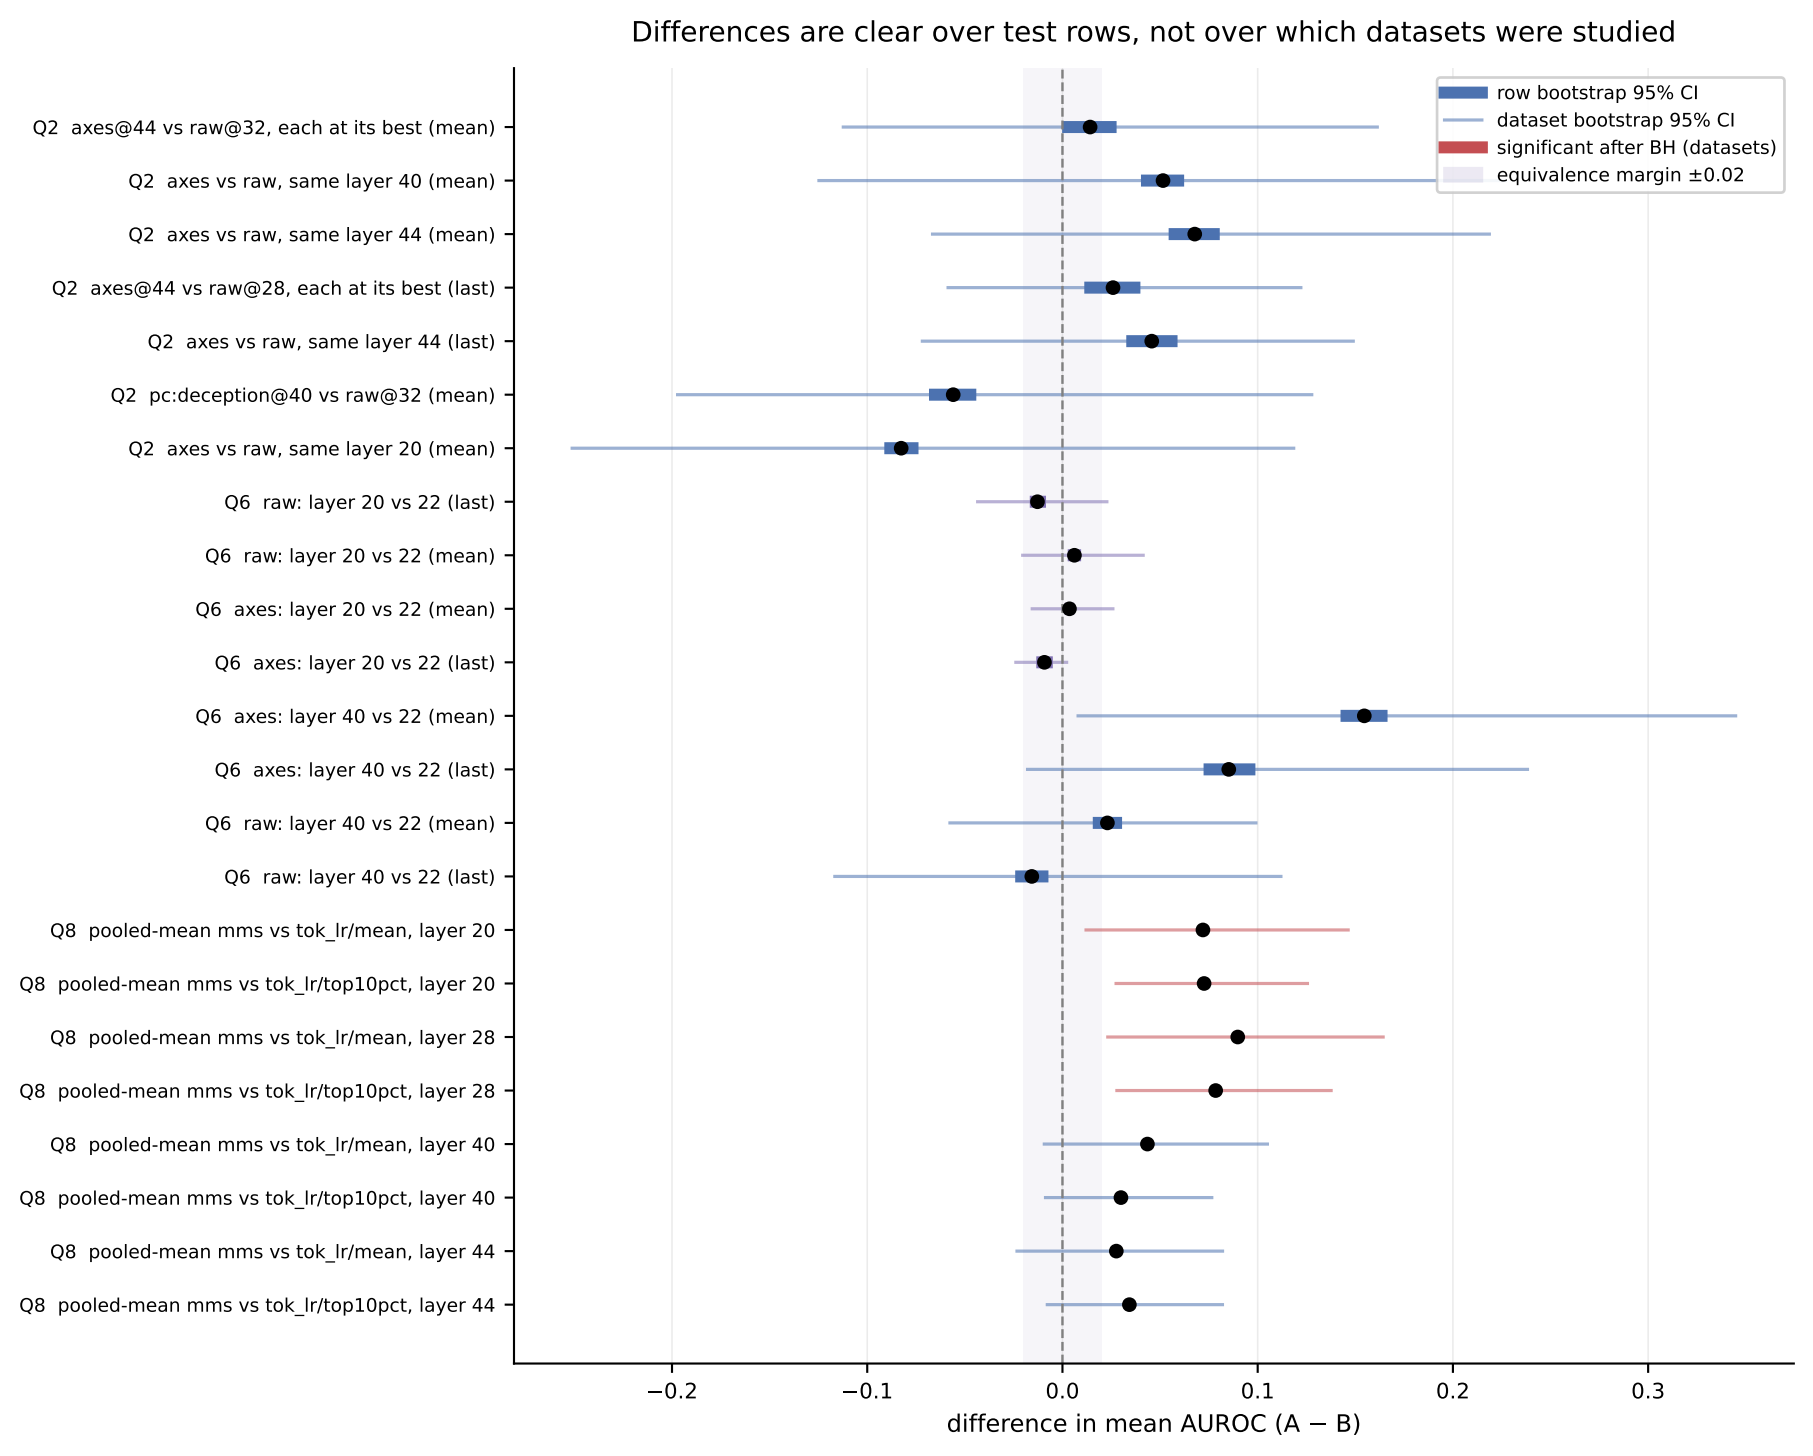
Differences are clear over test rows, not over which datasets were studied
row bootstrap 95% CI
dataset bootstrap 95% CI
significant after BH (datasets)
equivalence margin ±0.02
Q2 axes@44 vs raw@32, each at its best (mean)
Q2 axes vs raw, same layer 40 (mean)
Q2 axes vs raw, same layer 44 (mean)
Q2 axes@44 vs raw@28, each at its best (last)
Q2 axes vs raw, same layer 44 (last)
Q2 pc:deception@40 vs raw@32 (mean)
Q2 axes vs raw, same layer 20 (mean)
Q6 raw: layer 20 vs 22 (last)
Q6 raw: layer 20 vs 22 (mean)
Q6 axes: layer 20 vs 22 (mean)
Q6 axes: layer 20 vs 22 (last)
Q6 axes: layer 40 vs 22 (mean)
Q6 axes: layer 40 vs 22 (last)
Q6 raw: layer 40 vs 22 (mean)
Q6 raw: layer 40 vs 22 (last)
Q8 pooled-mean mms vs tok_lr/mean, layer 20
Q8 pooled-mean mms vs tok_lr/top10pct, layer 20
Q8 pooled-mean mms vs tok_lr/mean, layer 28
Q8 pooled-mean mms vs tok_lr/top10pct, layer 28
Q8 pooled-mean mms vs tok_lr/mean, layer 40
Q8 pooled-mean mms vs tok_lr/top10pct, layer 40
Q8 pooled-mean mms vs tok_lr/mean, layer 44
Q8 pooled-mean mms vs tok_lr/top10pct, layer 44
−0.2
−0.1
0.0
0.1
0.2
0.3
difference in mean AUROC (A − B)