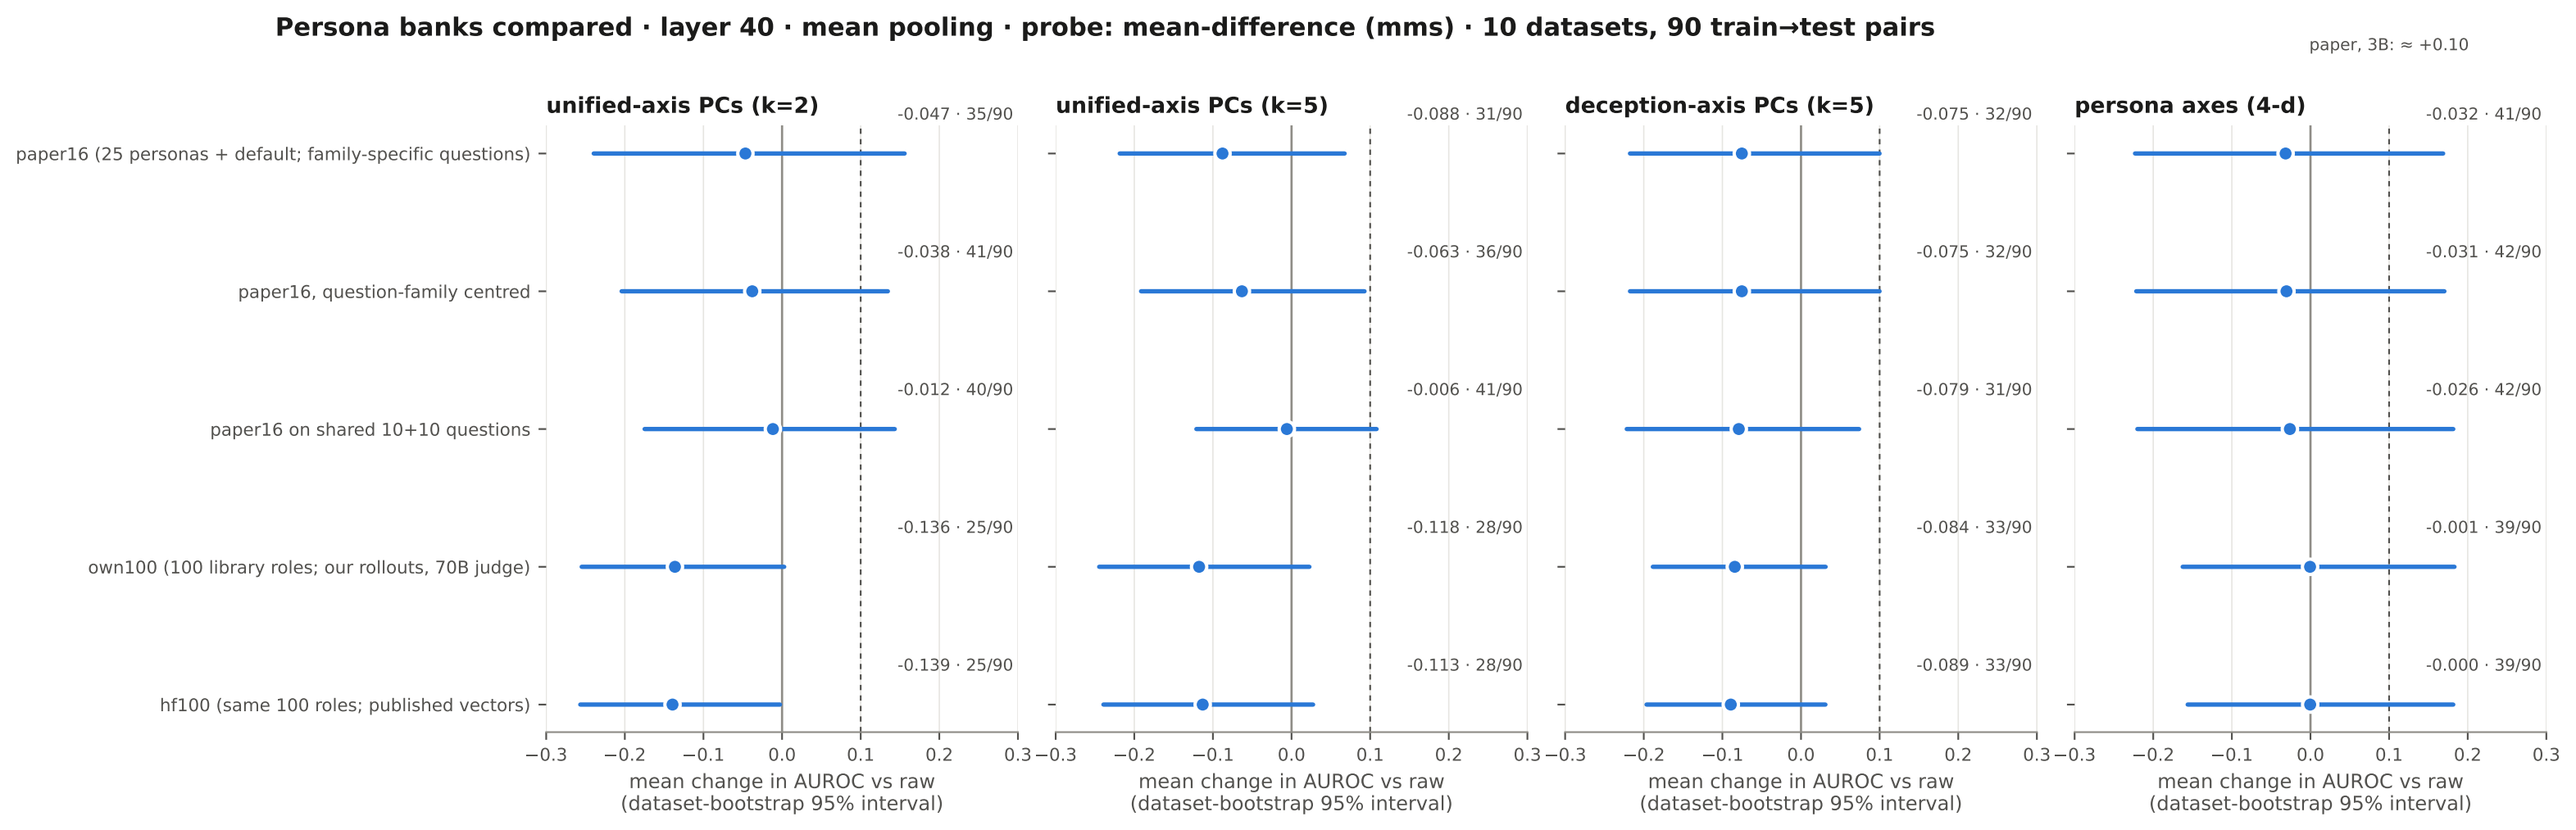
Persona banks compared · layer 40 · mean pooling · probe: mean-difference (mms) · 10 datasets, 90 train→test pairs
paper, 3B: ≈ +0.10
unified-axis PCs (k=2)
unified-axis PCs (k=5)
deception-axis PCs (k=5)
persona axes (4-d)
paper16 (25 personas + default; family-specific questions)
paper16, question-family centred
paper16 on shared 10+10 questions
own100 (100 library roles; our rollouts, 70B judge)
hf100 (same 100 roles; published vectors)
-0.047 · 35/90
-0.038 · 41/90
-0.012 · 40/90
-0.136 · 25/90
-0.139 · 25/90
-0.088 · 31/90
-0.063 · 36/90
-0.006 · 41/90
-0.118 · 28/90
-0.113 · 28/90
-0.075 · 32/90
-0.075 · 32/90
-0.079 · 31/90
-0.084 · 33/90
-0.089 · 33/90
-0.032 · 41/90
-0.031 · 42/90
-0.026 · 42/90
-0.001 · 39/90
-0.000 · 39/90
−0.3 −0.2 −0.1 0.0 0.1 0.2 0.3
mean change in AUROC vs raw
(dataset-bootstrap 95% interval)