




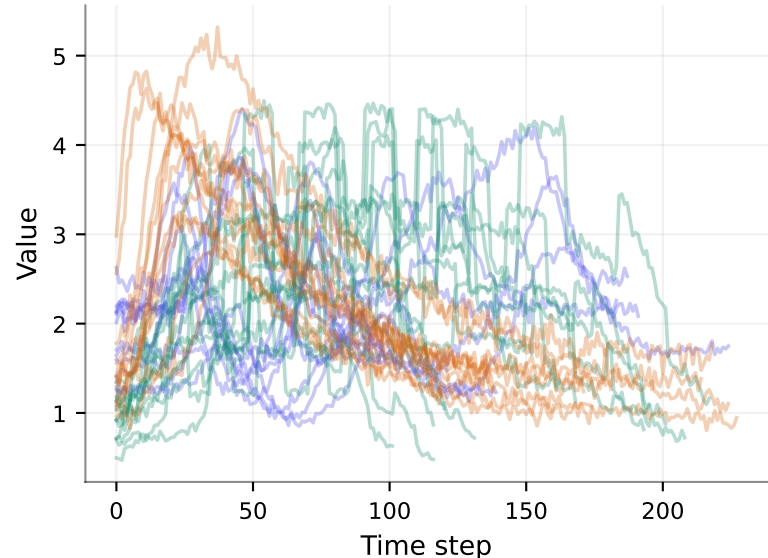


(a) Raw training curves of one leaf
different durations, levels and shapes

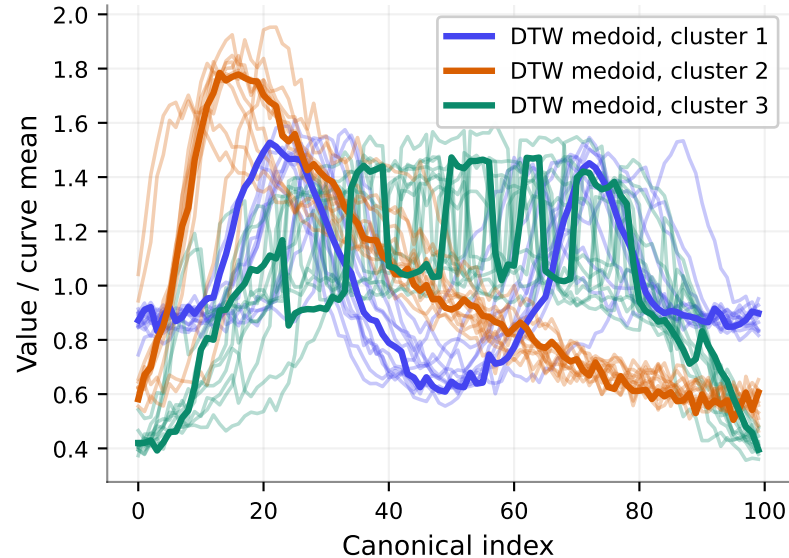


(b) Level divided out, then clustered by shape
bold = smallest total DTW distance to the rest

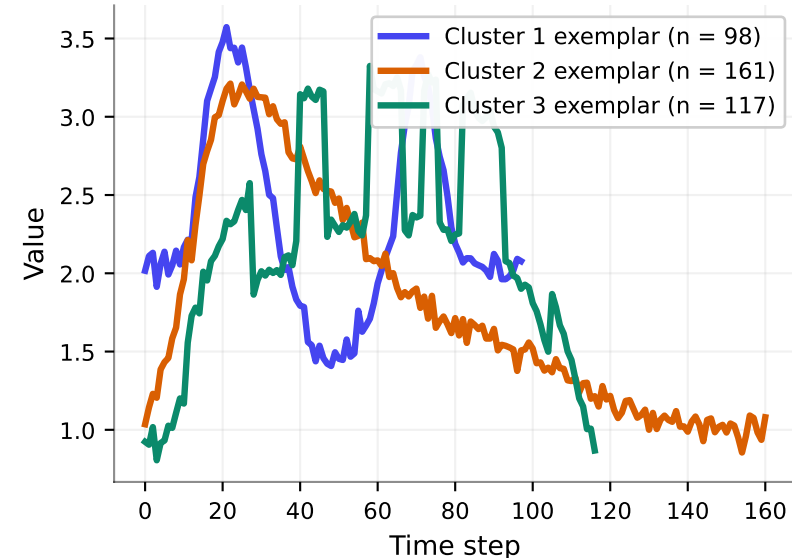


(c) Stored exemplars: the medoids' original values
real curves, never resampled, never averaged

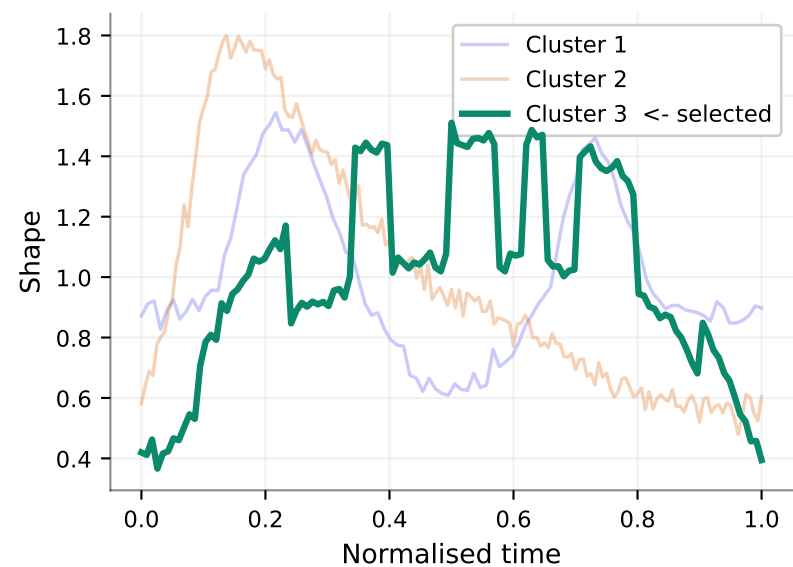

(d) Shape classifier picks a cluster
from attributes + ef_* , one row per curve

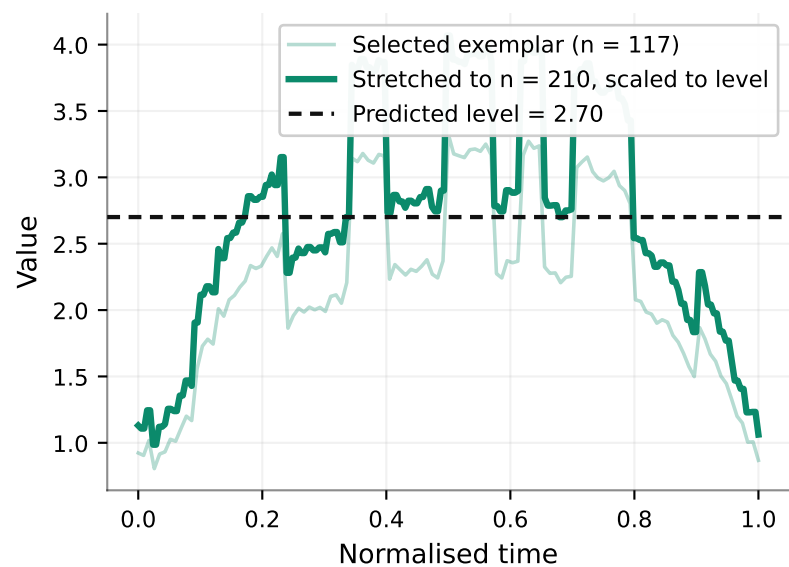

(e) NN time map, then rescale to the predicted level
measured values reused verbatim, never interpolated

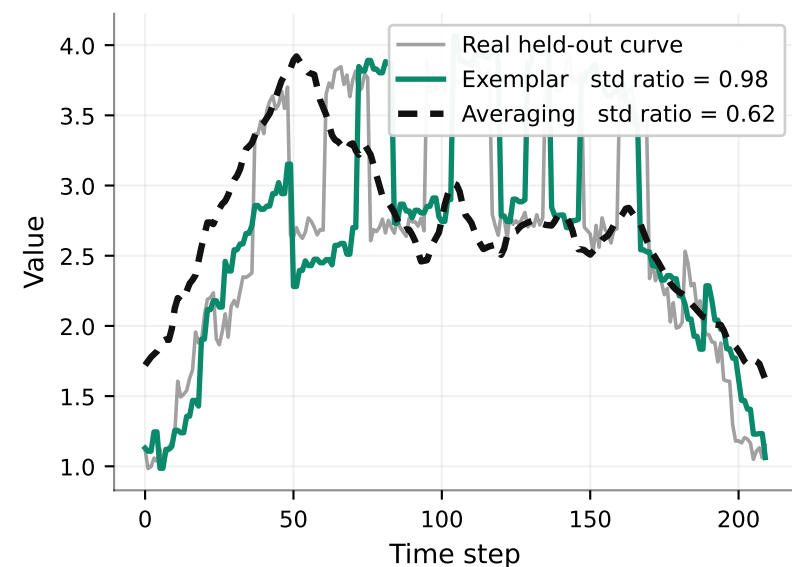

(f) Only the exemplar keeps a usable texture
averaging flattens the peaks and the duty cycling