

ZapKart Admin

Complete Code Learning Guide

Line-by-line explanations • Architecture diagrams • Test plan

Generated: 30/5/2026

1. Introduction

ZapKart Admin is a React single-page application (SPA) for managing a quick-commerce platform: stores, riders, orders, products, finance, and more.

1.1 Tech stack


- React 19 — UI components
- Vite — build tool and dev server
- React Router — page URLs (/login, /orders, etc.)
- Tailwind CSS — styling via className
- Firebase Auth — email/password login
- Supabase — PostgreSQL database (admins, orders, stores)
- MapLibre — maps on dashboard

1.2 How the app starts

- Browser loads index.html → empty div#root
- main.jsx checks .env variables
- App.jsx sets up routes and auth
- User sees LoginPage or Dashboard depending on login state


2. Architecture diagrams

2.1 System architecture

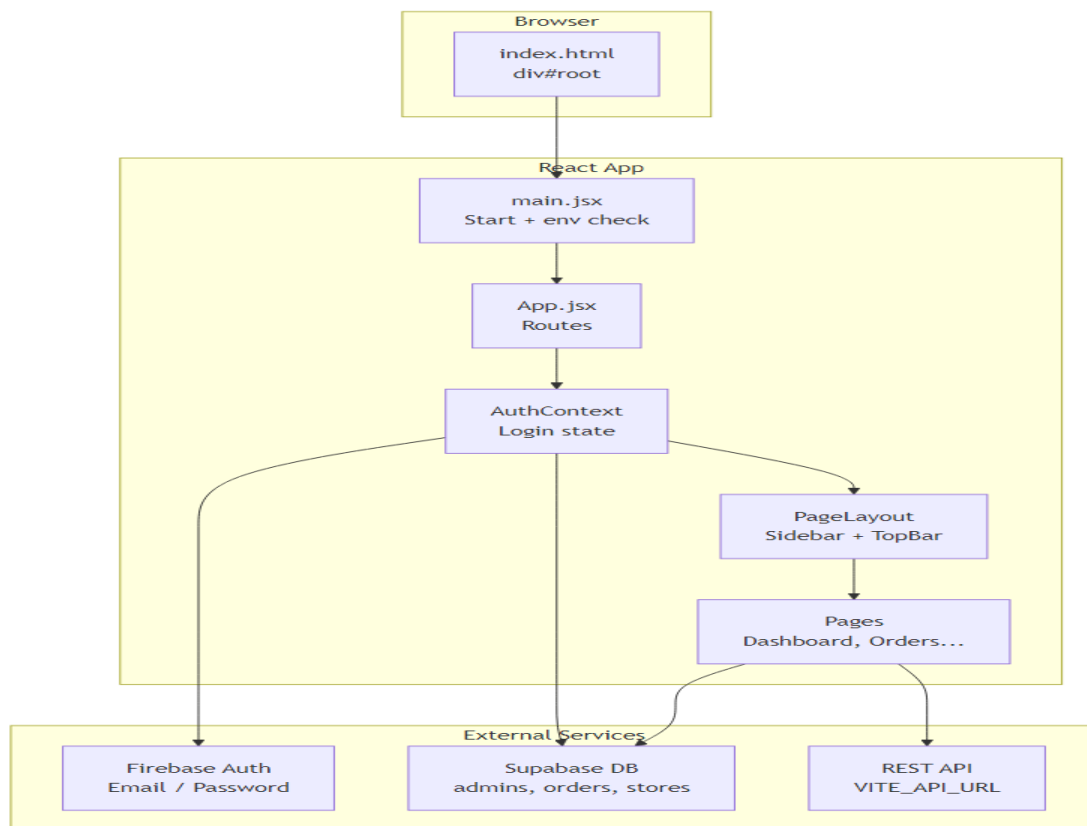


The browser loads React. Pages call Supabase/API. Login uses Firebase first, then Supabase verifies admin role.


2.2 Login flow (sequence)

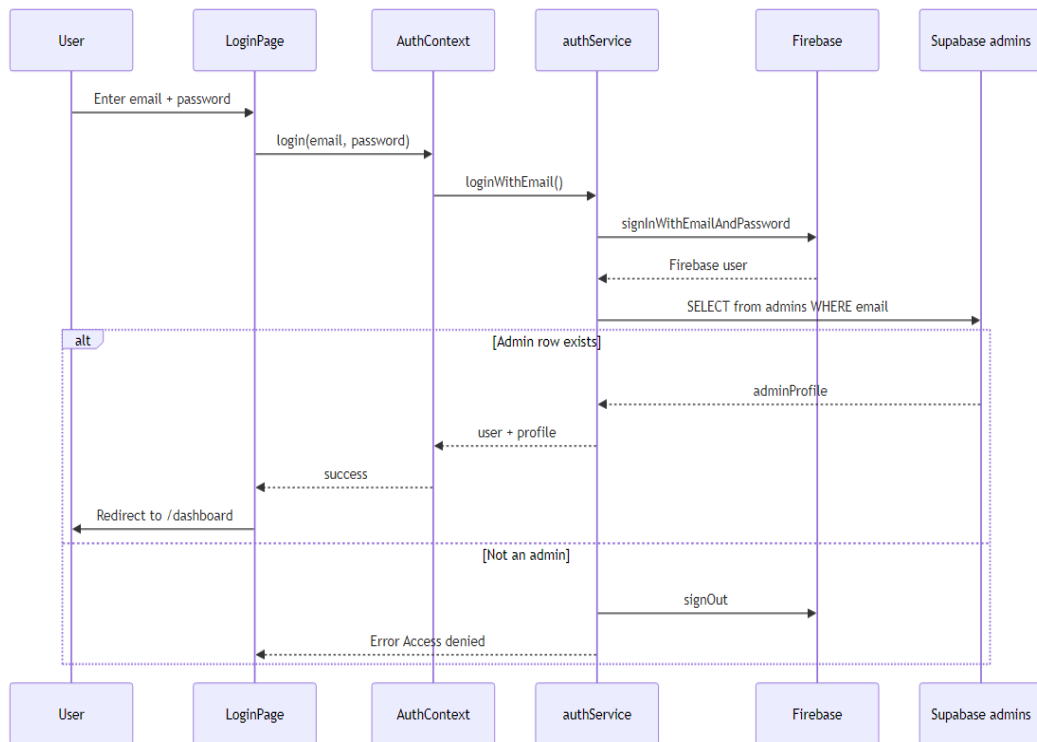

2.3 App routes

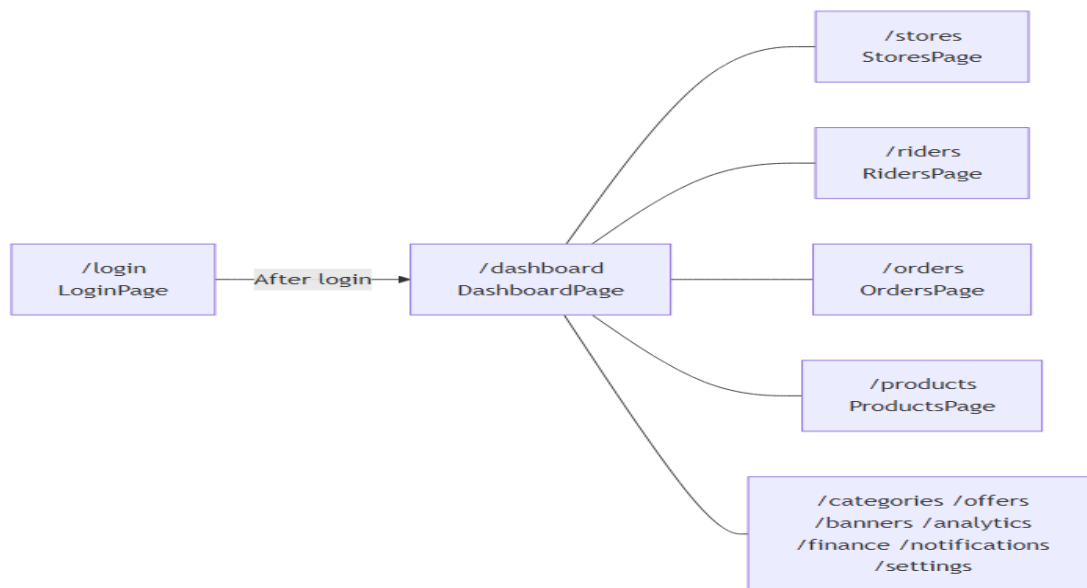

2.4 Folder structure

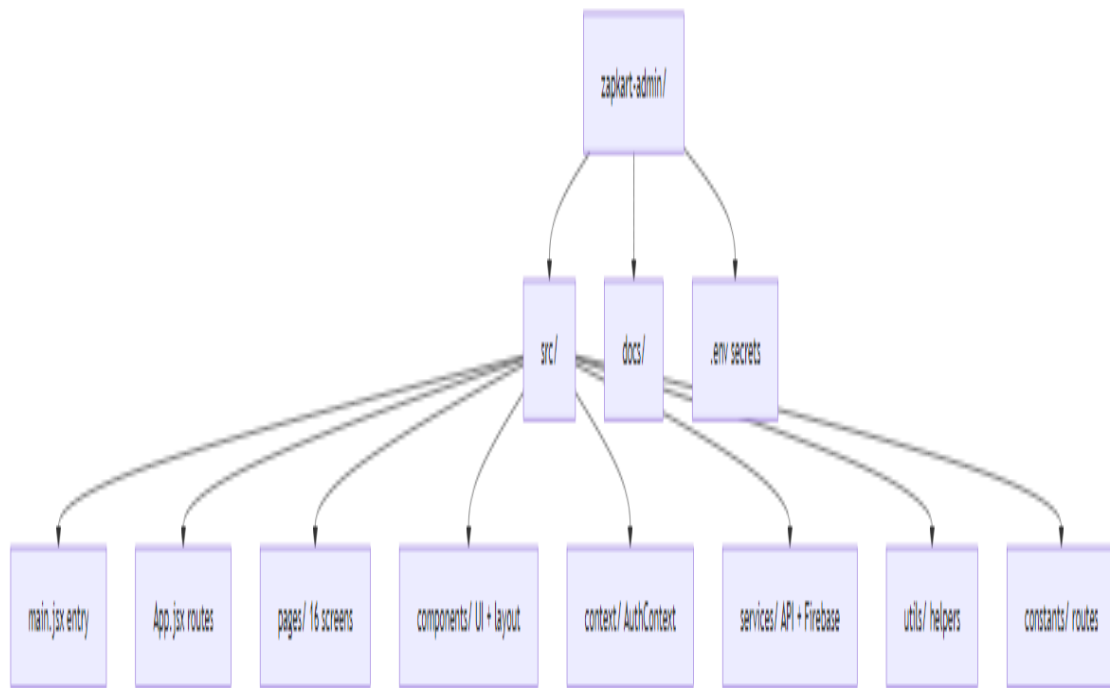

3. All admin pages

URL	File	Purpose
/login	src/pages/LoginPage.jsx	Super-admin sign-in with email and password.
/dashboard	src/pages/DashboardPage.jsx	KPIs, live orders, pending store KYC, map, alerts.
/stores	src/pages/StoresPage.jsx	Store directory with filters and status actions.
/stores/:id	src/pages/StoreDetailPage.jsx	Single store profile, KYC, products, stats.
/riders	src/pages/RidersPage.jsx	Rider directory with approve/suspend actions.
/riders/:id	src/pages/RiderDetailPage.jsx	Rider profile, KYC docs, deliveries, earnings.
/orders	src/pages/OrdersPage.jsx	Order list/kanban, filters, realtime updates.
/orders/:id	src/pages/OrderDetailPage.jsx	Order items, timeline, rider assign, status.
/products	src/pages/ProductsPage.jsx	Cross-store product monitoring and moderation.
/categories	src/pages/CategoriesPage.jsx	Category CRUD with drag reorder.
/offers	src/pages/OffersPage.jsx	Coupons and promotional offers.
/banners	src/pages/BannersPage.jsx	Marketing banners with image upload and ordering.
/analytics	src/pages/AnalyticsPage.jsx	Charts, date filters, CSV export.
/finance	src/pages/FinancePage.jsx	Payouts, COD reconciliation, settlements.
/notifications	src/pages/NotificationsPage.jsx	Broadcast push notifications and history.
/settings	src/pages/SettingsPage.jsx	Platform commission, fees, payout settings.

4. TestSprite — what to run next

After TC001 and TC002 (login) pass, run tests in batches of 3–5 with `npm run preview` on port 5173.

- TC003–TC005: Logout and protected routes
- TC008, TC014, TC018: Dashboard and sidebar
- TC009–TC012, TC020, TC026: Orders module
- TC015, TC021, TC023, TC027: Stores module
- TC019, TC024, TC025: Riders module
- TC013, TC016, TC017, TC022: Finance module

5. Line-by-line source code reference

Every line of each core file and page is listed below with a short explanation.

main (src/main.jsx)

Total lines: 103

Line	Code	Explanation
1	import { StrictMode } from 'react'	Import React hooks.
2	import { createRoot } from 'react-dom/client'	Import dependency.
3	import './index.css'	Import dependency.
4	import App from './App.jsx'	Import dependency.
5		Blank line.
6	// List of all required environment variables for the admin app	Comment: List of all required environment variables for the admin app
7	const REQUIRED_ENV_VARS = [	Logic or UI structure — read with surrounding lines.
8	'VITE_SUPABASE_URL',	Logic or UI structure — read with surrounding lines.
9	'VITE_SUPABASE_ANON_KEY',	Logic or UI structure — read with surrounding lines.
10	'VITE_FIREBASE_API_KEY',	Logic or UI structure — read with surrounding lines.
11	'VITE_FIREBASE_AUTH_DOMAIN',	Logic or UI structure — read with surrounding lines.
12	'VITE_FIREBASE_PROJECT_ID',	Logic or UI structure — read with surrounding lines.
13	'VITE_FIREBASE_STORAGE_BUCKET',	Logic or UI structure — read with surrounding lines.
14	'VITE_FIREBASE_MESSAGING_SENDER_ID',	Logic or UI structure — read with surrounding lines.
15	'VITE_FIREBASE_APP_ID',	Logic or UI structure — read with surrounding lines.
16	'VITE_API_URL',	Logic or UI structure — read with surrounding lines.
17	'VITE_GOOGLE_MAPS_KEY',	Logic or UI structure — read with surrounding lines.
18	]	Logic or UI structure — read with surrounding lines.
19		Blank line.
20	// Checks all required environment variables and collects missing ones	Comment: Checks all required environment variables and collects missing ones
21	const missingVars = REQUIRED_ENV_VARS.filter(	Logic or UI structure — read with surrounding lines.
22	(varName) => !import.meta.env[varName]	Logic or UI structure — read with surrounding lines.
23	)	Logic or UI structure — read with surrounding lines.
24		Blank line.
25	const root = createRoot(document.getElementById('root'))	Logic or UI structure — read with surrounding lines.
26		Blank line.
27	// Renders error screen if any environment variables are missing	Comment: Renders error screen if any environment variables are missing
28	if (missingVars.length > 0) {	Logic or UI structure — read with surrounding lines.
29	root.render(	Logic or UI structure — read with surrounding lines.
30	<div style={{	JSX element opening tag.
31	minHeight: '100vh',	Logic or UI structure — read with surrounding lines.
32	display: 'flex',	Logic or UI structure — read with surrounding lines.
33	alignItems: 'center',	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
34	justifyContent: 'center',	Logic or UI structure — read with surrounding lines.
35	backgroundColor: '#FEE2E2',	Logic or UI structure — read with surrounding lines.
36	padding: '24px',	Logic or UI structure — read with surrounding lines.
37	fontFamily: 'Inter, system-ui, sans-serif',	Logic or UI structure — read with surrounding lines.
38	}}>	Logic or UI structure — read with surrounding lines.
39	<div style={{	JSX element opening tag.
40	maxWidth: '560px',	Logic or UI structure — read with surrounding lines.
41	width: '100%',	Logic or UI structure — read with surrounding lines.
42	backgroundColor: '#FFFFFF',	Logic or UI structure — read with surrounding lines.
43	borderRadius: '12px',	Logic or UI structure — read with surrounding lines.
44	padding: '32px',	Logic or UI structure — read with surrounding lines.
45	boxShadow: '0 4px 16px rgba(0, 0, 0, 0.1)',	Logic or UI structure — read with surrounding lines.
46	border: '2px solid #EF4444',	Logic or UI structure — read with surrounding lines.
47	}}>	Logic or UI structure — read with surrounding lines.
48	<h1 style={{	JSX element opening tag.
49	color: '#EF4444',	Logic or UI structure — read with surrounding lines.
50	fontSize: '20px',	Logic or UI structure — read with surrounding lines.
51	fontWeight: '700',	Logic or UI structure — read with surrounding lines.
52	marginBottom: '8px',	Logic or UI structure — read with surrounding lines.
53	marginTop: 0,	Logic or UI structure — read with surrounding lines.
54	}}>	Logic or UI structure — read with surrounding lines.
55	 ZapKart Admin — Configuration Error	Logic or UI structure — read with surrounding lines.
56	</h1>	JSX element opening tag.
57	<p style={{	JSX element opening tag.
58	color: '#6B7280',	Logic or UI structure — read with surrounding lines.
59	fontSize: '14px',	Logic or UI structure — read with surrounding lines.
60	marginBottom: '20px',	Logic or UI structure — read with surrounding lines.
61	}}>	Logic or UI structure — read with surrounding lines.
62	The following environment variables are missing from your <code>.env</code> file.	Logic or UI structure — read with surrounding lines.
63	Copy <code>.env.example</code> to <code>.env</code> and fill in all values.	Logic or UI structure — read with surrounding lines.
64	</p>	JSX element opening tag.
65	<ul style={{	JSX element opening tag.
66	listStyle: 'none',	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
67	padding: 0,	Logic or UI structure — read with surrounding lines.
68	margin: 0,	Logic or UI structure — read with surrounding lines.
69	}}>	Logic or UI structure — read with surrounding lines.
70	{missingVars.map((varName) => (	Logic or UI structure — read with surrounding lines.
71	<li key={varName} style={{	JSX element opening tag.
72	padding: '8px 12px',	Logic or UI structure — read with surrounding lines.
73	marginBottom: '6px',	Logic or UI structure — read with surrounding lines.
74	backgroundColor: '#FEE2E2',	Logic or UI structure — read with surrounding lines.
75	borderRadius: '6px',	Logic or UI structure — read with surrounding lines.
76	fontFamily: 'monospace',	Logic or UI structure — read with surrounding lines.
77	fontSize: '13px',	Logic or UI structure — read with surrounding lines.
78	color: '#991B1B',	Logic or UI structure — read with surrounding lines.
79	}}>	Logic or UI structure — read with surrounding lines.
80	{varName}	Logic or UI structure — read with surrounding lines.
81		JSX element opening tag.
82	))}	Logic or UI structure — read with surrounding lines.
83		JSX element opening tag.
84	<p style={{	JSX element opening tag.
85	color: '#6B7280',	Logic or UI structure — read with surrounding lines.
86	fontSize: '12px',	Logic or UI structure — read with surrounding lines.
87	marginTop: '20px',	Logic or UI structure — read with surrounding lines.
88	marginBottom: 0,	Logic or UI structure — read with surrounding lines.
89	}}>	Logic or UI structure — read with surrounding lines.
90	Total missing: {missingVars.length} of {REQUIRED_ENV_VARS.length} required variables	Logic or UI structure — read with surrounding lines.
91	</p>	JSX element opening tag.
92	</div>	JSX element opening tag.
93	</div>	JSX element opening tag.
94	)	Logic or UI structure — read with surrounding lines.
95	} else {	Logic or UI structure — read with surrounding lines.
96	// Renders the app only when all environment variables are present	Comment: Renders the app only when all environment variables are present
97	root.render(	Logic or UI structure — read with surrounding lines.
98	<StrictMode>	JSX element opening tag.
99	<App />	Self-closing JSX element.
100	</StrictMode>	JSX element opening tag.
101	)	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
102	}	Logic or UI structure — read with surrounding lines.
103		Blank line.

App (src/App.jsx)

Total lines: 109

Line	Code	Explanation
1	import { BrowserRouter, Routes, Route, Navigate } from 'react-router-dom'	Import routing.
2	import { Toaster } from 'react-hot-toast'	Import dependency.
3	import { AuthProvider, ProtectedRoute, PublicRoute } from './context/AuthContext'	Import auth context.
4	import { ROUTES } from './constants/routes'	Import constants.
5	import PageLayout from './components/layout/PageLayout'	Import UI component.
6		Blank line.
7	// Pages	Comment: Pages
8	import LoginPage from './pages/LoginPage'	Import dependency.
9	import DashboardPage from './pages/DashboardPage'	Import dependency.
10	import StoresPage from './pages/StoresPage'	Import dependency.
11	import StoreDetailPage from './pages/StoreDetailPage'	Import dependency.
12	import RidersPage from './pages/RidersPage'	Import dependency.
13	import RiderDetailPage from './pages/RiderDetailPage'	Import dependency.
14	import OrdersPage from './pages/OrdersPage'	Import dependency.
15	import OrderDetailPage from './pages/OrderDetailPage'	Import dependency.
16	import ProductsPage from './pages/ProductsPage'	Import dependency.
17	import CategoriesPage from './pages/CategoriesPage'	Import dependency.
18	import OffersPage from './pages/OffersPage'	Import dependency.
19	import BannersPage from './pages/BannersPage'	Import dependency.
20	import AnalyticsPage from './pages/AnalyticsPage'	Import dependency.
21	import FinancePage from './pages/FinancePage'	Import dependency.
22	import NotificationsPage from './pages/NotificationsPage'	Import dependency.
23	import SettingsPage from './pages/SettingsPage'	Import dependency.
24		Blank line.
25	/**	Doc comment.
26	* ZapKart Admin App	Doc comment.
27	* Root component with BrowserRouter, AuthProvider, and all route definitions.	Doc comment.
28	*/	Doc comment.
29		Blank line.
30	// Main application component that sets up routing and authentication	Comment: Main application component that sets up routing and authentication
31	function App() {	Logic or UI structure — read with surrounding lines.
32	return (	Return JSX UI.
33	<BrowserRouter>	JSX element opening tag.
34	<AuthProvider>	JSX element opening tag.
35	<Routes>	Route definition.

Line	Code	Explanation
36	<code>/* Public route – only accessible when NOT logged in */</code>	Logic or UI structure — read with surrounding lines.
37	<code><Route</code>	Route definition.
38	<code>path={ROUTES.LOGIN}</code>	Logic or UI structure — read with surrounding lines.
39	<code>element={</code>	Logic or UI structure — read with surrounding lines.
40	<code><PublicRoute></code>	JSX element opening tag.
41	<code><LoginPage /></code>	Self-closing JSX element.
42	<code></PublicRoute></code>	JSX element opening tag.
43	<code>}</code>	Logic or UI structure — read with surrounding lines.
44	<code>/></code>	Logic or UI structure — read with surrounding lines.
45		Blank line.
46	<code>/* Protected routes – require admin authentication and layout shell */</code>	Logic or UI structure — read with surrounding lines.
47	<code><Route</code>	Route definition.
48	<code>element={</code>	Logic or UI structure — read with surrounding lines.
49	<code><ProtectedRoute></code>	JSX element opening tag.
50	<code><PageLayout /></code>	Self-closing JSX element.
51	<code></ProtectedRoute></code>	JSX element opening tag.
52	<code>}</code>	Logic or UI structure — read with surrounding lines.
53	<code>></code>	Logic or UI structure — read with surrounding lines.
54	<code><Route path={ROUTES.DASHBOARD} element={<DashboardPage />} /></code>	Route definition.
55	<code><Route path={ROUTES.STORES} element={<StoresPage />} /></code>	Route definition.
56	<code><Route path={ROUTES.STORE_DETAIL} element={<StoreDetailPage />} /></code>	Route definition.
57	<code><Route path={ROUTES.RIDERS} element={<RidersPage />} /></code>	Route definition.
58	<code><Route path={ROUTES.RIDER_DETAIL} element={<RiderDetailPage />} /></code>	Route definition.
59	<code><Route path={ROUTES.ORDERS} element={<OrdersPage />} /></code>	Route definition.
60	<code><Route path={ROUTES.ORDER_DETAIL} element={<OrderDetailPage />} /></code>	Route definition.
61	<code><Route path={ROUTES.PRODUCTS} element={<ProductsPage />} /></code>	Route definition.
62	<code><Route path={ROUTES.CATEGORIES} element={<CategoriesPage />} /></code>	Route definition.
63	<code><Route path={ROUTES.OFFERS} element={<OffersPage />} /></code>	Route definition.
64	<code><Route path={ROUTES.BANNERS} element={<BannersPage />} /></code>	Route definition.
65	<code><Route path={ROUTES.ANALYTICS} element={<AnalyticsPage />} /></code>	Route definition.
66	<code><Route path={ROUTES.FINANCE} element={<FinancePage />} /></code>	Route definition.
67	<code><Route path={ROUTES.NOTIFICATIONS} element={<NotificationsPage />} /></code>	Route definition.

Line	Code	Explanation
68	<code><Route path={ROUTES.SETTINGS} element={<SettingsPage />} /></code>	Route definition.
69	<code></Route></code>	JSX element opening tag.
70		Blank line.
71	<code>{/* Default and catch-all redirects */}</code>	Logic or UI structure — read with surrounding lines.
72	<code><Route path="/" " element={<Navigate to={ROUTES.DASHBOARD} replace />} /></code>	Route definition.
73	<code><Route path="*" " element={<Navigate to={ROUTES.DASHBOARD} replace />} /></code>	Route definition.
74	<code></Routes></code>	JSX element opening tag.
75		Blank line.
76	<code>{/* Global toast notification container */}</code>	Logic or UI structure — read with surrounding lines.
77	<code><Toaster</code>	JSX element opening tag.
78	<code>position="top-right"</code>	Logic or UI structure — read with surrounding lines.
79	<code>toastOptions={{</code>	Logic or UI structure — read with surrounding lines.
80	<code>duration: 4000,</code>	Logic or UI structure — read with surrounding lines.
81	<code>style: {</code>	Logic or UI structure — read with surrounding lines.
82	<code>fontFamily: 'Inter, system-ui, sans-serif',</code>	Logic or UI structure — read with surrounding lines.
83	<code>fontSize: '14px',</code>	Logic or UI structure — read with surrounding lines.
84	<code>borderRadius: '8px',</code>	Logic or UI structure — read with surrounding lines.
85	<code>padding: '12px 16px',</code>	Logic or UI structure — read with surrounding lines.
86	<code>},</code>	Logic or UI structure — read with surrounding lines.
87	<code>success: {</code>	Logic or UI structure — read with surrounding lines.
88	<code>style: {</code>	Logic or UI structure — read with surrounding lines.
89	<code>background: '#DCFCE7',</code>	Logic or UI structure — read with surrounding lines.
90	<code>color: '#16A34A',</code>	Logic or UI structure — read with surrounding lines.
91	<code>border: '1px solid #16A34A',</code>	Logic or UI structure — read with surrounding lines.
92	<code>},</code>	Logic or UI structure — read with surrounding lines.
93	<code>},</code>	Logic or UI structure — read with surrounding lines.
94	<code>error: {</code>	Logic or UI structure — read with surrounding lines.
95	<code>style: {</code>	Logic or UI structure — read with surrounding lines.
96	<code>background: '#FEE2E2',</code>	Logic or UI structure — read with surrounding lines.
97	<code>color: '#EF4444',</code>	Logic or UI structure — read with surrounding lines.
98	<code>border: '1px solid #EF4444',</code>	Logic or UI structure — read with surrounding lines.
99	<code>},</code>	Logic or UI structure — read with surrounding lines.
100	<code>},</code>	Logic or UI structure — read with surrounding lines.
101	<code>}}</code>	Logic or UI structure — read with surrounding lines.
102	<code>/></code>	Logic or UI structure — read with surrounding lines.
103	<code></AuthProvider></code>	JSX element opening tag.
104	<code></BrowserRouter></code>	JSX element opening tag.
105	<code>)</code>	Logic or UI structure — read with surrounding lines.
106	<code>}</code>	Logic or UI structure — read with surrounding lines.
107		Blank line.
108	<code>export default App</code>	Default export (main module).
109		Blank line.

AuthContext (src/context/AuthContext.jsx)

Total lines: 175

Line	Code	Explanation
1	import { createContext, useContext, useState, useEffect, useCallback } from 'react'	Import React hooks.
2	import { useNavigate } from 'react-router-dom'	Import routing.
3	import {	Import dependency.
4	loginWithEmail,	Logic or UI structure — read with surrounding lines.
5	logout as authLogout,	Logic or UI structure — read with surrounding lines.
6	onAuthChange,	Logic or UI structure — read with surrounding lines.
7	fetchAdminProfile,	Logic or UI structure — read with surrounding lines.
8	} from '../services/authService'	Logic or UI structure — read with surrounding lines.
9	import { ROUTES } from '../constants/routes'	Import constants.
10		Blank line.
11	/**	Doc comment.
12	* ZapKart Admin Authentication Context	Doc comment.
13	* Provides auth state, login/logout, and admin profile to the entire app.	Doc comment.
14	*/	Doc comment.
15		Blank line.
16	// Creates the authentication context with default null value	Comment: Creates the authentication context with default null value
17	const AuthContext = createContext(null)	Logic or UI structure — read with surrounding lines.
18		Blank line.
19	// Custom hook to access authentication context from any component	Comment: Custom hook to access authentication context from any component
20	export function useAuth() {	Named export function.
21	const context = useContext(AuthContext)	Logic or UI structure — read with surrounding lines.
22	if (!context) {	Logic or UI structure — read with surrounding lines.
23	throw new Error('useAuth must be used within an AuthProvider')	Logic or UI structure — read with surrounding lines.
24	}	Logic or UI structure — read with surrounding lines.
25	return context	Logic or UI structure — read with surrounding lines.
26	}	Logic or UI structure — read with surrounding lines.
27		Blank line.
28	// AuthProvider component that wraps the app and manages authentication state	Comment: AuthProvider component that wraps the app and manages authentication state
29	export function AuthProvider({ children }) {	Named export function.
30	const [user, setUser] = useState(null)	React state variable.
31	const [adminProfile, setAdminProfile] = useState(null)	React state variable.
32	const [loading, setLoading] = useState(true)	React state variable.
33	const [error, setError] = useState(null)	React state variable.
34		Blank line.
35	// Subscribes to Firebase auth state changes on mount	Comment: Subscribes to Firebase auth state changes on mount
36	useEffect(() => {	Side effect (fetch, subscribe, redirect).
37	const unsubscribe = onAuthChange(async (firebaseUser) => {	Logic or UI structure — read with surrounding lines.
38	try {	Try block start.

Line	Code	Explanation
39	if (firebaseUser) {	Logic or UI structure — read with surrounding lines.
40	// Fetches admin profile when Firebase user is authenticated	Comment: Fetches admin profile when Firebase user is authenticated
41	const profile = await fetchAdminProfile(firebaseUser.email)	Wait for async operation.
42	setUser(firebaseUser)	Logic or UI structure — read with surrounding lines.
43	setAdminProfile(profile)	Logic or UI structure — read with surrounding lines.
44	setError(null)	Logic or UI structure — read with surrounding lines.
45	} else {	Logic or UI structure — read with surrounding lines.
46	// Clears state when no Firebase user is present	Comment: Clears state when no Firebase user is present
47	setUser(null)	Logic or UI structure — read with surrounding lines.
48	setAdminProfile(null)	Logic or UI structure — read with surrounding lines.
49	}	Logic or UI structure — read with surrounding lines.
50	} catch (err) {	Catch errors.
51	// Signs out if admin profile verification fails	Comment: Signs out if admin profile verification fails
52	setUser(null)	Logic or UI structure — read with surrounding lines.
53	setAdminProfile(null)	Logic or UI structure — read with surrounding lines.
54	setError(err.message)	Logic or UI structure — read with surrounding lines.
55	await authLogout()	Wait for async operation.
56	} finally {	Finally block (cleanup).
57	setLoading(false)	Logic or UI structure — read with surrounding lines.
58	}	Logic or UI structure — read with surrounding lines.
59	})	Logic or UI structure — read with surrounding lines.
60		Blank line.
61	// Cleans up auth state listener on unmount	Comment: Cleans up auth state listener on unmount
62	return () => unsubscribe()	Return JSX UI.
63	}, [])	Logic or UI structure — read with surrounding lines.
64		Blank line.
65	// Authenticates admin with email and password	Comment: Authenticates admin with email and password
66	const login = useCallback(async (email, password) => {	Memoized callback function.
67	setLoading(true)	Logic or UI structure — read with surrounding lines.
68	setError(null)	Logic or UI structure — read with surrounding lines.
69	try {	Try block start.
70	const { user: firebaseUser, adminProfile: profile } =	Logic or UI structure — read with surrounding lines.
71	await loginWithEmail(email, password)	Wait for async operation.
72	setUser(firebaseUser)	Logic or UI structure — read with surrounding lines.
73	setAdminProfile(profile)	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
74	return { user: firebaseUser, adminProfile: profile }	Logic or UI structure — read with surrounding lines.
75	} catch (err) {	Catch errors.
76	setError(err.message)	Logic or UI structure — read with surrounding lines.
77	throw err	Logic or UI structure — read with surrounding lines.
78	} finally {	Finally block (cleanup).
79	setLoading(false)	Logic or UI structure — read with surrounding lines.
80	}	Logic or UI structure — read with surrounding lines.
81	}, [])	Logic or UI structure — read with surrounding lines.
82		Blank line.
83	// Signs out the current admin and clears state	Comment: Signs out the current admin and clears state
84	const logout = useCallback(async () => {	Memoized callback function.
85	try {	Try block start.
86	await authLogout()	Wait for async operation.
87	setUser(null)	Logic or UI structure — read with surrounding lines.
88	setAdminProfile(null)	Logic or UI structure — read with surrounding lines.
89	setError(null)	Logic or UI structure — read with surrounding lines.
90	} catch (err) {	Catch errors.
91	setError(err.message)	Logic or UI structure — read with surrounding lines.
92	}	Logic or UI structure — read with surrounding lines.
93	}, [])	Logic or UI structure — read with surrounding lines.
94		Blank line.
95	// Clears any authentication error messages	Comment: Clears any authentication error messages
96	const clearError = useCallback(() => {	Memoized callback function.
97	setError(null)	Logic or UI structure — read with surrounding lines.
98	}, [])	Logic or UI structure — read with surrounding lines.
99		Blank line.
100	// Memoized context value to prevent unnecessary re-renders	Comment: Memoized context value to prevent unnecessary re-renders
101	const value = {	Logic or UI structure — read with surrounding lines.
102	user,	Logic or UI structure — read with surrounding lines.
103	adminProfile,	Logic or UI structure — read with surrounding lines.
104	loading,	Logic or UI structure — read with surrounding lines.
105	error,	Logic or UI structure — read with surrounding lines.
106	login,	Logic or UI structure — read with surrounding lines.
107	logout,	Logic or UI structure — read with surrounding lines.
108	clearError,	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
109	isAuthenticated: !!user && !!adminProfile,	Logic or UI structure — read with surrounding lines.
110	}	Logic or UI structure — read with surrounding lines.
111		Blank line.
112	return <AuthContext.Provider value={value}>{children}</AuthContext.Provider>	Logic or UI structure — read with surrounding lines.
113	}	Logic or UI structure — read with surrounding lines.
114		Blank line.
115	// ProtectedRoute component that redirects to login if not authenticated	Comment: ProtectedRoute component that redirects to login if not authenticated
116	export function ProtectedRoute({ children }) {	Named export function.
117	const { isAuthenticated, loading } = useAuth()	Auth state and login/logout.
118	const navigate = useNavigate()	Programmatic navigation hook.
119		Blank line.
120	// Redirects to login page when user is not authenticated	Comment: Redirects to login page when user is not authenticated
121	useEffect(() => {	Side effect (fetch, subscribe, redirect).
122	if (!loading && !isAuthenticated) {	Logic or UI structure — read with surrounding lines.
123	navigate(ROUTES.LOGIN, { replace: true })	Navigate to route.
124	}	Logic or UI structure — read with surrounding lines.
125	}, [isAuthenticated, loading, navigate])	Logic or UI structure — read with surrounding lines.
126		Blank line.
127	// Shows loading spinner while checking authentication status	Comment: Shows loading spinner while checking authentication status
128	if (loading) {	Logic or UI structure — read with surrounding lines.
129	return (	Return JSX UI.
130	<div className="min-h-screen flex items-center justify-center bg-background">	CSS/Tailwind styling.
131	<div className="flex flex-col items-center gap-md">	CSS/Tailwind styling.
132	<div className="w-10 h-10 border-4 border-surface-container-high border-t-primary-container rounded-full an...>	CSS/Tailwind styling.
133	<p className="text-body-md text-secondary">Loading...</p>	CSS/Tailwind styling.
134	</div>	JSX element opening tag.
135	</div>	JSX element opening tag.
136	)	Logic or UI structure — read with surrounding lines.
137	}	Logic or UI structure — read with surrounding lines.
138		Blank line.
139	// Returns null while redirecting to prevent flash of protected content	Comment: Returns null while redirecting to prevent flash of protected content
140	if (!isAuthenticated) return null	Logic or UI structure — read with surrounding lines.
141		Blank line.
142	return children	Logic or UI structure — read with surrounding lines.
143	}	Logic or UI structure — read with surrounding lines.
144		Blank line.
145	// PublicRoute component that redirects authenticated users to dashboard	Comment: PublicRoute component that redirects authenticated users to dashboard
146	export function PublicRoute({ children }) {	Named export function.

Line	Code	Explanation
147	const { isAuthenticated, loading } = useAuth()	Auth state and login/logout.
148	const navigate = useNavigate()	Programmatic navigation hook.
149		Blank line.
150	// Redirects to dashboard if user is already authenticated	Comment: Redirects to dashboard if user is already authenticated
151	useEffect(() => {	Side effect (fetch, subscribe, redirect).
152	if (!loading && isAuthenticated) {	Logic or UI structure — read with surrounding lines.
153	navigate(ROUTES.DASHBOARD, { replace: true })	Navigate to route.
154	}	Logic or UI structure — read with surrounding lines.
155	}, [isAuthenticated, loading, navigate])	Logic or UI structure — read with surrounding lines.
156		Blank line.
157	// Shows loading spinner while checking authentication status	Comment: Shows loading spinner while checking authentication status
158	if (loading) {	Logic or UI structure — read with surrounding lines.
159	return (	Return JSX UI.
160	<div className="min-h-screen flex items-center justify-center bg-background">	CSS/Tailwind styling.
161	<div className="flex flex-col items-center gap-md">	CSS/Tailwind styling.
162	<div className="w-10 h-10 border-4 border-surface-container-high border-t-primary-container rounded-full an...>	CSS/Tailwind styling.
163	<p className="text-body-md text-secondary">Loading...</p>	CSS/Tailwind styling.
164	</div>	JSX element opening tag.
165	</div>	JSX element opening tag.
166	)	Logic or UI structure — read with surrounding lines.
167	}	Logic or UI structure — read with surrounding lines.
168		Blank line.
169	if (isAuthenticated) return null	Logic or UI structure — read with surrounding lines.
170		Blank line.
171	return children	Logic or UI structure — read with surrounding lines.
172	}	Logic or UI structure — read with surrounding lines.
173		Blank line.
174	export default AuthContext	Default export (main module).
175		Blank line.

authService (src/services/authService.js)

Total lines: 83

Line	Code	Explanation
1	import {	Import dependency.
2	signInWithEmailAndPassword,	Logic or UI structure — read with surrounding lines.
3	signOut,	Logic or UI structure — read with surrounding lines.
4	onAuthStateChanged,	Logic or UI structure — read with surrounding lines.
5	} from 'firebase/auth'	Logic or UI structure — read with surrounding lines.
6	import { auth } from './firebase'	Import dependency.
7	import { supabase } from './supabase'	Import dependency.
8		Blank line.
9	/**	Doc comment.
10	* ZapKart Admin Authentication Service	Doc comment.
11	* Uses Firebase email/password auth + Supabase admin profile verification.	Doc comment.
12	*/	Doc comment.
13		Blank line.
14	// Signs in admin with email and password, verifies admin role in Supabase	Comment: Signs in admin with email and password, verifies admin role in Supabase
15	export async function loginWithEmail(email, password) {	Named export function.
16	const normalizedEmail = email.toLowerCase().trim()	Logic or UI structure — read with surrounding lines.
17	const userCredential = await signInWithEmailAndPassword(auth, normalizedEmail, password)	Wait for async operation.
18	const user = userCredential.user	Logic or UI structure — read with surrounding lines.
19		Blank line.
20	// Fetches admin profile from Supabase to verify admin role	Comment: Fetches admin profile from Supabase to verify admin role
21	const { data: adminProfile, error } = await supabase	Wait for async operation.
22	.from('admins')	Logic or UI structure — read with surrounding lines.
23	.select('*')	Logic or UI structure — read with surrounding lines.
24	.eq('email', normalizedEmail)	Logic or UI structure — read with surrounding lines.
25	.single()	Logic or UI structure — read with surrounding lines.
26		Blank line.
27	if (error !adminProfile) {	Logic or UI structure — read with surrounding lines.
28	await signOut(auth)	Wait for async operation.
29	throw new Error('Access denied. This email is not registered as an admin.')	Logic or UI structure — read with surrounding lines.
30	}	Logic or UI structure — read with surrounding lines.
31		Blank line.
32	return { user, adminProfile }	Logic or UI structure — read with surrounding lines.
33	}	Logic or UI structure — read with surrounding lines.
34		Blank line.
35	// Signs out the current admin user from Firebase	Comment: Signs out the current admin user from Firebase
36	export async function logout() {	Named export function.
37	await signOut(auth)	Wait for async operation.
38	}	Logic or UI structure — read with surrounding lines.
39		Blank line.
40	// Returns the currently authenticated Firebase user or null	Comment: Returns the currently authenticated Firebase user or null
41	export function getCurrentUser() {	Named export function.
42	return auth.currentUser	Logic or UI structure — read with surrounding lines.
43	}	Logic or UI structure — read with surrounding lines.
44		Blank line.

Line	Code	Explanation
45	// Retrieves a fresh Firebase ID token for backend API authorization	Comment: Retrieves a fresh Firebase ID token for backend API authorization
46	export async function getIdToken() {	Named export function.
47	const user = auth.currentUser	Logic or UI structure — read with surrounding lines.
48	if (!user) throw new Error('No authenticated user')	Logic or UI structure — read with surrounding lines.
49	return user.getIdToken(true)	Logic or UI structure — read with surrounding lines.
50	}	Logic or UI structure — read with surrounding lines.
51		Blank line.
52	// Subscribes to Firebase auth state changes and invokes callback with user	Comment: Subscribes to Firebase auth state changes and invokes callback with user
53	export function onAuthChange(callback) {	Named export function.
54	return onAuthStateChanged(auth, callback)	Logic or UI structure — read with surrounding lines.
55	}	Logic or UI structure — read with surrounding lines.
56		Blank line.
57	// Fetches the admin profile from Supabase by email address	Comment: Fetches the admin profile from Supabase by email address
58	export async function fetchAdminProfile(email) {	Named export function.
59	const { data, error } = await supabase	Wait for async operation.
60	.from('admins')	Logic or UI structure — read with surrounding lines.
61	.select('*')	Logic or UI structure — read with surrounding lines.
62	.eq('email', email.toLowerCase().trim())	Logic or UI structure — read with surrounding lines.
63	.single()	Logic or UI structure — read with surrounding lines.
64		Blank line.
65	if (error) throw new Error('Failed to fetch admin profile')	Logic or UI structure — read with surrounding lines.
66	return data	Logic or UI structure — read with surrounding lines.
67	}	Logic or UI structure — read with surrounding lines.
68		Blank line.
69	// Creates an authenticated fetch wrapper that includes Firebase JWT token	Comment: Creates an authenticated fetch wrapper that includes Firebase JWT token
70	export async function authenticatedFetch(url, options = {}) {	Named export function.
71	const token = await getIdToken()	Wait for async operation.
72	const apiUrl = import.meta.env.VITE_API_URL	Logic or UI structure — read with surrounding lines.
73		Blank line.
74	return fetch(`\${apiUrl}\${url}`, {	Logic or UI structure — read with surrounding lines.
75	...options,	Logic or UI structure — read with surrounding lines.
76	headers: {	Logic or UI structure — read with surrounding lines.
77	'Content-Type': 'application/json',	Logic or UI structure — read with surrounding lines.
78	Authorization: `Bearer \${token}`,	Logic or UI structure — read with surrounding lines.
79	...options.headers,	Logic or UI structure — read with surrounding lines.
80	},	Logic or UI structure — read with surrounding lines.
81	})	Logic or UI structure — read with surrounding lines.
82	}	Logic or UI structure — read with surrounding lines.
83		Blank line.

firebase (src/services/firebase.js)

Total lines: 33

Line	Code	Explanation
1	import { initializeApp } from 'firebase/app'	Import dependency.
2	import { getAuth } from 'firebase/auth'	Import dependency.
3		Blank line.
4	// Firebase configuration from environment variables	Comment: Firebase configuration from environment variables
5	const firebaseConfig = {	Logic or UI structure — read with surrounding lines.
6	apiKey: import.meta.env.VITE_FIREBASE_API_KEY,	Logic or UI structure — read with surrounding lines.
7	authDomain:	Logic or UI structure — read with surrounding lines.
8	import.meta.env.VITE_FIREBASE_AUTH_DOMAIN,	
9	projectId:	Logic or UI structure — read with surrounding lines.
10	import.meta.env.VITE_FIREBASE_PROJECT_ID,	
11	storageBucket:	Logic or UI structure — read with surrounding lines.
12	import.meta.env.VITE_FIREBASE_STORAGE_BUCKET,	
13	messagingSenderId:	Logic or UI structure — read with surrounding lines.
14	import.meta.env.VITE_FIREBASE_MESSAGING_SENDER_ID,	
15	appId: import.meta.env.VITE_FIREBASE_APP_ID,	Logic or UI structure — read with surrounding lines.
16	}	Logic or UI structure — read with surrounding lines.
17		Blank line.
18	// Collects all missing Firebase environment variables for error reporting	Comment: Collects all missing Firebase environment variables for error reporting
19	const missingVars = Object.entries(firebaseConfig)	Logic or UI structure — read with surrounding lines.
20	.filter(([, value]) => !value)	Logic or UI structure — read with surrounding lines.
21	.map([key]) => key)	Logic or UI structure — read with surrounding lines.
22		Blank line.
23	// Throws descriptive error if any Firebase config values are missing	Comment: Throws descriptive error if any Firebase config values are missing
24	if (missingVars.length > 0) {	Logic or UI structure — read with surrounding lines.
25	throw new Error(	Logic or UI structure — read with surrounding lines.
26	`Missing Firebase environment variables: \${missingVars.join(', ')} Please check your .env file.`	Logic or UI structure — read with surrounding lines.
27	)	Logic or UI structure — read with surrounding lines.
28	}	Logic or UI structure — read with surrounding lines.
29		Blank line.
30	// Initializes the Firebase app instance	Comment: Initializes the Firebase app instance
31	const app = initializeApp(firebaseConfig)	Logic or UI structure — read with surrounding lines.
32		Blank line.
33	// Exports the Firebase auth instance configured for email/password authentication	Comment: Exports the Firebase auth instance configured for email/password authentication
34	export const auth = getAuth(app)	Logic or UI structure — read with surrounding lines.
35		Blank line.
36	export default app	Default export (main module).
37		Blank line.

supabase (src/services/supabase.js)

Total lines: 19

Line	Code	Explanation
1	<code>import { createClient } from '@supabase/supabase-js'</code>	Import dependency.
2		Blank line.
3	<code>// Supabase URL from environment variables</code>	Comment: Supabase URL from environment variables
4	<code>const supabaseUrl = import.meta.env.VITE_SUPABASE_URL</code>	Logic or UI structure — read with surrounding lines.
5	<code>// Supabase anonymous key — subject to RLS policies</code>	Comment: Supabase anonymous key — subject to RLS policies
6	<code>const supabaseAnonKey = import.meta.env.VITE_SUPABASE_ANON_KEY</code>	Logic or UI structure — read with surrounding lines.
7		Blank line.
8	<code>// Validates that required Supabase environment variables are present</code>	Comment: Validates that required Supabase environment variables are present
9	<code>if (!supabaseUrl !supabaseAnonKey) {</code>	Logic or UI structure — read with surrounding lines.
10	<code> throw new Error(</code>	Logic or UI structure — read with surrounding lines.
11	<code> 'Missing Supabase environment variables. Please check your .env file for VITE_SUPABASE_URL and VITE_SUPABASE_ANON...</code>	Logic or UI structure — read with surrounding lines.
12	<code>)</code>	Logic or UI structure — read with surrounding lines.
13	<code>}</code>	Logic or UI structure — read with surrounding lines.
14		Blank line.
15	<code>// Creates and exports the Supabase client instance for all database operations</code>	Comment: Creates and exports the Supabase client instance for all database operations
16	<code>export const supabase = createClient(supabaseUrl, supabaseAnonKey)</code>	Logic or UI structure — read with surrounding lines.
17		Blank line.
18	<code>export default supabase</code>	Default export (main module).
19		Blank line.

routes (src/constants/routes.js)

Total lines: 65

Line	Code	Explanation
1	import {	Import dependency.
2	LayoutDashboard,	Logic or UI structure — read with surrounding lines.
3	Store,	Logic or UI structure — read with surrounding lines.
4	Bike,	Logic or UI structure — read with surrounding lines.
5	ShoppingCart,	Logic or UI structure — read with surrounding lines.
6	Package,	Logic or UI structure — read with surrounding lines.
7	Grid3x3,	Logic or UI structure — read with surrounding lines.
8	Tag,	Logic or UI structure — read with surrounding lines.
9	Image,	Logic or UI structure — read with surrounding lines.
10	BarChart3,	Logic or UI structure — read with surrounding lines.
11	Wallet,	Logic or UI structure — read with surrounding lines.
12	Bell,	Logic or UI structure — read with surrounding lines.
13	Settings,	Logic or UI structure — read with surrounding lines.
14	} from 'lucide-react'	Logic or UI structure — read with surrounding lines.
15		Blank line.
16	/**	Doc comment.
17	* ZapKart Admin Route Definitions	Doc comment.
18	* All 16 routes from PRD Section 13 with metadata.	Doc comment.
19	*/	Doc comment.
20		Blank line.
21	// All application route paths as constants	Comment: All application route paths as constants
22	export const ROUTES = {	Logic or UI structure — read with surrounding lines.
23	LOGIN: '/login',	Logic or UI structure — read with surrounding lines.
24	DASHBOARD: '/dashboard',	Logic or UI structure — read with surrounding lines.
25	STORES: '/stores',	Logic or UI structure — read with surrounding lines.
26	STORE_DETAIL: '/stores/:id',	Logic or UI structure — read with surrounding lines.
27	RIDERS: '/riders',	Logic or UI structure — read with surrounding lines.
28	RIDER_DETAIL: '/riders/:id',	Logic or UI structure — read with surrounding lines.
29	ORDERS: '/orders',	Logic or UI structure — read with surrounding lines.
30	ORDER_DETAIL: '/orders/:id',	Logic or UI structure — read with surrounding lines.
31	PRODUCTS: '/products',	Logic or UI structure — read with surrounding lines.
32	CATEGORIES: '/categories',	Logic or UI structure — read with surrounding lines.
33	OFFERS: '/offers',	Logic or UI structure — read with surrounding lines.
34	BANNERS: '/banners',	Logic or UI structure — read with surrounding lines.
35	ANALYTICS: '/analytics',	Logic or UI structure — read with surrounding lines.
36	FINANCE: '/finance',	Logic or UI structure — read with surrounding lines.
37	NOTIFICATIONS: '/notifications',	Logic or UI structure — read with surrounding lines.
38	SETTINGS: '/settings',	Logic or UI structure — read with surrounding lines.
39	}	Logic or UI structure — read with surrounding lines.
40		Blank line.
41	// Sidebar navigation items with icons and labels	Comment: Sidebar navigation items with icons and labels
42	export const SIDEBAR_NAV_ITEMS = [	Logic or UI structure — read with surrounding lines.
43	{ path: ROUTES.DASHBOARD, label: 'Dashboard', icon: LayoutDashboard },	Logic or UI structure — read with surrounding lines.
44	{ path: ROUTES.STORES, label: 'Stores', icon: Store },	Logic or UI structure — read with surrounding lines.
45	{ path: ROUTES.RIDERS, label: 'Riders', icon: Bike },	Logic or UI structure — read with surrounding lines.
46	{ path: ROUTES.ORDERS, label: 'Orders', icon: ShoppingCart },	Logic or UI structure — read with surrounding lines.
47	{ path: ROUTES.PRODUCTS, label: 'Products', icon: Package },	Logic or UI structure — read with surrounding lines.
48	{ path: ROUTES.CATEGORIES, label: 'Categories', icon: Grid3x3 },	Logic or UI structure — read with surrounding lines.
49	{ path: ROUTES.OFFERS, label: 'Offers', icon: Tag },	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
50	{ path: ROUTES.BANNERS, label: 'Banners', icon: Image },	Logic or UI structure — read with surrounding lines.
51	{ path: ROUTES.ANALYTICS, label: 'Analytics', icon: BarChart3 },	Logic or UI structure — read with surrounding lines.
52	{ path: ROUTES.FINANCE, label: 'Finance', icon: Wallet },	Logic or UI structure — read with surrounding lines.
53	{ path: ROUTES.NOTIFICATIONS, label: 'Notifications', icon: Bell },	Logic or UI structure — read with surrounding lines.
54	{ path: ROUTES.SETTINGS, label: 'Settings', icon: Settings },	Logic or UI structure — read with surrounding lines.
55	]	Logic or UI structure — read with surrounding lines.
56		Blank line.
57	// Routes that do not require authentication	Comment: Routes that do not require authentication
58	export const PUBLIC_ROUTES = [ROUTES.LOGIN]	Logic or UI structure — read with surrounding lines.
59		Blank line.
60	// Default redirect path after login	Comment: Default redirect path after login
61	export const DEFAULT_AUTHENTICATED_ROUTE = ROUTES.DASHBOARD	Logic or UI structure — read with surrounding lines.
62		Blank line.
63	// Default redirect path when not authenticated	Comment: Default redirect path when not authenticated
64	export const DEFAULT_UNAUTHENTICATED_ROUTE = ROUTES.LOGIN	Logic or UI structure — read with surrounding lines.
65		Blank line.

PageLayout (src/components/layout/PageLayout.jsx)

Total lines: 32

Line	Code	Explanation
1	import { useState } from 'react'	Import React hooks.
2	import { Outlet } from 'react-router-dom'	Import routing.
3	import TopBar from './TopBar'	Import dependency.
4	import Sidebar from './Sidebar'	Import dependency.
5		Blank line.
6	/**	Doc comment.
7	* PageLayout Component	Doc comment.
8	* Serves as the primary structural shell for all authenticated admin routes.	Doc comment.
9	* Integrates TopBar, Sidebar, and the dynamic router page content container.	Doc comment.
10	*/	Doc comment.
11	export default function PageLayout() {	Default export (main module).
12	const [isSidebarOpen, setIsSidebarOpen] = useState(false)	React state variable.
13		Blank line.
14	return (	Return JSX UI.
15	<div className="min-h-screen bg-background text-on-background font-body-md antialiased flex flex-col">	CSS/Tailwind styling.
16	{/* Dynamic Header navbar */}	Logic or UI structure — read with surrounding lines.
17	<TopBar onToggleSidebar={() => setIsSidebarOpen((prev) => !prev)} />	Self-closing JSX element.
18		Blank line.
19	{/* Main wrapper containing fixed sidebar and scrollable pages */}	Logic or UI structure — read with surrounding lines.
20	<div className="flex flex-1 pt-16">	CSS/Tailwind styling.
21	{/* Left Drawer / Panel Navigation */}	Logic or UI structure — read with surrounding lines.
22	<Sidebar isOpen={isSidebarOpen} onClose={() => setIsSidebarOpen(false)} />	Self-closing JSX element.
23		Blank line.
24	{/* Dynamic page contents - responsive padding and transition shifts */}	Logic or UI structure — read with surrounding lines.
25	<main className="flex-1 w-full md:pl-[280px] p-margin-mobile md:p-lg flex flex-col gap-lg transition-all dura..."	CSS/Tailwind styling.
26	<Outlet />	Self-closing JSX element.
27	</main>	JSX element opening tag.
28	</div>	JSX element opening tag.
29	</div>	JSX element opening tag.
30	)	Logic or UI structure — read with surrounding lines.
31	}	Logic or UI structure — read with surrounding lines.
32		Blank line.

Sidebar (src/components/layout/Sidebar.jsx)

Total lines: 138

Line	Code	Explanation
1	import { useState } from 'react'	Import React hooks.
2	import { NavLink } from 'react-router-dom'	Import routing.
3	import { Logout, HelpCircle, X, ChevronDown, ChevronUp } from 'lucide-react'	Import icons.
4	import { useAuth } from '../context/AuthContext'	Import auth context.
5	import { SIDEBAR_NAV_ITEMS } from '../constants/routes'	Import constants.
6		Blank line.
7	/**	Doc comment.
8	* Sidebar Component	Doc comment.
9	* Renders vertical navigation links, collapsible in desktop, slide-out drawer in mobile.	Doc comment.
10	* Uses the merged MD3 color palette and active navigation styles from Stitch.	Doc comment.
11	*/	Doc comment.
12	export default function Sidebar({ isOpen, onClose }) {	Default export (main module).
13	const { adminProfile, logout } = useAuth()	Auth state and login/logout.
14	const [isFooterCollapsed, setIsFooterCollapsed] = useState(false)	React state variable.
15		Blank line.
16	// Get admin initials for the avatar fallback	Comment: Get admin initials for the avatar fallback
17	const getInitials = (name) => {	Logic or UI structure — read with surrounding lines.
18	if (!name) return 'SA'	Logic or UI structure — read with surrounding lines.
19	return name	Logic or UI structure — read with surrounding lines.
20	.split(' ')	Logic or UI structure — read with surrounding lines.
21	.map((n) => n[0])	Logic or UI structure — read with surrounding lines.
22	.slice(0, 2)	Logic or UI structure — read with surrounding lines.
23	.join('')	Logic or UI structure — read with surrounding lines.
24	.toUpperCase()	Logic or UI structure — read with surrounding lines.
25	}	Logic or UI structure — read with surrounding lines.
26		Blank line.
27	return (	Return JSX UI.
28	<>	JSX element opening tag.
29	{ /* Mobile Overlay Background (Tap to close sidebar) */ }	Logic or UI structure — read with surrounding lines.
30	{ isOpen && (	Logic or UI structure — read with surrounding lines.
31	<div	JSX element opening tag.
32	onClick={onClose}	User event handler.
33	className="fixed inset-0 z-40 bg-inverse-surface/40 backdrop-blur-sm transition-opacity md:hidden"	CSS/Tailwind styling.
34	/>	Logic or UI structure — read with surrounding lines.
35	)}	Logic or UI structure — read with surrounding lines.
36		Blank line.
37	{ /* Sidebar Panel container */ }	Logic or UI structure — read with surrounding lines.
38	<aside	JSX element opening tag.
39	className={`fixed top-0 bottom-0 left-0 z-40 flex flex-col w-64 bg-slate-900 border-r border-slate-800 transi...	CSS/Tailwind styling.

Line	Code	Explanation
40	isOpen ? 'translate-x-0' : '-translate-x-full md:translate-x-0'	Logic or UI structure — read with surrounding lines.
41	}``	Logic or UI structure — read with surrounding lines.
42	>	Logic or UI structure — read with surrounding lines.
43	/* Mobile Header: Logo + Close Button */	Logic or UI structure — read with surrounding lines.
44	<div className="flex items- center justify-between h-16 px-md border-b border-slate-800 md:hidden bg-slate-950">	CSS/Tailwind styling.
45	<div className="font- headline-md text-headline-md text- brand tracking-tight font-bold">	CSS/Tailwind styling.
46	ZapKart	Logic or UI structure — read with surrounding lines.
47	</div>	JSX element opening tag.
48	<button	JSX element opening tag.
49	onClick={onClose}	User event handler.
50	className="p-sm text- slate-400 hover:bg-slate-800 rounded- full flex items-center justify-center h-10 w-10..."	CSS/Tailwind styling.
51	aria-label="Close sidebar"	Logic or UI structure — read with surrounding lines.
52	>	Logic or UI structure — read with surrounding lines.
53	<X className="w-5 h-5" />	CSS/Tailwind styling.
54	</button>	JSX element opening tag.
55	</div>	JSX element opening tag.
56		Blank line.
57	/* Navigation Links Scrollable list */	Logic or UI structure — read with surrounding lines.
58	<div className="flex-1 overflow-y-auto px-md py-lg flex flex- col gap-xs">	CSS/Tailwind styling.
59	{SIDEBAR_NAV_ITEMS.map((item) => {	Logic or UI structure — read with surrounding lines.
60	const Icon = item.icon	Logic or UI structure — read with surrounding lines.
61	return (	Return JSX UI.
62	<NavLink	JSX element opening tag.
63	key={item.path}	Logic or UI structure — read with surrounding lines.
64	to={item.path}	Logic or UI structure — read with surrounding lines.
65	onClick={onClose}	User event handler.
66	className={({ isActive	CSS/Tailwind styling.
67	}) => `flex items-center gap-md px-md py-sm h-[44px] rounded-lg transition-all duration-200 \${	Logic or UI structure — read with surrounding lines.
68	isActive	Logic or UI structure — read with surrounding lines.
69	? 'bg-brand text-white font-semibold shadow-md scale-95'	Logic or UI structure — read with surrounding lines.
70	: 'text-slate- 300 hover:text-white hover:bg-slate- 800 font-body-md'	Logic or UI structure — read with surrounding lines.
71	}``	Logic or UI structure — read with surrounding lines.
72	}	Logic or UI structure — read with surrounding lines.
73	>	Logic or UI structure — read with surrounding lines.
74	<Icon className="w-5 h-5 shrink-0" />	CSS/Tailwind styling.
75		JSX element opening tag.
76	{item.label}	JSX element opening tag.
77	</NavLink>	JSX element opening tag.
78	)	Logic or UI structure — read with surrounding lines.
79	}}}	Logic or UI structure — read with surrounding lines.
79	</div>	JSX element opening tag.

Line	Code	Explanation
80		Blank line.
81	<pre> {/* Footer Profile & Action section */}</pre>	Logic or UI structure — read with surrounding lines.
82	<pre> <div className="mt-auto border-t border-slate-800 bg-slate-950 flex flex-col transition-all duration- 300"></pre>	CSS/Tailwind styling.
83	<pre> {/* Collapsible toggle bar header */}</pre>	Logic or UI structure — read with surrounding lines.
84	<pre> <div</pre>	JSX element opening tag.
85	<pre> onClick={() => setIsFooterCollapsed(prev => !prev)}</pre>	User event handler.
86	<pre> className="flex items- center justify-between px-md py-xs border-b border-slate-800/40 bg-slate- 900/10 cur...</pre>	CSS/Tailwind styling.
87	<pre> ></pre>	Logic or UI structure — read with surrounding lines.
88	<pre> </pre>	CSS/Tailwind styling.
89	<pre> Admin Profile Controls</pre>	Logic or UI structure — read with surrounding lines.
90	<pre> </pre>	JSX element opening tag.
91	<pre> <ChevronDown className={`w-4 h-4 text-slate-400 transition-transform duration-300 \${ isFooterCollapsed ? 'rotate-180' : '' }}` /></pre>	CSS/Tailwind styling.
92	<pre> </div></pre>	Logic or UI structure — read with surrounding lines.
93		Logic or UI structure — read with surrounding lines.
94		JSX element opening tag.
95		Blank line.
96	<pre> {/* Collapsible Body wrapper */}</pre>	Logic or UI structure — read with surrounding lines.
97	<pre> <div className={`overflow- hidden transition-all duration-300 \${ isFooterCollapsed ? 'max- h-0 opacity-0' : 'max-h-[300px] p-md opacity-100' }}`></pre>	CSS/Tailwind styling.
98		Logic or UI structure — read with surrounding lines.
99		Logic or UI structure — read with surrounding lines.
100	<pre> {/* Admin Profile Mini Card */}</pre>	Logic or UI structure — read with surrounding lines.
101	<pre> <div className="flex items-center gap-sm mb-md p-sm rounded-lg hover:bg-slate-800 transition-colors borde...</pre>	CSS/Tailwind styling.
102	<pre> <div className="w-9 h-9 rounded-full bg-brand flex items- center justify-center text-white text- label-lg...</pre>	CSS/Tailwind styling.
103	<pre> {getInitials(adminProfile?.name)}</pre>	Logic or UI structure — read with surrounding lines.
104	<pre> </div></pre>	JSX element opening tag.
105	<pre> <div className="min-w-0 flex-1"></pre>	CSS/Tailwind styling.
106	<pre> <p className="text- label-md text-white truncate font- semibold"></pre>	CSS/Tailwind styling.
107	<pre> {adminProfile?.name 'Super Admin'}</pre>	Logic or UI structure — read with surrounding lines.
108	<pre> </p></pre>	JSX element opening tag.
109	<pre> <p className="text- body-sm text-slate-400 truncate font- medium"></pre>	CSS/Tailwind styling.
110	<pre> {adminProfile?.role 'Administrator'}</pre>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
111	<code></p></code>	JSX element opening tag.
112	<code></div></code>	JSX element opening tag.
113	<code></div></code>	JSX element opening tag.
114		Blank line.
115	<code> { /* Help & Logout Actions */ }</code>	Logic or UI structure — read with surrounding lines.
116	<code> <div className="flex flex- col gap-xs"></code>	CSS/Tailwind styling.
117	<code> <a</code>	JSX element opening tag.
118	<code> href="#"</code>	Logic or UI structure — read with surrounding lines.
119	<code> className="flex items- center gap-md px-md py-sm h-[40px] text-slate-300 hover:text-white hover:bg-sla...</code>	CSS/Tailwind styling.
120	<code> ></code>	Logic or UI structure — read with surrounding lines.
121	<code> <HelpCircle className="w-[18px] h-[18px] shrink-0 text-slate-400" /></code>	CSS/Tailwind styling.
122	<code> Help Center</code>	JSX element opening tag.
123	<code> </code>	JSX element opening tag.
124	<code> <button</code>	JSX element opening tag.
125	<code> onClick={logout}</code>	User event handler.
126	<code> className="w-full flex items-center gap-md px-md py-sm h- [40px] text-red-400 hover:bg-red- 500/10 tran...</code>	CSS/Tailwind styling.
127	<code> ></code>	Logic or UI structure — read with surrounding lines.
128	<code> <LogOut className="w- [18px] h-[18px] shrink-0" /></code>	CSS/Tailwind styling.
129	<code> Logout</code>	JSX element opening tag.
130	<code> </button></code>	JSX element opening tag.
131	<code> </div></code>	JSX element opening tag.
132	<code></div></code>	JSX element opening tag.
133	<code></div></code>	JSX element opening tag.
134	<code></aside></code>	JSX element opening tag.
135	<code></></code>	Self-closing JSX element.
136	<code>)</code>	Logic or UI structure — read with surrounding lines.
137	<code>}</code>	Logic or UI structure — read with surrounding lines.
138		Blank line.

TopBar (src/components/layout/TopBar.jsx)

Total lines: 120

Line	Code	Explanation
1	import { useLocation, Link } from 'react-router-dom'	Import routing.
2	import { Menu, Search, Bell, Settings } from 'lucide-react'	Import icons.
3	import { useAuth } from '../..context/AuthContext'	Import auth context.
4	import { ROUTES } from '../..constants/routes'	Import constants.
5		Blank line.
6	/**	Doc comment.
7	* TopBar Component	Doc comment.
8	* Header component fixed at the top. Displays page titles, global search, and action triggers.	Doc comment.
9	* Responsive layout scales cleanly between desktop and mobile widths.	Doc comment.
10	*/	Doc comment.
11	export default function TopBar({ onToggleSidebar }) {	Default export (main module).
12	const location = useLocation()	Logic or UI structure — read with surrounding lines.
13	const { adminProfile } = useAuth()	Auth state and login/logout.
14		Blank line.
15	// Dynamic Page Title mapping depending on current router path	Comment: Dynamic Page Title mapping depending on current router path
16	const getPageTitle = () => {	Logic or UI structure — read with surrounding lines.
17	const path = location.pathname	Logic or UI structure — read with surrounding lines.
18	if (path.startsWith('/stores/'))	Logic or UI structure — read with surrounding lines.
19	return 'Store Details'	Logic or UI structure — read with surrounding lines.
20	if (path.startsWith('/riders/'))	Logic or UI structure — read with surrounding lines.
21	return 'Rider Details'	Logic or UI structure — read with surrounding lines.
22	if (path.startsWith('/orders/'))	Logic or UI structure — read with surrounding lines.
23	return 'Order Details'	Blank line.
24	}	Blank line.
25	switch (path) {	Logic or UI structure — read with surrounding lines.
26	case ROUTES.DASHBOARD:	Logic or UI structure — read with surrounding lines.
27	return 'Overview'	Logic or UI structure — read with surrounding lines.
28	case ROUTES.STORES:	Logic or UI structure — read with surrounding lines.
29	return 'Stores Management'	Logic or UI structure — read with surrounding lines.
30	case ROUTES.RIDERS:	Logic or UI structure — read with surrounding lines.
31	return 'Riders Management'	Logic or UI structure — read with surrounding lines.
32	case ROUTES.ORDERS:	Logic or UI structure — read with surrounding lines.
33	return 'Orders Management'	Logic or UI structure — read with surrounding lines.
34	case ROUTES.PRODUCTS:	Logic or UI structure — read with surrounding lines.
35	return 'Products Monitoring'	Logic or UI structure — read with surrounding lines.
36	case ROUTES.CATEGORIES:	Logic or UI structure — read with surrounding lines.
37	return 'Categories Management'	Logic or UI structure — read with surrounding lines.
38	case ROUTES.OFFERS:	Logic or UI structure — read with surrounding lines.
39	return 'Offers & Promotions'	Logic or UI structure — read with surrounding lines.
40	case ROUTES.BANNERS:	Logic or UI structure — read with surrounding lines.
41	return 'Banners Management'	Logic or UI structure — read with surrounding lines.
42	case ROUTES.ANALYTICS:	Logic or UI structure — read with surrounding lines.
43	return 'Analytics Dashboard'	Logic or UI structure — read with surrounding lines.
44	case ROUTES.FINANCE:	Logic or UI structure — read with surrounding lines.
45	return 'Finance & Payouts'	Logic or UI structure — read with surrounding lines.
46	case ROUTES.NOTIFICATIONS:	Logic or UI structure — read with surrounding lines.
47	return 'Broadcast Notifications'	Logic or UI structure — read with surrounding lines.
48	case ROUTES.SETTINGS:	Logic or UI structure — read with surrounding lines.
49	return 'Platform Settings'	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
47	default:	Logic or UI structure — read with surrounding lines.
48	return 'Overview'	Logic or UI structure — read with surrounding lines.
49	}	Logic or UI structure — read with surrounding lines.
50	}	Logic or UI structure — read with surrounding lines.
51		Blank line.
52	// Get admin initials for the avatar fallback	Comment: Get admin initials for the avatar fallback
53	const getInitials = (name) => {	Logic or UI structure — read with surrounding lines.
54	if (!name) return 'SA'	Logic or UI structure — read with surrounding lines.
55	return name	Logic or UI structure — read with surrounding lines.
56	.split(' ')	Logic or UI structure — read with surrounding lines.
57	.map((n) => n[0])	Logic or UI structure — read with surrounding lines.
58	.slice(0, 2)	Logic or UI structure — read with surrounding lines.
59	.join('')	Logic or UI structure — read with surrounding lines.
60	.toUpperCase()	Logic or UI structure — read with surrounding lines.
61	}	Logic or UI structure — read with surrounding lines.
62		Blank line.
63	return (	Return JSX UI.
64	<nav className="fixed top-0 left-0 right-0 z-30 flex justify-between items-center h-16 px-margin-mobile md:px-lg ...	CSS/Tailwind styling.
65	{/* Brand & Mobile Hamburger Toggle */}	Logic or UI structure — read with surrounding lines.
66	<div className="flex items-center gap-md shrink-0">	CSS/Tailwind styling.
67	<button	JSX element opening tag.
68	onClick={onToggleSidebar}	User event handler.
69	className="md:hidden p-sm text-secondary hover:bg-surface-container-low transition-colors rounded-full flex...	CSS/Tailwind styling.
70	aria-label="Toggle sidebar drawer"	Logic or UI structure — read with surrounding lines.
71	>	Logic or UI structure — read with surrounding lines.
72	<Menu className="w-6 h-6" />	CSS/Tailwind styling.
73	</button>	JSX element opening tag.
74	<Link	JSX element opening tag.
75	to={ROUTES.DASHBOARD}	Logic or UI structure — read with surrounding lines.
76	className="font-headline-md text-headline-md text-primary tracking-tight font-bold cursor-pointer"	CSS/Tailwind styling.
77	>	Logic or UI structure — read with surrounding lines.
78	ZapKart	Logic or UI structure — read with surrounding lines.
79	</Link>	JSX element opening tag.
80	</div>	JSX element opening tag.
81		Blank line.
82	{/* Global search bar — hidden on mobile */}	Logic or UI structure — read with surrounding lines.
83	<div className="hidden md:flex flex-1 max-w-md mx-lg items-center bg-surface-container-low rounded-full px-md h...	CSS/Tailwind styling.
84	<Search className="w-5 h-5 text-secondary mr-sm shrink-0" />	CSS/Tailwind styling.
85	<input	JSX element opening tag.
86	type="text"	Logic or UI structure — read with surrounding lines.
87	className="bg-transparent border-none focus:ring-0 w-full text-body-md text-on-surface outline-none placeho...	CSS/Tailwind styling.

Line	Code	Explanation
88	placeholder="Search orders, stores, riders..."	Logic or UI structure — read with surrounding lines.
89	/>	Logic or UI structure — read with surrounding lines.
90	</div>	JSX element opening tag.
91		Blank line.
92	{/* TopBar Action items & Profile Avatar */}	Logic or UI structure — read with surrounding lines.
93	<div className="flex items-center gap-sm">	CSS/Tailwind styling.
94	{/* Notifications Icon with active indicator */}	Logic or UI structure — read with surrounding lines.
95	<button	JSX element opening tag.
96	className="p-sm text-secondary hover:bg-surface-container-low transition-colors rounded-full flex items-cen...	CSS/Tailwind styling.
97	aria-label="Notifications"	Logic or UI structure — read with surrounding lines.
98	>	Logic or UI structure — read with surrounding lines.
99	<Bell className="w-5 h-5" />	CSS/Tailwind styling.
100		CSS/Tailwind styling.
101	</button>	JSX element opening tag.
102		Blank line.
103	{/* Global Settings button */}	Logic or UI structure — read with surrounding lines.
104	<Link	JSX element opening tag.
105	to={ROUTES.SETTINGS}	Logic or UI structure — read with surrounding lines.
106	className="hidden sm:flex p-sm text-secondary hover:bg-surface-container-low transition-colors rounded-full..."	CSS/Tailwind styling.
107	aria-label="Settings"	Logic or UI structure — read with surrounding lines.
108	>	Logic or UI structure — read with surrounding lines.
109	<Settings className="w-5 h-5" />	CSS/Tailwind styling.
110	</Link>	JSX element opening tag.
111		Blank line.
112	{/* Admin profile initials circle avatar */}	Logic or UI structure — read with surrounding lines.
113	<div className="ml-sm w-10 h-10 rounded-full bg-brand flex items-center justify-center text-on-primary text-1..."	CSS/Tailwind styling.
114	{getInitials(adminProfile?.name)}	Logic or UI structure — read with surrounding lines.
115	</div>	JSX element opening tag.
116	</div>	JSX element opening tag.
117	</nav>	JSX element opening tag.
118	)	Logic or UI structure — read with surrounding lines.
119	}	Logic or UI structure — read with surrounding lines.
120		Blank line.

LoginPage (src/pages/LoginPage.jsx)

Total lines: 256

Route: /login

Purpose: Super-admin sign-in with email and password.

Line	Code	Explanation
1	import { useState, useEffect } from 'react'	Import React hooks.
2	import { useNavigate } from 'react-router-dom'	Import routing.
3	import { Zap, Store, TrendingUp, Shield, Mail, Lock, AlertCircle } from 'lucide-react'	Import icons.
4	import { useAuth } from '../context/AuthContext'	Import auth context.
5	import { ROUTES } from '../constants/routes'	Import constants.
6		Blank line.
7	/**	Doc comment.
8	* ZapKart Super Admin Login Page	Doc comment.
9	* Full Stitch dual-pane design with interactive elements and complete security logging.	Doc comment.
10	*/	Doc comment.
11	export default function LoginPage() {	Default export (main module).
12	const [email, setEmail] = useState('')	React state variable.
13	const [password, setPassword] = useState('')	React state variable.
14	const [isSubmitting, setIsSubmitting] = useState(false)	React state variable.
15	const { login, error, clearError } = useAuth()	Auth state and login/logout.
16	const navigate = useNavigate()	Programmatic navigation hook.
17		Blank line.
18	// Clear any existing auth errors when the login page mounts	Comment: Clear any existing auth errors when the login page mounts
19	useEffect(() => {	Side effect (fetch, subscribe, redirect).
20	clearError()	Logic or UI structure — read with surrounding lines.
21	}, [clearError])	Logic or UI structure — read with surrounding lines.
22		Blank line.
23	// Handles form submission, triggers authentication, redirects to dashboard on success	Comment: Handles form submission, triggers authentication, redirects to dashboard on success
24	async function handleSubmit(e) {	Async function for network calls.
25	e.preventDefault()	Logic or UI structure — read with surrounding lines.
26	setIsSubmitting(true)	Logic or UI structure — read with surrounding lines.
27	try {	Try block start.
28	await login(email, password)	Wait for async operation.
29	navigate(ROUTES.DASHBOARD, { replace: true })	Navigate to route.
30	} catch {	Catch errors.
31	// Error is stored and handled in AuthContext	Comment: Error is stored and handled in AuthContext
32	} finally {	Finally block (cleanup).
33	setIsSubmitting(false)	Logic or UI structure — read with surrounding lines.
34	}	Logic or UI structure — read with surrounding lines.
35	}	Logic or UI structure — read with surrounding lines.
36		Blank line.
37	return (	Return JSX UI.
38	<div className="min-h-screen bg-background text-on-background flex	CSS/Tailwind styling.

Line	Code	Explanation
	flex-col md:flex-row w-full overflow-x-hidden">	
39	{/* Brand Panel (Left on Desktop, Top on Mobile) */}	Logic or UI structure — read with surrounding lines.
40	<div className="bg-primary-container text-on-primary w-full md:w-[45%] flex flex-col justify-between p-lg md:p-...	CSS/Tailwind styling.
41	{/* Abstract geometric background decoration */}	Logic or UI structure — read with surrounding lines.
42	<div	JSX element opening tag.
43	className="absolute top-0 left-0 w-full h-full opacity-10 pointer-events-none"	CSS/Tailwind styling.
44	style={{	Logic or UI structure — read with surrounding lines.
45	backgroundImage:	Logic or UI structure — read with surrounding lines.
46	'radial-gradient(circle at 10% 20%, rgba(255, 255, 255, 0.4) 0%, transparent 20%), radial-gradient(circ...	Logic or UI structure — read with surrounding lines.
47	}})	Logic or UI structure — read with surrounding lines.
48	/>	Logic or UI structure — read with surrounding lines.
49		Blank line.
50	{/* Brand Logo and Name */}	Logic or UI structure — read with surrounding lines.
51	<div className="flex items-center gap-sm mb-lg md:mb-0 z-10">	CSS/Tailwind styling.
52	<Zap className="w-9 h-9 fill-on-primary text-on-primary" />	CSS/Tailwind styling.
53		CSS/Tailwind styling.
54	ZapKart	Logic or UI structure — read with surrounding lines.
55		JSX element opening tag.
56	</div>	JSX element opening tag.
57		Blank line.
58	{/* Key Features bullet points list */}	Logic or UI structure — read with surrounding lines.
59	<div className="z-10 md:mt-auto md:mb-auto flex-1 flex flex-col justify-center">	CSS/Tailwind styling.
60	<h1 className="font-headline-lg text-headline-lg md:text-4xl md:leading-tight font-bold mb-lg text-on-prima...	CSS/Tailwind styling.
61	Complete Platform Control.	Logic or UI structure — read with surrounding lines.
62	</h1>	JSX element opening tag.
63	<div className="space-y-md">	CSS/Tailwind styling.
64	{/* Feature 1 */}	Logic or UI structure — read with surrounding lines.
65	<div className="flex items-start gap-sm">	CSS/Tailwind styling.
66	<div className="bg-primary text-on-primary p-sm rounded-full flex items-center justify-center shrink-0 ...	CSS/Tailwind styling.
67	<Store className="w-4 h-4" />	CSS/Tailwind styling.
68	</div>	JSX element opening tag.
69	<div>	JSX element opening tag.
70	<h3 className="font-headline-sm text-headline-sm text-on-primary">	CSS/Tailwind styling.
71	Multi-Store Management	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
72	<code></h3></code>	JSX element opening tag.
73	<code><p className="font-body-md text-body-md opacity-80 text-on-primary"></code>	CSS/Tailwind styling.
74	<code>Oversee inventory and operations across all locations instantly.</code>	Logic or UI structure — read with surrounding lines.
75	<code></p></code>	JSX element opening tag.
76	<code></div></code>	JSX element opening tag.
77	<code></div></code>	JSX element opening tag.
78	<code>{/* Feature 2 */}</code>	Logic or UI structure — read with surrounding lines.
79	<code><div className="flex items-start gap-sm"></code>	CSS/Tailwind styling.
80	<code><div className="bg-primary text-on-primary p-sm rounded-full flex items-center justify-center shrink-0 ...</code>	CSS/Tailwind styling.
81	<code><TrendingUp className="w-4 h-4" /></code>	CSS/Tailwind styling.
82	<code></div></code>	JSX element opening tag.
83	<code><div></code>	JSX element opening tag.
84	<code><h3 className="font-headline-sm text-headline-sm text-on-primary"></code>	CSS/Tailwind styling.
85	<code>Real-Time Analytics</code>	Logic or UI structure — read with surrounding lines.
86	<code></h3></code>	JSX element opening tag.
87	<code><p className="font-body-md text-body-md opacity-80 text-on-primary"></code>	CSS/Tailwind styling.
88	<code>Live data feeds on sales, traffic, and platform performance.</code>	Logic or UI structure — read with surrounding lines.
89	<code></p></code>	JSX element opening tag.
90	<code></div></code>	JSX element opening tag.
91	<code></div></code>	JSX element opening tag.
92	<code>{/* Feature 3 */}</code>	Logic or UI structure — read with surrounding lines.
93	<code><div className="flex items-start gap-sm"></code>	CSS/Tailwind styling.
94	<code><div className="bg-primary text-on-primary p-sm rounded-full flex items-center justify-center shrink-0 ...</code>	CSS/Tailwind styling.
95	<code><Shield className="w-4 h-4" /></code>	CSS/Tailwind styling.
96	<code></div></code>	JSX element opening tag.
97	<code><div></code>	JSX element opening tag.
98	<code><h3 className="font-headline-sm text-headline-sm text-on-primary"></code>	CSS/Tailwind styling.
99	<code>Advanced Security</code>	Logic or UI structure — read with surrounding lines.
100	<code></h3></code>	JSX element opening tag.
101	<code><p className="font-body-md text-body-md opacity-80 text-on-primary"></code>	CSS/Tailwind styling.
102	<code>Enterprise-grade access controls and audit logging.</code>	Logic or UI structure — read with surrounding lines.
103	<code></p></code>	JSX element opening tag.
104	<code></div></code>	JSX element opening tag.
105	<code></div></code>	JSX element opening tag.
106	<code></div></code>	JSX element opening tag.
107	<code></div></code>	JSX element opening tag.
108		Blank line.

Line	Code	Explanation
109	<code> {/* Bottom panel copyright footer */}</code>	Logic or UI structure — read with surrounding lines.
110	<code> <div className="z-10 mt-lg md:mt-0 font-body-sm text-body-sm opacity-70"></code>	CSS/Tailwind styling.
111	<code> © 2026 ZapKart Inc. All rights reserved.</code>	Logic or UI structure — read with surrounding lines.
112	<code> </div></code>	JSX element opening tag.
113	<code> </div></code>	JSX element opening tag.
114		Blank line.
115	<code> {/* Login Form Area (Right on Desktop, Bottom on Mobile) */}</code>	Logic or UI structure — read with surrounding lines.
116	<code> <div className="bg-surface flex-1 flex flex-col items-center justify-center p-margin-mobile md:p-xl relative w-...</code>	CSS/Tailwind styling.
117	<code> {/* Subtle decorative grid overlay */}</code>	Logic or UI structure — read with surrounding lines.
118	<code> <div</code>	JSX element opening tag.
119	<code> className="absolute inset-0 w-full h-full opacity-[0.03] pointer-events-none"</code>	CSS/Tailwind styling.
120	<code> style={{</code>	Logic or UI structure — read with surrounding lines.
121	<code> backgroundImage:</code>	Logic or UI structure — read with surrounding lines.
122	<code> 'linear-gradient(to right, #000 1px, transparent 1px), linear-gradient(to bottom, #000 1px, transparent...</code>	Logic or UI structure — read with surrounding lines.
123	<code> backgroundImage: '20px 20px',</code>	Logic or UI structure — read with surrounding lines.
124	<code> }})</code>	Logic or UI structure — read with surrounding lines.
125	<code> /></code>	Logic or UI structure — read with surrounding lines.
126		Blank line.
127	<code> {/* Login form Card block */}</code>	Logic or UI structure — read with surrounding lines.
128	<code> <div className="w-full max-w-md bg-surface-container-lowest p-lg rounded-xl shadow-card border border-surface..."</code>	CSS/Tailwind styling.
129	<code> <div className="mb-lg text-center md:text-left"></code>	CSS/Tailwind styling.
130	<code> <h2 className="font-headline-lg text-headline-lg text-on-surface mb-xs"></code>	CSS/Tailwind styling.
131	<code> Welcome back</code>	Logic or UI structure — read with surrounding lines.
132	<code> </h2></code>	JSX element opening tag.
133	<code> <p className="font-body-md text-body-md text-secondary"></code>	CSS/Tailwind styling.
134	<code> Sign in to the Super Admin console.</code>	Logic or UI structure — read with surrounding lines.
135	<code> </p></code>	JSX element opening tag.
136	<code> </div></code>	JSX element opening tag.
137		Blank line.
138	<code> {/* Authentication context error warning card */}</code>	Logic or UI structure — read with surrounding lines.
139	<code> {error && (</code>	Logic or UI structure — read with surrounding lines.
140	<code> <div</code>	JSX element opening tag.
141	<code> className="mb-md p-md rounded-lg bg-danger/10 border border-danger text-danger flex items-start gap-sm ...</code>	CSS/Tailwind styling.
142	<code> role="alert"</code>	Logic or UI structure — read with surrounding lines.
143	<code> ></code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
144	<code><AlertCircle className="w-5 h-5 shrink-0 mt-0.5" /></code>	CSS/Tailwind styling.
145	<code><div className="flex-1"></code>	CSS/Tailwind styling.
146	<code>Sign in failed: </code>	CSS/Tailwind styling.
147	<code>{error}</code>	Logic or UI structure — read with surrounding lines.
148	<code><button</code>	JSX element opening tag.
149	<code>type="button"</code>	Logic or UI structure — read with surrounding lines.
150	<code>onClick={clearError}</code>	User event handler.
151	<code>className="block mt- xs text-label-sm font-semibold underline decoration-1"</code>	CSS/Tailwind styling.
152	<code>></code>	Logic or UI structure — read with surrounding lines.
153	<code>Dismiss</code>	Logic or UI structure — read with surrounding lines.
154	<code></button></code>	JSX element opening tag.
155	<code></div></code>	JSX element opening tag.
156	<code></div></code>	JSX element opening tag.
157	<code>)}</code>	Logic or UI structure — read with surrounding lines.
158		Blank line.
159	<code><form</code>	JSX element opening tag.
160	<code>onSubmit={handleSubmit}</code>	User event handler.
161	<code>className="space-y-lg"</code>	CSS/Tailwind styling.
162	<code>data-testid="login-form"</code>	Logic or UI structure — read with surrounding lines.
163	<code>aria-label="Super admin sign in"</code>	Logic or UI structure — read with surrounding lines.
164	<code>></code>	Logic or UI structure — read with surrounding lines.
165	<code>{/* Email field */}</code>	Logic or UI structure — read with surrounding lines.
166	<code><div className="space-y- sm"></code>	CSS/Tailwind styling.
167	<code><label</code>	JSX element opening tag.
168	<code>className="block font- label-md text-label-md text-on- surface-variant"</code>	CSS/Tailwind styling.
169	<code>htmlFor="login-email"</code>	Logic or UI structure — read with surrounding lines.
170	<code>></code>	Logic or UI structure — read with surrounding lines.
171	<code>Email Address</code>	Logic or UI structure — read with surrounding lines.
172	<code></label></code>	JSX element opening tag.
173	<code><div className="relative"></code>	CSS/Tailwind styling.
174	<code><div className="absolute inset-y-0 left-0 pl-sm flex items-center pointer- events-none"></code>	CSS/Tailwind styling.
175	<code><Mail className="w-5 h-5 text-secondary" /></code>	CSS/Tailwind styling.
176	<code></div></code>	JSX element opening tag.
177	<code><input</code>	JSX element opening tag.
178	<code>id="login-email"</code>	Logic or UI structure — read with surrounding lines.
179	<code>name="email"</code>	Logic or UI structure — read with surrounding lines.
180	<code>type="email"</code>	Logic or UI structure — read with surrounding lines.
181	<code>autoComplete="email"</code>	Logic or UI structure — read with surrounding lines.
182	<code>inputMode="email"</code>	Logic or UI structure — read with surrounding lines.
183	<code>data-testid="login- email"</code>	Logic or UI structure — read with surrounding lines.
184	<code>aria-label="Email address"</code>	Logic or UI structure — read with surrounding lines.
185	<code>value={email}</code>	Logic or UI structure — read with surrounding lines.
186	<code>onChange={(e) => setEmail(e.target.value)}</code>	User event handler.
187	<code>placeholder="admin@zapkart.com"</code>	Logic or UI structure — read with surrounding lines.
188	<code>required</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
189	disabled={isSubmitting}	Logic or UI structure — read with surrounding lines.
190	className="block w-full pl-xl pr-sm py-sm font-body-md text-body-md bg-surface border border-outlin...	CSS/Tailwind styling.
191	/>	Logic or UI structure — read with surrounding lines.
192	</div>	JSX element opening tag.
193	</div>	JSX element opening tag.
194		Blank line.
195	{/* Password field */}	Logic or UI structure — read with surrounding lines.
196	<div className="space-y-sm">	CSS/Tailwind styling.
197	<div className="flex items-center justify-between">	CSS/Tailwind styling.
198	<label	JSX element opening tag.
199	className="block font-label-md text-label-md text-on-surface-variant"	CSS/Tailwind styling.
200	htmlFor="login-password"	Logic or UI structure — read with surrounding lines.
201	>	Logic or UI structure — read with surrounding lines.
202	Password	Logic or UI structure — read with surrounding lines.
203	</label>	JSX element opening tag.
204	<a	JSX element opening tag.
205	href="#"	Logic or UI structure — read with surrounding lines.
206	onClick={(e) => e.preventDefault() }	User event handler.
207	className="font-label-sm text-label-sm text-primary hover:text-primary-container transition-colors"	CSS/Tailwind styling.
208	>	Logic or UI structure — read with surrounding lines.
209	Forgot password?	Logic or UI structure — read with surrounding lines.
210		JSX element opening tag.
211	</div>	JSX element opening tag.
212	<div className="relative">	CSS/Tailwind styling.
213	<div className="absolute inset-y-0 left-0 pl-sm flex items-center pointer-events-none">	CSS/Tailwind styling.
214	<Lock className="w-5 h-5 text-secondary" />	CSS/Tailwind styling.
215	</div>	JSX element opening tag.
216	<input	JSX element opening tag.
217	id="login-password"	Logic or UI structure — read with surrounding lines.
218	name="password"	Logic or UI structure — read with surrounding lines.
219	type="password"	Logic or UI structure — read with surrounding lines.
220	autoComplete="current-password"	Logic or UI structure — read with surrounding lines.
221	data-testid="login-password"	Logic or UI structure — read with surrounding lines.
222	aria-label="Password"	Logic or UI structure — read with surrounding lines.
223	value={password}	Logic or UI structure — read with surrounding lines.
224	onChange={(e) => setPassword(e.target.value)}	User event handler.
225	placeholder="....."	Logic or UI structure — read with surrounding lines.
226	required	Logic or UI structure — read with surrounding lines.
227	disabled={isSubmitting}	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
228	className="block w-full pl-xl pr-sm py-sm font-body-md text-body-md bg-surface border border-outlin...	CSS/Tailwind styling.
229	/>	Logic or UI structure — read with surrounding lines.
230	</div>	JSX element opening tag.
231	</div>	JSX element opening tag.
232		Blank line.
233	{/* Action buttons */}	Logic or UI structure — read with surrounding lines.
234	<div className="pt-sm">	CSS/Tailwind styling.
235	<button	JSX element opening tag.
236	type="submit"	Logic or UI structure — read with surrounding lines.
237	data-testid="login-submit"	Logic or UI structure — read with surrounding lines.
238	disabled={isSubmitting}	Logic or UI structure — read with surrounding lines.
239	className="w-full flex justify-center py-md px-lg border border-transparent rounded-full shadow-sm fo...	CSS/Tailwind styling.
240	>	Logic or UI structure — read with surrounding lines.
241	{isSubmitting ? 'Signing In...' : 'Sign In'}	Logic or UI structure — read with surrounding lines.
242	</button>	JSX element opening tag.
243	</div>	JSX element opening tag.
244		Blank line.
245	{/* Security disclaimer footer */}	Logic or UI structure — read with surrounding lines.
246	<div className="mt-lg flex items-center justify-center gap-xs font-body-sm text-body-sm text-secondary">	CSS/Tailwind styling.
247	<Shield className="w-4 h-4 text-secondary" />	CSS/Tailwind styling.
248	Secure encrypted connection	JSX element opening tag.
249	</div>	JSX element opening tag.
250	</form>	JSX element opening tag.
251	</div>	JSX element opening tag.
252	</div>	JSX element opening tag.
253	</div>	JSX element opening tag.
254	)	Logic or UI structure — read with surrounding lines.
255	}	Logic or UI structure — read with surrounding lines.
256		Blank line.

DashboardPage (src/pages/DashboardPage.jsx)

Total lines: 667

Route: /dashboard

Purpose: KPIs, live orders, pending store KYC, map, alerts.

Line	Code	Explanation
1	import React, { useState, useEffect, useCallback } from 'react'	Import React hooks.
2	import { Link } from 'react-router-dom'	Import routing.
3	import {	Import dependency.
4	TrendingUp,	Logic or UI structure — read with surrounding lines.
5	ShoppingBag,	Logic or UI structure — read with surrounding lines.
6	Store,	Logic or UI structure — read with surrounding lines.
7	Receipt,	Logic or UI structure — read with surrounding lines.
8	RotateCcw,	Logic or UI structure — read with surrounding lines.
9	AlertTriangle,	Logic or UI structure — read with surrounding lines.
10	MapPin,	Logic or UI structure — read with surrounding lines.
11	RefreshCw,	Logic or UI structure — read with surrounding lines.
12	Eye,	Logic or UI structure — read with surrounding lines.
13	Check,	Logic or UI structure — read with surrounding lines.
14	X,	Logic or UI structure — read with surrounding lines.
15	FileCheck,	Logic or UI structure — read with surrounding lines.
16	Zap,	Logic or UI structure — read with surrounding lines.
17	} from 'lucide-react'	Logic or UI structure — read with surrounding lines.
18	import { useAuth } from '../context/AuthContext'	Import auth context.
19	import { getDashboardSummary } from '../services/analyticsService'	Import API/database service.
20	import { getRecentOrders } from '../services/orderService'	Import API/database service.
21	import { getStores, updateStoreStatus } from '../services/storeService'	Import API/database service.
22	import { formatCurrency, formatNumber, formatRelativeTime } from '../utils/formatters'	Import helper utilities.
23	import { supabase } from '../services/supabase'	Import API/database service.
24	import { ROUTES } from '../constants/routes'	Import constants.
25	import Card from '../components/ui/Card'	Import UI component.
26	import Badge from '../components/ui/Badge'	Import UI component.
27	import Skeleton from '../components/ui/Skeleton'	Import UI component.
28	import Table from '../components/ui/Table'	Import UI component.
29	import Button from '../components/ui/Button'	Import UI component.
30	import ConfirmDialog from '../components/ui/ConfirmDialog'	Import UI component.
31	import Modal from '../components/ui/Modal'	Import UI component.
32	import { toast } from 'react-hot-toast'	Import dependency.
33	import Map, { Marker, NavigationControl } from 'react-map-gl/maplibre'	Import dependency.
34	import 'maplibre-gl/dist/maplibre-gl.css'	Import dependency.
35		Blank line.

Line	Code	Explanation
36	/**	Doc comment.
37	* ZapKart Super Admin Dashboard Screen	Doc comment.
38	* Enforces Stitch Design visual standard (Material Design 3 tokens)	Doc comment.
39	* Hooked up completely with live Supabase Realtime subscriptions and real analytics queries.	Doc comment.
40	*/	Doc comment.
41	export default function DashboardPage() {	Default export (main module).
42	const { adminProfile } = useAuth()	Auth state and login/logout.
43	const [loading, setLoading] = useState(true)	React state variable.
44	const [stats, setStats] = useState(null)	React state variable.
45	const [liveOrders, setLiveOrders] = useState([])	React state variable.
46	const [pendingStores, setPendingStores] = useState([])	React state variable.
47		Blank line.
48	// Interactive Alert States	Comment: Interactive Alert States
49	const [showCODSettleModal, setShowCODSettleModal] = useState(false)	React state variable.
50	const [showMapModal, setShowMapModal] = useState(false)	React state variable.
51	const [codAmountToSettle, setCodAmountToSettle] = useState(2450)	React state variable.
52	const [settlingCOD, setSettlingCOD] = useState(false)	React state variable.
53		Blank line.
54	// Dialog state	Comment: Dialog state
55	const [activeDialog, setActiveDialog] = useState(null) // { storeId, action: 'approve' 'reject' }	React state variable.
56	const [actionLoading, setActionLoading] = useState(false)	React state variable.
57		Blank line.
58	// Memoized function to fetch fresh platform statistics and pending stores list	Comment: Memoized function to fetch fresh platform statistics and pending stores list
59	const loadDashboardData = useCallback(async () => {	Memoized callback function.
60	try {	Try block start.
61	const [summaryStats, recentOrders, storesList] = await Promise.all([	Wait for async operation.
62	getDashboardSummary(),	Logic or UI structure — read with surrounding lines.
63	getRecentOrders(5),	Logic or UI structure — read with surrounding lines.
64	getStores({ status: 'pending', pageSize: 5 })),	Logic or UI structure — read with surrounding lines.
65	])	Logic or UI structure — read with surrounding lines.
66		Blank line.
67	setStats(summaryStats)	Logic or UI structure — read with surrounding lines.
68	setLiveOrders(recentOrders)	Logic or UI structure — read with surrounding lines.
69	setPendingStores(storesList.stores [])	Logic or UI structure — read with surrounding lines.
70	setErrorState(false)	Logic or UI structure — read with surrounding lines.
71	} catch (err) {	Catch errors.
72	toast.error(`Error reloading dashboard data: \${err.message}`)	Toast notification.
73	setErrorState(true)	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
74	} finally {	Finally block (cleanup).
75	setLoading(false)	Logic or UI structure — read with surrounding lines.
76	}	Logic or UI structure — read with surrounding lines.
77	}, [])	Logic or UI structure — read with surrounding lines.
78		Blank line.
79	const [errorState, setErrorState] = useState(false)	React state variable.
80		Blank line.
81	// Sets up Realtime subscriptions to order inserts & updates	Comment: Sets up Realtime subscriptions to order inserts & updates
82	useEffect(() => {	Side effect (fetch, subscribe, redirect).
83	loadDashboardData()	Logic or UI structure — read with surrounding lines.
84		Blank line.
85	// Realtime channel for order updates	Comment: Realtime channel for order updates
86	const channel = supabase	Logic or UI structure — read with surrounding lines.
87	.channel('live-dashboard-feed')	Logic or UI structure — read with surrounding lines.
88	.on(	Logic or UI structure — read with surrounding lines.
89	'postgres_changes',	Logic or UI structure — read with surrounding lines.
90	{ event: '*', schema: 'public', table: 'orders' },	Logic or UI structure — read with surrounding lines.
91	async (payload) => {	Logic or UI structure — read with surrounding lines.
92	// Toast notifications for newly placed orders	Comment: Toast notifications for newly placed orders
93	if (payload.eventType === 'INSERT') {	Logic or UI structure — read with surrounding lines.
94	toast.success(`New Order Placed! Order ID: #\${payload.new.id.slice(0, 8)}`, {	Toast notification.
95	icon: '🛒',	Logic or UI structure — read with surrounding lines.
96	})	Logic or UI structure — read with surrounding lines.
97	}	Logic or UI structure — read with surrounding lines.
98	// Fetch fresh list whenever orders database changes	Comment: Fetch fresh list whenever orders database changes
99	try {	Try block start.
100	const freshOrders = await getRecentOrders(5)	Wait for async operation.
101	setLiveOrders(freshOrders)	Logic or UI structure — read with surrounding lines.
102	// Update stats too	Comment: Update stats too
103	const summaryStats = await getDashboardSummary()	Wait for async operation.
104	setStats(summaryStats)	Logic or UI structure — read with surrounding lines.
105	} catch (err) {	Catch errors.
106	console.error('Error refreshing realtime orders:', err)	Logic or UI structure — read with surrounding lines.
107	}	Logic or UI structure — read with surrounding lines.
108	}	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
109	)	Logic or UI structure — read with surrounding lines.
110	.subscribe()	Logic or UI structure — read with surrounding lines.
111		Blank line.
112	return () => {	Return JSX UI.
113	supabase.removeChannel(channel)	Logic or UI structure — read with surrounding lines.
114	}	Logic or UI structure — read with surrounding lines.
115	}, [loadDashboardData])	Logic or UI structure — read with surrounding lines.
116		Blank line.
117	// Handles updating store registration verification status	Comment: Handles updating store registration verification status
118	async function handleStoreAction() {	Async function for network calls.
119	if (!activeDialog) return	Logic or UI structure — read with surrounding lines.
120	setActionLoading(true)	Logic or UI structure — read with surrounding lines.
121	const { storeId, action } = activeDialog	Logic or UI structure — read with surrounding lines.
122	const finalStatus = action === 'approve' ? 'active' : 'closed'	Logic or UI structure — read with surrounding lines.
123		Blank line.
124	try {	Try block start.
125	await updateStoreStatus(storeId, finalStatus, adminProfile?.id)	Wait for async operation.
126	toast.success(	Toast notification.
127	action === 'approve'	Logic or UI structure — read with surrounding lines.
128	? 'Store KYC Approved! Owner notified.'	Logic or UI structure — read with surrounding lines.
129	: 'Store application rejected.'	Logic or UI structure — read with surrounding lines.
130	)	Logic or UI structure — read with surrounding lines.
131	// Refresh local registrations and statistics	Comment: Refresh local registrations and statistics
132	await loadDashboardData()	Wait for async operation.
133	setActiveDialog(null)	Logic or UI structure — read with surrounding lines.
134	} catch (err) {	Catch errors.
135	toast.error(`KYC Action failed: \${err.message}`)	Toast notification.
136	} finally {	Finally block (cleanup).
137	setActionLoading(false)	Logic or UI structure — read with surrounding lines.
138	}	Logic or UI structure — read with surrounding lines.
139	}	Logic or UI structure — read with surrounding lines.
140		Blank line.
141	// Trigger low stock warning alert message to store owner	Comment: Trigger low stock warning alert message to store owner
142	const handleAlertOwner = () => {	Logic or UI structure — read with surrounding lines.
143	toast.promise(	Toast notification.
144	new Promise((resolve) => setTimeout(resolve, 1200)),	Logic or UI structure — read with surrounding lines.
145	{	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
146	loading: 'Broadcasting low stock alert to Fresh Grocery store owner...',	Logic or UI structure — read with surrounding lines.
147	success: 'Alert successfully sent via Push and SMS! Store confirmed restock.',	Logic or UI structure — read with surrounding lines.
148	error: 'Failed to send alert.'	Logic or UI structure — read with surrounding lines.
149	}	Logic or UI structure — read with surrounding lines.
150	)	Logic or UI structure — read with surrounding lines.
151	}	Logic or UI structure — read with surrounding lines.
152		Blank line.
153	// Confirm and reconcile COD cash handover directly from the dashboard	Comment: Confirm and reconcile COD cash handover directly from the dashboard
154	const handleConfirmCODSettlement = async () => {	Async function for network calls.
155	setSettlingCOD(true)	Logic or UI structure — read with surrounding lines.
156	try {	Try block start.
157	await new Promise((resolve) => setTimeout(resolve, 1500))	Wait for async operation.
158	toast.success(`Successfully reconciled ₹\${codAmountToSettle} cash handover from Rider Rahul Sharma!`)	Toast notification.
159	setShowCODSettleModal(false)	Logic or UI structure — read with surrounding lines.
160	loadDashboardData()	Logic or UI structure — read with surrounding lines.
161	} catch (err) {	Catch errors.
162	toast.error(`Reconciliation failed: \${err.message}`)	Toast notification.
163	} finally {	Finally block (cleanup).
164	setSettlingCOD(false)	Logic or UI structure — read with surrounding lines.
165	}	Logic or UI structure — read with surrounding lines.
166	}	Logic or UI structure — read with surrounding lines.
167		Blank line.
168	// Pre-configured custom priority alert messages	Comment: Pre-configured custom priority alert messages
169	const priorityAlerts = [	Logic or UI structure — read with surrounding lines.
170	{	Logic or UI structure — read with surrounding lines.
171	id: 'alert-1',	Logic or UI structure — read with surrounding lines.
172	title: 'Low Stock Warning',	Logic or UI structure — read with surrounding lines.
173	desc: 'Store #24 (Fresh Grocery) has 8 core dairy items out of stock.',	Logic or UI structure — read with surrounding lines.
174	type: 'danger',	Logic or UI structure — read with surrounding lines.
175	btnText: 'Alert Owner',	Logic or UI structure — read with surrounding lines.
176	action: handleAlertOwner,	Logic or UI structure — read with surrounding lines.
177	},	Logic or UI structure — read with surrounding lines.
178	{	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
179	id: 'alert-2',	Logic or UI structure — read with surrounding lines.
180	title: 'High COD Balance Alert',	Logic or UI structure — read with surrounding lines.
181	desc: 'Rider Rahul Sharma holds ₹2,450 COD cash (exceeds ₹2,000 threshold).',	Logic or UI structure — read with surrounding lines.
182	type: 'warning',	Logic or UI structure — read with surrounding lines.
183	btnText: 'Settle Cash',	Logic or UI structure — read with surrounding lines.
184	action: () => setShowCODSettleModal(true),	Logic or UI structure — read with surrounding lines.
185	},	Logic or UI structure — read with surrounding lines.
186	{	Logic or UI structure — read with surrounding lines.
187	id: 'alert-3',	Logic or UI structure — read with surrounding lines.
188	title: 'Weather Delivery Delay',	Logic or UI structure — read with surrounding lines.
189	desc: 'Northside Zone B reports +15 min average delays due to rainfall.',	Logic or UI structure — read with surrounding lines.
190	type: 'info',	Logic or UI structure — read with surrounding lines.
191	btnText: 'View Map',	Logic or UI structure — read with surrounding lines.
192	action: () => setShowMapModal(true),	Logic or UI structure — read with surrounding lines.
193	},	Logic or UI structure — read with surrounding lines.
194	]	Logic or UI structure — read with surrounding lines.
195		Blank line.
196	// Column definitions for the live orders table component	Comment: Column definitions for the live orders table component
197	const orderColumns = [	Logic or UI structure — read with surrounding lines.
198	{	Logic or UI structure — read with surrounding lines.
199	title: 'Order ID',	Logic or UI structure — read with surrounding lines.
200	key: 'id',	Logic or UI structure — read with surrounding lines.
201	render: (id) => (	Logic or UI structure — read with surrounding lines.
202		CSS/Tailwind styling.
203	#{id.slice(0, 8).toUpperCase() }	Logic or UI structure — read with surrounding lines.
204		JSX element opening tag.
205	),	Logic or UI structure — read with surrounding lines.
206	},	Logic or UI structure — read with surrounding lines.
207	{	Logic or UI structure — read with surrounding lines.
208	title: 'Store',	Logic or UI structure — read with surrounding lines.
209	key: 'stores',	Logic or UI structure — read with surrounding lines.
210	render: (stores) => {stores?.store_name '-'} ,	CSS/Tailwind styling.

Line	Code	Explanation
211	},	Logic or UI structure — read with surrounding lines.
212	{	Logic or UI structure — read with surrounding lines.
213	title: 'Customer',	Logic or UI structure — read with surrounding lines.
214	key: 'customers',	Logic or UI structure — read with surrounding lines.
215	render: (customers) => {customers?.name '-'},	CSS/Tailwind styling.
216	},	Logic or UI structure — read with surrounding lines.
217	{	Logic or UI structure — read with surrounding lines.
218	title: 'Total',	Logic or UI structure — read with surrounding lines.
219	key: 'total',	Logic or UI structure — read with surrounding lines.
220	render: (total) => {formatCurrency(total)},	CSS/Tailwind styling.
221	},	Logic or UI structure — read with surrounding lines.
222	{	Logic or UI structure — read with surrounding lines.
223	title: 'Status',	Logic or UI structure — read with surrounding lines.
224	key: 'status',	Logic or UI structure — read with surrounding lines.
225	render: (status) => <Badge variant={status}>{status}</Badge>,	Logic or UI structure — read with surrounding lines.
226	},	Logic or UI structure — read with surrounding lines.
227	{	Logic or UI structure — read with surrounding lines.
228	title: 'Time',	Logic or UI structure — read with surrounding lines.
229	key: 'created_at',	Logic or UI structure — read with surrounding lines.
230	render: (createdAt) => (	Logic or UI structure — read with surrounding lines.
231		CSS/Tailwind styling.
232	{formatRelativeTime(createdAt)}	Logic or UI structure — read with surrounding lines.
233		JSX element opening tag.
234	),	Logic or UI structure — read with surrounding lines.
235	},	Logic or UI structure — read with surrounding lines.
236	]	Logic or UI structure — read with surrounding lines.
237		Blank line.
238	return (	Return JSX UI.
239	<div className="flex flex-col gap-lg w-full">	CSS/Tailwind styling.
240	{/* Header section with titles and quick reload actions */}	Logic or UI structure — read with surrounding lines.
241	<header className="flex flex-col sm:flex-row justify-between items-start sm:items-center gap-md select-none">	CSS/Tailwind styling.
242	<div>	JSX element opening tag.
243	<h1 className="font-headline-lg text-headline-lg text-on-surface">Overview</h1>	CSS/Tailwind styling.

Line	Code	Explanation
244	<code><p className="font-body-md text-secondary mt-xs">Real-time platform network metrics.</p></code>	CSS/Tailwind styling.
245	<code></div></code>	JSX element opening tag.
246	<code><div className="flex gap-sm w-full sm:w-auto"></code>	CSS/Tailwind styling.
247	<code><Button</code>	JSX element opening tag.
248	<code>variant="outline"</code>	Logic or UI structure — read with surrounding lines.
249	<code>size="sm"</code>	Logic or UI structure — read with surrounding lines.
250	<code>onClick={loadDashboardData}</code>	User event handler.
251	<code>className="flex items-center gap-xs flex-1 sm:flex-initial"</code>	CSS/Tailwind styling.
252	<code>></code>	Logic or UI structure — read with surrounding lines.
253	<code><RefreshCw className={`w-4 h-4 \${loading ? 'animate-spin' : ''}`} /></code>	CSS/Tailwind styling.
254	<code>Refresh</code>	Logic or UI structure — read with surrounding lines.
255	<code></Button></code>	JSX element opening tag.
256	<code></div></code>	JSX element opening tag.
257	<code></header></code>	JSX element opening tag.
258		Blank line.
259	<code>{/* KPI Cards Grid loader state or statistics */}</code>	Logic or UI structure — read with surrounding lines.
260	<code><section className="grid grid-cols-1 sm:grid-cols-2 lg:grid-cols-5 gap-md w-full"></code>	CSS/Tailwind styling.
261	<code>{loading ? (</code>	Logic or UI structure — read with surrounding lines.
262	<code><Skeleton variant="card" rows={5} /></code>	Self-closing JSX element.
263	<code>) : errorState ? (</code>	Logic or UI structure — read with surrounding lines.
264	<code><div className="col-span-full py-lg text-center text-error bg-error-container/20 rounded-xl border border-e...</code>	CSS/Tailwind styling.
265	<code>Failed to load statistics summaries.</code>	Logic or UI structure — read with surrounding lines.
266	<code></div></code>	JSX element opening tag.
267	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
268	<code><></code>	JSX element opening tag.
269	<code>{/* Card 1: Gross Sales */}</code>	Logic or UI structure — read with surrounding lines.
270	<code><Card className="min-h-[120px] bg-surface-bright border-surface-variant flex flex-col justify-between p-0...</code>	CSS/Tailwind styling.
271	<code><div className="p-md flex justify-between items-start w-full"></code>	CSS/Tailwind styling.
272	<code><div className="w-10 h-10 rounded-full bg-primary-fixed flex items-center justify-center"></code>	CSS/Tailwind styling.
273	<code><TrendingUp className="w-5 h-5 text-primary-container" /></code>	CSS/Tailwind styling.
274	<code></div></code>	JSX element opening tag.
275	<code><Badge variant="success" className="h-6 gap-xs"></code>	CSS/Tailwind styling.
276	<code>+12%</code>	Logic or UI structure — read with surrounding lines.
277	<code></Badge></code>	JSX element opening tag.
278	<code></div></code>	JSX element opening tag.
279	<code><div className="px-md pb-md"></code>	CSS/Tailwind styling.
280	<code><p className="font-label-md text-secondary font-semibold">Gross Sales</p></code>	CSS/Tailwind styling.

Line	Code	Explanation
281	<code><p className="font-headline-lg text-headline-lg text-on-surface font-bold mt-xs"></code>	CSS/Tailwind styling.
282	<code>{formatCurrency(stats?.grossSales)}</code>	Logic or UI structure — read with surrounding lines.
283	<code></p></code>	JSX element opening tag.
284	<code></div></code>	JSX element opening tag.
285	<code></Card></code>	JSX element opening tag.
286		Blank line.
287	<code>{/* Card 2: Total Orders */}</code>	Logic or UI structure — read with surrounding lines.
288	<code><Card className="min-h-[120px] bg-surface-bright border-surface-variant flex flex-col justify-between p-0..."</code>	CSS/Tailwind styling.
289	<code><div className="p-md flex justify-between items-start w-full"></code>	CSS/Tailwind styling.
290	<code><div className="w-10 h-10 rounded-full bg-secondary-fixed flex items-center justify-center"></code>	CSS/Tailwind styling.
291	<code><ShoppingBag className="w-5 h-5 text-secondary" /></code>	CSS/Tailwind styling.
292	<code></div></code>	JSX element opening tag.
293	<code><Badge variant="success" className="h-6 gap-xs"></code>	CSS/Tailwind styling.
294	<code>+8%</code>	Logic or UI structure — read with surrounding lines.
295	<code></Badge></code>	JSX element opening tag.
296	<code></div></code>	JSX element opening tag.
297	<code><div className="px-md pb-md"></code>	CSS/Tailwind styling.
298	<code><p className="font-label-md text-secondary font-semibold">Total Orders</p></code>	CSS/Tailwind styling.
299	<code><p className="font-headline-lg text-headline-lg text-on-surface font-bold mt-xs"></code>	CSS/Tailwind styling.
300	<code>{formatNumber(stats?.totalOrders)}</code>	Logic or UI structure — read with surrounding lines.
301	<code></p></code>	JSX element opening tag.
302	<code></div></code>	JSX element opening tag.
303	<code></Card></code>	JSX element opening tag.
304		Blank line.
305	<code>{/* Card 3: Active Stores */}</code>	Logic or UI structure — read with surrounding lines.
306	<code><Card className="min-h-[120px] bg-surface-bright border-surface-variant flex flex-col justify-between p-0..."</code>	CSS/Tailwind styling.
307	<code><div className="p-md flex justify-between items-start w-full"></code>	CSS/Tailwind styling.
308	<code><div className="w-10 h-10 rounded-full bg-tertiary-fixed flex items-center justify-center"></code>	CSS/Tailwind styling.
309	<code><Store className="w-5 h-5 text-tertiary" /></code>	CSS/Tailwind styling.
310	<code></div></code>	JSX element opening tag.
311	<code><Badge variant="secondary" className="h-6 gap-xs"></code>	CSS/Tailwind styling.
312	<code>0%</code>	Logic or UI structure — read with surrounding lines.
313	<code></Badge></code>	JSX element opening tag.
314	<code></div></code>	JSX element opening tag.
315	<code><div className="px-md pb-md"></code>	CSS/Tailwind styling.
316	<code><p className="font-label-md text-secondary font-semibold">Active Stores</p></code>	CSS/Tailwind styling.
317	<code><p className="font-headline-lg text-headline-lg text-on-surface font-bold mt-xs"></code>	CSS/Tailwind styling.

Line	Code	Explanation
318	<code>{formatNumber(stats?.activeStores)}</code>	Logic or UI structure — read with surrounding lines.
319	<code></p></code>	JSX element opening tag.
320	<code></div></code>	JSX element opening tag.
321	<code></Card></code>	JSX element opening tag.
322		Blank line.
323	<code>{/* Card 4: Average Order Value */}</code>	Logic or UI structure — read with surrounding lines.
324	<code><Card className="min-h-[120px] bg-surface-bright border-surface-variant flex flex-col justify-between p-0...</code>	CSS/Tailwind styling.
325	<code><div className="p-md flex justify-between items-start w-full"></code>	CSS/Tailwind styling.
326	<code><div className="w-10 h-10 rounded-full bg-primary-fixed flex items-center justify-center"></code>	CSS/Tailwind styling.
327	<code><Receipt className="w-5 h-5 text-primary-container" /></code>	CSS/Tailwind styling.
328	<code></div></code>	JSX element opening tag.
329	<code><Badge variant="success" className="h-6 gap-xs"></code>	CSS/Tailwind styling.
330	<code>+3%</code>	Logic or UI structure — read with surrounding lines.
331	<code></Badge></code>	JSX element opening tag.
332	<code></div></code>	JSX element opening tag.
333	<code><div className="px-md pb-md"></code>	CSS/Tailwind styling.
334	<code><p className="font-label-md text-secondary font-semibold">Avg Order Value</p></code>	CSS/Tailwind styling.
335	<code><p className="font-headline-lg text-headline-lg text-on-surface font-bold mt-xs"></code>	CSS/Tailwind styling.
336	<code>{formatCurrency(stats?.avgOrderValue)}</code>	Logic or UI structure — read with surrounding lines.
337	<code></p></code>	JSX element opening tag.
338	<code></div></code>	JSX element opening tag.
339	<code></Card></code>	JSX element opening tag.
340		Blank line.
341	<code>{/* Card 5: Returns */}</code>	Logic or UI structure — read with surrounding lines.
342	<code><Card className="min-h-[120px] bg-surface-bright border-surface-variant flex flex-col justify-between p-0...</code>	CSS/Tailwind styling.
343	<code><div className="p-md flex justify-between items-start w-full"></code>	CSS/Tailwind styling.
344	<code><div className="w-10 h-10 rounded-full bg-error-container flex items-center justify-center"></code>	CSS/Tailwind styling.
345	<code><RotateCcw className="w-5 h-5 text-error" /></code>	CSS/Tailwind styling.
346	<code></div></code>	JSX element opening tag.
347	<code><Badge variant="danger" className="h-6 gap-xs"></code>	CSS/Tailwind styling.
348	<code>-2%</code>	Logic or UI structure — read with surrounding lines.
349	<code></Badge></code>	JSX element opening tag.
350	<code></div></code>	JSX element opening tag.
351	<code><div className="px-md pb-md"></code>	CSS/Tailwind styling.
352	<code><p className="font-label-md text-secondary font-semibold">Cancelled Orders</p></code>	CSS/Tailwind styling.
353	<code><p className="font-headline-lg text-headline-lg text-on-surface font-bold mt-xs"></code>	CSS/Tailwind styling.
354	<code>{formatNumber(stats?.totalOrders - stats?.deliveredOrders)}</code>	Logic or UI structure — read with surrounding lines.
355	<code></p></code>	JSX element opening tag.

Line	Code	Explanation
356	<code></div></code>	JSX element opening tag.
357	<code></Card></code>	JSX element opening tag.
358	<code></></code>	Self-closing JSX element.
359	<code>)}</code>	Logic or UI structure — read with surrounding lines.
360	<code></section></code>	JSX element opening tag.
361		Blank line.
362	<code>{/* Priority Alerts horizontal slide track layout */}</code>	Logic or UI structure — read with surrounding lines.
363	<code><section className="flex flex-col gap-sm"></code>	CSS/Tailwind styling.
364	<code><h2 className="font-headline-sm text-headline-sm text-on-surface flex items-center gap-sm font-bold"></code>	CSS/Tailwind styling.
365	<code><AlertTriangle className="w-5 h-5 text-error" /> Priority Network Alerts</code>	CSS/Tailwind styling.
366	<code></h2></code>	JSX element opening tag.
367	<code><div className="flex gap-md overflow-x-auto pb-sm snap-x w-full"></code>	CSS/Tailwind styling.
368	<code>{priorityAlerts.map((alert) => (</code>	Logic or UI structure — read with surrounding lines.
369	<code><div</code>	JSX element opening tag.
370	<code>key={alert.id}</code>	Logic or UI structure — read with surrounding lines.
371	<code>className={`min-w-[290px] md:min-w-[340px] flex-shrink-0 border rounded-xl p-md shadow-card flex gap-md...`}</code>	CSS/Tailwind styling.
372	<code>alert.type === 'danger'</code>	Logic or UI structure — read with surrounding lines.
373	<code>? 'border-error/30 bg-error-container/10 text-on-error-container'</code>	Logic or UI structure — read with surrounding lines.
374	<code>: alert.type === 'warning'</code>	Logic or UI structure — read with surrounding lines.
375	<code>? 'border-warning/30 bg-warning-soft/20 text-warning-DEFAULT'</code>	Logic or UI structure — read with surrounding lines.
376	<code>: 'border-outline-variant text-on-surface'</code>	Logic or UI structure — read with surrounding lines.
377	<code>}``}</code>	Logic or UI structure — read with surrounding lines.
378	<code>></code>	Logic or UI structure — read with surrounding lines.
379	<code><AlertTriangle</code>	JSX element opening tag.
380	<code>className={`w-6 h-6 shrink-0 mt-0.5`}</code>	CSS/Tailwind styling.
381	<code>alert.type === 'danger'</code>	Logic or UI structure — read with surrounding lines.
382	<code>? 'text-error'</code>	Logic or UI structure — read with surrounding lines.
383	<code>: alert.type === 'warning'</code>	Logic or UI structure — read with surrounding lines.
384	<code>? 'text-warning'</code>	Logic or UI structure — read with surrounding lines.
385	<code>: 'text-secondary'</code>	Logic or UI structure — read with surrounding lines.
386	<code>}``}</code>	Logic or UI structure — read with surrounding lines.
387	<code>/></code>	Logic or UI structure — read with surrounding lines.
388	<code><div className="min-w-0 flex-1"></code>	CSS/Tailwind styling.
389	<code><p className="font-label-lg text-label-lg font-bold">{alert.title}</p></code>	CSS/Tailwind styling.

Line	Code	Explanation
390	<code><p className="font-body-sm text-body-sm mt-xs opacity-90 leading-relaxed font-medium"></code>	CSS/Tailwind styling.
391	<code>{alert.desc}</code>	Logic or UI structure — read with surrounding lines.
392	<code></p></code>	JSX element opening tag.
393	<code><Button variant="outline" size="sm" onClick={alert.action} className="mt-sm h-8 font-semibold"></code>	CSS/Tailwind styling.
394	<code>{alert.btnText}</code>	Logic or UI structure — read with surrounding lines.
395	<code></Button></code>	JSX element opening tag.
396	<code></div></code>	JSX element opening tag.
397	<code></div></code>	JSX element opening tag.
398	<code>)))</code>	Logic or UI structure — read with surrounding lines.
399	<code></div></code>	JSX element opening tag.
400	<code></section></code>	JSX element opening tag.
401		Blank line.
402	<code>{/* Split pane for pending approvals & live orders feed */}</code>	Logic or UI structure — read with surrounding lines.
403	<code><div className="grid grid-cols-1 lg:grid-cols-3 gap-lg w-full"></code>	CSS/Tailwind styling.
404	<code>{/* Left Side: Pending KYC Registrations List */}</code>	Logic or UI structure — read with surrounding lines.
405	<code><section className="lg:col-span-1 flex flex-col gap-sm"></code>	CSS/Tailwind styling.
406	<code><h2 className="font-headline-sm text-headline-sm text-on-surface flex items-center gap-sm font-bold"></code>	CSS/Tailwind styling.
407	<code><FileCheck className="w-5 h-5 text-primary" /> Store Registrations</code>	CSS/Tailwind styling.
408	<code></h2></code>	JSX element opening tag.
409	<code><Card className="flex flex-col gap-md p-0 overflow-hidden bg-surface-bright shadow-card"></code>	CSS/Tailwind styling.
410	<code><div className="px-md py-sm bg-surface border-b border-surface-variant flex justify-between items-center ...</code>	CSS/Tailwind styling.
411	<code>Pending KYC Approvals</code>	CSS/Tailwind styling.
412	<code><Badge variant="warning">{pendingStores.length} waiting</Badge></code>	JSX element opening tag.
413	<code></div></code>	JSX element opening tag.
414	<code><div className="p-md flex flex-col gap-sm divide-y divide-surface-variant/40"></code>	CSS/Tailwind styling.
415	<code>{loading ? (</code>	Logic or UI structure — read with surrounding lines.
416	<code><Skeleton variant="block" height="72px" rows={2} /></code>	Self-closing JSX element.
417	<code>) : pendingStores.length === 0 ? (</code>	Logic or UI structure — read with surrounding lines.
418	<code><div className="text-center py-xl text-body-sm text-secondary font-semibold"></code>	CSS/Tailwind styling.
419	<code>🎉 All store validations completed!</code>	Logic or UI structure — read with surrounding lines.
420	<code></div></code>	JSX element opening tag.
421	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
422	<code>pendingStores.map((store, index) =></code>	Logic or UI structure — read with surrounding lines.
	<code>(</code>	

Line	Code	Explanation
423	<code><div key={store.id} className={`flex flex-col gap-xs pt-sm \${index === 0 ? 'pt-0' : ''}`}></code>	CSS/Tailwind styling.
424	<code><div className="flex justify- between items-start gap-sm"></code>	CSS/Tailwind styling.
425	<code><div className="min-w-0 flex- 1"></code>	CSS/Tailwind styling.
426	<code><h4 className="font-label-lg text-on-surface font-bold truncate"></code>	CSS/Tailwind styling.
427	<code>{store.store_name}</code>	Logic or UI structure — read with surrounding lines.
428	<code></h4></code>	JSX element opening tag.
429	<code><p className="font-body-sm text-secondary font-medium truncate flex items- center gap-xs mt-0.5"></code>	CSS/Tailwind styling.
430	<code><MapPin className="w-3.5 h-3.5 text-secondary shrink-0" /></code>	CSS/Tailwind styling.
431	<code>{store.address 'Location Details'}</code>	Logic or UI structure — read with surrounding lines.
432	<code></p></code>	JSX element opening tag.
433	<code></div></code>	JSX element opening tag.
434	<code><Badge variant="secondary">{store.store_type}</Badge></code>	JSX element opening tag.
435	<code></div></code>	JSX element opening tag.
436		Blank line.
437	<code><div className="flex items- center gap-xs justify-end mt-sm pt-sm border-t border-dashed border-su...</code>	CSS/Tailwind styling.
438	<code><Link to={` /stores/\${store.id}`}></code>	JSX element opening tag.
439	<code><Button variant="ghost" size="sm" className="h-8 font-semibold"></code>	CSS/Tailwind styling.
440	<code><Eye className="w-4 h-4 mr-1" /> View</code>	CSS/Tailwind styling.
441	<code></Button></code>	JSX element opening tag.
442	<code></Link></code>	JSX element opening tag.
443	<code><Button</code>	JSX element opening tag.
444	<code>variant="outline"</code>	Logic or UI structure — read with surrounding lines.
445	<code>size="sm"</code>	Logic or UI structure — read with surrounding lines.
446	<code>onClick={() => setActiveDialog({ storeId: store.id, action: 'reject' })}</code>	User event handler.
447	<code>className="h-8 text-danger border-danger/30 hover:bg-danger/10 hover:text- danger font-semibold"</code>	CSS/Tailwind styling.
448	<code>></code>	Logic or UI structure — read with surrounding lines.
449	<code><X className="w-4 h-4" /> Reject</code>	CSS/Tailwind styling.
450	<code></Button></code>	JSX element opening tag.
451	<code><Button</code>	JSX element opening tag.
452	<code>variant="primary"</code>	Logic or UI structure — read with surrounding lines.
453	<code>size="sm"</code>	Logic or UI structure — read with surrounding lines.
454	<code>onClick={() => setActiveDialog({ storeId: store.id, action: 'approve' })}</code>	User event handler.
455	<code>className="h-8 font- semibold"</code>	CSS/Tailwind styling.

Line	Code	Explanation
456	>	Logic or UI structure — read with surrounding lines.
457	<Check className="w-4 h-4" /> Approve	CSS/Tailwind styling.
458	</Button>	JSX element opening tag.
459	</div>	JSX element opening tag.
460	</div>	JSX element opening tag.
461	))	Logic or UI structure — read with surrounding lines.
462	}}	Logic or UI structure — read with surrounding lines.
463	</div>	JSX element opening tag.
464	</Card>	JSX element opening tag.
465	</section>	JSX element opening tag.
466		Blank line.
467	{/* Right Side: Live active orders list */}	Logic or UI structure — read with surrounding lines.
468	<section className="lg:col-span-2 flex flex-col gap-sm">	CSS/Tailwind styling.
469	<h2 className="font-headline-sm text-headline-sm text-on-surface flex items-center justify-between gap-sm f...	CSS/Tailwind styling.
470		CSS/Tailwind styling.
471	<Zap className="w-5 h-5 text-primary-container fill-primary-container" /> Real-time Live Orders	CSS/Tailwind styling.
472		JSX element opening tag.
473	<Link to={ROUTES.ORDERS}>	JSX element opening tag.
474	<Button variant="ghost" size="sm" className="font-semibold text-primary">	CSS/Tailwind styling.
475	View All	Logic or UI structure — read with surrounding lines.
476	</Button>	JSX element opening tag.
477	</Link>	JSX element opening tag.
478	</h2>	JSX element opening tag.
479		Blank line.
480	{/* Desktop Table View */}	Logic or UI structure — read with surrounding lines.
481	<div className="hidden md:block">	CSS/Tailwind styling.
482	<Table	JSX element opening tag.
483	columns={orderColumns}	Logic or UI structure — read with surrounding lines.
484	data={liveOrders}	Logic or UI structure — read with surrounding lines.
485	isLoading={loading}	Logic or UI structure — read with surrounding lines.
486	emptyMessage="No Live Orders Today"	Logic or UI structure — read with surrounding lines.
487	emptyDescription="Any incoming order will update instantly in this live network grid."	Logic or UI structure — read with surrounding lines.
488	/>	Logic or UI structure — read with surrounding lines.
489	</div>	JSX element opening tag.
490		Blank line.
491	{/* Mobile responsive Card List view */}	Logic or UI structure — read with surrounding lines.
492	<div className="md:hidden flex flex-col gap-sm w-full">	CSS/Tailwind styling.
493	{loading ? (	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
494	<code><Skeleton variant="block" height="96px" rows={3} /></code>	Self-closing JSX element.
495	<code>) : liveOrders.length === 0 ? (</code>	Logic or UI structure — read with surrounding lines.
496	<code><div className="p-xl text-center text-body-sm text-secondary bg-surface-container-lowest border border-...</code>	CSS/Tailwind styling.
497	<code>No active orders today.</code>	Logic or UI structure — read with surrounding lines.
498	<code></div></code>	JSX element opening tag.
499	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
500	<code>liveOrders.map((order) => (</code>	Logic or UI structure — read with surrounding lines.
501	<code><Card</code>	JSX element opening tag.
502	<code>key={order.id}</code>	Logic or UI structure — read with surrounding lines.
503	<code>className="bg-surface-bright border-surface-variant flex-col gap-sm p-sm shadow-card"</code>	CSS/Tailwind styling.
504	<code>></code>	Logic or UI structure — read with surrounding lines.
505	<code><div className="flex justify-between items-center w-full"></code>	CSS/Tailwind styling.
506	<code></code>	CSS/Tailwind styling.
507	<code>#{order.id.slice(0, 8).toUpperCase()}</code>	Logic or UI structure — read with surrounding lines.
508	<code></code>	JSX element opening tag.
509	<code><Badge variant={order.status}>{order.status}</Badge></code>	JSX element opening tag.
510	<code></div></code>	JSX element opening tag.
511	<code><div></code>	JSX element opening tag.
512	<code><h4 className="font-label-lg text-on-surface font-bold"></code>	CSS/Tailwind styling.
513	<code>{order.stores?.store_name 'Downtown Hub'}</code>	Logic or UI structure — read with surrounding lines.
514	<code></h4></code>	JSX element opening tag.
515	<code><p className="font-body-sm text-secondary font-medium mt-0.5"></code>	CSS/Tailwind styling.
516	<code>Customer: {order.customers?.name 'Rahul Sharma'}</code>	Logic or UI structure — read with surrounding lines.
517	<code></p></code>	JSX element opening tag.
518	<code></div></code>	JSX element opening tag.
519	<code><div className="flex justify-between items-center mt-xs pt-sm border-t border-surface-variant w-full"></code>	CSS/Tailwind styling.
520	<code></code>	CSS/Tailwind styling.
521	<code>{formatCurrency(order.total)}</code>	Logic or UI structure — read with surrounding lines.
522	<code></code>	JSX element opening tag.
523	<code></code>	CSS/Tailwind styling.
524	<code>{formatRelativeTime(order.created_at)}</code>	Logic or UI structure — read with surrounding lines.
525	<code></code>	JSX element opening tag.
526	<code></div></code>	JSX element opening tag.
527	<code></Card></code>	JSX element opening tag.
528	<code>))</code>	Logic or UI structure — read with surrounding lines.
529	<code>}}</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
530	<code></div></code>	JSX element opening tag.
531	<code></section></code>	JSX element opening tag.
532	<code></div></code>	JSX element opening tag.
533		Blank line.
534	<code>{/* Global Confirm Actions Dialog for approvals/rejections */}</code>	Logic or UI structure — read with surrounding lines.
535	<code><ConfirmDialog</code>	JSX element opening tag.
536	<code>isOpen={!activeDialog}</code>	Logic or UI structure — read with surrounding lines.
537	<code>onClose={() => setActiveDialog(null)}</code>	Logic or UI structure — read with surrounding lines.
538	<code>onConfirm={handleStoreAction}</code>	Logic or UI structure — read with surrounding lines.
539	<code>isLoading={actionLoading}</code>	Logic or UI structure — read with surrounding lines.
540	<code>isDanger={activeDialog?.action === 'reject'}</code>	Logic or UI structure — read with surrounding lines.
541	<code>title={activeDialog?.action === 'approve' ? 'Approve Store KYC?' : 'Reject Store Application?'}</code>	Logic or UI structure — read with surrounding lines.
542	<code>message={</code>	Logic or UI structure — read with surrounding lines.
543	<code>activeDialog?.action === 'approve'</code>	Logic or UI structure — read with surrounding lines.
544	<code>? 'Approving this store will allow the merchant to go live, publish items, and receive payouts.'</code>	Logic or UI structure — read with surrounding lines.
545	<code>: 'Are you sure you want to reject this store registration? Their application profile status will be upda...</code>	Logic or UI structure — read with surrounding lines.
546	<code>}</code>	Logic or UI structure — read with surrounding lines.
547	<code>confirmText={activeDialog?.action === 'approve' ? 'Approve Store' : 'Reject Store'}</code>	Logic or UI structure — read with surrounding lines.
548	<code>/></code>	Logic or UI structure — read with surrounding lines.
549		Blank line.
550	<code>{/* COD Cash Settlement Modal */}</code>	Logic or UI structure — read with surrounding lines.
551	<code><Modal</code>	JSX element opening tag.
552	<code>isOpen={showCODSettleModal}</code>	Logic or UI structure — read with surrounding lines.
553	<code>onClose={() => setShowCODSettleModal(false)}</code>	Logic or UI structure — read with surrounding lines.
554	<code>title="Rider COD Handover Settlement"</code>	Logic or UI structure — read with surrounding lines.
555	<code>></code>	Logic or UI structure — read with surrounding lines.
556	<code><div className="space-y-4"></code>	CSS/Tailwind styling.
557	<code><div className="bg-slate-50 p-4 rounded-xl border border-border"></code>	CSS/Tailwind styling.
558	<code><p className="text-xs font-semibold text-secondary uppercase tracking-wider">Rider Profile</p></code>	CSS/Tailwind styling.
559	<code><p className="text-base font-bold text-on-surface mt-1">Rahul Sharma</p></code>	CSS/Tailwind styling.
560	<code><p className="text-sm text-secondary">+91 99887 76655</p></code>	CSS/Tailwind styling.
561	<code></div></code>	JSX element opening tag.
562	<code><div className="bg-amber-50 p-4 rounded-xl border border-amber-200 flex items-center justify-between"></code>	CSS/Tailwind styling.
563	<code><div></code>	JSX element opening tag.

Line	Code	Explanation
564	<code><p className="text-xs font-semibold text-amber-800 uppercase tracking-wider">Cash on Hand</p></code>	CSS/Tailwind styling.
565	<code><p className="text-2xl font-bold text-amber-900 mt-1">₹2,450</p></code>	CSS/Tailwind styling.
566	<code></div></code>	JSX element opening tag.
567	<code><Badge variant="danger">Limit Exceeded</Badge></code>	JSX element opening tag.
568	<code></div></code>	JSX element opening tag.
569	<code><div></code>	JSX element opening tag.
570	<code><label className="block text-sm font-semibold text-on-surface mb-1">Handover Amount to Collect (₹)</label></code>	CSS/Tailwind styling.
571	<code><input</code>	JSX element opening tag.
572	<code>type="number"</code>	Logic or UI structure — read with surrounding lines.
573	<code>className="w-full border border-brand rounded-lg p-2 focus:ring-1 focus:ring-brand outline-none text-b..."</code>	CSS/Tailwind styling.
574	<code>value={codAmountToSettle}</code>	Logic or UI structure — read with surrounding lines.
575	<code>onChange={(e) => setCodAmountToSettle(Number(e.target.value))}</code>	User event handler.
576	<code>max={2450}</code>	Logic or UI structure — read with surrounding lines.
577	<code>min={1}</code>	Logic or UI structure — read with surrounding lines.
578	<code>/></code>	Logic or UI structure — read with surrounding lines.
579	<code></div></code>	JSX element opening tag.
580	<code><div className="flex gap-md pt-md"></code>	CSS/Tailwind styling.
581	<code><Button</code>	JSX element opening tag.
582	<code>variant="outline"</code>	Logic or UI structure — read with surrounding lines.
583	<code>onClick={() => setShowCODSettleModal(false)}</code>	User event handler.
584	<code>className="flex-1 font-semibold"</code>	CSS/Tailwind styling.
585	<code>></code>	Logic or UI structure — read with surrounding lines.
586	<code>Cancel</code>	Logic or UI structure — read with surrounding lines.
587	<code></Button></code>	JSX element opening tag.
588	<code><Button</code>	JSX element opening tag.
589	<code>variant="primary"</code>	Logic or UI structure — read with surrounding lines.
590	<code>onClick={handleConfirmCODSettlement}</code>	User event handler.
591	<code>isLoading={settlingCOD}</code>	Logic or UI structure — read with surrounding lines.
592	<code>className="flex-1 font-semibold"</code>	CSS/Tailwind styling.
593	<code>></code>	Logic or UI structure — read with surrounding lines.
594	<code>Confirm Handover</code>	Logic or UI structure — read with surrounding lines.
595	<code></Button></code>	JSX element opening tag.
596	<code></div></code>	JSX element opening tag.
597	<code></div></code>	JSX element opening tag.
598	<code></Modal></code>	JSX element opening tag.
599		Blank line.
600	<code>{/* Live Map Delay Monitor Modal */}</code>	Logic or UI structure — read with surrounding lines.
601	<code><Modal</code>	JSX element opening tag.

Line	Code	Explanation
602	isOpen={showMapModal}	Logic or UI structure — read with surrounding lines.
603	onClose={() => setShowMapModal(false)}	Logic or UI structure — read with surrounding lines.
604	title="Live Traffic & Delay Monitoring – Zone B"	Logic or UI structure — read with surrounding lines.
605	>	Logic or UI structure — read with surrounding lines.
606	<div className="space-y-4">	CSS/Tailwind styling.
607	<div className="bg-blue-50 p-3 rounded-xl border border-blue-200 text-blue-800 text-sm font-medium">	CSS/Tailwind styling.
608	 Heavy rainfall active in Northside Bangalore. Delivery dispatch times adjusted +15 mins.	Logic or UI structure — read with surrounding lines.
609	</div>	JSX element opening tag.
610	{/* Map container */}	Logic or UI structure — read with surrounding lines.
611	<div className="w-full h-80 rounded-xl overflow-hidden border border-gray-200">	CSS/Tailwind styling.
612	<Map	JSX element opening tag.
613	initialViewState={{	Logic or UI structure — read with surrounding lines.
614	latitude: 12.9716,	Logic or UI structure — read with surrounding lines.
615	longitude: 77.5946,	Logic or UI structure — read with surrounding lines.
616	zoom: 12	Logic or UI structure — read with surrounding lines.
617	}}	Logic or UI structure — read with surrounding lines.
618	mapStyle="https://basemaps.cartocdn.com/gl/positron-gl-style/style.json"	Logic or UI structure — read with surrounding lines.
619	style={{ width: '100%', height: '100%' }}	Logic or UI structure — read with surrounding lines.
620	>	Logic or UI structure — read with surrounding lines.
621	<NavigationControl position="top-right" />	Self-closing JSX element.
622	{/* Delayed Store Marker */}	Logic or UI structure — read with surrounding lines.
623	<Marker latitude={12.9816} longitude={77.5996}>	JSX element opening tag.
624	<div className="flex flex-col items-center">	CSS/Tailwind styling.
625	<div className="bg-red-600 text-white text-xs font-semibold px-2 py-1 rounded shadow-md border border-white">	CSS/Tailwind styling.
626	Fresh Grocery (Delay)	Logic or UI structure — read with surrounding lines.
627	</div>	JSX element opening tag.
628	<div className="w-3 h-3 bg-red-600 rounded-full border-2 border-white shadow-sm mt-0.5"/>	CSS/Tailwind styling.
629	</div>	JSX element opening tag.
630	</Marker>	JSX element opening tag.
631	{/* Rider Route Marker */}	Logic or UI structure — read with surrounding lines.
632	<Marker latitude={12.9616} longitude={77.5846}>	JSX element opening tag.
633	<div className="flex flex-col items-center">	CSS/Tailwind styling.

Line	Code	Explanation
634	<code><div className="bg-brand text-white text-xs font-semibold px-2 py-1 rounded shadow-md border border..."</code>	CSS/Tailwind styling.
635	<code>Rider Rahul (On Route)</code>	Logic or UI structure — read with surrounding lines.
636	<code></div></code>	JSX element opening tag.
637	<code><div className="w-3 h-3 bg-brand rounded-full border-2 border-white shadow-sm mt-0.5" /></code>	CSS/Tailwind styling.
638	<code></div></code>	JSX element opening tag.
639	<code></Marker></code>	JSX element opening tag.
640	<code></Map></code>	JSX element opening tag.
641	<code></div></code>	JSX element opening tag.
642	<code><div className="flex justify-between items-center text-xs text-secondary bg-surface p-3 rounded-lg border b..."</code>	CSS/Tailwind styling.
643	<code><div className="flex items-center gap-1"></code>	CSS/Tailwind styling.
644	<code> Delayed Stores</code>	CSS/Tailwind styling.
645	<code></div></code>	JSX element opening tag.
646	<code><div className="flex items-center gap-1"></code>	CSS/Tailwind styling.
647	<code> Active Riders</code>	CSS/Tailwind styling.
648	<code></div></code>	JSX element opening tag.
649	<code><div className="flex items-center gap-1"></code>	CSS/Tailwind styling.
650	<code> Safe Dispatch</code>	CSS/Tailwind styling.
651	<code></div></code>	JSX element opening tag.
652	<code></div></code>	JSX element opening tag.
653	<code><div className="flex pt-sm"></code>	CSS/Tailwind styling.
654	<code><Button</code>	JSX element opening tag.
655	<code>variant="outline"</code>	Logic or UI structure — read with surrounding lines.
656	<code>onClick={() => setShowMapModal(false)}</code>	User event handler.
657	<code>className="w-full font-semibold"</code>	CSS/Tailwind styling.
658	<code>></code>	Logic or UI structure — read with surrounding lines.
659	<code>Close Monitor</code>	Logic or UI structure — read with surrounding lines.
660	<code></Button></code>	JSX element opening tag.
661	<code></div></code>	JSX element opening tag.
662	<code></div></code>	JSX element opening tag.
663	<code></Modal></code>	JSX element opening tag.
664	<code></div></code>	JSX element opening tag.
665	<code>)</code>	Logic or UI structure — read with surrounding lines.
666	<code>}</code>	Logic or UI structure — read with surrounding lines.
667		Blank line.

StoresPage (src/pages/StoresPage.jsx)

Total lines: 401

Route: /stores

Purpose: Store directory with filters and status actions.

Line	Code	Explanation
1	import { useState, useEffect, useCallback } from 'react'	Import React hooks.
2	import { useNavigate } from 'react-router-dom'	Import routing.
3	import { Search, Filter, X, Star, MoreVertical, Plus, Store as StoreIcon } from 'lucide-react'	Import icons.
4	import toast from 'react-hot-toast'	Import dependency.
5	import { getStores, updateStoreStatus } from '../services/storeService'	Import API/database service.
6	import { formatCurrency, formatDate } from '../utils/formatters'	Import helper utilities.
7	import Badge from '../components/ui/Badge'	Import UI component.
8	import Pagination from '../components/ui/Pagination'	Import UI component.
9	import Spinner from '../components/ui/Spinner'	Import UI component.
10	import EmptyState from '../components/ui/EmptyState'	Import UI component.
11	import ConfirmDialog from '../components/ui/ConfirmDialog'	Import UI component.
12		Blank line.
13	/**	Doc comment.
14	* ZapKart Admin – Store Inventory Management Page	Doc comment.
15	* Matching the Stitch stores_management_responsive design.	Doc comment.
16	* Desktop: table view Mobile: card view	Doc comment.
17	*/	Doc comment.
18		Blank line.
19	const STATUS_TABS = [	Logic or UI structure — read with surrounding lines.
20	{ key: 'all', label: 'All Stores' },	Logic or UI structure — read with surrounding lines.
21	{ key: 'active', label: 'Active' },	Logic or UI structure — read with surrounding lines.
22	{ key: 'pending', label: 'Pending Approval' },	Logic or UI structure — read with surrounding lines.
23	{ key: 'suspended', label: 'Suspended' },	Logic or UI structure — read with surrounding lines.
24	{ key: 'closed', label: 'Closed' },	Logic or UI structure — read with surrounding lines.
25	]	Logic or UI structure — read with surrounding lines.
26		Blank line.
27	const PAGE_SIZE = 20	Logic or UI structure — read with surrounding lines.
28		Blank line.
29	// Maps store status to Badge variant for visual consistency	Comment: Maps store status to Badge variant for visual consistency
30	function statusVariant(status) {	Logic or UI structure — read with surrounding lines.
31	const map = {	Logic or UI structure — read with surrounding lines.
32	active: 'success',	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
33	pending: 'warning',	Logic or UI structure — read with surrounding lines.
34	suspended: 'danger',	Logic or UI structure — read with surrounding lines.
35	closed: 'secondary',	Logic or UI structure — read with surrounding lines.
36	}	Logic or UI structure — read with surrounding lines.
37	return map[status?.toLowerCase()] 'secondary'	Logic or UI structure — read with surrounding lines.
38	}	Logic or UI structure — read with surrounding lines.
39		Blank line.
40	export default function StoresPage() {	Default export (main module).
41	const navigate = useNavigate()	Programmatic navigation hook.
42	const [stores, setStores] = useState([])	React state variable.
43	const [total, setTotal] = useState(0)	React state variable.
44	const [page, setPage] = useState(1)	React state variable.
45	const [status, setStatus] = useState('all')	React state variable.
46	const [search, setSearch] = useState('')	React state variable.
47	const [debouncedSearch, setDebouncedSearch] = useState('')	React state variable.
48	const [loading, setLoading] = useState(true)	React state variable.
49	const [actionMenuId, setActionMenuId] = useState(null)	React state variable.
50	const [confirmDialog, setConfirmDialog] = useState(null)	React state variable.
51		Blank line.
52	// Debounce search input by 400ms	Comment: Debounce search input by 400ms
53	useEffect(() => {	Side effect (fetch, subscribe, redirect).
54	const t = setTimeout(() => setDebouncedSearch(search), 400)	Logic or UI structure — read with surrounding lines.
55	return () => clearTimeout(t)	Return JSX UI.
56	}, [search])	Logic or UI structure — read with surrounding lines.
57		Blank line.
58	// Fetch stores whenever filters change	Comment: Fetch stores whenever filters change
59	const fetchStores = useCallback(async () => {	Memoized callback function.
60	setLoading(true)	Logic or UI structure — read with surrounding lines.
61	try {	Try block start.
62	const res = await getStores({ status, search: debouncedSearch, page, pageSize: PAGE_SIZE })	Wait for async operation.
63	setStores(res.stores [])	Logic or UI structure — read with surrounding lines.
64	setTotal(res.total 0)	Logic or UI structure — read with surrounding lines.
65	} catch (err) {	Catch errors.
66	console.error('Failed to fetch stores:', err)	Logic or UI structure — read with surrounding lines.
67	toast.error('Could not load stores.')	Toast notification.
68	} finally {	Finally block (cleanup).
69	setLoading(false)	Logic or UI structure — read with surrounding lines.
70	}	Logic or UI structure — read with surrounding lines.
71	}, [status, debouncedSearch, page])	Logic or UI structure — read with surrounding lines.
72		Blank line.

Line	Code	Explanation
73	useEffect(() => {	Side effect (fetch, subscribe, redirect).
74	fetchStores()	Logic or UI structure — read with surrounding lines.
75	}, [fetchStores])	Logic or UI structure — read with surrounding lines.
76		Blank line.
77	// Reset page to 1 when filters change	Comment: Reset page to 1 when filters change
78	useEffect(() => {	Side effect (fetch, subscribe, redirect).
79	setPage(1)	Logic or UI structure — read with surrounding lines.
80	}, [status, debouncedSearch])	Logic or UI structure — read with surrounding lines.
81		Blank line.
82	// Handle status action from the dropdown	Comment: Handle status action from the dropdown
83	const handleStatusAction = (store, newStatus) => {	Logic or UI structure — read with surrounding lines.
84	setActionMenuId(null)	Logic or UI structure — read with surrounding lines.
85	const labels = { active: 'activate', suspended: 'suspend', closed: 'close' }	Logic or UI structure — read with surrounding lines.
86	setConfirmDialog({	Logic or UI structure — read with surrounding lines.
87	title: `\${labels[newStatus]?.charAt(0).toUpperCase() + labels[newStatus]?.slice(1)} Store`,	Logic or UI structure — read with surrounding lines.
88	message: `Are you sure you want to \${labels[newStatus]} "\${store.store_name}"? \${newStatus === 'suspended' ? 'T...`	Logic or UI structure — read with surrounding lines.
89	variant: newStatus === 'active' ? 'primary' : 'danger',	Logic or UI structure — read with surrounding lines.
90	onConfirm: async () => {	Logic or UI structure — read with surrounding lines.
91	try {	Try block start.
92	await updateStoreStatus(store.id, newStatus, 'admin')	Wait for async operation.
93	toast.success(`Store \${labels[newStatus]}d successfully`)	Toast notification.
94	fetchStores()	Logic or UI structure — read with surrounding lines.
95	} catch (err) {	Catch errors.
96	toast.error(`Failed: \${err.message}`)	Toast notification.
97	}	Logic or UI structure — read with surrounding lines.
98	setConfirmDialog(null)	Logic or UI structure — read with surrounding lines.
99	},	Logic or UI structure — read with surrounding lines.
100	})	Logic or UI structure — read with surrounding lines.
101	}	Logic or UI structure — read with surrounding lines.
102		Blank line.
103	// Close action menu when clicking outside	Comment: Close action menu when clicking outside
104	useEffect(() => {	Side effect (fetch, subscribe, redirect).
105	const close = () => setActionMenuId(null)	Logic or UI structure — read with surrounding lines.
106	if (actionMenuId) window.addEventListener('click', close)	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
107	return () =>	Return JSX UI.
108	window.removeEventListener('click', close)	Logic or UI structure — read with surrounding lines.
109	}, [actionMenuId])	Blank line.
110	return (	Return JSX UI.
111	<div className="animate-fade-in">	CSS/Tailwind styling.
112	{/* — Page Header — */}	Logic or UI structure — read with surrounding lines.
113	<div className="flex flex-col md:flex-row justify-between items-start md:items-center mb-6 gap-4">	CSS/Tailwind styling.
114	<div>	JSX element opening tag.
115	<h2 className="text-headline-lg text-on-surface">Store Inventory Management</h2>	CSS/Tailwind styling.
116	<p className="text-body-md text-secondary mt-1">	CSS/Tailwind styling.
117	Manage active stores, performance, and inventory levels.	Logic or UI structure — read with surrounding lines.
118	</p>	JSX element opening tag.
119	</div>	JSX element opening tag.
120	<button className="bg-primary text-on-primary font-label-lg px-6 py-3 rounded-full flex items-center gap-2 ho...	CSS/Tailwind styling.
121	<Plus className="w-5 h-5" />	CSS/Tailwind styling.
122	Add New Store	Logic or UI structure — read with surrounding lines.
123	</button>	JSX element opening tag.
124	</div>	JSX element opening tag.
125		Blank line.
126	{/* — Filters & Search Bar — */}	Logic or UI structure — read with surrounding lines.
127	<div className="bg-surface border border-surface-variant rounded-xl p-4 mb-6 shadow-card flex flex-col md:flex-...	CSS/Tailwind styling.
128	{/* Search Input */}	Logic or UI structure — read with surrounding lines.
129	<div className="relative w-full md:w-96">	CSS/Tailwind styling.
130	<Search className="absolute left-3 top-1/2 -translate-y-1/2 w-5 h-5 text-secondary" />	CSS/Tailwind styling.
131	<input	JSX element opening tag.
132	id="store-search"	Logic or UI structure — read with surrounding lines.
133	type="text"	Logic or UI structure — read with surrounding lines.
134	value={search}	Logic or UI structure — read with surrounding lines.
135	onChange={(e) => setSearch(e.target.value)}	User event handler.
136	placeholder="Search stores by name, ID, or location..."	Logic or UI structure — read with surrounding lines.
137	className="w-full pl-10 pr-4 py-3 rounded-lg border border-surface-variant bg-surface-container-lowest fo...	CSS/Tailwind styling.
138	/>	Logic or UI structure — read with surrounding lines.
139	</div>	JSX element opening tag.
140		Blank line.

Line	Code	Explanation
141	<code>/* Status filter chips */</code>	Logic or UI structure — read with surrounding lines.
142	<code><div className="flex gap-2 w-full md:w-auto overflow-x-auto pb-2 md:pb-0 scrollbar-hide"></code>	CSS/Tailwind styling.
143	<code>{STATUS_TABS.map((tab) => {</code>	Logic or UI structure — read with surrounding lines.
144	<code>const isActive = status === tab.key</code>	Logic or UI structure — read with surrounding lines.
145	<code>return (</code>	Return JSX UI.
146	<code><button</code>	JSX element opening tag.
147	<code>key={tab.key}</code>	Logic or UI structure — read with surrounding lines.
148	<code>id={`filter-\${tab.key}`}</code>	Logic or UI structure — read with surrounding lines.
149	<code>onClick={() => setStatus(tab.key)}</code>	User event handler.
150	<code>className={`flex-shrink-0 flex items-center gap-2 px-4 py-2 rounded-full font-label-md text-label-md ...`}</code>	CSS/Tailwind styling.
151	<code>isActive</code>	Logic or UI structure — read with surrounding lines.
152	<code>? 'bg-primary-container text-on-primary-container shadow-sm'</code>	Logic or UI structure — read with surrounding lines.
153	<code>: 'border border-surface-variant bg-surface text-secondary hover:bg-surface-container-low'</code>	Logic or UI structure — read with surrounding lines.
154	<code>}`}</code>	Logic or UI structure — read with surrounding lines.
155	<code>></code>	Logic or UI structure — read with surrounding lines.
156	<code>{tab.label}</code>	Logic or UI structure — read with surrounding lines.
157	<code>{isActive && tab.key !== 'all' && (</code>	Logic or UI structure — read with surrounding lines.
158	<code><X</code>	JSX element opening tag.
159	<code>className="w-3.5 h-3.5 cursor-pointer"</code>	CSS/Tailwind styling.
160	<code>onClick={(e) => {</code>	User event handler.
161	<code>e.stopPropagation()</code>	Logic or UI structure — read with surrounding lines.
162	<code>setStatus('all')</code>	Logic or UI structure — read with surrounding lines.
163	<code>}}</code>	Logic or UI structure — read with surrounding lines.
164	<code>/></code>	Logic or UI structure — read with surrounding lines.
165	<code>})}</code>	Logic or UI structure — read with surrounding lines.
166	<code></button></code>	JSX element opening tag.
167	<code>)</code>	Logic or UI structure — read with surrounding lines.
168	<code>}}}</code>	Logic or UI structure — read with surrounding lines.
169	<code></div></code>	JSX element opening tag.
170	<code></div></code>	JSX element opening tag.
171		Blank line.
172	<code>/* — Loading State — */</code>	Logic or UI structure — read with surrounding lines.
173	<code>{loading && (</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
174	<code><div className="flex items-center justify-center py-20"></code>	CSS/Tailwind styling.
175	<code><Spinner size="lg" /></code>	Self-closing JSX element.
176	<code></div></code>	JSX element opening tag.
177	<code>)}</code>	Logic or UI structure — read with surrounding lines.
178		Blank line.
179	<code>{/* — Empty State — */}</code>	Logic or UI structure — read with surrounding lines.
180	<code>{!loading && stores.length === 0 && (</code>	Logic or UI structure — read with surrounding lines.
181	<code><EmptyState</code>	JSX element opening tag.
182	<code>icon={StoreIcon}</code>	Logic or UI structure — read with surrounding lines.
183	<code>title="No stores found"</code>	Logic or UI structure — read with surrounding lines.
184	<code>description={debouncedSearch ? `No stores match "\${debouncedSearch}". Try another search term.` : 'There ar...</code>	Logic or UI structure — read with surrounding lines.
185	<code>className="py-16"</code>	CSS/Tailwind styling.
186	<code>/></code>	Logic or UI structure — read with surrounding lines.
187	<code>)}</code>	Logic or UI structure — read with surrounding lines.
188		Blank line.
189	<code>{/* — Desktop Table View (Hidden on Mobile) — */}</code>	Logic or UI structure — read with surrounding lines.
190	<code>{!loading && stores.length > 0 && (</code>	Logic or UI structure — read with surrounding lines.
191	<code><></code>	JSX element opening tag.
192	<code><div className="hidden md:block bg-surface border border-surface-variant rounded-xl shadow-card overflow-hi...</code>	CSS/Tailwind styling.
193	<code><table className="w-full text-left border-collapse"></code>	CSS/Tailwind styling.
194	<code><thead></code>	JSX element opening tag.
195	<code><tr className="bg-surface-container-low border-b border-surface-variant text-secondary font-label-sm ...</code>	CSS/Tailwind styling.
196	<code><th className="p-4 font-semibold">Store Info</th></code>	CSS/Tailwind styling.
197	<code><th className="p-4 font-semibold">Location</th></code>	CSS/Tailwind styling.
198	<code><th className="p-4 font-semibold">Status</th></code>	CSS/Tailwind styling.
199	<code><th className="p-4 font-semibold">Daily Revenue</th></code>	CSS/Tailwind styling.
200	<code><th className="p-4 font-semibold">Rating</th></code>	CSS/Tailwind styling.
201	<code><th className="p-4 font-semibold text-right">Actions</th></code>	CSS/Tailwind styling.
202	<code></tr></code>	JSX element opening tag.
203	<code></thead></code>	JSX element opening tag.
204	<code><tbody className="divide-y divide-surface-variant"></code>	CSS/Tailwind styling.
205	<code>{stores.map((store) => (</code>	Logic or UI structure — read with surrounding lines.
206	<code><tr</code>	JSX element opening tag.
207	<code>key={store.id}</code>	Logic or UI structure — read with surrounding lines.
208	<code>className="hover:bg-surface-container-lowest transition-colors cursor-pointer"</code>	CSS/Tailwind styling.

Line	Code	Explanation
209	onClick={() => navigate(`/stores/\${store.id}`)}	User event handler.
210	>	Logic or UI structure — read with surrounding lines.
211	{/* Store Info - avatar + name */}	Logic or UI structure — read with surrounding lines.
212	<td className="p-4">	CSS/Tailwind styling.
213	<div className="flex items-center gap-3">	CSS/Tailwind styling.
214	<div className="w-12 h-12 rounded-lg bg-surface-container flex items-center justify-center ov...	CSS/Tailwind styling.
215	{store.logo_url ? (	Logic or UI structure — read with surrounding lines.
216	<img	JSX element opening tag.
217	src={store.logo_url}	Logic or UI structure — read with surrounding lines.
218	alt={store.store_name}	Logic or UI structure — read with surrounding lines.
219	className="w- full h-full object-cover"	CSS/Tailwind styling.
220	/>	Logic or UI structure — read with surrounding lines.
221	) : (	Logic or UI structure — read with surrounding lines.
222	<StoreIcon className="w-6 h-6 text-secondary" />	CSS/Tailwind styling.
223	)}	Logic or UI structure — read with surrounding lines.
224	</div>	JSX element opening tag.
225	<div>	JSX element opening tag.
226	<div className="text-label-lg text-on-surface font-semibold">	CSS/Tailwind styling.
227	{store.store_name 'Unnamed Store'}	Logic or UI structure — read with surrounding lines.
228	</div>	JSX element opening tag.
229	<div className="text-label-sm text-secondary">	CSS/Tailwind styling.
230	ID: {store.id?.slice(0, 8)?.toUpperCase() '-'}	Logic or UI structure — read with surrounding lines.
231	</div>	JSX element opening tag.
232	</div>	JSX element opening tag.
233	</div>	JSX element opening tag.
234	</td>	JSX element opening tag.
235		Blank line.
236	{/* Location */}	Logic or UI structure — read with surrounding lines.
237	<td className="p-4 text- body-md text-secondary">	CSS/Tailwind styling.
238	{store.address store.city '-'}	Logic or UI structure — read with surrounding lines.
239	</td>	JSX element opening tag.
240		Blank line.
241	{/* Status */}	Logic or UI structure — read with surrounding lines.
242	<td className="p-4">	CSS/Tailwind styling.
243	<Badge variant={statusVariant(store.status)}>	JSX element opening tag.
244	{store.status 'unknown'}	Logic or UI structure — read with surrounding lines.
245	</Badge>	JSX element opening tag.

Line	Code	Explanation
246	<code></td></code>	JSX element opening tag.
247		Blank line.
248	<code>{/* Daily Revenue */}</code>	Logic or UI structure — read with surrounding lines.
249	<code><td className="p-4 text-headline-sm text-primary font-semibold"></code>	CSS/Tailwind styling.
250	<code>{formatCurrency(store.daily_revenue 0)}</code>	Logic or UI structure — read with surrounding lines.
251	<code></td></code>	JSX element opening tag.
252		Blank line.
253	<code>{/* Rating */}</code>	Logic or UI structure — read with surrounding lines.
254	<code><td className="p-4"></code>	CSS/Tailwind styling.
255	<code><div className="flex items-center gap-1"></code>	CSS/Tailwind styling.
256	<code><Star className="w-4 h-4 text-[#FBBC04] fill-[#FBBC04]" /></code>	CSS/Tailwind styling.
257	<code></code>	CSS/Tailwind styling.
258	<code>{store.rating?.toFixed(1) '-'}</code>	Logic or UI structure — read with surrounding lines.
259	<code></code>	JSX element opening tag.
260	<code></div></code>	JSX element opening tag.
261	<code></td></code>	JSX element opening tag.
262		Blank line.
263	<code>{/* Actions */}</code>	Logic or UI structure — read with surrounding lines.
264	<code><td className="p-4 text-right"></code>	CSS/Tailwind styling.
265	<code><div className="relative inline-block"></code>	CSS/Tailwind styling.
266	<code><button</code>	JSX element opening tag.
267	<code>id={`action-\${store.id}`}</code>	Logic or UI structure — read with surrounding lines.
268	<code>onClick={(e) => {</code>	User event handler.
269	<code>e.stopPropagation()</code>	Logic or UI structure — read with surrounding lines.
270	<code>setActionMenuId(actionMenuId === store.id ? null : store.id)</code>	Logic or UI structure — read with surrounding lines.
271	<code>}}}</code>	Logic or UI structure — read with surrounding lines.
272	<code>className="text-primary hover:bg-surface-container-low p-2 rounded-full transition-colors"</code>	CSS/Tailwind styling.
273	<code>></code>	Logic or UI structure — read with surrounding lines.
274	<code><MoreVertical className="w-5 h-5" /></code>	CSS/Tailwind styling.
275	<code></button></code>	JSX element opening tag.
276	<code>{actionMenuId === store.id && (</code>	Logic or UI structure — read with surrounding lines.
277	<code><div className="absolute right-0 top-10 z-30 w-48 bg-surface-container-lowest border border...</code>	CSS/Tailwind styling.
278	<code><button</code>	JSX element opening tag.
279	<code>onClick={(e) => { e.stopPropagation(); navigate(`/stores/\${store.id}`) }}}</code>	User event handler.
280	<code>className="w-full text-left px-4 py-2.5 text-body-md text-on-surface hover:bg-surface-c...</code>	CSS/Tailwind styling.

Line	Code	Explanation
281	>	Logic or UI structure — read with surrounding lines.
282	View Details	Logic or UI structure — read with surrounding lines.
283	</button>	JSX element opening tag.
284	{store.status !== 'active' && (	Logic or UI structure — read with surrounding lines.
285	<button	JSX element opening tag.
286	onClick={(e) => { e.stopPropagation(); handleStatusAction(store, 'active') }}	User event handler.
287	className="w-full text-left px-4 py-2.5 text-body-md text-success hover:bg-surface-co...	CSS/Tailwind styling.
288	>	Logic or UI structure — read with surrounding lines.
289	Activate	Logic or UI structure — read with surrounding lines.
290	</button>	JSX element opening tag.
291	)}	Logic or UI structure — read with surrounding lines.
292	{store.status !== 'suspended' && (	Logic or UI structure — read with surrounding lines.
293	<button	JSX element opening tag.
294	onClick={(e) => { e.stopPropagation(); handleStatusAction(store, 'suspended') }}	User event handler.
295	className="w-full text-left px-4 py-2.5 text-body-md text-warning hover:bg-surface-co...	CSS/Tailwind styling.
296	>	Logic or UI structure — read with surrounding lines.
297	Suspend Store	Logic or UI structure — read with surrounding lines.
298	</button>	JSX element opening tag.
299	)}	Logic or UI structure — read with surrounding lines.
300	{store.status !== 'closed' && (	Logic or UI structure — read with surrounding lines.
301	<button	JSX element opening tag.
302	onClick={(e) => { e.stopPropagation(); handleStatusAction(store, 'closed') }}	User event handler.
303	className="w-full text-left px-4 py-2.5 text-body-md text-danger hover:bg-surface-con...	CSS/Tailwind styling.
304	>	Logic or UI structure — read with surrounding lines.
305	Close Store	Logic or UI structure — read with surrounding lines.
306	</button>	JSX element opening tag.
307	)}	Logic or UI structure — read with surrounding lines.
308	</div>	JSX element opening tag.
309	)}	Logic or UI structure — read with surrounding lines.
310	</div>	JSX element opening tag.
311	</td>	JSX element opening tag.
312	</tr>	JSX element opening tag.
313	))}	Logic or UI structure — read with surrounding lines.
314	</tbody>	JSX element opening tag.

Line	Code	Explanation
315	<code></table></code>	JSX element opening tag.
316	<code></div></code>	JSX element opening tag.
317		Blank line.
318	<code> { /* — Mobile Card View (Hidden on Desktop) — */ }</code>	Logic or UI structure — read with surrounding lines.
319	<code> <div className="md:hidden space-y-4 mb-6"></code>	CSS/Tailwind styling.
320	<code> {stores.map((store) => (</code>	Logic or UI structure — read with surrounding lines.
321	<code> <div</code>	JSX element opening tag.
322	<code> key={store.id}</code>	Logic or UI structure — read with surrounding lines.
323	<code> className="bg-surface border border-surface-variant rounded-xl p-3 shadow-card flex flex-col gap-3"</code>	CSS/Tailwind styling.
324	<code> ></code>	Logic or UI structure — read with surrounding lines.
325	<code> <div className="flex gap-3"></code>	CSS/Tailwind styling.
326	<code> { /* Store image / icon */ }</code>	Logic or UI structure — read with surrounding lines.
327	<code> <div className="w-16 h-16 rounded-lg bg-surface-container flex items-center justify-center overflow...</code>	CSS/Tailwind styling.
328	<code> {store.logo_url ? (</code>	Logic or UI structure — read with surrounding lines.
329	<code> <img</code>	CSS/Tailwind styling.
330	<code> src={store.logo_url} alt={store.store_name} className="w-full h-full object-cover" /></code>	Logic or UI structure — read with surrounding lines.
331	<code> <StoreIcon</code>	CSS/Tailwind styling.
332	<code> className="w-7 h-7 text-secondary" />) : (</code>	Logic or UI structure — read with surrounding lines.
333	<code> <div></code>	JSX element opening tag.
334	<code> <div className="flex-1 min-w-0"></code>	CSS/Tailwind styling.
335	<code> <div className="flex justify-between items-start"></code>	CSS/Tailwind styling.
336	<code> <div className="text-label-lg text-on-surface font-semibold truncate"></code>	CSS/Tailwind styling.
337	<code> {store.store_name 'Unnamed'}</code>	Logic or UI structure — read with surrounding lines.
338	<code> </div></code>	JSX element opening tag.
339	<code> <Badge</code>	CSS/Tailwind styling.
340	<code> variant={statusVariant(store.status)} className="ml-2"></code>	Logic or UI structure — read with surrounding lines.
341	<code> {store.status}</code>	JSX element opening tag.
342	<code> </Badge></code>	JSX element opening tag.
343	<code> <div className="text-body-sm text-secondary mt-0.5 truncate"></code>	CSS/Tailwind styling.
344	<code> {store.address store.city '-'}</code>	Logic or UI structure — read with surrounding lines.
345	<code> </div></code>	JSX element opening tag.
346	<code> <div className="flex justify-between items-end mt-2"></code>	CSS/Tailwind styling.
347	<code> <div className="text-headline-sm text-primary font-semibold"></code>	CSS/Tailwind styling.
348	<code> {formatCurrency(store.daily_revenue 0)}</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
349	<code></div></code>	JSX element opening tag.
350	<code><div className="flex items-center gap-1"></code>	CSS/Tailwind styling.
351	<code><Star className="w-3.5 h-3.5 text-[#FBBC04] fill-[#FBBC04]" /></code>	CSS/Tailwind styling.
352	<code>{store.rating?.toFixed(1) '-'}</code>	CSS/Tailwind styling.
353	<code></div></code>	JSX element opening tag.
354	<code></div></code>	JSX element opening tag.
355	<code></div></code>	JSX element opening tag.
356	<code></div></code>	JSX element opening tag.
357	<code>{/* Card bottom actions */}</code>	Logic or UI structure — read with surrounding lines.
358	<code><div className="border-t border-surface-variant pt-2 flex justify-end gap-2"></code>	CSS/Tailwind styling.
359	<code><button</code>	JSX element opening tag.
360	<code>onClick={() => setActionMenuId(actionMenuId === store.id ? null : store.id)}</code>	User event handler.
361	<code>className="px-4 py-1.5 rounded-full border border-surface-variant text-secondary font-label-md ho...</code>	CSS/Tailwind styling.
362	<code>></code>	Logic or UI structure — read with surrounding lines.
363	<code>Manage</code>	Logic or UI structure — read with surrounding lines.
364	<code></button></code>	JSX element opening tag.
365	<code><button</code>	JSX element opening tag.
366	<code>onClick={() => navigate(`/stores/\${store.id}`)}</code>	User event handler.
367	<code>className="px-4 py-1.5 rounded-full bg-primary-container text-on-primary-container font-label-md ...</code>	CSS/Tailwind styling.
368	<code>></code>	Logic or UI structure — read with surrounding lines.
369	<code>View Details</code>	Logic or UI structure — read with surrounding lines.
370	<code></button></code>	JSX element opening tag.
371	<code></div></code>	JSX element opening tag.
372	<code></div></code>	JSX element opening tag.
373	<code>)))}</code>	Logic or UI structure — read with surrounding lines.
374	<code></div></code>	JSX element opening tag.
375		Blank line.
376	<code>{/* — Pagination — */}</code>	Logic or UI structure — read with surrounding lines.
377	<code><Pagination</code>	JSX element opening tag.
378	<code>currentPage={page}</code>	Logic or UI structure — read with surrounding lines.
379	<code>totalItems={total}</code>	Logic or UI structure — read with surrounding lines.
380	<code>itemsPerPage={PAGE_SIZE}</code>	Logic or UI structure — read with surrounding lines.
381	<code>onPageChange={setPage}</code>	Logic or UI structure — read with surrounding lines.
382	<code>/></code>	Logic or UI structure — read with surrounding lines.
383	<code></></code>	Self-closing JSX element.

Line	Code	Explanation
384	}}	Logic or UI structure — read with surrounding lines.
385		Blank line.
386	{ /* — Confirm Dialog — */ }	Logic or UI structure — read with surrounding lines.
387	{confirmDialog && (	Logic or UI structure — read with surrounding lines.
388	<ConfirmDialog	JSX element opening tag.
389	isOpen={true}	Logic or UI structure — read with surrounding lines.
390	title={confirmDialog.title}	Logic or UI structure — read with surrounding lines.
391	message={confirmDialog.message}	Logic or UI structure — read with surrounding lines.
392	confirmLabel="Confirm"	Logic or UI structure — read with surrounding lines.
393	variant={confirmDialog.variant}	Logic or UI structure — read with surrounding lines.
394	onConfirm={confirmDialog.onConfirm}	Logic or UI structure — read with surrounding lines.
395	onCancel={() => setConfirmDialog(null)}	Logic or UI structure — read with surrounding lines.
396	/>	Logic or UI structure — read with surrounding lines.
397	)}	Logic or UI structure — read with surrounding lines.
398	</div>	JSX element opening tag.
399	)	Logic or UI structure — read with surrounding lines.
400	}	Logic or UI structure — read with surrounding lines.
401		Blank line.

StoreDetailPage (src/pages/StoreDetailPage.jsx)

Total lines: 891

Route: /stores/:id

Purpose: Single store profile, KYC, products, stats.

Line	Code	Explanation
1	import { useState, useEffect, useCallback } from 'react'	Import React hooks.
2	import { useParams, useNavigate, Link } from 'react-router-dom'	Import routing.
3	import {	Import dependency.
4	ArrowLeft, Star, Phone, MapPin, Clock, Truck, User, Edit2,	Logic or UI structure — read with surrounding lines.
5	MessageSquare, Ban, CheckCircle, Package, FileText, Settings,	Logic or UI structure — read with surrounding lines.
6	TrendingUp, ShoppingBag, Receipt, Percent, ExternalLink,	Logic or UI structure — read with surrounding lines.
7	Store as StoreIcon, Shield, AlertTriangle, Trash2, Flag, Info	Logic or UI structure — read with surrounding lines.
8	} from 'lucide-react'	Logic or UI structure — read with surrounding lines.
9	import toast from 'react-hot-toast'	Import dependency.
10	import {	Import dependency.
11	getStoreById,	Logic or UI structure — read with surrounding lines.
12	updateStoreStatus,	Logic or UI structure — read with surrounding lines.
13	getStoreStats,	Logic or UI structure — read with surrounding lines.
14	getStoreDocuments,	Logic or UI structure — read with surrounding lines.
15	verifyStoreDocument,	Logic or UI structure — read with surrounding lines.
16	updateStore	Logic or UI structure — read with surrounding lines.
17	} from '../services/storeService'	Logic or UI structure — read with surrounding lines.
18	import {	Import dependency.
19	getProducts,	Logic or UI structure — read with surrounding lines.
20	flagProduct,	Logic or UI structure — read with surrounding lines.
21	removeProduct	Logic or UI structure — read with surrounding lines.
22	} from '../services/productService'	Logic or UI structure — read with surrounding lines.
23	import { formatCurrency, formatDate, formatPhone, formatNumber } from '../utils/formatters'	Import helper utilities.
24	import Badge from '../components/ui/Badge'	Import UI component.
25	import Spinner from '../components/ui/Spinner'	Import UI component.
26	import ConfirmDialog from '../components/ui/ConfirmDialog'	Import UI component.
27	import Card from '../components/ui/Card'	Import UI component.
28	import Toggle from '../components/ui/Toggle'	Import UI component.
29	import Modal from '../components/ui/Modal'	Import UI component.
30	import Input from '../components/ui/Input'	Import UI component.
31	import Button from '../components/ui/Button'	Import UI component.
32		Blank line.
33	/**	Doc comment.
34	* ZapKart Admin — Store Detail Page	Doc comment.

Line	Code	Explanation
35	<code>* Matching the Stitch store_detail_fresh_mart design.</code>	Doc comment.
36	<code>* Sections: Header card, Quick Stats, Tabbed content (Overview / KYC / Products / Settings).</code>	Doc comment.
37	<code>*/</code>	Doc comment.
38		Blank line.
39	<code>const TABS = [</code>	Logic or UI structure — read with surrounding lines.
40	<code> { key: 'overview', label: 'Overview', icon: TrendingUp },</code>	Logic or UI structure — read with surrounding lines.
41	<code> { key: 'kyc', label: 'KYC Documents', icon: FileText },</code>	Logic or UI structure — read with surrounding lines.
42	<code> { key: 'products', label: 'Products', icon: Package },</code>	Logic or UI structure — read with surrounding lines.
43	<code> { key: 'settings', label: 'Settings', icon: Settings },</code>	Logic or UI structure — read with surrounding lines.
44	<code>]</code>	Logic or UI structure — read with surrounding lines.
45		Blank line.
46	<code>// Maps store status to Badge variant</code>	Comment: Maps store status to Badge variant
47	<code>function statusVariant(status) {</code>	Logic or UI structure — read with surrounding lines.
48	<code> const map = { active: 'success', pending: 'warning', suspended: 'danger', closed: 'secondary' }</code>	Logic or UI structure — read with surrounding lines.
49	<code> return map[status?.toLowerCase()] 'secondary'</code>	Logic or UI structure — read with surrounding lines.
50	<code>}</code>	Logic or UI structure — read with surrounding lines.
51		Blank line.
52	<code>export default function StoreDetailPage() {</code>	Default export (main module).
53	<code> const { id } = useParams()</code>	Logic or UI structure — read with surrounding lines.
54	<code> const navigate = useNavigate()</code>	Programmatic navigation hook.
55	<code> const [store, setStore] = useState(null)</code>	React state variable.
56	<code> const [stats, setStats] = useState(null)</code>	React state variable.
57	<code> const [documents, setDocuments] = useState([])</code>	React state variable.
58	<code> const [loading, setLoading] = useState(true)</code>	React state variable.
59	<code> const [activeTab, setActiveTab] = useState('overview')</code>	React state variable.
60	<code> const [confirmDialog, setConfirmDialog] = useState(null)</code>	React state variable.
61		Blank line.
62	<code> // Fetch store data, stats, and documents in parallel</code>	Comment: Fetch store data, stats, and documents in parallel
63	<code> const fetchAll = useCallback(async () => {</code>	Memoized callback function.
64	<code> setLoading(true)</code>	Logic or UI structure — read with surrounding lines.
65	<code> try {</code>	Try block start.
66	<code> const [storeData, storeStats, storeDocs] = await Promise.allSettled([</code>	Wait for async operation.
67	<code> getStoreById(id),</code>	Logic or UI structure — read with surrounding lines.
68	<code> getStoreStats(id),</code>	Logic or UI structure — read with surrounding lines.
69	<code> getStoreDocuments(id),</code>	Logic or UI structure — read with surrounding lines.
70	<code>])</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
71	if (storeData.status === 'fulfilled') setStore(storeData.value)	Logic or UI structure — read with surrounding lines.
72	else throw new Error(storeData.reason?.message 'Store not found')	Logic or UI structure — read with surrounding lines.
73	if (storeStats.status === 'fulfilled') setStats(storeStats.value)	Logic or UI structure — read with surrounding lines.
74	if (storeDocs.status === 'fulfilled') setDocuments(storeDocs.value [])	Logic or UI structure — read with surrounding lines.
75	} catch (err) {	Catch errors.
76	console.error(err)	Logic or UI structure — read with surrounding lines.
77	toast.error('Could not load store details.')	Toast notification.
78	} finally {	Finally block (cleanup).
79	setLoading(false)	Logic or UI structure — read with surrounding lines.
80	}	Logic or UI structure — read with surrounding lines.
81	}, [id])	Logic or UI structure — read with surrounding lines.
82		Blank line.
83	useEffect(() => {	Side effect (fetch, subscribe, redirect).
84	fetchAll()	Logic or UI structure — read with surrounding lines.
85	}, [fetchAll])	Logic or UI structure — read with surrounding lines.
86		Blank line.
87	// Handle status change	Comment: Handle status change
88	const handleStatusAction = (newStatus) => {	Logic or UI structure — read with surrounding lines.
89	const labels = { active: 'activate', suspended: 'suspend', closed: 'close' }	Logic or UI structure — read with surrounding lines.
90	setConfirmDialog({	Logic or UI structure — read with surrounding lines.
91	title: `\${labels[newStatus]?.charAt(0).toUpperCase() + labels[newStatus]?.slice(1)} Store`,	Logic or UI structure — read with surrounding lines.
92	message: `Are you sure you want to \${labels[newStatus]} "\${store?.store_name}"?\${newStatus === 'suspended' ? ' ...	Logic or UI structure — read with surrounding lines.
93	variant: newStatus === 'active' ? 'primary' : 'danger',	Logic or UI structure — read with surrounding lines.
94	onConfirm: async () => {	Logic or UI structure — read with surrounding lines.
95	try {	Try block start.
96	await updateStoreStatus(id, newStatus, 'admin')	Wait for async operation.
97	toast.success(`Store \${labels[newStatus]}d successfully`)	Toast notification.
98	fetchAll()	Logic or UI structure — read with surrounding lines.
99	} catch (err) {	Catch errors.
100	toast.error(`Failed: \${err.message}`)	Toast notification.
101	}	Logic or UI structure — read with surrounding lines.
102	setConfirmDialog(null)	Logic or UI structure — read with surrounding lines.
103	},	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
104	})	Logic or UI structure — read with surrounding lines.
105	}	Logic or UI structure — read with surrounding lines.
106		Blank line.
107	// Handle KYC doc verification toggle	Comment: Handle KYC doc verification toggle
108	const handleVerifyDoc = async (docId, currentVerified) => {	Async function for network calls.
109	try {	Try block start.
110	await verifyStoreDocument(docId, !currentVerified)	Wait for async operation.
111	toast.success(currentVerified ? 'Document marked pending' : 'Document verified successfully')	Toast notification.
112	const updated = await getStoreDocuments(id)	Wait for async operation.
113	setDocuments(updated [])	Logic or UI structure — read with surrounding lines.
114	} catch (err) {	Catch errors.
115	toast.error(`Verification failed: \${err.message}`)	Toast notification.
116	}	Logic or UI structure — read with surrounding lines.
117	}	Logic or UI structure — read with surrounding lines.
118		Blank line.
119	// Handle setting updates (e.g. commission rate)	Comment: Handle setting updates (e.g. commission rate)
120	const handleUpdateStore = async (updates) => {	Async function for network calls.
121	try {	Try block start.
122	const updated = await updateStore(id, updates)	Wait for async operation.
123	setStore(updated)	Logic or UI structure — read with surrounding lines.
124	toast.success('Store configuration updated successfully')	Toast notification.
125	} catch (err) {	Catch errors.
126	toast.error(`Update failed: \${err.message}`)	Toast notification.
127	}	Logic or UI structure — read with surrounding lines.
128	}	Logic or UI structure — read with surrounding lines.
129		Blank line.
130	if (loading) {	Logic or UI structure — read with surrounding lines.
131	return (	Return JSX UI.
132	<div className="flex items-center justify-center min-h-[60vh]">	CSS/Tailwind styling.
133	<Spinner size="lg" />	Self-closing JSX element.
134	</div>	JSX element opening tag.
135	)	Logic or UI structure — read with surrounding lines.
136	}	Logic or UI structure — read with surrounding lines.
137		Blank line.
138	if (!store) {	Logic or UI structure — read with surrounding lines.
139	return (	Return JSX UI.

Line	Code	Explanation
140	<code><div className="flex flex-col items-center justify-center min-h-[50vh] gap-4 animate-fade-in"></code>	CSS/Tailwind styling.
141	<code><StoreIcon className="w-16 h-16 text-secondary opacity-40" /></code>	CSS/Tailwind styling.
142	<code><h2 className="text-headline-md text-on-surface">Store Not Found</h2></code>	CSS/Tailwind styling.
143	<code><p className="text-body-md text-secondary">The requested store could not be loaded.</p></code>	CSS/Tailwind styling.
144	<code><button</code>	JSX element opening tag.
145	<code>onClick={() => navigate('/stores')}</code>	User event handler.
146	<code>className="mt-2 px-6 py-2.5 rounded-full bg-primary text-on-primary font-label-lg transition-colors hover:b..."</code>	CSS/Tailwind styling.
147	<code>></code>	Logic or UI structure — read with surrounding lines.
148	<code>Back to Stores</code>	Logic or UI structure — read with surrounding lines.
149	<code></button></code>	JSX element opening tag.
150	<code></div></code>	JSX element opening tag.
151	<code>)</code>	Logic or UI structure — read with surrounding lines.
152	<code>}</code>	Logic or UI structure — read with surrounding lines.
153		Blank line.
154	<code>return (</code>	Return JSX UI.
155	<code><div className="animate-fade-in"></code>	CSS/Tailwind styling.
156	<code>{/* — Breadcrumb — */}</code>	Logic or UI structure — read with surrounding lines.
157	<code><nav className="flex items-center gap-2 mb-6 text-body-sm text-secondary"></code>	CSS/Tailwind styling.
158	<code><Link</code>	JSX element opening tag.
159	<code>to="/stores"</code>	Logic or UI structure — read with surrounding lines.
160	<code>className="hover:text-primary transition-colors flex items-center gap-1 font-medium"</code>	CSS/Tailwind styling.
161	<code>></code>	Logic or UI structure — read with surrounding lines.
162	<code><ArrowLeft className="w-4 h-4" /></code>	CSS/Tailwind styling.
163	<code>Stores</code>	JSX element opening tag.
164	<code></Link></code>	CSS/Tailwind styling.
165	<code></code>	CSS/Tailwind styling.
166	<code>{store.store_name 'Store Detail'}</code>	CSS/Tailwind styling.
167	<code></nav></code>	JSX element opening tag.
168	<code>{/* — Store Header Card — */}</code>	Blank line.
169	<code><div className="bg-surface-container-lowest rounded-xl shadow-card border border-surface-variant p-5 mb-6 flex ..."</code>	Logic or UI structure — read with surrounding lines.
170	<code>{/* Left: Store photos */}</code>	CSS/Tailwind styling.
171	<code><div className="flex gap-2 shrink-0"></code>	CSS/Tailwind styling.
172	<code><div className="relative w-40 h-24 rounded-xl overflow-hidden bg-surface-container group border border-surf..."</code>	CSS/Tailwind styling.
173	<code>{store.logo_url ? (</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
174	<code></code>	CSS/Tailwind styling.
175	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
176	<code><div className="w-full h-full flex items-center justify-center"></code>	CSS/Tailwind styling.
177	<code><StoreIcon className="w-10 h- 10 text-secondary opacity-40" /></code>	CSS/Tailwind styling.
178	<code></div></code>	JSX element opening tag.
179	<code>)}</code>	Logic or UI structure — read with surrounding lines.
180	<code><div className="absolute bottom-0 left-0 right-0 bg-gradient-to-t from-black/60 to-transparent p-1.5 text..."</code>	CSS/Tailwind styling.
181	<code>Store Front</code>	Logic or UI structure — read with surrounding lines.
182	<code></div></code>	JSX element opening tag.
183	<code></div></code>	JSX element opening tag.
184	<code></div></code>	JSX element opening tag.
185		Blank line.
186	<code>{/* Middle: Store details */}</code>	Logic or UI structure — read with surrounding lines.
187	<code><div className="flex-1 flex flex-col gap-2"></code>	CSS/Tailwind styling.
188	<code><div className="flex items-center gap-3 flex-wrap"></code>	CSS/Tailwind styling.
189	<code><h2 className="text-headline-lg text-on-surface">{store.store_name}</h2></code>	CSS/Tailwind styling.
190	<code></code>	CSS/Tailwind styling.
191	<code>{store.store_type 'General Store'} · {store.city 'Location N/A'}</code>	Logic or UI structure — read with surrounding lines.
192	<code></code>	JSX element opening tag.
193	<code></div></code>	JSX element opening tag.
194		Blank line.
195	<code><div className="grid grid-cols-1 md:grid-cols-2 gap-x-4 gap-y-2 text-body-sm text-secondary"></code>	CSS/Tailwind styling.
196	<code><div className="flex items-center gap-1.5"></code>	CSS/Tailwind styling.
197	<code><User className="w-4 h-4 shrink- 0" /></code>	CSS/Tailwind styling.
198	<code></code>	JSX element opening tag.
199	<code>{store.owner_name '-'} · {' '}</code>	Logic or UI structure — read with surrounding lines.
200	<code></code>	CSS/Tailwind styling.
201	<code>{formatPhone(store.owner_phone)}</code>	Logic or UI structure — read with surrounding lines.
202	<code></code>	JSX element opening tag.
203	<code></code>	JSX element opening tag.
204	<code></div></code>	JSX element opening tag.
205	<code><div className="flex items-center gap-1.5"></code>	CSS/Tailwind styling.
206	<code><MapPin className="w-4 h-4 shrink-0" /></code>	CSS/Tailwind styling.
207	<code>{store.address '- '}</code>	CSS/Tailwind styling.

Line	Code	Explanation
208	<code></div></code>	JSX element opening tag.
209	<code><div className="flex items-center gap-1.5"></code>	CSS/Tailwind styling.
210	<code><Clock className="w-4 h-4 shrink-0" /></code>	CSS/Tailwind styling.
211	<code>{store.opening_time '8:00 AM'} - {store.closing_time '10:00 PM'}</code>	JSX element opening tag.
212	<code></div></code>	JSX element opening tag.
213	<code><div className="flex items-center gap-1.5"></code>	CSS/Tailwind styling.
214	<code><Truck className="w-4 h-4 shrink-0" /></code>	CSS/Tailwind styling.
215	<code>Delivery radius: {store.delivery_radius 2} km</code>	JSX element opening tag.
216	<code></div></code>	JSX element opening tag.
217	<code></div></code>	JSX element opening tag.
218		Blank line.
219	<code><div className="flex flex-wrap gap-4 mt-1 pt-2 border-t border-surface-variant font-label-md text-label-md"></code>	CSS/Tailwind styling.
220	<code><div className="text-secondary"></code>	CSS/Tailwind styling.
221	<code>Joined: {formatDate(store.created_at)}</code>	CSS/Tailwind styling.
222	<code></div></code>	JSX element opening tag.
223	<code>{store.gstin && (</code>	Logic or UI structure — read with surrounding lines.
224	<code><div className="text-secondary"></code>	CSS/Tailwind styling.
225	<code>GSTIN: {store.gstin}</code>	CSS/Tailwind styling.
226	<code></div></code>	JSX element opening tag.
227	<code>)}</code>	Logic or UI structure — read with surrounding lines.
228	<code><div className="text-secondary flex items-center gap-1"></code>	CSS/Tailwind styling.
229	<code>Commission: {store.commission_rate 18}%</code>	CSS/Tailwind styling.
230	<code></div></code>	JSX element opening tag.
231	<code></div></code>	JSX element opening tag.
232	<code></div></code>	JSX element opening tag.
233		Blank line.
234	<code>{/* Right: Status & Actions */}</code>	Logic or UI structure — read with surrounding lines.
235	<code><div className="flex flex-col items-end justify-between gap-4 border-t lg:border-t-0 lg:border-l border-surfa...</code>	CSS/Tailwind styling.
236	<code><div className="flex items-center gap-4 w-full justify-between lg:justify-end"></code>	CSS/Tailwind styling.
237	<code><div className="text-label-lg text-on-surface flex items-center gap-1.5"></code>	CSS/Tailwind styling.
238	<code>{store.rating?.toFixed(1) '-'}</code>	CSS/Tailwind styling.
239	<code><Star className="w-4 h-4 text-[#FBBC04] fill-[#FBBC04]" /></code>	CSS/Tailwind styling.
240	<code></code>	CSS/Tailwind styling.
241	<code>({formatNumber(store.total_reviews 0)} reviews)</code>	Logic or UI structure — read with surrounding lines.
242	<code></code>	JSX element opening tag.

Line	Code	Explanation
243	<code></div></code>	JSX element opening tag.
244	<code><Badge variant={statusVariant(store.status)} className="text-label-md px-3 py-1"></code>	CSS/Tailwind styling.
245	<code>●</code>	CSS/Tailwind styling.
246	<code>{store.status}</code>	Logic or UI structure — read with surrounding lines.
247	<code></Badge></code>	JSX element opening tag.
248	<code></div></code>	JSX element opening tag.
249		Blank line.
250	<code><div className="flex flex-col sm:flex-row lg:flex-col gap-2 w-full lg:w-auto mt-auto"></code>	CSS/Tailwind styling.
251	<code><button className="px-4 py-2 border border-secondary text-secondary font- label-lg rounded-full hover:bg-s...</code>	CSS/Tailwind styling.
252	<code><MessageSquare className="w-4 h- 4" /> Send Message</code>	CSS/Tailwind styling.
253	<code></button></code>	JSX element opening tag.
254	<code>{store.status === 'active' ? (</code>	Logic or UI structure — read with surrounding lines.
255	<code><button</code>	JSX element opening tag.
256	<code>onClick={() => handleStatusAction('suspended')}</code>	User event handler.
257	<code>className="px-4 py-2 border border-danger text-danger font-label-lg rounded-full hover:bg-danger/10 t...</code>	CSS/Tailwind styling.
258	<code>></code>	Logic or UI structure — read with surrounding lines.
259	<code><Ban className="w-4 h-4" /> Suspend Store</code>	CSS/Tailwind styling.
260	<code></button></code>	JSX element opening tag.
261	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
262	<code><button</code>	JSX element opening tag.
263	<code>onClick={() => handleStatusAction('active')}</code>	User event handler.
264	<code>className="px-4 py-2 border border-success text-success font-label-lg rounded-full hover:bg-success/1...</code>	CSS/Tailwind styling.
265	<code>></code>	Logic or UI structure — read with surrounding lines.
266	<code><CheckCircle className="w-4 h- 4" /> Activate Store</code>	CSS/Tailwind styling.
267	<code></button></code>	JSX element opening tag.
268	<code>)}</code>	Logic or UI structure — read with surrounding lines.
269	<code></div></code>	JSX element opening tag.
270	<code></div></code>	JSX element opening tag.
271	<code></div></code>	JSX element opening tag.
272		Blank line.
273	<code>{/* — Quick Stats Row — */}</code>	Logic or UI structure — read with surrounding lines.
274	<code><div className="grid grid-cols-2 md:grid-cols-4 gap-4 mb-6"></code>	CSS/Tailwind styling.
275	<code><StatCard</code>	JSX element opening tag.
276	<code>icon={<TrendingUp className="w-5 h- 5" />}</code>	CSS/Tailwind styling.
277	<code>iconBg="bg-primary-fixed text- primary"</code>	Logic or UI structure — read with surrounding lines.
278	<code>label="Total Revenue"</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
279	value={formatCurrency(stats?.totalRevenue 0)}	Logic or UI structure — read with surrounding lines.
280	valueClass="text-primary"	Logic or UI structure — read with surrounding lines.
281	/>	Logic or UI structure — read with surrounding lines.
282	<StatCard	JSX element opening tag.
283	icon={<ShoppingBag className="w-5 h-5" />}	CSS/Tailwind styling.
284	iconBg="bg-surface-container-high text-on-surface"	Logic or UI structure — read with surrounding lines.
285	label="Total Orders"	Logic or UI structure — read with surrounding lines.
286	value={formatNumber(stats?.totalOrders 0)}	Logic or UI structure — read with surrounding lines.
287	/>	Logic or UI structure — read with surrounding lines.
288	<StatCard	JSX element opening tag.
289	icon={<Receipt className="w-5 h-5" />}	CSS/Tailwind styling.
290	iconBg="bg-surface-container-high text-on-surface"	Logic or UI structure — read with surrounding lines.
291	label="Delivered"	Logic or UI structure — read with surrounding lines.
292	value={formatNumber(stats?.deliveredOrders 0)}	Logic or UI structure — read with surrounding lines.
293	/>	Logic or UI structure — read with surrounding lines.
294	<StatCard	JSX element opening tag.
295	icon={<Percent className="w-5 h-5" />}	CSS/Tailwind styling.
296	iconBg="bg-success/10 text-success"	Logic or UI structure — read with surrounding lines.
297	label="Completion Rate"	Logic or UI structure — read with surrounding lines.
298	value={stats?.totalOrders ? `\${Math.round((stats.deliveredOrders / stats.totalOrders) * 100)}%` : '-'}	Logic or UI structure — read with surrounding lines.
299	/>	Logic or UI structure — read with surrounding lines.
300	</div>	JSX element opening tag.
301		Blank line.
302	/* — Tab Navigation — */	Logic or UI structure — read with surrounding lines.
303	<div className="flex gap-1 border-b border-surface-variant mb-6 overflow-x-auto scrollbar-hide">	CSS/Tailwind styling.
304	{TABS.map((tab) => {	Logic or UI structure — read with surrounding lines.
305	const Icon = tab.icon	Logic or UI structure — read with surrounding lines.
306	const isActive = activeTab === tab.key	Logic or UI structure — read with surrounding lines.
307	return (	Return JSX UI.
308	<button	JSX element opening tag.
309	key={tab.key}	Logic or UI structure — read with surrounding lines.
310	id={`tab-\${tab.key}`}	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
343	onConfirm={confirmDialog.onConfirm}	Logic or UI structure — read with surrounding lines.
344	onCancel={() => setConfirmDialog(null)}	Logic or UI structure — read with surrounding lines.
345	/>	Logic or UI structure — read with surrounding lines.
346	}}	Logic or UI structure — read with surrounding lines.
347	</div>	JSX element opening tag.
348	)	Logic or UI structure — read with surrounding lines.
349	}	Logic or UI structure — read with surrounding lines.
350		Blank line.
351	/* ===== Sub-Components ===== */	Doc comment.
352		Blank line.
353	// Stat card for the quick stats row	Comment: Stat card for the quick stats row
354	function StatCard({ icon, iconBg, label, value, valueClass = 'text-on-surface' }) {	Logic or UI structure — read with surrounding lines.
355	return (	Return JSX UI.
356	<div className="bg-surface-container- lowest rounded-lg border border-surface- variant p-4 shadow-card flex items-c...	CSS/Tailwind styling.
357	<div className={`w-10 h-10 rounded-full flex items-center justify-center shrink-0 \${iconBg}`}>	CSS/Tailwind styling.
358	{icon}	Logic or UI structure — read with surrounding lines.
359	</div>	JSX element opening tag.
360	<div>	JSX element opening tag.
361	<p className="text-label-md text- secondary mb-0.5">{label}</p>	CSS/Tailwind styling.
362	<p className={`text-headline-md font- bold \${valueClass}`}>{value}</p>	CSS/Tailwind styling.
363	</div>	JSX element opening tag.
364	</div>	JSX element opening tag.
365	)	Logic or UI structure — read with surrounding lines.
366	}	Logic or UI structure — read with surrounding lines.
367		Blank line.
368	// Overview tab content	Comment: Overview tab content
369	function OverviewTab({ store, stats, onUpdate, onStatusAction }) {	Logic or UI structure — read with surrounding lines.
370	// Local store open/closed toggles	Comment: Local store open/closed toggles
371	const isOpen = store.is_open ?? true	Logic or UI structure — read with surrounding lines.
372		Blank line.
373	const handleOpenToggle = async (checked) => {	Async function for network calls.
374	try {	Try block start.
375	await onUpdate({ is_open: checked })	Wait for async operation.
376	toast.success(checked ? 'Store marked Open' : 'Store marked Closed')	Toast notification.
377	} catch (err) {	Catch errors.
378	toast.error('Failed to update operational status')	Toast notification.
379	}	Logic or UI structure — read with surrounding lines.
380	}	Logic or UI structure — read with surrounding lines.
381		Blank line.

Line	Code	Explanation
382	const handleActiveToggle = (checked) => {	Logic or UI structure — read with surrounding lines.
383	if (!checked) {	Logic or UI structure — read with surrounding lines.
384	onStatusAction('suspended')	Logic or UI structure — read with surrounding lines.
385	} else {	Logic or UI structure — read with surrounding lines.
386	onStatusAction('active')	Logic or UI structure — read with surrounding lines.
387	}	Logic or UI structure — read with surrounding lines.
388	}	Logic or UI structure — read with surrounding lines.
389		Blank line.
390	return (	Return JSX UI.
391	<div className="grid grid-cols-1 lg:grid-cols-2 gap-6 animate-fade-in">	CSS/Tailwind styling.
392	/* Store Information */	Logic or UI structure — read with surrounding lines.
393	<Card className="p-5 flex flex-col gap-4">	CSS/Tailwind styling.
394	<h3 className="text-headline-sm text-on-surface flex items-center gap-2 font-bold border-b border-surface-var..."	CSS/Tailwind styling.
395	<StoreIcon className="w-5 h-5 text-primary" /> Store Information	CSS/Tailwind styling.
396	</h3>	JSX element opening tag.
397	<div className="space-y-3 text-body-md">	CSS/Tailwind styling.
398	<InfoRow label="Store Name" value={store.store_name} />	Self-closing JSX element.
399	<InfoRow label="Owner" value={store.owner_name} />	Self-closing JSX element.
400	<InfoRow label="Phone" value={formatPhone(store.owner_phone)} />	Self-closing JSX element.
401	<InfoRow label="Email" value={store.owner_email '-'} />	Self-closing JSX element.
402	<InfoRow label="Type" value={store.store_type 'General Store'} />	Self-closing JSX element.
403	<InfoRow label="Address" value={store.address '-'} />	Self-closing JSX element.
404	<InfoRow label="City" value={store.city '-'} />	Self-closing JSX element.
405	<InfoRow label="PIN Code" value={store.pincode '-'} />	Self-closing JSX element.
406	<InfoRow label="Delivery Radius" value={` \${store.delivery_radius    2} km`} />	Self-closing JSX element.
407	<InfoRow label="Commission Rate" value={` \${store.commission_rate    18}%`} />	Self-closing JSX element.
408	<InfoRow label="GSTIN" value={store.gstin '-'} />	Self-closing JSX element.
409	<InfoRow label="FSSAI" value={store.fssai_number '-'} />	Self-closing JSX element.
410	<InfoRow label="Joined" value={formatDate(store.created_at)} />	Self-closing JSX element.
411	</div>	JSX element opening tag.
412	</Card>	JSX element opening tag.
413		Blank line.
414	/* Control Panel & Performance */	Logic or UI structure — read with surrounding lines.
415	<div className="flex flex-col gap-6">	CSS/Tailwind styling.

Line	Code	Explanation
416	<code> {/* Quick Toggles */}</code>	Logic or UI structure — read with surrounding lines.
417	<code> <Card className="p-5 flex flex-col gap-4"></code>	CSS/Tailwind styling.
418	<code> <h3 className="text-headline-sm text-on-surface flex items-center gap-2 font-bold border-b border-surface-v..."</code>	CSS/Tailwind styling.
419	<code> <Shield className="w-5 h-5 text-primary" /> Operational Controls</code>	CSS/Tailwind styling.
420	<code> </h3></code>	JSX element opening tag.
421	<code> <div className="flex flex-col gap-4 py-2"></code>	CSS/Tailwind styling.
422	<code> <div className="flex justify-between items-center bg-surface-container-low p-3 rounded-xl border border-s..."</code>	CSS/Tailwind styling.
423	<code> <div></code>	JSX element opening tag.
424	<code> <p className="text-label-lg text-on-surface">Store Open Status</p></code>	CSS/Tailwind styling.
425	<code> <p className="text-body-sm text-secondary">Control if this store is accepting orders online today.</p></code>	CSS/Tailwind styling.
426	<code> </div></code>	JSX element opening tag.
427	<code> <Toggle checked={isOpen} onChange={handleOpenToggle} label={isOpen ? 'OPEN' : 'CLOSED'} /></code>	User event handler.
428	<code> </div></code>	JSX element opening tag.
429		Blank line.
430	<code> <div className="flex justify-between items-center bg-surface-container-low p-3 rounded-xl border border-s..."</code>	CSS/Tailwind styling.
431	<code> <div></code>	JSX element opening tag.
432	<code> <p className="text-label-lg text-on-surface">Store Approval / Access</p></code>	CSS/Tailwind styling.
433	<code> <p className="text-body-sm text-secondary">Quickly suspend or approve this merchant account.</p></code>	CSS/Tailwind styling.
434	<code> </div></code>	JSX element opening tag.
435	<code> <Toggle</code>	JSX element opening tag.
436	<code> checked={store.status === 'active'}</code>	Logic or UI structure — read with surrounding lines.
437	<code> onChange={handleActiveToggle}</code>	User event handler.
438	<code> label={store.status === 'active' ? 'ACTIVE' : 'SUSPENDED'}</code>	Logic or UI structure — read with surrounding lines.
439	<code> /></code>	Logic or UI structure — read with surrounding lines.
440	<code> </div></code>	JSX element opening tag.
441	<code> </div></code>	JSX element opening tag.
442	<code></Card></code>	JSX element opening tag.
443		Blank line.
444	<code> {/* Performance Summary */}</code>	Logic or UI structure — read with surrounding lines.
445	<code> <Card className="p-5"></code>	CSS/Tailwind styling.
446	<code> <h3 className="text-headline-sm text-on-surface flex items-center gap-2 font-bold border-b border-surface-v..."</code>	CSS/Tailwind styling.
447	<code> <TrendingUp className="w-5 h-5 text-primary" /> Performance Summary</code>	CSS/Tailwind styling.
448	<code> </h3></code>	JSX element opening tag.
449	<code> <div className="space-y-4"></code>	CSS/Tailwind styling.
450	<code> <div className="flex items-center justify-between p-3 bg-primary-fixed/30 rounded-lg"></code>	CSS/Tailwind styling.

Line	Code	Explanation
451	<code>Total Revenue</code>	CSS/Tailwind styling.
452	<code>{formatCurrency(stats?.totalRevenue 0)}</s...</code>	CSS/Tailwind styling.
453	<code></div></code>	JSX element opening tag.
454	<code><div className="flex items-center justify-between p-3 bg-surface-container-low rounded-lg"></code>	CSS/Tailwind styling.
455	<code>Total Orders</code>	CSS/Tailwind styling.
456	<code>{formatNumber(stats?.totalOrders 0)}</s...</code>	CSS/Tailwind styling.
457	<code></div></code>	JSX element opening tag.
458	<code><div className="flex items-center justify-between p-3 bg-surface-container-low rounded-lg"></code>	CSS/Tailwind styling.
459	<code>Delivered Orders</code>	CSS/Tailwind styling.
460	<code>{formatNumber(stats?.deliveredOrders 0)}...</code>	CSS/Tailwind styling.
461	<code></div></code>	JSX element opening tag.
462	<code><div className="flex items-center justify-between p-3 bg-success/10 rounded-lg"></code>	CSS/Tailwind styling.
463	<code>Completion Rate</code>	CSS/Tailwind styling.
464	<code></code>	CSS/Tailwind styling.
465	<code>{stats?.totalOrders ? `\${Math.round((stats.deliveredOrders / stats.totalOrders) * 100)}%` : '-'}</code>	Logic or UI structure — read with surrounding lines.
466	<code></code>	JSX element opening tag.
467	<code></div></code>	JSX element opening tag.
468	<code><div className="flex items-center justify-between p-3 bg-surface-container-low rounded-lg"></code>	CSS/Tailwind styling.
469	<code>Average Rating</code>	CSS/Tailwind styling.
470	<code></code>	CSS/Tailwind styling.
471	<code>{store.rating?.toFixed(1) '-'}</code>	Logic or UI structure — read with surrounding lines.
472	<code><Star className="w-4 h-4 text-[#FBBC04] fill-[#FBBC04]" /></code>	CSS/Tailwind styling.
473	<code></code>	JSX element opening tag.
474	<code></div></code>	JSX element opening tag.
475	<code></div></code>	JSX element opening tag.
476	<code></Card></code>	JSX element opening tag.
477	<code></div></code>	JSX element opening tag.
478	<code></div></code>	JSX element opening tag.
479	<code>)</code>	Logic or UI structure — read with surrounding lines.
480	<code>}</code>	Logic or UI structure — read with surrounding lines.
481		Blank line.
482	<code>// Simple info row inside a detail card</code>	Comment: Simple info row inside a detail card

Line	Code	Explanation
483	function InfoRow({ label, value }) {	Logic or UI structure — read with surrounding lines.
484	return (	Return JSX UI.
485	<div className="flex justify-between items-start gap-4 py-1.5 border-b border-surface-variant last:border-0">	CSS/Tailwind styling.
486	{label}	CSS/Tailwind styling.
487	{value '-'}	CSS/Tailwind styling.
488	</div>	JSX element opening tag.
489	)	Logic or UI structure — read with surrounding lines.
490	}	Logic or UI structure — read with surrounding lines.
491		Blank line.
492	// KYC Documents tab with slider toggles	Comment: KYC Documents tab with slider toggles
493	function KycTab({ documents, onVerify }) {	Logic or UI structure — read with surrounding lines.
494	if (!documents documents.length === 0) {	Logic or UI structure — read with surrounding lines.
495	return (	Return JSX UI.
496	<div className="flex flex-col items-center justify-center py-16 text-center animate-fade-in">	CSS/Tailwind styling.
497	<FileText className="w-16 h-16 text-secondary opacity-30 mb-4" />	CSS/Tailwind styling.
498	<h3 className="text-headline-sm text-on-surface mb-1">No KYC Documents</h3>	CSS/Tailwind styling.
499	<p className="text-body-md text-secondary">This store has not uploaded any verification documents yet.</p>	CSS/Tailwind styling.
500	</div>	JSX element opening tag.
501	)	Logic or UI structure — read with surrounding lines.
502	}	Logic or UI structure — read with surrounding lines.
503		Blank line.
504	return (	Return JSX UI.
505	<div className="grid grid-cols-1 md:grid-cols-2 lg:grid-cols-3 gap-4 animate-fade-in">	CSS/Tailwind styling.
506	{documents.map((doc) => (	Logic or UI structure — read with surrounding lines.
507	<Card key={doc.id} className="p-4 flex flex-col gap-4 border border-surface-variant shadow-sm">	CSS/Tailwind styling.
508	<div className="flex items-start justify-between">	CSS/Tailwind styling.
509	<div>	JSX element opening tag.
510	<h4 className="text-label-lg text-on-surface capitalize font-semibold">	CSS/Tailwind styling.
511	{doc.document_type?.replace(/_/g, ' ') 'Document'}	Logic or UI structure — read with surrounding lines.
512	</h4>	JSX element opening tag.
513	<p className="text-body-sm text-secondary mt-0.5">{formatDate(doc.created_at)}</p>	CSS/Tailwind styling.
514	</div>	JSX element opening tag.
515	<Badge variant={doc.verified ? 'success' : 'warning'}>	JSX element opening tag.

Line	Code	Explanation
516	<code>{doc.verified ? 'Verified' : 'Pending'}</code>	Logic or UI structure — read with surrounding lines.
517	<code></Badge></code>	JSX element opening tag.
518	<code></div></code>	JSX element opening tag.
519		Blank line.
520	<code>{doc.document_url ? (</code>	Logic or UI structure — read with surrounding lines.
521	<code><a</code>	JSX element opening tag.
522	<code>href={doc.document_url}</code>	Logic or UI structure — read with surrounding lines.
523	<code>target="_blank"</code>	Logic or UI structure — read with surrounding lines.
524	<code>rel="noopener noreferrer"</code>	Logic or UI structure — read with surrounding lines.
525	<code>className="flex items-center gap-1.5 text-primary text-body-sm font-medium hover:underline p-3 bg-surfa...</code>	CSS/Tailwind styling.
526	<code>></code>	Logic or UI structure — read with surrounding lines.
527	<code><ExternalLink className="w-4 h-4 shrink-0" /></code>	CSS/Tailwind styling.
528	<code>View Uploaded Attachment</code>	CSS/Tailwind styling.
529	<code></code>	JSX element opening tag.
530	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
531	<code><div className="p-3 bg-surface-container-low rounded-lg text-body-sm text-secondary flex items-center gap...</code>	CSS/Tailwind styling.
532	<code><Info className="w-4 h-4 shrink-0" /> Attachment Unavailable</code>	CSS/Tailwind styling.
533	<code></div></code>	JSX element opening tag.
534	<code>)}</code>	Logic or UI structure — read with surrounding lines.
535		Blank line.
536	<code>{/* KYC verification slider toggle */}</code>	Logic or UI structure — read with surrounding lines.
537	<code><div className="mt-auto pt-3 border-t border-surface-variant flex justify-between items-center"></code>	CSS/Tailwind styling.
538	<code>Verification Status</code>	CSS/Tailwind styling.
539	<code><Toggle</code>	JSX element opening tag.
540	<code>checked={doc.verified}</code>	Logic or UI structure — read with surrounding lines.
541	<code>onChange={() => onVerify(doc.id, doc.verified)}</code>	User event handler.
542	<code>label={doc.verified ? 'VERIFIED' : 'PENDING'}</code>	Logic or UI structure — read with surrounding lines.
543	<code>/></code>	Logic or UI structure — read with surrounding lines.
544	<code></div></code>	JSX element opening tag.
545	<code></Card></code>	JSX element opening tag.
546	<code>)}</code>	Logic or UI structure — read with surrounding lines.
547	<code></div></code>	JSX element opening tag.
548	<code>)</code>	Logic or UI structure — read with surrounding lines.
549	<code>}</code>	Logic or UI structure — read with surrounding lines.
550		Blank line.

Line	Code	Explanation
551	// Products tab with MRP Pricing Violation tracking & sort, flags & deactivation	Comment: Products tab with MRP Pricing Violation tracking & sort, flags & deactivation
552	function ProductsTab({ storeId }) {	Logic or UI structure — read with surrounding lines.
553	const [products, setProducts] = useState([])	React state variable.
554	const [loading, setLoading] = useState(true)	React state variable.
555	const [flagModal, setFlagModal] = useState(null) // holds product object when flagging	React state variable.
556	const [flagReason, setFlagReason] = useState('')	React state variable.
557	const [confirmDialog, setConfirmDialog] = useState(null)	React state variable.
558		Blank line.
559	const fetchProducts = useCallback(async () => {	Memoized callback function.
560	setLoading(true)	Logic or UI structure — read with surrounding lines.
561	try {	Try block start.
562	const res = await getProducts({ storeId, pageSize: 100 }) // Load up to 100 products for review catalog	Wait for async operation.
563	const items = res.products []	Logic or UI structure — read with surrounding lines.
564		Blank line.
565	// Sort: Price Violation (store_price > platform_mrp) first, then by created_at descending	Comment: Sort: Price Violation (store_price > platform_mrp) first, then by created_at descending
566	const sorted = [...items].sort((a, b) => {	Logic or UI structure — read with surrounding lines.
567	const violationA = (a.store_price 0) > (a.platform_mrp 0)	Logic or UI structure — read with surrounding lines.
568	const violationB = (b.store_price 0) > (b.platform_mrp 0)	Logic or UI structure — read with surrounding lines.
569	if (violationA && !violationB) return -1	Logic or UI structure — read with surrounding lines.
570	if (!violationA && violationB) return 1	Logic or UI structure — read with surrounding lines.
571	return new Date(b.created_at) - new Date(a.created_at)	Logic or UI structure — read with surrounding lines.
572	})	Logic or UI structure — read with surrounding lines.
573		Blank line.
574	setProducts(sorted)	Logic or UI structure — read with surrounding lines.
575	} catch (err) {	Catch errors.
576	toast.error('Failed to load store products catalog')	Toast notification.
577	console.error(err)	Logic or UI structure — read with surrounding lines.
578	} finally {	Finally block (cleanup).
579	setLoading(false)	Logic or UI structure — read with surrounding lines.
580	}	Logic or UI structure — read with surrounding lines.
581	}, [storeId])	Logic or UI structure — read with surrounding lines.
582		Blank line.
583	useEffect(() => {	Side effect (fetch, subscribe, redirect).
584	fetchProducts()	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
585	}, [fetchProducts])	Logic or UI structure — read with surrounding lines.
586		Blank line.
587	// Handle flag product action	Comment: Handle flag product action
588	const handleFlagProduct = async () => {	Async function for network calls.
589	if (!flagReason.trim()) {	Logic or UI structure — read with surrounding lines.
590	toast.error('Please enter a reason for flagging this listing.')	Toast notification.
591	return	Logic or UI structure — read with surrounding lines.
592	}	Logic or UI structure — read with surrounding lines.
593	try {	Try block start.
594	await flagProduct(flagModal.id, flagReason, 'admin')	Wait for async operation.
595	toast.success('Product listing has been successfully flagged for revision')	Toast notification.
596	setFlagModal(null)	Logic or UI structure — read with surrounding lines.
597	setFlagReason('')	Logic or UI structure — read with surrounding lines.
598	fetchProducts()	Logic or UI structure — read with surrounding lines.
599	} catch (err) {	Catch errors.
600	toast.error(`Action failed: \${err.message}`)	Toast notification.
601	}	Logic or UI structure — read with surrounding lines.
602	}	Logic or UI structure — read with surrounding lines.
603		Blank line.
604	// Handle remove/deactivate product listing action	Comment: Handle remove/deactivate product listing action
605	const handleRemoveProduct = (product) => {	Logic or UI structure — read with surrounding lines.
606	setConfirmDialog({	Logic or UI structure — read with surrounding lines.
607	title: 'Remove Product Listing',	Logic or UI structure — read with surrounding lines.
608	message: `Are you sure you want to deactivate and remove the catalog listing for "\${product.name}"? This action...`	Logic or UI structure — read with surrounding lines.
609	variant: 'danger',	Logic or UI structure — read with surrounding lines.
610	onConfirm: async () => {	Logic or UI structure — read with surrounding lines.
611	try {	Try block start.
612	await removeProduct(product.id, 'admin')	Wait for async operation.
613	toast.success('Product listing removed from database successfully')	Toast notification.
614	fetchProducts()	Logic or UI structure — read with surrounding lines.
615	} catch (err) {	Catch errors.
616	toast.error(`Deactivation failed: \${err.message}`)	Toast notification.
617	}	Logic or UI structure — read with surrounding lines.
618	setConfirmDialog(null)	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
619	},	Logic or UI structure — read with surrounding lines.
620	})	Logic or UI structure — read with surrounding lines.
621	}	Logic or UI structure — read with surrounding lines.
622		Blank line.
623	if (loading) {	Logic or UI structure — read with surrounding lines.
624	return (	Return JSX UI.
625	<div className="flex justify-center items-center py-12">	CSS/Tailwind styling.
626	<Spinner size="md" />	Self-closing JSX element.
627	</div>	JSX element opening tag.
628	)	Logic or UI structure — read with surrounding lines.
629	}	Logic or UI structure — read with surrounding lines.
630		Blank line.
631	if (products.length === 0) {	Logic or UI structure — read with surrounding lines.
632	return (	Return JSX UI.
633	<div className="flex flex-col items-center justify-center py-16 text-center animate-fade-in">	CSS/Tailwind styling.
634	<Package className="w-16 h-16 text-secondary opacity-30 mb-4" />	CSS/Tailwind styling.
635	<h3 className="text-headline-sm text-on-surface mb-1">No Products Assigned</h3>	CSS/Tailwind styling.
636	<p className="text-body-md text-secondary">This store hasn't uploaded or been mapped to any products yet.</p>	CSS/Tailwind styling.
637	</div>	JSX element opening tag.
638	)	Logic or UI structure — read with surrounding lines.
639	}	Logic or UI structure — read with surrounding lines.
640		Blank line.
641	return (	Return JSX UI.
642	<div className="space-y-4 animate-fade-in">	CSS/Tailwind styling.
643	{/* Informational Warning Alert */}	Logic or UI structure — read with surrounding lines.
644	<div className="flex gap-3 bg-warning/15 border border-warning/30 p-4 rounded-xl text-body-md text-on-surface-v...">	CSS/Tailwind styling.
645	<AlertTriangle className="text-warning w-5 h-5 shrink-0" />	CSS/Tailwind styling.
646	<div>	JSX element opening tag.
647	<p className="font-semibold text-on-surface">Compliance Catalog Review</p>	CSS/Tailwind styling.
648	<p className="text-body-sm text-secondary mt-0.5">	CSS/Tailwind styling.
649	Store pricing must NEVER exceed the legally declared Platform MRP (Maximum Retail Price). Listings violat...	Logic or UI structure — read with surrounding lines.
650	</p>	JSX element opening tag.
651	</div>	JSX element opening tag.
652	</div>	JSX element opening tag.
653		Blank line.
654	{/* Catalog Table */}	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
655	<code><div className="bg-surface-container-lowest border border-surface-variant rounded-xl shadow-card overflow-hidden"></code>	CSS/Tailwind styling.
656	<code><div className="overflow-x-auto"></code>	CSS/Tailwind styling.
657	<code><table className="w-full text-left border-collapse min-w-[700px]"></code>	CSS/Tailwind styling.
658	<code><thead></code>	JSX element opening tag.
659	<code><tr className="bg-surface-container-low border-b border-surface-variant text-secondary font-label-sm up...></code>	CSS/Tailwind styling.
660	<code><th className="p-4 font-semibold">Product Name</th></code>	CSS/Tailwind styling.
661	<code><th className="p-4 font-semibold">SKU / ID</th></code>	CSS/Tailwind styling.
662	<code><th className="p-4 font-semibold">Store Price</th></code>	CSS/Tailwind styling.
663	<code><th className="p-4 font-semibold">Platform MRP</th></code>	CSS/Tailwind styling.
664	<code><th className="p-4 font-semibold">Status</th></code>	CSS/Tailwind styling.
665	<code><th className="p-4 font-semibold text-right">Actions</th></code>	CSS/Tailwind styling.
666	<code></tr></code>	JSX element opening tag.
667	<code></thead></code>	JSX element opening tag.
668	<code><tbody className="divide-y divide-surface-variant"></code>	CSS/Tailwind styling.
669	<code>{products.map((product) => {</code>	Logic or UI structure — read with surrounding lines.
670	<code>const isViolation = (product.store_price 0) > (product.platform_mrp 0)</code>	Logic or UI structure — read with surrounding lines.
671	<code>return (</code>	Return JSX UI.
672	<code><tr</code>	JSX element opening tag.
673	<code>key={product.id}</code>	Logic or UI structure — read with surrounding lines.
674	<code>className={`transition- colors \${</code>	CSS/Tailwind styling.
675	<code>isViolation</code>	Logic or UI structure — read with surrounding lines.
676	<code>? 'bg-red-50/70 hover:bg-red-100/70 dark:bg-red-950/20 dark:hover:bg-red-950/30'</code>	Logic or UI structure — read with surrounding lines.
677	<code>: 'hover:bg-surface- container-lowest'</code>	Logic or UI structure — read with surrounding lines.
678	<code>}` }</code>	Logic or UI structure — read with surrounding lines.
679	<code>></code>	Logic or UI structure — read with surrounding lines.
680	<code><td className="p-4 font-medium text-on-surface"></code>	CSS/Tailwind styling.
681	<code><div className="flex items-center gap-3"></code>	CSS/Tailwind styling.
682	<code><div className="w-10 h-10 rounded-lg bg-surface-container flex items-center justify-center ov...</code>	CSS/Tailwind styling.
683	<code>{product.image_url ?</code>	Logic or UI structure — read with surrounding lines.
684	<code>(</code>	CSS/Tailwind styling.
685	<code>) : (</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
686	<code><Package</code> <code>className="w-5 h-5 text-secondary" /></code>	CSS/Tailwind styling.
687	<code>)}</code>	Logic or UI structure — read with surrounding lines.
688	<code></div></code>	JSX element opening tag.
689	<code><div></code>	JSX element opening tag.
690	<code><div</code> <code>className="text-label-lg font-</code> <code>semibold">{product.name}</div></code>	CSS/Tailwind styling.
691	<code>{isViolation && (</code>	Logic or UI structure — read with surrounding lines.
692	<code><span</code> <code>className="inline-flex items-center gap-1</code> <code>text-[11px] text-danger font-semibold bg-...</code>	CSS/Tailwind styling.
693	<code><AlertTriangle</code> <code>className="w-3 h-3" /> Price exceeds MRP!</code>	CSS/Tailwind styling.
694	<code></code>	JSX element opening tag.
695	<code>)}</code>	Logic or UI structure — read with surrounding lines.
696	<code></div></code>	JSX element opening tag.
697	<code></div></code>	JSX element opening tag.
698	<code></td></code>	JSX element opening tag.
699	<code><td className="p-4 text-</code> <code>body-sm text-secondary font-medium"></code>	CSS/Tailwind styling.
700	<code>{product.sku </code> <code>product.id?.slice(0, 8).toUpperCase()}</code>	Logic or UI structure — read with surrounding lines.
701	<code></td></code>	JSX element opening tag.
702	<code><td className={`p-4 text-</code> <code>headline-sm font-bold \${isViolation ? 'text-</code> <code>danger' : 'text-on-surface'}`}></code>	CSS/Tailwind styling.
703	<code>{formatCurrency(product.store_price 0)}</code>	Logic or UI structure — read with surrounding lines.
704	<code></td></code>	JSX element opening tag.
705	<code><td className="p-4 text-</code> <code>body-md text-secondary font-semibold"></code>	CSS/Tailwind styling.
706	<code>{formatCurrency(product.platform_mrp 0)}</code>	Logic or UI structure — read with surrounding lines.
707	<code></td></code>	JSX element opening tag.
708	<code><td className="p-4"></code>	CSS/Tailwind styling.
709	<code>{product.is_flagged ? (</code>	Logic or UI structure — read with surrounding lines.
710	<code><Badge</code> <code>variant="warning">Flagged</Badge></code>	JSX element opening tag.
711	<code>) : product.is_active ?</code> <code>(</code>	Logic or UI structure — read with surrounding lines.
712	<code><Badge</code> <code>variant="success">Active</Badge></code>	JSX element opening tag.
713	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
714	<code><Badge</code> <code>variant="secondary">Inactive</Badge></code>	JSX element opening tag.
715	<code>)}</code>	Logic or UI structure — read with surrounding lines.
716	<code></td></code>	JSX element opening tag.
717	<code><td className="p-4 text-</code> <code>right"></code>	CSS/Tailwind styling.
718	<code><div className="flex</code> <code>items-center justify-end gap-2"></code>	CSS/Tailwind styling.
719	<code>{!product.is_flagged</code> <code>&& (</code>	Logic or UI structure — read with surrounding lines.
720	<code><button</code>	JSX element opening tag.
721	<code>onClick={() =></code> <code>setFlagModal(product)}</code>	User event handler.

Line	Code	Explanation
722	className="p-2 hover:bg-surface-container-high rounded-full transition-colors text-warning"	CSS/Tailwind styling.
723	title="Flag listing for review"	Logic or UI structure — read with surrounding lines.
724	>	Logic or UI structure — read with surrounding lines.
725	<Flag className="w-4.5 h-4.5" />	CSS/Tailwind styling.
726	</button>	JSX element opening tag.
727	)}	Logic or UI structure — read with surrounding lines.
728	<button	JSX element opening tag.
729	onClick={() => handleRemoveProduct(product)}	User event handler.
730	className="p-2 hover:bg-surface-container-high rounded-full transition-colors text-danger"	CSS/Tailwind styling.
731	title="Deactivate listing"	Logic or UI structure — read with surrounding lines.
732	>	Logic or UI structure — read with surrounding lines.
733	<Trash2 className="w-4.5 h-4.5" />	CSS/Tailwind styling.
734	</button>	JSX element opening tag.
735	</div>	JSX element opening tag.
736	</td>	JSX element opening tag.
737	</tr>	JSX element opening tag.
738	)	Logic or UI structure — read with surrounding lines.
739	}}}	Logic or UI structure — read with surrounding lines.
740	</tbody>	JSX element opening tag.
741	</table>	JSX element opening tag.
742	</div>	JSX element opening tag.
743	</div>	JSX element opening tag.
744		Blank line.
745	{/* Flag Reason Modal */}	Logic or UI structure — read with surrounding lines.
746	{flagModal && (	Logic or UI structure — read with surrounding lines.
747	<Modal	JSX element opening tag.
748	isOpen={true}	Logic or UI structure — read with surrounding lines.
749	onClose={() => setFlagModal(null)}	Logic or UI structure — read with surrounding lines.
750	title="Flag Product Listing"	Logic or UI structure — read with surrounding lines.
751	>	Logic or UI structure — read with surrounding lines.
752	<div className="space-y-4 py-2">	CSS/Tailwind styling.
753	<p className="text-body-md text- secondary">	CSS/Tailwind styling.
754	State the reason why product {flagModal.name} ...	CSS/Tailwind styling.
755	</p>	JSX element opening tag.
756	<Input	JSX element opening tag.
757	id="flag-reason-input"	Logic or UI structure — read with surrounding lines.
758	label="Moderation Reason"	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
759	placeholder="e.g. Price exceeds platform MRP / Mismatched imagery..."	Logic or UI structure — read with surrounding lines.
760	value={flagReason}	Logic or UI structure — read with surrounding lines.
761	onChange={(e) => setFlagReason(e.target.value)}	User event handler.
762	error={!flagReason.trim() ? 'A valid explanation is required' : ''}	Logic or UI structure — read with surrounding lines.
763	/>	Logic or UI structure — read with surrounding lines.
764	<div className="flex justify-end gap-2 pt-2">	CSS/Tailwind styling.
765	<Button variant="outline" onClick={() => setFlagModal(null)}>Cancel</Button>	User event handler.
766	<Button variant="primary" onClick={handleFlagProduct} className="bg-primary text-white">Flag Listing</B...	CSS/Tailwind styling.
767	</div>	JSX element opening tag.
768	</div>	JSX element opening tag.
769	</Modal>	JSX element opening tag.
770	)}	Logic or UI structure — read with surrounding lines.
771		Blank line.
772	{/* Confirm Deactivation Dialog */}	Logic or UI structure — read with surrounding lines.
773	{confirmDialog && (	Logic or UI structure — read with surrounding lines.
774	<ConfirmDialog	JSX element opening tag.
775	isOpen={true}	Logic or UI structure — read with surrounding lines.
776	title={confirmDialog.title}	Logic or UI structure — read with surrounding lines.
777	message={confirmDialog.message}	Logic or UI structure — read with surrounding lines.
778	confirmLabel="Confirm"	Logic or UI structure — read with surrounding lines.
779	variant={confirmDialog.variant}	Logic or UI structure — read with surrounding lines.
780	onConfirm={confirmDialog.onConfirm}	Logic or UI structure — read with surrounding lines.
781	onCancel={() => setConfirmDialog(null)}	Logic or UI structure — read with surrounding lines.
782	/>	Logic or UI structure — read with surrounding lines.
783	)}	Logic or UI structure — read with surrounding lines.
784	</div>	JSX element opening tag.
785	)	Logic or UI structure — read with surrounding lines.
786	}	Logic or UI structure — read with surrounding lines.
787		Blank line.
788	// Settings Tab (Override store commission rates, radius, times)	Comment: Settings Tab (Override store commission rates, radius, times)
789	function SettingsTab({ store, onUpdate }) {	Logic or UI structure — read with surrounding lines.
790	const [commission, setCommission] = useState(store.commission_rate 18)	React state variable.
791	const [radius, setRadius] = useState(store.delivery_radius 2)	React state variable.

Line	Code	Explanation
792	const [minOrder, setMinOrder] = useState(store.min_order_amount 0)	React state variable.
793	const [openTime, setOpenTime] = useState(store.opening_time '08:00')	React state variable.
794	const [closeTime, setCloseTime] = useState(store.closing_time '22:00')	React state variable.
795	const [saving, setSaving] = useState(false)	React state variable.
796		Blank line.
797	const handleSubmit = async (e) => {	Async function for network calls.
798	e.preventDefault()	Logic or UI structure — read with surrounding lines.
799	setSaving(true)	Logic or UI structure — read with surrounding lines.
800	try {	Try block start.
801	await onUpdate({	Wait for async operation.
802	commission_rate: parseFloat(commission),	Logic or UI structure — read with surrounding lines.
803	delivery_radius: parseFloat(radius),	Logic or UI structure — read with surrounding lines.
804	min_order_amount: parseFloat(minOrder),	Logic or UI structure — read with surrounding lines.
805	opening_time: openTime,	Logic or UI structure — read with surrounding lines.
806	closing_time: closeTime,	Logic or UI structure — read with surrounding lines.
807	})	Logic or UI structure — read with surrounding lines.
808	} catch (err) {	Catch errors.
809	console.error(err)	Logic or UI structure — read with surrounding lines.
810	} finally {	Finally block (cleanup).
811	setSaving(false)	Logic or UI structure — read with surrounding lines.
812	}	Logic or UI structure — read with surrounding lines.
813	}	Logic or UI structure — read with surrounding lines.
814		Blank line.
815	return (	Return JSX UI.
816	<div className="max-w-2xl animate-fade-in">	CSS/Tailwind styling.
817	<Card className="p-6">	CSS/Tailwind styling.
818	<h3 className="text-headline-sm text-on-surface mb-4 flex items-center gap-2 font-bold border-b border-surfac...>	CSS/Tailwind styling.
819	<Settings className="w-5 h-5 text-primary" /> Store Configuration	CSS/Tailwind styling.
820	</h3>	JSX element opening tag.
821	<form onSubmit={handleSubmit} className="space-y-4">	CSS/Tailwind styling.
822	<div className="grid grid-cols-1 sm:grid-cols-2 gap-4">	CSS/Tailwind styling.
823	<Input	JSX element opening tag.
824	id="commission-input"	Logic or UI structure — read with surrounding lines.
825	type="number"	Logic or UI structure — read with surrounding lines.
826	label="Override Commission Rate (%)"	Logic or UI structure — read with surrounding lines.
827	min="0"	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
828	max="100"	Logic or UI structure — read with surrounding lines.
829	step="0.1"	Logic or UI structure — read with surrounding lines.
830	value={commission}	Logic or UI structure — read with surrounding lines.
831	onChange={(e) => setCommission(e.target.value)}	User event handler.
832	required	Logic or UI structure — read with surrounding lines.
833	/>	Logic or UI structure — read with surrounding lines.
834	<Input	JSX element opening tag.
835	id="radius-input"	Logic or UI structure — read with surrounding lines.
836	type="number"	Logic or UI structure — read with surrounding lines.
837	label="Delivery Radius (km)"	Logic or UI structure — read with surrounding lines.
838	min="0.1"	Logic or UI structure — read with surrounding lines.
839	step="0.1"	Logic or UI structure — read with surrounding lines.
840	value={radius}	Logic or UI structure — read with surrounding lines.
841	onChange={(e) => setRadius(e.target.value)}	User event handler.
842	required	Logic or UI structure — read with surrounding lines.
843	/>	Logic or UI structure — read with surrounding lines.
844	</div>	JSX element opening tag.
845		Blank line.
846	<Input	JSX element opening tag.
847	id="minorder-input"	Logic or UI structure — read with surrounding lines.
848	type="number"	Logic or UI structure — read with surrounding lines.
849	label="Minimum Order Value (₹)"	Logic or UI structure — read with surrounding lines.
850	min="0"	Logic or UI structure — read with surrounding lines.
851	step="1"	Logic or UI structure — read with surrounding lines.
852	value={minOrder}	Logic or UI structure — read with surrounding lines.
853	onChange={(e) => setMinOrder(e.target.value)}	User event handler.
854	required	Logic or UI structure — read with surrounding lines.
855	/>	Logic or UI structure — read with surrounding lines.
856		Blank line.
857	<div className="grid grid-cols-1 sm:grid-cols-2 gap-4">	CSS/Tailwind styling.
858	<Input	JSX element opening tag.
859	id="opentime-input"	Logic or UI structure — read with surrounding lines.
860	type="time"	Logic or UI structure — read with surrounding lines.
861	label="Opening Time"	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
862	value={openTime}	Logic or UI structure — read with surrounding lines.
863	onChange={(e) => setOpenTime(e.target.value)}	User event handler.
864	required	Logic or UI structure — read with surrounding lines.
865	/>	Logic or UI structure — read with surrounding lines.
866	<Input	JSX element opening tag.
867	id="closetime-input"	Logic or UI structure — read with surrounding lines.
868	type="time"	Logic or UI structure — read with surrounding lines.
869	label="Closing Time"	Logic or UI structure — read with surrounding lines.
870	value={closeTime}	Logic or UI structure — read with surrounding lines.
871	onChange={(e) => setCloseTime(e.target.value)}	User event handler.
872	required	Logic or UI structure — read with surrounding lines.
873	/>	Logic or UI structure — read with surrounding lines.
874	</div>	JSX element opening tag.
875		Blank line.
876	<div className="pt-4 border-t border-surface-variant flex justify-end">	CSS/Tailwind styling.
877	<Button	JSX element opening tag.
878	type="submit"	Logic or UI structure — read with surrounding lines.
879	variant="primary"	Logic or UI structure — read with surrounding lines.
880	disabled={saving}	Logic or UI structure — read with surrounding lines.
881	className="bg-primary text-white px-6 min-h-[44px]"	CSS/Tailwind styling.
882	>	Logic or UI structure — read with surrounding lines.
883	{saving ? 'Saving Config...' : 'Apply Changes'}	Logic or UI structure — read with surrounding lines.
884	</Button>	JSX element opening tag.
885	</div>	JSX element opening tag.
886	</form>	JSX element opening tag.
887	</Card>	JSX element opening tag.
888	</div>	JSX element opening tag.
889	)	Logic or UI structure — read with surrounding lines.
890	}	Logic or UI structure — read with surrounding lines.
891		Blank line.

RidersPage (src/pages/RidersPage.jsx)

Total lines: 566

Route: /riders

Purpose: Rider directory with approve/suspend actions.

Line	Code	Explanation
1	import { useState, useEffect, useCallback } from 'react'	Import React hooks.
2	import { useNavigate } from 'react-router-dom'	Import routing.
3	import { Search, Filter, X, Star, MoreVertical, Plus, Bike, ShieldAlert, CheckCircle2, UserCheck, AlertCircle } from ...	Import icons.
4	import toast from 'react-hot-toast'	Import dependency.
5	import { getRiders, updateRiderStatus } from '../services/riderService'	Import API/database service.
6	import { formatCurrency, formatDate, formatPhone } from '../utils/formatters'	Import helper utilities.
7	import Badge from '../components/ui/Badge'	Import UI component.
8	import Pagination from '../components/ui/Pagination'	Import UI component.
9	import Spinner from '../components/ui/Spinner'	Import UI component.
10	import EmptyState from '../components/ui/EmptyState'	Import UI component.
11	import ConfirmDialog from '../components/ui/ConfirmDialog'	Import UI component.
12		Blank line.
13	/**	Doc comment.
14	* ZapKart Admin – Rider Management Directory Page	Doc comment.
15	* Matching the Stitch riders_management_responsive design.	Doc comment.
16	* Desktop: robust table Mobile: listing cards	Doc comment.
17	*/	Doc comment.
18		Blank line.
19	const STATUS_TABS = [	Logic or UI structure — read with surrounding lines.
20	{ key: 'all', label: 'All Riders' },	Logic or UI structure — read with surrounding lines.
21	{ key: 'online', label: 'Online' },	Logic or UI structure — read with surrounding lines.
22	{ key: 'pending_kyc', label: 'KYC Pending' },	Logic or UI structure — read with surrounding lines.
23	{ key: 'active', label: 'Active' },	Logic or UI structure — read with surrounding lines.
24	{ key: 'suspended', label: 'Suspended' },	Logic or UI structure — read with surrounding lines.
25	]	Logic or UI structure — read with surrounding lines.
26		Blank line.
27	const VEHICLE_TYPES = [	Logic or UI structure — read with surrounding lines.
28	{ key: 'bike', label: 'Two Wheeler' },	Logic or UI structure — read with surrounding lines.
29	{ key: 'ev', label: 'EV' },	Logic or UI structure — read with surrounding lines.
30	{ key: 'bicycle', label: 'Bicycle' },	Logic or UI structure — read with surrounding lines.
31	]	Logic or UI structure — read with surrounding lines.
32		Blank line.

Line	Code	Explanation
33	const RATING_FILTERS = [	Logic or UI structure — read with surrounding lines.
34	{ key: '4+', label: '4.0 & Above' },	Logic or UI structure — read with surrounding lines.
35	{ key: '3+', label: '3.0 & Above' },	Logic or UI structure — read with surrounding lines.
36	{ key: 'low', label: 'Below 3.0' },	Logic or UI structure — read with surrounding lines.
37	]	Logic or UI structure — read with surrounding lines.
38		Blank line.
39	const KYC_STATUSES = [	Logic or UI structure — read with surrounding lines.
40	{ key: 'verified', label: 'Verified' },	Logic or UI structure — read with surrounding lines.
41	{ key: 'pending', label: 'Pending' },	Logic or UI structure — read with surrounding lines.
42	{ key: 'rejected', label: 'Rejected' },	Logic or UI structure — read with surrounding lines.
43	]	Logic or UI structure — read with surrounding lines.
44		Blank line.
45	const ZONES = [	Logic or UI structure — read with surrounding lines.
46	{ key: 'blr-south', label: 'Bengaluru South' },	Logic or UI structure — read with surrounding lines.
47	{ key: 'blr-koramangala', label: 'Koramangala' },	Logic or UI structure — read with surrounding lines.
48	{ key: 'del-ncr', label: 'Delhi NCR' },	Logic or UI structure — read with surrounding lines.
49	]	Logic or UI structure — read with surrounding lines.
50		Blank line.
51	const PAGE_SIZE = 20	Logic or UI structure — read with surrounding lines.
52		Blank line.
53	// Helpers for initials avatar	Comment: Helpers for initials avatar
54	export function getInitials(name) {	Named export function.
55	if (!name) return 'RK'	Logic or UI structure — read with surrounding lines.
56	const parts = name.trim().split(' ')	Logic or UI structure — read with surrounding lines.
57	if (parts.length >= 2) {	Logic or UI structure — read with surrounding lines.
58	return (parts[0][0] + parts[1][0]).toUpperCase()	Return JSX UI.
59	}	Logic or UI structure — read with surrounding lines.
60	return name.slice(0, 2).toUpperCase()	Logic or UI structure — read with surrounding lines.
61	}	Logic or UI structure — read with surrounding lines.
62		Blank line.
63	export default function RidersPage() {	Default export (main module).
64	const navigate = useNavigate()	Programmatic navigation hook.
65	const [riders, setRiders] = useState([])	React state variable.
66	const [total, setTotal] = useState(0)	React state variable.
67	const [page, setPage] = useState(1)	React state variable.
68	const [status, setStatus] = useState('all')	React state variable.
69	const [search, setSearch] = useState('')	React state variable.

Line	Code	Explanation
70	const [debouncedSearch, setDebouncedSearch] = useState('')	React state variable.
71	const [vehicleType, setVehicleType] = useState('')	React state variable.
72	const [ratingFilter, setRatingFilter] = useState('')	React state variable.
73	const [kycStatus, setKycStatus] = useState('')	React state variable.
74	const [zone, setZone] = useState('')	React state variable.
75	const [loading, setLoading] = useState(true)	React state variable.
76	const [actionMenuId, setActionMenuId] = useState(null)	React state variable.
77	const [confirmDialog, setConfirmDialog] = useState(null)	React state variable.
78		Blank line.
79	// Debounce search input	Comment: Debounce search input
80	useEffect(() => {	Side effect (fetch, subscribe, redirect).
81	const t = setTimeout(() => setDebouncedSearch(search), 400)	Logic or UI structure — read with surrounding lines.
82	return () => clearTimeout(t)	Return JSX UI.
83	}, [search])	Logic or UI structure — read with surrounding lines.
84		Blank line.
85	// Fetch riders based on status and search query	Comment: Fetch riders based on status and search query
86	const fetchRiders = useCallback(async () => {	Memoized callback function.
87	setLoading(true)	Logic or UI structure — read with surrounding lines.
88	try {	Try block start.
89	const res = await getRiders({	Wait for async operation.
90	status,	Logic or UI structure — read with surrounding lines.
91	search: debouncedSearch,	Logic or UI structure — read with surrounding lines.
92	page,	Logic or UI structure — read with surrounding lines.
93	pageSize: PAGE_SIZE,	Logic or UI structure — read with surrounding lines.
94	})	Logic or UI structure — read with surrounding lines.
95	let items = res.riders []	Logic or UI structure — read with surrounding lines.
96		Blank line.
97	// Client-side sub-filtering for extra filters in design (vehicleType, ratingFilter, kycStatus, zone)	Comment: Client-side sub-filtering for extra filters in design (vehicleType, ratingFilter, kycStatus, zone)
98	if (vehicleType) {	Logic or UI structure — read with surrounding lines.
99	items = items.filter((r) => r.vehicle_type?.toLowerCase() === vehicleType.toLowerCase())	Logic or UI structure — read with surrounding lines.
100	}	Logic or UI structure — read with surrounding lines.
101	if (ratingFilter) {	Logic or UI structure — read with surrounding lines.
102	if (ratingFilter === '4+') items = items.filter((r) => (r.rating 0) >= 4.0)	Logic or UI structure — read with surrounding lines.
103	else if (ratingFilter === '3+') items = items.filter((r) => (r.rating 0) >= 3.0)	Logic or UI structure — read with surrounding lines.
104	else if (ratingFilter === 'low') items = items.filter((r) => (r.rating 0) < 3.0)	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
105	}	Logic or UI structure — read with surrounding lines.
106	if (kycStatus) {	Logic or UI structure — read with surrounding lines.
107	if (kycStatus === 'verified') items = items.filter((r) => r.status === 'active')	Logic or UI structure — read with surrounding lines.
108	else if (kycStatus === 'pending') items = items.filter((r) => r.status === 'pending_kyc')	Logic or UI structure — read with surrounding lines.
109	else if (kycStatus === 'rejected') items = items.filter((r) => r.status === 'suspended')	Logic or UI structure — read with surrounding lines.
110	}	Logic or UI structure — read with surrounding lines.
111	if (zone) {	Logic or UI structure — read with surrounding lines.
112	items = items.filter((r) => r.zone?.toLowerCase() === zone.toLowerCase())	Logic or UI structure — read with surrounding lines.
113	}	Logic or UI structure — read with surrounding lines.
114		Blank line.
115	setRiders(items)	Logic or UI structure — read with surrounding lines.
116	setTotal(res.total 0)	Logic or UI structure — read with surrounding lines.
117	} catch (err) {	Catch errors.
118	console.error(err)	Logic or UI structure — read with surrounding lines.
119	toast.error('Could not load riders directory.')	Toast notification.
120	} finally {	Finally block (cleanup).
121	setLoading(false)	Logic or UI structure — read with surrounding lines.
122	}	Logic or UI structure — read with surrounding lines.
123	}, [status, debouncedSearch, page, vehicleType, ratingFilter, kycStatus, zone])	Logic or UI structure — read with surrounding lines.
124		Blank line.
125	useEffect(() => {	Side effect (fetch, subscribe, redirect).
126	fetchRiders()	Logic or UI structure — read with surrounding lines.
127	}, [fetchRiders])	Logic or UI structure — read with surrounding lines.
128		Blank line.
129	// Reset page when filters modify	Comment: Reset page when filters modify
130	useEffect(() => {	Side effect (fetch, subscribe, redirect).
131	setPage(1)	Logic or UI structure — read with surrounding lines.
132	}, [status, debouncedSearch, vehicleType, ratingFilter, kycStatus, zone])	Logic or UI structure — read with surrounding lines.
133		Blank line.
134	const clearAllFilters = () => {	Logic or UI structure — read with surrounding lines.
135	setSearch('')	Logic or UI structure — read with surrounding lines.
136	setVehicleType('')	Logic or UI structure — read with surrounding lines.
137	setRatingFilter('')	Logic or UI structure — read with surrounding lines.
138	setKycStatus('')	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
139	setZone('')	Logic or UI structure — read with surrounding lines.
140	setStatus('all')	Logic or UI structure — read with surrounding lines.
141	}	Logic or UI structure — read with surrounding lines.
142		Blank line.
143	// Handle rider action	Comment: Handle rider action
144	const handleStatusAction = (rider, newStatus) => {	Logic or UI structure — read with surrounding lines.
145	setActionMenuId(null)	Logic or UI structure — read with surrounding lines.
146	const labels = { active: 'approve', suspended: 'suspend', pending_kyc: 'reject kyc' }	Logic or UI structure — read with surrounding lines.
147	setConfirmDialog({	Logic or UI structure — read with surrounding lines.
148	title: `\${labels[newStatus]?.charAt(0).toUpperCase() + labels[newStatus]?.slice(1)} Rider`,	Logic or UI structure — read with surrounding lines.
149	message: `Are you sure you want to \${labels[newStatus]} "\${rider.name}"? \${newStatus === 'suspended' ? 'They wi...	Logic or UI structure — read with surrounding lines.
150	variant: newStatus === 'active' ? 'primary' : 'danger',	Logic or UI structure — read with surrounding lines.
151	onConfirm: async () => {	Logic or UI structure — read with surrounding lines.
152	try {	Try block start.
153	await updateRiderStatus(rider.id, newStatus, 'admin')	Wait for async operation.
154	toast.success(`Rider status updated successfully`)	Toast notification.
155	fetchRiders()	Logic or UI structure — read with surrounding lines.
156	} catch (err) {	Catch errors.
157	toast.error(`Failed: \${err.message}`)	Toast notification.
158	}	Logic or UI structure — read with surrounding lines.
159	setConfirmDialog(null)	Logic or UI structure — read with surrounding lines.
160	},	Logic or UI structure — read with surrounding lines.
161	))	Logic or UI structure — read with surrounding lines.
162	}	Logic or UI structure — read with surrounding lines.
163		Blank line.
164	// Close action menu when clicking outside	Comment: Close action menu when clicking outside
165	useEffect(() => {	Side effect (fetch, subscribe, redirect).
166	const close = () => setActionMenuId(null)	Logic or UI structure — read with surrounding lines.
167	if (actionMenuId) window.addEventListener('click', close)	Logic or UI structure — read with surrounding lines.
168	return () => window.removeEventListener('click', close)	Return JSX UI.
169	}, [actionMenuId])	Logic or UI structure — read with surrounding lines.
170		Blank line.
171	return (	Return JSX UI.

Line	Code	Explanation
172	<code><div className="animate-fade-in space-y-6"></code>	CSS/Tailwind styling.
173	<code> { /* — Header Section — */ }</code>	Logic or UI structure — read with surrounding lines.
174	<code> <div className="flex flex-col sm:flex-row justify-between items-start sm:items-center gap-4"></code>	CSS/Tailwind styling.
175	<code> <div></code>	JSX element opening tag.
176	<code> <h2 className="text-[28px] leading-[36px] font-bold text-on-background tracking-tight">Riders</h2></code>	CSS/Tailwind styling.
177	<code> <p className="font-body-sm text-body-sm text-secondary mt-1"></code>	CSS/Tailwind styling.
178	<code> Manage delivery personnel across all operating zones.</code>	Logic or UI structure — read with surrounding lines.
179	<code> </p></code>	JSX element opening tag.
180	<code> </div></code>	JSX element opening tag.
181	<code> <button className="flex items-center gap-2 bg-surface text-primary border border-primary font-label-lg text-l...</code>	CSS/Tailwind styling.
182	<code> <Plus className="w-5 h-5" /></code>	CSS/Tailwind styling.
183	<code> Add Rider Manually</code>	Logic or UI structure — read with surrounding lines.
184	<code> </button></code>	JSX element opening tag.
185	<code> </div></code>	JSX element opening tag.
186		Blank line.
187	<code> { /* — Status Tabs — */ }</code>	Logic or UI structure — read with surrounding lines.
188	<code> <div className="flex overflow-x-auto gap-6 border-b border-surface-variant pb-[1px] scrollbar-hide"></code>	CSS/Tailwind styling.
189	<code> {STATUS_TABS.map((tab) => {</code>	Logic or UI structure — read with surrounding lines.
190	<code> const isActive = status === tab.key</code>	Logic or UI structure — read with surrounding lines.
191	<code> return (</code>	Return JSX UI.
192	<code> <button</code>	JSX element opening tag.
193	<code> key={tab.key}</code>	Logic or UI structure — read with surrounding lines.
194	<code> onClick={() => setStatus(tab.key)}</code>	User event handler.
195	<code> className={`pb-3 font-label-lg text-label-lg whitespace-nowrap border-b-2 transition-all \${</code>	CSS/Tailwind styling.
196	<code> isActive</code>	Logic or UI structure — read with surrounding lines.
197	<code> ? 'border-primary text-primary font-bold'</code>	Logic or UI structure — read with surrounding lines.
198	<code> : 'border-transparent text-secondary hover:text-on-surface'</code>	Logic or UI structure — read with surrounding lines.
199	<code> `}`</code>	Logic or UI structure — read with surrounding lines.
200	<code> ></code>	Logic or UI structure — read with surrounding lines.
201	<code> {tab.label}</code>	Logic or UI structure — read with surrounding lines.
202	<code> </button></code>	JSX element opening tag.
203	<code>)</code>	Logic or UI structure — read with surrounding lines.
204	<code>)}</code>	Logic or UI structure — read with surrounding lines.
205	<code></div></code>	JSX element opening tag.

Line	Code	Explanation
206		Blank line.
207	<code>{/* — Filters Row — */}</code>	Logic or UI structure — read with surrounding lines.
208	<code><div className="flex flex-wrap gap-3 items-center bg-surface-container-lowest p-3 rounded-xl shadow-card border..."</code>	CSS/Tailwind styling.
209	<code>{/* Search */}</code>	Logic or UI structure — read with surrounding lines.
210	<code><div className="flex-1 min-w-[200px] max-w-[280px]"></code>	CSS/Tailwind styling.
211	<code><div className="flex items-center gap-2 bg-surface-container-low rounded-lg px-3 py-2 border border-surface..."</code>	CSS/Tailwind styling.
212	<code><Search className="text-secondary w-5 h-5" /></code>	CSS/Tailwind styling.
213	<code><input</code>	JSX element opening tag.
214	<code>id="rider-search"</code>	Logic or UI structure — read with surrounding lines.
215	<code>type="text"</code>	Logic or UI structure — read with surrounding lines.
216	<code>value={search}</code>	Logic or UI structure — read with surrounding lines.
217	<code>onChange={(e) => setSearch(e.target.value)}</code>	User event handler.
218	<code>placeholder="Search rider name or phone..."</code>	Logic or UI structure — read with surrounding lines.
219	<code>className="bg-transparent border-none focus:ring-0 w-full text-body-sm text-on-surface outline-none"</code>	CSS/Tailwind styling.
220	<code>/></code>	Logic or UI structure — read with surrounding lines.
221	<code></div></code>	JSX element opening tag.
222	<code></div></code>	JSX element opening tag.
223		Blank line.
224	<code>{/* Vehicle Select */}</code>	Logic or UI structure — read with surrounding lines.
225	<code><div className="relative min-w-[140px]"></code>	CSS/Tailwind styling.
226	<code><select</code>	JSX element opening tag.
227	<code>id="vehicle-filter"</code>	Logic or UI structure — read with surrounding lines.
228	<code>value={vehicleType}</code>	Logic or UI structure — read with surrounding lines.
229	<code>onChange={(e) => setVehicleType(e.target.value)}</code>	User event handler.
230	<code>className="w-full bg-surface-container-low border border-surface-variant rounded-lg py-2.5 pl-3 pr-8 font..."</code>	CSS/Tailwind styling.
231	<code>></code>	Logic or UI structure — read with surrounding lines.
232	<code><option value="">Vehicle Type</option></code>	JSX element opening tag.
233	<code>{VEHICLE_TYPES.map((t) => (</code>	Logic or UI structure — read with surrounding lines.
234	<code><option key={t.key} value={t.key}>{t.label}</option></code>	JSX element opening tag.
235	<code>)))}</code>	Logic or UI structure — read with surrounding lines.
236	<code></select></code>	JSX element opening tag.
237	<code></div></code>	JSX element opening tag.
238		Blank line.
239	<code>{/* Rating Select */}</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
240	<code><div className="relative min-w-[120px]"></code>	CSS/Tailwind styling.
241	<code><select</code>	JSX element opening tag.
242	<code>id="rating-filter"</code>	Logic or UI structure — read with surrounding lines.
243	<code>value={ratingFilter}</code>	Logic or UI structure — read with surrounding lines.
244	<code>onChange={(e) => setRatingFilter(e.target.value)}</code>	User event handler.
245	<code>className="w-full bg-surface-container-low border border-surface-variant rounded-lg py-2.5 pl-3 pr-8 font..."</code>	CSS/Tailwind styling.
246	<code>></code>	Logic or UI structure — read with surrounding lines.
247	<code><option value="">Rating</option></code>	JSX element opening tag.
248	<code>{RATING_FILTERS.map((r) => (</code>	Logic or UI structure — read with surrounding lines.
249	<code><option key={r.key} value={r.key}>{r.label}</option></code>	JSX element opening tag.
250	<code>)))}</code>	Logic or UI structure — read with surrounding lines.
251	<code></select></code>	JSX element opening tag.
252	<code></div></code>	JSX element opening tag.
253		Blank line.
254	<code>{/* KYC Select */}</code>	Logic or UI structure — read with surrounding lines.
255	<code><div className="relative min-w-[130px]"></code>	CSS/Tailwind styling.
256	<code><select</code>	JSX element opening tag.
257	<code>id="kyc-filter"</code>	Logic or UI structure — read with surrounding lines.
258	<code>value={kycStatus}</code>	Logic or UI structure — read with surrounding lines.
259	<code>onChange={(e) => setKycStatus(e.target.value)}</code>	User event handler.
260	<code>className="w-full bg-surface-container-low border border-surface-variant rounded-lg py-2.5 pl-3 pr-8 font..."</code>	CSS/Tailwind styling.
261	<code>></code>	Logic or UI structure — read with surrounding lines.
262	<code><option value="">KYC Status</option></code>	JSX element opening tag.
263	<code>{KYC_STATUSES.map((k) => (</code>	Logic or UI structure — read with surrounding lines.
264	<code><option key={k.key} value={k.key}>{k.label}</option></code>	JSX element opening tag.
265	<code>)))}</code>	Logic or UI structure — read with surrounding lines.
266	<code></select></code>	JSX element opening tag.
267	<code></div></code>	JSX element opening tag.
268		Blank line.
269	<code>{/* Clear Button */}</code>	Logic or UI structure — read with surrounding lines.
270	<code>{(search vehicleType ratingFilter kycStatus zone status !== 'all') && (</code>	Logic or UI structure — read with surrounding lines.
271	<code><button</code>	JSX element opening tag.
272	<code>onClick={clearAllFilters}</code>	User event handler.
273	<code>className="ml-auto text-secondary hover:text-primary transition-colors flex items-center gap-1 font-label..."</code>	CSS/Tailwind styling.
274	<code>></code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
275	<code><X className="w-4 h-4" /> Clear Filters</code>	CSS/Tailwind styling.
276	<code></button></code>	JSX element opening tag.
277	<code>)}</code>	Logic or UI structure — read with surrounding lines.
278	<code></div></code>	JSX element opening tag.
279		Blank line.
280	<code>{/* — Loading State — */}</code>	Logic or UI structure — read with surrounding lines.
281	<code>{loading && (</code>	Logic or UI structure — read with surrounding lines.
282	<code><div className="flex items-center justify-center py-20"></code>	CSS/Tailwind styling.
283	<code><Spinner size="lg" /></code>	Self-closing JSX element.
284	<code></div></code>	JSX element opening tag.
285	<code>)}</code>	Logic or UI structure — read with surrounding lines.
286		Blank line.
287	<code>{/* — Empty State — */}</code>	Logic or UI structure — read with surrounding lines.
288	<code>{!loading && riders.length === 0 && (</code>	Logic or UI structure — read with surrounding lines.
289	<code><EmptyState</code>	JSX element opening tag.
290	<code>icon={Bike}</code>	Logic or UI structure — read with surrounding lines.
291	<code>title="No riders found"</code>	Logic or UI structure — read with surrounding lines.
292	<code>description="We couldn't find any delivery personnel matching the selected filter criteria."</code>	Logic or UI structure — read with surrounding lines.
293	<code>className="py-16"</code>	CSS/Tailwind styling.
294	<code>/></code>	Logic or UI structure — read with surrounding lines.
295	<code>)}</code>	Logic or UI structure — read with surrounding lines.
296		Blank line.
297	<code>{/* — Desktop Table View (Hidden on Mobile) — */}</code>	Logic or UI structure — read with surrounding lines.
298	<code>{!loading && riders.length > 0 && (</code>	Logic or UI structure — read with surrounding lines.
299	<code><></code>	JSX element opening tag.
300	<code><div className="hidden md:block bg-surface border border-surface-variant rounded-xl shadow-card overflow-hi...</code>	CSS/Tailwind styling.
301	<code><table className="w-full text-left border-collapse"></code>	CSS/Tailwind styling.
302	<code><thead></code>	JSX element opening tag.
303	<code><tr className="bg-surface-container-low border-b border-surface-variant text-secondary font-label-sm ...</code>	CSS/Tailwind styling.
304	<code><th className="p-4 font-semibold">Rider</th></code>	CSS/Tailwind styling.
305	<code><th className="p-4 font-semibold">Vehicle</th></code>	CSS/Tailwind styling.
306	<code><th className="p-4 font-semibold">KYC</th></code>	CSS/Tailwind styling.
307	<code><th className="p-4 font-semibold">Status</th></code>	CSS/Tailwind styling.
308	<code><th className="p-4 font-semibold text-right">COD Cash</th></code>	CSS/Tailwind styling.
309	<code><th className="p-4 font-semibold text-right">Week Earnings</th></code>	CSS/Tailwind styling.

Line	Code	Explanation
310	<code><th className="p-4 font-semibold">Rating</th></code>	CSS/Tailwind styling.
311	<code><th className="p-4 font-semibold text-right">Actions</th></code>	CSS/Tailwind styling.
312	<code></tr></code>	JSX element opening tag.
313	<code></thead></code>	JSX element opening tag.
314	<code><tbody className="divide-y divide-surface-variant"></code>	CSS/Tailwind styling.
315	<code>{riders.map((rider) => {</code>	Logic or UI structure — read with surrounding lines.
316	<code>const isCodCritical = (rider.cod_balance 0) >= 2000</code>	Logic or UI structure — read with surrounding lines.
317	<code>const initialAvatar = getInitials(rider.name)</code>	Logic or UI structure — read with surrounding lines.
318	<code>return (</code>	Return JSX UI.
319	<code><tr</code>	JSX element opening tag.
320	<code>key={rider.id}</code>	Logic or UI structure — read with surrounding lines.
321	<code>className={`hover:bg-surface-container-low transition-colors cursor-pointer \${</code>	CSS/Tailwind styling.
322	<code>rider.status === 'pending_kyc'</code>	Logic or UI structure — read with surrounding lines.
323	<code>? 'border-l-4 border-blue-500 bg-blue-50/20'</code>	Logic or UI structure — read with surrounding lines.
324	<code>: isCodCritical</code>	Logic or UI structure — read with surrounding lines.
325	<code>? 'border-l-4 border-red-500 bg-red-50/10'</code>	Logic or UI structure — read with surrounding lines.
326	<code>: ''</code>	Logic or UI structure — read with surrounding lines.
327	<code>}`}</code>	Logic or UI structure — read with surrounding lines.
328	<code>onClick={() => navigate(`/riders/\${rider.id}`)}></code>	User event handler.
329	<code>></code>	Logic or UI structure — read with surrounding lines.
330	<code>{/* Profile details */}</code>	Logic or UI structure — read with surrounding lines.
331	<code><td className="p-4"></code>	CSS/Tailwind styling.
332	<code><div className="flex items-center gap-3"></code>	CSS/Tailwind styling.
333	<code><div className="w-11 h-11 rounded-full bg-primary-container text-on-primary-container flex ...</code>	CSS/Tailwind styling.
334	<code>{initialAvatar}</code>	Logic or UI structure — read with surrounding lines.
335	<code></div></code>	JSX element opening tag.
336	<code><div></code>	JSX element opening tag.
337	<code><div className="text-label-lg font-bold text-on-surface flex items-center gap-1.5"></code>	CSS/Tailwind styling.
338	<code>{rider.name}</code>	Logic or UI structure — read with surrounding lines.
339	<code>{isCodCritical && (</code>	Logic or UI structure — read with surrounding lines.
340	<code><AlertCircle className="w-4 h-4 text-danger" title="COD Limit Exceeded!" /></code>	CSS/Tailwind styling.
341	<code>)}</code>	Logic or UI structure — read with surrounding lines.
342	<code></div></code>	JSX element opening tag.

Line	Code	Explanation
380	<code>/></code>	Logic or UI structure — read with surrounding lines.
381	<code></code>	CSS/Tailwind styling.
382	<code>{rider.is_online ? 'Online' : 'Offline'}</code>	Logic or UI structure — read with surrounding lines.
383	<code></code>	JSX element opening tag.
384	<code></div></code>	JSX element opening tag.
385	<code></td></code>	JSX element opening tag.
386		Blank line.
387	<code>{/* COD Balance */}</code>	Logic or UI structure — read with surrounding lines.
388	<code><td className={`p-4 text-right font-bold \${isCodCritical ? 'text-danger font-extrabold' : 'text...`</code>	CSS/Tailwind styling.
389	<code>{formatCurrency(rider.cod_balance 0)}</code>	Logic or UI structure — read with surrounding lines.
390	<code></td></code>	JSX element opening tag.
391		Blank line.
392	<code>{/* Weekly Earnings */}</code>	Logic or UI structure — read with surrounding lines.
393	<code><td className="p-4 text-right font-semibold text-primary"></code>	CSS/Tailwind styling.
394	<code>{formatCurrency(rider.weekly_delivery_earnings 0)}</code>	Logic or UI structure — read with surrounding lines.
395	<code></td></code>	JSX element opening tag.
396		Blank line.
397	<code>{/* Rating */}</code>	Logic or UI structure — read with surrounding lines.
398	<code><td className="p-4"></code>	CSS/Tailwind styling.
399	<code><div className="flex items-center gap-1"></code>	CSS/Tailwind styling.
400	<code><Star className="w-4 h-4 text-[#FBBC04] fill-[#FBBC04]" /></code>	CSS/Tailwind styling.
401	<code></code>	CSS/Tailwind styling.
402	<code>{rider.rating?.toFixed(1) '-'}</code>	Logic or UI structure — read with surrounding lines.
403	<code></code>	JSX element opening tag.
404	<code></div></code>	JSX element opening tag.
405	<code></td></code>	JSX element opening tag.
406		Blank line.
407	<code>{/* Row Actions */}</code>	Logic or UI structure — read with surrounding lines.
408	<code><td className="p-4 text-right" onClick={(e) => e.stopPropagation()}></code>	CSS/Tailwind styling.
409	<code><div className="relative inline-block text-left"></code>	CSS/Tailwind styling.
410	<code><button</code>	JSX element opening tag.
411	<code>id={`action- \${rider.id}`}`}</code>	Logic or UI structure — read with surrounding lines.
412	<code>onClick={() => setActionMenuId(actionMenuId === rider.id ? null : rider.id)}</code>	User event handler.
413	<code>className="text- primary hover:bg-surface-container-high p-2 rounded-full transition-colors"</code>	CSS/Tailwind styling.
414	<code>></code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
415	<code><MoreVertical className="w-5 h-5" /></code>	CSS/Tailwind styling.
416	<code></button></code>	JSX element opening tag.
417	<code>{actionMenuId === rider.id && (</code>	Logic or UI structure — read with surrounding lines.
418	<code><div className="absolute right-0 top-10 z-30 w-48 bg-surface-container-lowest border bord...</code>	CSS/Tailwind styling.
419	<code><button</code>	JSX element opening tag.
420	<code>onClick={() => navigate(`/riders/\${rider.id}`)}}</code>	User event handler.
421	<code>className="w- full text-left px-4 py-2.5 text-body-md text- on-surface hover:bg-surface...</code>	CSS/Tailwind styling.
422	<code>></code>	Logic or UI structure — read with surrounding lines.
423	<code>View Profile</code>	Logic or UI structure — read with surrounding lines.
424	<code></button></code>	JSX element opening tag.
425	<code>{rider.status === 'pending_kyc' && (</code>	Logic or UI structure — read with surrounding lines.
426	<code><button</code>	JSX element opening tag.
427	<code>onClick={() => handleStatusAction(rider, 'active')}}</code>	User event handler.
428	<code>className="w-full text-left px-4 py-2.5 text- body-md text-success hover:bg-surface-...</code>	CSS/Tailwind styling.
429	<code>></code>	Logic or UI structure — read with surrounding lines.
430	<code>Approve KYC</code>	Logic or UI structure — read with surrounding lines.
431	<code></button></code>	JSX element opening tag.
432	<code>)}</code>	Logic or UI structure — read with surrounding lines.
433	<code>{rider.status !== 'suspended' && (</code>	Logic or UI structure — read with surrounding lines.
434	<code><button</code>	JSX element opening tag.
435	<code>onClick={() => handleStatusAction(rider, 'suspended')}}</code>	User event handler.
436	<code>className="w-full text-left px-4 py-2.5 text- body-md text-danger hover:bg-surface-c...</code>	CSS/Tailwind styling.
437	<code>></code>	Logic or UI structure — read with surrounding lines.
438	<code>Suspend</code>	Logic or UI structure — read with surrounding lines.
439	<code></button></code>	JSX element opening tag.
440	<code>)}</code>	Logic or UI structure — read with surrounding lines.
441	<code>{rider.status === 'suspended' && (</code>	Logic or UI structure — read with surrounding lines.
442	<code><button</code>	JSX element opening tag.
443	<code>onClick={() => handleStatusAction(rider, 'active')}}</code>	User event handler.
444	<code>className="w-full text-left px-4 py-2.5 text- body-md text-success hover:bg-surface-...</code>	CSS/Tailwind styling.
445	<code>></code>	Logic or UI structure — read with surrounding lines.
446	<code>Unsuspend</code>	Logic or UI structure — read with surrounding lines.
447	<code></button></code>	JSX element opening tag.

Line	Code	Explanation
448	)}	Logic or UI structure — read with surrounding lines.
449	</div>	JSX element opening tag.
450	)}	Logic or UI structure — read with surrounding lines.
451	</div>	JSX element opening tag.
452	</td>	JSX element opening tag.
453	</tr>	JSX element opening tag.
454	)	Logic or UI structure — read with surrounding lines.
455	)})	Logic or UI structure — read with surrounding lines.
456	</tbody>	JSX element opening tag.
457	</table>	JSX element opening tag.
458	</div>	JSX element opening tag.
459		Blank line.
460	{ /* — Mobile Card View (Hidden on Desktop) — */	Logic or UI structure — read with surrounding lines.
461	<div className="md:hidden space-y-4">	CSS/Tailwind styling.
462	{riders.map((rider) => {	Logic or UI structure — read with surrounding lines.
463	const isCodCritical = (rider.cod_balance 0) >= 2000	Logic or UI structure — read with surrounding lines.
464	const initialAvatar = getInitials(rider.name)	Logic or UI structure — read with surrounding lines.
465	return (	Return JSX UI.
466	<div	JSX element opening tag.
467	key={rider.id}	Logic or UI structure — read with surrounding lines.
468	className={`bg-surface border border-surface-variant rounded-xl p-3.5 shadow-card flex flex-col gap...`}	CSS/Tailwind styling.
469	rider.status === 'pending_kyc'	Logic or UI structure — read with surrounding lines.
470	? 'border-l-4 border-blue-500 bg-blue-50/10'	Logic or UI structure — read with surrounding lines.
471	: isCodCritical	Logic or UI structure — read with surrounding lines.
472	? 'border-l-4 border-red-500 bg-red-50/10'	Logic or UI structure — read with surrounding lines.
473	: ''	Logic or UI structure — read with surrounding lines.
474	`}`	Logic or UI structure — read with surrounding lines.
475	>	Logic or UI structure — read with surrounding lines.
476	<div className="flex gap-3">	CSS/Tailwind styling.
477	<div className="w-12 h-12 rounded-full bg-primary-container text-on-primary-container flex items-...">	CSS/Tailwind styling.
478	{initialAvatar}	Logic or UI structure — read with surrounding lines.
479	</div>	JSX element opening tag.
480	<div className="flex-1 min-w-0">	CSS/Tailwind styling.
481	<div className="flex justify-between items-start">	CSS/Tailwind styling.
482	<div className="text-label-lg font-bold text-on-surface truncate flex items-center gap-1">	CSS/Tailwind styling.

Line	Code	Explanation
483	<code>{rider.name}</code>	Logic or UI structure — read with surrounding lines.
484	<code>{isCodCritical && <AlertCircle className="w-4 h-4 text-danger" />}</code>	CSS/Tailwind styling.
485	<code></div></code>	JSX element opening tag.
486	<code><Badge</code>	JSX element opening tag.
487	<code>variant={</code>	Logic or UI structure — read with surrounding lines.
488	<code>rider.status === 'active'</code>	Logic or UI structure — read with surrounding lines.
489	<code>? 'success'</code>	Logic or UI structure — read with surrounding lines.
490	<code>: rider.status === 'pending_kyc'</code>	Logic or UI structure — read with surrounding lines.
491	<code>? 'warning'</code>	Logic or UI structure — read with surrounding lines.
492	<code>: 'danger'</code>	Logic or UI structure — read with surrounding lines.
493	<code>}</code>	Logic or UI structure — read with surrounding lines.
494	<code>></code>	Logic or UI structure — read with surrounding lines.
495	<code>{rider.status === 'active' ? 'Verified' : rider.status === 'pending_kyc' ? 'Pending' : 'Sus...</code>	Logic or UI structure — read with surrounding lines.
496	<code></Badge></code>	JSX element opening tag.
497	<code></div></code>	JSX element opening tag.
498	<code><div className="text- body-sm text-secondary mt- 0.5">{formatPhone(rider.phone)}</div></code>	CSS/Tailwind styling.
499	<code><div className="flex justify-between items-end mt-2"></code>	CSS/Tailwind styling.
500	<code><div></code>	JSX element opening tag.
501	<code><div className="text-body-xs text-secondary">Weekly Earnings</div></code>	CSS/Tailwind styling.
502	<code><div className="text-headline-sm text-primary font- bold">{formatCurrency(rider.weekly_deliv...</code>	CSS/Tailwind styling.
503	<code></div></code>	JSX element opening tag.
504	<code><div className="text- right"></code>	CSS/Tailwind styling.
505	<code><div className="text-body-xs text-secondary">COD Cash</div></code>	CSS/Tailwind styling.
506	<code><div className={`text-label-lg font-bold \${isCodCritical ? 'text-danger font-extrabold' : '...</code>	CSS/Tailwind styling.
507	<code>{formatCurrency(rider.cod_balance 0)}</code>	Logic or UI structure — read with surrounding lines.
508	<code></div></code>	JSX element opening tag.
509	<code></div></code>	JSX element opening tag.
510	<code></div></code>	JSX element opening tag.
511	<code></div></code>	JSX element opening tag.
512	<code></div></code>	JSX element opening tag.
513		Blank line.
514	<code><div className="border-t border-surface-variant pt-2 flex justify- between items-center"></code>	CSS/Tailwind styling.

Line	Code	Explanation
515	<code><div className="flex items-center gap-1 text-body-sm font-semibold"></code>	CSS/Tailwind styling.
516	<code><Star className="w-3.5 h-3.5 text-[#FBBC04] fill-[#FBBC04]" /></code>	CSS/Tailwind styling.
517	<code>{rider.rating?.toFixed(1) '-'}</code>	JSX element opening tag.
518	<code></div></code>	JSX element opening tag.
519	<code><div className="flex gap-2"></code>	CSS/Tailwind styling.
520	<code><button</code>	JSX element opening tag.
521	<code>onClick={() => navigate(`/riders/\${rider.id}`)}`}</code>	User event handler.
522	<code>className="px-4 py-1.5 rounded-full border border-surface-variant text-secondary font-label-m..."</code>	CSS/Tailwind styling.
523	<code>></code>	Logic or UI structure — read with surrounding lines.
524	<code>Profile</code>	Logic or UI structure — read with surrounding lines.
525	<code></button></code>	JSX element opening tag.
526	<code>{rider.status === 'pending_kyc' && (</code>	Logic or UI structure — read with surrounding lines.
527	<code><button</code>	JSX element opening tag.
528	<code>onClick={() => handleStatusAction(rider, 'active')}`}</code>	User event handler.
529	<code>className="px-4 py-1.5 rounded-full bg-primary-container text-on-primary-container font-lab..."</code>	CSS/Tailwind styling.
530	<code>></code>	Logic or UI structure — read with surrounding lines.
531	<code>Verify</code>	Logic or UI structure — read with surrounding lines.
532	<code></button></code>	JSX element opening tag.
533	<code>)}`}</code>	Logic or UI structure — read with surrounding lines.
534	<code></div></code>	JSX element opening tag.
535	<code></div></code>	JSX element opening tag.
536	<code></div></code>	JSX element opening tag.
537	<code>)</code>	Logic or UI structure — read with surrounding lines.
538	<code>}}}</code>	Logic or UI structure — read with surrounding lines.
539	<code></div></code>	JSX element opening tag.
540		Blank line.
541	<code>{/* — Pagination — */}</code>	Logic or UI structure — read with surrounding lines.
542	<code><Pagination</code>	JSX element opening tag.
543	<code>currentPage={page}</code>	Logic or UI structure — read with surrounding lines.
544	<code>totalItems={total}</code>	Logic or UI structure — read with surrounding lines.
545	<code>itemsPerPage={PAGE_SIZE}</code>	Logic or UI structure — read with surrounding lines.
546	<code>onPageChange={setPage}</code>	Logic or UI structure — read with surrounding lines.
547	<code>/></code>	Logic or UI structure — read with surrounding lines.
548	<code></></code>	Self-closing JSX element.
549	<code>}}}</code>	Logic or UI structure — read with surrounding lines.
550		Blank line.

Line	Code	Explanation
551	<code>{/* — Confirm Dialog — */}</code>	Logic or UI structure — read with surrounding lines.
552	<code>{confirmDialog && (</code>	Logic or UI structure — read with surrounding lines.
553	<code><ConfirmDialog</code>	JSX element opening tag.
554	<code>isOpen={true}</code>	Logic or UI structure — read with surrounding lines.
555	<code>title={confirmDialog.title}</code>	Logic or UI structure — read with surrounding lines.
556	<code>message={confirmDialog.message}</code>	Logic or UI structure — read with surrounding lines.
557	<code>confirmLabel="Confirm"</code>	Logic or UI structure — read with surrounding lines.
558	<code>variant={confirmDialog.variant}</code>	Logic or UI structure — read with surrounding lines.
559	<code>onConfirm={confirmDialog.onConfirm}</code>	Logic or UI structure — read with surrounding lines.
560	<code>onCancel={() => setConfirmDialog(null)}</code>	Logic or UI structure — read with surrounding lines.
561	<code>/></code>	Logic or UI structure — read with surrounding lines.
562	<code>)}</code>	Logic or UI structure — read with surrounding lines.
563	<code></div></code>	JSX element opening tag.
564	<code>)</code>	Logic or UI structure — read with surrounding lines.
565	<code>}</code>	Logic or UI structure — read with surrounding lines.
566		Blank line.

RiderDetailPage (src/pages/RiderDetailPage.jsx)

Total lines: 621

Route: /riders/:id

Purpose: Rider profile, KYC docs, deliveries, earnings.

Line	Code	Explanation
1	import { useState, useEffect, useCallback } from 'react'	Import React hooks.
2	import { useParams, useNavigate, Link } from 'react-router-dom'	Import routing.
3	import {	Import dependency.
4	ArrowLeft, Star, Phone, MapPin, Calendar, CreditCard,	Logic or UI structure — read with surrounding lines.
5	MessageSquare, ShieldAlert, CheckCircle2, AlertTriangle, ExternalLink,	Logic or UI structure — read with surrounding lines.
6	Bike, Eye, ShieldCheck, Mail, Info, TrendingUp, CheckCircle, Navigation,	Logic or UI structure — read with surrounding lines.
7	ShoppingBag, ClipboardList, Ban	Logic or UI structure — read with surrounding lines.
8	} from 'lucide-react'	Logic or UI structure — read with surrounding lines.
9	import toast from 'react-hot-toast'	Import dependency.
10	import {	Import dependency.
11	getRiderById,	Logic or UI structure — read with surrounding lines.
12	updateRiderStatus,	Logic or UI structure — read with surrounding lines.
13	getRiderStats,	Logic or UI structure — read with surrounding lines.
14	getRiderDocuments,	Logic or UI structure — read with surrounding lines.
15	verifyRiderDocument,	Logic or UI structure — read with surrounding lines.
16	updateRider	Logic or UI structure — read with surrounding lines.
17	} from '../services/riderService'	Logic or UI structure — read with surrounding lines.
18	import { supabase } from '../services/supabase'	Import API/database service.
19	import { formatCurrency, formatDate, formatPhone, formatNumber } from '../utils/formatters'	Import helper utilities.
20	import Badge from '../components/ui/Badge'	Import UI component.
21	import Spinner from '../components/ui/Spinner'	Import UI component.
22	import ConfirmDialog from '../components/ui/ConfirmDialog'	Import UI component.
23	import Card from '../components/ui/Card'	Import UI component.
24	import Toggle from '../components/ui/Toggle'	Import UI component.
25	import CODBalanceCard from '../components/riders/CODBalanceCard'	Import UI component.
26		Blank line.
27	/**	Doc comment.
28	* ZapKart Admin – Rider Detail Page	Doc comment.
29	* Matching the Stitch rider_detail_rahul_kumar_mobile_responsive design.	Doc comment.
30	* Sections: Header card, Quick Stats, Tabbed Workspace (Overview / KYC / Deliveries / Earnings / Reviews).	Doc comment.
31	*/	Doc comment.
32		Blank line.
33	const TABS = [	Logic or UI structure — read with surrounding lines.
34	{ key: 'overview', label: 'Overview', icon: ClipboardList },	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
35	<code>{ key: 'kyc', label: 'KYC Documents', icon: ShieldCheck },</code>	Logic or UI structure — read with surrounding lines.
36	<code>{ key: 'deliveries', label: 'Deliveries', icon: ShoppingBag },</code>	Logic or UI structure — read with surrounding lines.
37	<code>{ key: 'earnings', label: 'Earnings', icon: TrendingUp },</code>	Logic or UI structure — read with surrounding lines.
38	<code>{ key: 'reviews', label: 'Reviews', icon: Star },</code>	Logic or UI structure — read with surrounding lines.
39	<code>]</code>	Logic or UI structure — read with surrounding lines.
40		Blank line.
41	<code>export default function RiderDetailPage() {</code>	Default export (main module).
42	<code> const { id } = useParams()</code>	Logic or UI structure — read with surrounding lines.
43	<code> const navigate = useNavigate()</code>	Programmatic navigation hook.
44	<code> const [rider, setRider] = useState(null)</code>	React state variable.
45	<code> const [documents, setDocuments] = useState([])</code>	React state variable.
46	<code> const [loading, setLoading] = useState(true)</code>	React state variable.
47	<code> const [activeTab, setActiveTab] = useState('overview')</code>	React state variable.
48	<code> const [confirmDialog, setConfirmDialog] = useState(null)</code>	React state variable.
49		Blank line.
50	<code> // Fetch rider profile data, stats, and documents in parallel</code>	Comment: Fetch rider profile data, stats, and documents in parallel
51	<code> const fetchAll = useCallback(async () => {</code>	Memoized callback function.
52	<code> setLoading(true)</code>	Logic or UI structure — read with surrounding lines.
53	<code> try {</code>	Try block start.
54	<code> const [riderData, docsData] = await Promise.allSettled([</code>	Wait for async operation.
55	<code> getRiderById(id),</code>	Logic or UI structure — read with surrounding lines.
56	<code> getRiderDocuments(id),</code>	Logic or UI structure — read with surrounding lines.
57	<code>])</code>	Logic or UI structure — read with surrounding lines.
58		Blank line.
59	<code> if (riderData.status === 'fulfilled') {</code>	Logic or UI structure — read with surrounding lines.
60	<code> setRider(riderData.value)</code>	Logic or UI structure — read with surrounding lines.
61	<code> } else {</code>	Logic or UI structure — read with surrounding lines.
62	<code> throw new Error(riderData.reason?.message 'Rider not found')</code>	Logic or UI structure — read with surrounding lines.
63	<code> }</code>	Logic or UI structure — read with surrounding lines.
64		Blank line.
65	<code> if (docsData.status === 'fulfilled') {</code>	Logic or UI structure — read with surrounding lines.
66	<code> setDocuments(docsData.value [])</code>	Logic or UI structure — read with surrounding lines.
67	<code> }</code>	Logic or UI structure — read with surrounding lines.
68	<code> } catch (err) {</code>	Catch errors.
69	<code> console.error(err)</code>	Logic or UI structure — read with surrounding lines.
70	<code> toast.error('Could not load rider profile details.')</code>	Toast notification.
71	<code> } finally {</code>	Finally block (cleanup).

Line	Code	Explanation
72	setLoading(false)	Logic or UI structure — read with surrounding lines.
73	}	Logic or UI structure — read with surrounding lines.
74	}, [id])	Logic or UI structure — read with surrounding lines.
75		Blank line.
76	useEffect(() => {	Side effect (fetch, subscribe, redirect).
77	fetchAll()	Logic or UI structure — read with surrounding lines.
78	}, [fetchAll])	Logic or UI structure — read with surrounding lines.
79		Blank line.
80	// Handle status suspension or activation	Comment: Handle status suspension or activation
81	const handleStatusAction = (newStatus) => {	Logic or UI structure — read with surrounding lines.
82	const labels = { active: 'activate', suspended: 'suspend', pending_kyc: 'mark pending' }	Logic or UI structure — read with surrounding lines.
83	setConfirmDialog({	Logic or UI structure — read with surrounding lines.
84	title: `\${labels[newStatus]?.charAt(0).toUpperCase() + labels[newStatus]?.slice(1)} Rider`,	Logic or UI structure — read with surrounding lines.
85	message: `Are you sure you want to \${labels[newStatus]} "\${rider?.name}"? \${	Logic or UI structure — read with surrounding lines.
86	newStatus === 'suspended' ? 'They will be blocked from receiving new delivery assignments.' : ''	Logic or UI structure — read with surrounding lines.
87	}`,	Logic or UI structure — read with surrounding lines.
88	variant: newStatus === 'active' ? 'primary' : 'danger',	Logic or UI structure — read with surrounding lines.
89	onConfirm: async () => {	Logic or UI structure — read with surrounding lines.
90	try {	Try block start.
91	await updateRiderStatus(id, newStatus, 'admin')	Wait for async operation.
92	toast.success(`Rider status updated successfully`)	Toast notification.
93	fetchAll()	Logic or UI structure — read with surrounding lines.
94	} catch (err) {	Catch errors.
95	toast.error(`Failed to update status: \${err.message}`)	Toast notification.
96	}	Logic or UI structure — read with surrounding lines.
97	setConfirmDialog(null)	Logic or UI structure — read with surrounding lines.
98	},	Logic or UI structure — read with surrounding lines.
99	})	Logic or UI structure — read with surrounding lines.
100	}	Logic or UI structure — read with surrounding lines.
101		Blank line.
102	// Handle KYC doc verification toggle slider	Comment: Handle KYC doc verification toggle slider
103	const handleVerifyDoc = async (docId, currentVerified) => {	Async function for network calls.
104	try {	Try block start.

Line	Code	Explanation
105	await verifyRiderDocument(docId, !currentVerified)	Wait for async operation.
106	toast.success(currentVerified ? 'Document unverified' : 'Document verified successfully')	Toast notification.
107	const updatedDocs = await getRiderDocuments(id)	Wait for async operation.
108	setDocuments(updatedDocs [])	Logic or UI structure — read with surrounding lines.
109	} catch (err) {	Catch errors.
110	toast.error(`Verification failed: \${err.message}`)	Toast notification.
111	}	Logic or UI structure — read with surrounding lines.
112	}	Logic or UI structure — read with surrounding lines.
113		Blank line.
114	// Handle details edit/update	Comment: Handle details edit/update
115	const handleUpdateRider = async (updates) => {	Async function for network calls.
116	try {	Try block start.
117	const updated = await updateRider(id, updates)	Wait for async operation.
118	setRider(updated)	Logic or UI structure — read with surrounding lines.
119	toast.success('Rider details saved successfully')	Toast notification.
120	} catch (err) {	Catch errors.
121	toast.error(`Update failed: \${err.message}`)	Toast notification.
122	}	Logic or UI structure — read with surrounding lines.
123	}	Logic or UI structure — read with surrounding lines.
124		Blank line.
125	if (loading) {	Logic or UI structure — read with surrounding lines.
126	return (	Return JSX UI.
127	<div className="flex items-center justify-center min-h-[60vh]">	CSS/Tailwind styling.
128	<Spinner size="lg" />	Self-closing JSX element.
129	</div>	JSX element opening tag.
130	)	Logic or UI structure — read with surrounding lines.
131	}	Logic or UI structure — read with surrounding lines.
132		Blank line.
133	if (!rider) {	Logic or UI structure — read with surrounding lines.
134	return (	Return JSX UI.
135	<div className="flex flex-col items-center justify-center min-h-[50vh] gap-4 animate-fade-in">	CSS/Tailwind styling.
136	<Bike className="w-16 h-16 text-secondary opacity-40" />	CSS/Tailwind styling.
137	<h2 className="text-headline-md text-on-surface">Rider Not Found</h2>	CSS/Tailwind styling.
138	<p className="text-body-md text-secondary">The requested rider profile could not be loaded.</p>	CSS/Tailwind styling.
139	<button	JSX element opening tag.
140	onClick={() => navigate('/riders')}	User event handler.
141	className="mt-2 px-6 py-2.5 rounded-full bg-primary text-on-primary font-label-lg transition-colors hover:b...	CSS/Tailwind styling.
142	>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
143	Back to Riders Directory	Logic or UI structure — read with surrounding lines.
144	</button>	JSX element opening tag.
145	</div>	JSX element opening tag.
146	)	Logic or UI structure — read with surrounding lines.
147	}	Logic or UI structure — read with surrounding lines.
148		Blank line.
149	const initialsAvatar = rider.name ? (rider.name.trim().split(' ').slice(0, 2).map((n) => n[0]).join('')).toUpperCase...	Logic or UI structure — read with surrounding lines.
150		Blank line.
151	return (	Return JSX UI.
152	<div className="animate-fade-in space-y-6">	CSS/Tailwind styling.
153	{/* — Breadcrumb — */}	Logic or UI structure — read with surrounding lines.
154	<nav className="flex items-center gap-2 text-body-sm text-secondary">	CSS/Tailwind styling.
155	<Link	JSX element opening tag.
156	to="/riders"	Logic or UI structure — read with surrounding lines.
157	className="hover:text-primary transition-colors flex items-center gap-1 font-medium"	CSS/Tailwind styling.
158	>	Logic or UI structure — read with surrounding lines.
159	<ArrowLeft className="w-4 h-4" /> Riders	CSS/Tailwind styling.
160	</Link>	JSX element opening tag.
161		CSS/Tailwind styling.
162	{rider.name 'Rider Profile'}	CSS/Tailwind styling.
163	</nav>	JSX element opening tag.
164		Blank line.
165	{/* — Header Card — */}	Logic or UI structure — read with surrounding lines.
166	<div className="bg-surface-container-lowest rounded-xl shadow-card border border-surface-variant p-5 flex flex-...	CSS/Tailwind styling.
167	<div className="flex items-center gap-4 flex-col sm:flex-row text-center sm:text-left w-full lg:w-auto">	CSS/Tailwind styling.
168	{/* Avatar (Initials circle) */}	Logic or UI structure — read with surrounding lines.
169	<div className="w-20 h-20 rounded-full bg-primary-container text-on-primary-container flex items-center jus...	CSS/Tailwind styling.
170	{initialsAvatar}	Logic or UI structure — read with surrounding lines.
171	</div>	JSX element opening tag.
172	<div className="space-y-1.5 w-full">	CSS/Tailwind styling.
173	<div className="flex flex-col sm:flex-row items-center gap-2">	CSS/Tailwind styling.
174	<h2 className="text-headline-lg font-bold text-on-surface">{rider.name}</h2>	CSS/Tailwind styling.
175	<Badge variant={rider.status === 'active' ? 'success' : 'warning'}>	JSX element opening tag.
176		CSS/Tailwind styling.
177	{rider.status === 'active' ? 'Active' : rider.status}	Logic or UI structure — read with surrounding lines.
178	</Badge>	JSX element opening tag.
179	</div>	JSX element opening tag.

Line	Code	Explanation
180	<code><div className="grid grid-cols-1 sm:grid-cols-2 gap-x-6 gap-y-2 text-body-sm text-secondary"></code>	CSS/Tailwind styling.
181	<code><div className="flex items-center justify-center sm:justify-start gap-1.5"></code>	CSS/Tailwind styling.
182	<code><Phone className="w-4 h-4 shrink-0" /></code>	CSS/Tailwind styling.
183	<code></code>	CSS/Tailwind styling.
184	<code>{formatPhone(rider.phone)}</code>	Logic or UI structure — read with surrounding lines.
185	<code></code>	JSX element opening tag.
186	<code></div></code>	JSX element opening tag.
187	<code><div className="flex items-center justify-center sm:justify-start gap-1.5"></code>	CSS/Tailwind styling.
188	<code><Bike className="w-4 h-4 shrink-0" /></code>	CSS/Tailwind styling.
189	<code>{rider.vehicle_number 'Bicycle'}</code>	JSX element opening tag.
190	<code></div></code>	JSX element opening tag.
191	<code><div className="flex items-center justify-center sm:justify-start gap-1.5"></code>	CSS/Tailwind styling.
192	<code><Calendar className="w-4 h-4 shrink-0" /></code>	CSS/Tailwind styling.
193	<code>Joined: {formatDate(rider.created_at)}</code>	JSX element opening tag.
194	<code></div></code>	JSX element opening tag.
195	<code><div className="flex items-center justify-center sm:justify-start gap-1.5"></code>	CSS/Tailwind styling.
196	<code><CreditCard className="w-4 h-4 shrink-0" /></code>	CSS/Tailwind styling.
197	<code>Bank: {rider.bank_account_number ? `**** *` : `****`} : '-'</code>	JSX element opening tag.
198	<code></div></code>	JSX element opening tag.
199	<code><div className="flex items-center justify-center sm:justify-start gap-1.5 sm:col-span-2"></code>	CSS/Tailwind styling.
200	<code><MapPin className="w-4 h-4 shrink-0" /></code>	CSS/Tailwind styling.
201	<code>{rider.zone 'Koramangala'} Zone, {rider.city 'Bengaluru'}</code>	JSX element opening tag.
202	<code></div></code>	JSX element opening tag.
203	<code></div></code>	JSX element opening tag.
204	<code></div></code>	JSX element opening tag.
205	<code></div></code>	JSX element opening tag.
206		Blank line.
207	<code>{/* Action Controls */}</code>	Logic or UI structure — read with surrounding lines.
208	<code><div className="flex flex-col gap-3 w-full lg:w-auto items-center lg:items-end"></code>	CSS/Tailwind styling.
209	<code><div className="text-headline-sm font-bold text-on-surface flex items-center gap-1 bg-surface-container-hig...</code>	CSS/Tailwind styling.
210	<code>Rating:</code>	CSS/Tailwind styling.
211	<code>{rider.rating?.toFixed(1) '-' }</code>	JSX element opening tag.
212	<code><Star className="w-4 h-4 text-[#FBB03B] fill-[#FBB03B]" /></code>	CSS/Tailwind styling.
213	<code></code>	CSS/Tailwind styling.

Line	Code	Explanation
214	(({formatNumber(rider.total_deliveries 0)} deliveries)	Logic or UI structure — read with surrounding lines.
215		JSX element opening tag.
216	</div>	JSX element opening tag.
217	<div className="flex items-center gap-2 w-full sm:w-auto justify-center">	CSS/Tailwind styling.
218	<button className="flex-1 sm:flex-none border border-primary text-primary px-4 py-2 rounded-full font-lab...	CSS/Tailwind styling.
219	<Navigation className="w-4 h-4" /> View Live Location	CSS/Tailwind styling.
220	</button>	JSX element opening tag.
221	{rider.status === 'active' ? (	Logic or UI structure — read with surrounding lines.
222	<button	JSX element opening tag.
223	onClick={() => handleStatusAction('suspended')}	User event handler.
224	className="flex-1 sm:flex-none bg-error text-on-error px-5 py-2 rounded-full font-label-md text-label...	CSS/Tailwind styling.
225	>	Logic or UI structure — read with surrounding lines.
226	Suspend	Logic or UI structure — read with surrounding lines.
227	</button>	JSX element opening tag.
228	) : (	Logic or UI structure — read with surrounding lines.
229	<button	JSX element opening tag.
230	onClick={() => handleStatusAction('active')}	User event handler.
231	className="flex-1 sm:flex-none bg-success text-white px-5 py-2 rounded-full font-label-md text-label-...	CSS/Tailwind styling.
232	>	Logic or UI structure — read with surrounding lines.
233	Activate	Logic or UI structure — read with surrounding lines.
234	</button>	JSX element opening tag.
235	)} </div>	Logic or UI structure — read with surrounding lines.
236	</div>	JSX element opening tag.
237	</div>	JSX element opening tag.
238	</div>	JSX element opening tag.
239		Blank line.
240	{/* — Quick Stats Row — */}	Logic or UI structure — read with surrounding lines.
241	<div className="grid grid-cols-2 lg:grid-cols-4 gap-4 overflow-x-auto scrollbar-hide">	CSS/Tailwind styling.
242	<StatCard	JSX element opening tag.
243	icon={<TrendingUp className="w-5 h-5" />}	CSS/Tailwind styling.
244	iconBg="bg-primary-fixed text-primary"	Logic or UI structure — read with surrounding lines.
245	label="Today Earnings"	Logic or UI structure — read with surrounding lines.
246	value={formatCurrency(rider.daily_delivery_earnings 0)}	Logic or UI structure — read with surrounding lines.
247	/>	Logic or UI structure — read with surrounding lines.
248	<StatCard	JSX element opening tag.
249	icon={<CreditCard className="w-5 h-5" />}	CSS/Tailwind styling.

Line	Code	Explanation
250	iconBg="bg-primary-fixed text-primary"	Logic or UI structure — read with surrounding lines.
251	label="This Week Earnings"	Logic or UI structure — read with surrounding lines.
252	value={formatCurrency(rider.weekly_delivery_earnings 0)}	Logic or UI structure — read with surrounding lines.
253	/>	Logic or UI structure — read with surrounding lines.
254	<StatCard	JSX element opening tag.
255	icon={<ShoppingBag className="w-5 h-5" />}	CSS/Tailwind styling.
256	iconBg="bg-surface-container-high text-secondary"	Logic or UI structure — read with surrounding lines.
257	label="Total Deliveries"	Logic or UI structure — read with surrounding lines.
258	value={formatNumber(rider.total_deliveries 0)}	Logic or UI structure — read with surrounding lines.
259	/>	Logic or UI structure — read with surrounding lines.
260	<StatCard	JSX element opening tag.
261	icon={<CheckCircle className="w-5 h-5" />}	CSS/Tailwind styling.
262	iconBg="bg-success/10 text-success"	Logic or UI structure — read with surrounding lines.
263	label="Acceptance Rate"	Logic or UI structure — read with surrounding lines.
264	value={rider.total_deliveries ? '98%' : '-'}	Logic or UI structure — read with surrounding lines.
265	/>	Logic or UI structure — read with surrounding lines.
266	</div>	JSX element opening tag.
267		Blank line.
268	{/* — Tab Navigation — */}	Logic or UI structure — read with surrounding lines.
269	<div className="flex gap-1 border-b border-surface-variant mb-6 overflow-x-auto scrollbar-hide">	CSS/Tailwind styling.
270	{TABS.map((tab) => {	Logic or UI structure — read with surrounding lines.
271	const Icon = tab.icon	Logic or UI structure — read with surrounding lines.
272	const isActive = activeTab === tab.key	Logic or UI structure — read with surrounding lines.
273	return (	Return JSX UI.
274	<button	JSX element opening tag.
275	key={tab.key}	Logic or UI structure — read with surrounding lines.
276	onClick={() => setActiveTab(tab.key)}	User event handler.
277	className={`flex items-center gap-2 px-5 py-3 font-label-lg text-label-lg transition-colors whitespace-...`}	CSS/Tailwind styling.
278	isActive	Logic or UI structure — read with surrounding lines.
279	? 'border-primary text-primary font-bold'	Logic or UI structure — read with surrounding lines.
280	: 'border-transparent text-secondary hover:text-on-surface'	Logic or UI structure — read with surrounding lines.
281	}`` }	Logic or UI structure — read with surrounding lines.
282	>	Logic or UI structure — read with surrounding lines.
283	<Icon className="w-4 h-4" />	CSS/Tailwind styling.

Line	Code	Explanation
284	{tab.label}	Logic or UI structure — read with surrounding lines.
285	</button>	JSX element opening tag.
286	)	Logic or UI structure — read with surrounding lines.
287	}}}	Logic or UI structure — read with surrounding lines.
288	</div>	JSX element opening tag.
289		Blank line.
290	{/* — Tab Workspaces — */}	Logic or UI structure — read with surrounding lines.
291	<div className="min-h-[350px]">	CSS/Tailwind styling.
292	{activeTab === 'overview' && (	Logic or UI structure — read with surrounding lines.
293	<OverviewTab rider={rider} onUpdate={handleUpdateRider} onReconcile={fetchAll} />	Self-closing JSX element.
294	)})	Logic or UI structure — read with surrounding lines.
295	{activeTab === 'kyc' && (	Logic or UI structure — read with surrounding lines.
296	<KycTab documents={documents} onVerify={handleVerifyDoc} />	Self-closing JSX element.
297	)})	Logic or UI structure — read with surrounding lines.
298	{activeTab === 'deliveries' && (	Logic or UI structure — read with surrounding lines.
299	<DeliveriesTab riderId={id} />	Self-closing JSX element.
300	)})	Logic or UI structure — read with surrounding lines.
301	{activeTab === 'earnings' && (	Logic or UI structure — read with surrounding lines.
302	<EarningsTab rider={rider} />	Self-closing JSX element.
303	)})	Logic or UI structure — read with surrounding lines.
304	{activeTab === 'reviews' && (	Logic or UI structure — read with surrounding lines.
305	<ReviewsTab rider={rider} />	Self-closing JSX element.
306	)})	Logic or UI structure — read with surrounding lines.
307	</div>	JSX element opening tag.
308		Blank line.
309	{/* — Confirm Dialog — */}	Logic or UI structure — read with surrounding lines.
310	{confirmDialog && (	Logic or UI structure — read with surrounding lines.
311	<ConfirmDialog	JSX element opening tag.
312	isOpen={true}	Logic or UI structure — read with surrounding lines.
313	title={confirmDialog.title}	Logic or UI structure — read with surrounding lines.
314	message={confirmDialog.message}	Logic or UI structure — read with surrounding lines.
315	confirmLabel="Confirm"	Logic or UI structure — read with surrounding lines.
316	variant={confirmDialog.variant}	Logic or UI structure — read with surrounding lines.
317	onConfirm={confirmDialog.onConfirm}	Logic or UI structure — read with surrounding lines.
318	onCancel={() => setConfirmDialog(null)}	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
319	<code>/></code>	Logic or UI structure — read with surrounding lines.
320	<code>)}</code>	Logic or UI structure — read with surrounding lines.
321	<code></div></code>	JSX element opening tag.
322	<code>)</code>	Logic or UI structure — read with surrounding lines.
323	<code>}</code>	Logic or UI structure — read with surrounding lines.
324		Blank line.
325	<code>/* ===== Sub-Components ===== */</code>	Doc comment.
326		Blank line.
327	<code>// Stat card for the quick stats row</code>	Comment: Stat card for the quick stats row
328	<code>function StatCard({ icon, iconBg, label, value }) {</code>	Logic or UI structure — read with surrounding lines.
329	<code> return (</code>	Return JSX UI.
330	<code> <div className="bg-surface-container-lowest rounded-xl border border-surface-variant p-4 shadow-card flex items-c...</code>	CSS/Tailwind styling.
331	<code> <div className={`w-10 h-10 rounded-full flex items-center justify-center shrink-0 \${iconBg}`}></code>	CSS/Tailwind styling.
332	<code> {icon}</code>	Logic or UI structure — read with surrounding lines.
333	<code> </div></code>	JSX element opening tag.
334	<code> <div></code>	JSX element opening tag.
335	<code> <p className="text-label-md text-secondary mb-0.5">{label}</p></code>	CSS/Tailwind styling.
336	<code> <p className="text-headline-md font-bold text-on-surface">{value}</p></code>	CSS/Tailwind styling.
337	<code> </div></code>	JSX element opening tag.
338	<code></div></code>	JSX element opening tag.
339	<code>)</code>	Logic or UI structure — read with surrounding lines.
340	<code>}</code>	Logic or UI structure — read with surrounding lines.
341		Blank line.
342	<code>// Overview tab content with CODBalanceCard</code>	Comment: Overview tab content with CODBalanceCard
343	<code>function OverviewTab({ rider, onUpdate, onReconcile }) {</code>	Logic or UI structure — read with surrounding lines.
344	<code> return (</code>	Return JSX UI.
345	<code> <div className="grid grid-cols-1 lg:grid-cols-2 gap-6 animate-fade-in"></code>	CSS/Tailwind styling.
346	<code> {/* CODBalanceCard compliance */}</code>	Logic or UI structure — read with surrounding lines.
347	<code> <CODBalanceCard rider={rider} onReconcileSuccess={onReconcile} /></code>	Self-closing JSX element.
348		Blank line.
349	<code> {/* Detailed Rider Info Card */}</code>	Logic or UI structure — read with surrounding lines.
350	<code> <Card className="p-5 flex flex-col gap-4 border border-surface-variant"></code>	CSS/Tailwind styling.
351	<code> <h3 className="text-headline-sm text-on-surface font-bold border-b border-surface-variant pb-2 flex items-cen...</code>	CSS/Tailwind styling.
352	<code> <Info className="w-5 h-5 text-primary" /> Delivery Personnel Information</code>	CSS/Tailwind styling.
353	<code> </h3></code>	JSX element opening tag.
354	<code> <div className="space-y-3 text-body-md"></code>	CSS/Tailwind styling.
355	<code> <InfoRow label="Rider Name" value={rider.name} /></code>	Self-closing JSX element.

Line	Code	Explanation
356	<code><InfoRow label="Phone Number"</code> <code>value={formatPhone(rider.phone)} /></code>	Self-closing JSX element.
357	<code><InfoRow label="Alternate Phone"</code> <code>value={formatPhone(rider.alternate_phone) '-'} /></code>	Self-closing JSX element.
358	<code><InfoRow label="Vehicle Type"</code> <code>value={rider.vehicle_type?.toUpperCase() </code> <code>'BICYCLE'} /></code>	Self-closing JSX element.
359	<code><InfoRow label="Vehicle Number"</code> <code>value={rider.vehicle_number '-'} /></code>	Self-closing JSX element.
360	<code><InfoRow label="Delivery Zone"</code> <code>value={` \${rider.zone    'Koramangala'} Zone`} /></code>	Self-closing JSX element.
361	<code><InfoRow label="Operating City"</code> <code>value={rider.city 'Bengaluru'} /></code>	Self-closing JSX element.
362	<code><InfoRow label="Account Status"</code> <code>value={rider.status?.toUpperCase()} /></code>	Self-closing JSX element.
363	<code><InfoRow label="Duty Status"</code> <code>value={rider.is_online ? 'ONLINE (DUTY)' :</code> <code>'OFFLINE'} /></code>	Self-closing JSX element.
364	<code><InfoRow label="Joined Date"</code> <code>value={formatDate(rider.created_at)} /></code>	Self-closing JSX element.
365	<code></div></code>	JSX element opening tag.
366	<code></Card></code>	JSX element opening tag.
367	<code></div></code>	JSX element opening tag.
368	<code>)</code>	Logic or UI structure — read with surrounding lines.
369	<code>}</code>	Logic or UI structure — read with surrounding lines.
370		Blank line.
371	<code>// Simple row inside a detail card</code>	Comment: Simple row inside a detail card
372	<code>function InfoRow({ label, value }) {</code>	Logic or UI structure — read with surrounding lines.
373	<code> return (</code>	Return JSX UI.
374	<code> <div className="flex justify-between items-start</code> <code>gap-4 py-1.5 border-b border-surface-variant</code> <code>last:border-0"></code>	CSS/Tailwind styling.
375	<code> <span className="text-secondary font-medium</code> <code>text-body-sm shrink-0 w-32">{label}</code>	CSS/Tailwind styling.
376	<code> <span className="text-on-surface text-right</code> <code>break-words font-semibold">{value '-'}</code>	CSS/Tailwind styling.
377	<code> </div></code>	JSX element opening tag.
378	<code>)</code>	Logic or UI structure — read with surrounding lines.
379	<code>}</code>	Logic or UI structure — read with surrounding lines.
380		Blank line.
381	<code>// KYC Documents tab with custom Toggle sliders</code>	Comment: KYC Documents tab with custom Toggle sliders
382	<code>function KycTab({ documents, onVerify }) {</code>	Logic or UI structure — read with surrounding lines.
383	<code> if (!documents documents.length === 0) {</code>	Logic or UI structure — read with surrounding lines.
384	<code> return (</code>	Return JSX UI.
385	<code> <div className="flex flex-col items-center</code> <code>justify-center py-16 text-center animate-fade-in"></code>	CSS/Tailwind styling.
386	<code> <ShieldAlert className="w-16 h-16 text-</code> <code>secondary opacity-30 mb-4" /></code>	CSS/Tailwind styling.
387	<code> <h3 className="text-headline-sm text-on-</code> <code>surface mb-1">No KYC Documents</h3></code>	CSS/Tailwind styling.
388	<code> <p className="text-body-md text-</code> <code>secondary">This rider has not uploaded any</code> <code>verification documents yet.</p></code>	CSS/Tailwind styling.
389	<code> </div></code>	JSX element opening tag.

Line	Code	Explanation
390	)	Logic or UI structure — read with surrounding lines.
391	}	Logic or UI structure — read with surrounding lines.
392		Blank line.
393	return (	Return JSX UI.
394	<div className="grid grid-cols-1 md:grid-cols-2 lg:grid-cols-3 gap-6 animate-fade-in">	CSS/Tailwind styling.
395	{documents.map((doc) => (	Logic or UI structure — read with surrounding lines.
396	<Card key={doc.id} className="p-4 flex flex-col gap-4 border border-surface-variant shadow-sm relative group ...	CSS/Tailwind styling.
397	<div className="flex items-start justify-between">	CSS/Tailwind styling.
398	<div>	JSX element opening tag.
399	<h4 className="text-label-lg text-on-surface capitalize font-bold">	CSS/Tailwind styling.
400	{doc.document_type?.replace(/_/g, ' ') 'Document'}	Logic or UI structure — read with surrounding lines.
401	</h4>	JSX element opening tag.
402	<p className="text-body-sm text-secondary mt-0.5">{formatDate(doc.created_at)}</p>	CSS/Tailwind styling.
403	</div>	JSX element opening tag.
404	<Badge variant={doc.verified ? 'success' : 'warning'}>	JSX element opening tag.
405	{doc.verified ? 'Verified' : 'Pending'}	Logic or UI structure — read with surrounding lines.
406	</Badge>	JSX element opening tag.
407	</div>	JSX element opening tag.
408		Blank line.
409	<div className="relative aspect-[3/2] bg-surface-container-low rounded-lg overflow-hidden border border-sur...	CSS/Tailwind styling.
410	{doc.document_url ? (	Logic or UI structure — read with surrounding lines.
411	<>	JSX element opening tag.
412	<img src={doc.document_url} alt="KYC Document Preview" className="w-full h-full object-cover rounded-...	CSS/Tailwind styling.
413	<a	JSX element opening tag.
414	href={doc.document_url}	Logic or UI structure — read with surrounding lines.
415	target="_blank"	Logic or UI structure — read with surrounding lines.
416	rel="noopener noreferrer"	Logic or UI structure — read with surrounding lines.
417	className="absolute top-2 right-2 bg-surface-container-lowest/80 backdrop-blur text-on-surface p-1....	CSS/Tailwind styling.
418	title="Expand to Fullscreen View"	Logic or UI structure — read with surrounding lines.
419	>	Logic or UI structure — read with surrounding lines.
420	<ExternalLink className="w-4 h-4" />	CSS/Tailwind styling.
421		JSX element opening tag.
422	</>	Self-closing JSX element.
423	) : (	Logic or UI structure — read with surrounding lines.
424	<div className="text-body-sm text-secondary flex flex-col items-center gap-1">	CSS/Tailwind styling.

Line	Code	Explanation
425	<code><Info className="w-8 h-8 opacity-45"</code>	CSS/Tailwind styling.
426	<code>> Attachment Unavailable</code>	
427	<code></div></code>	JSX element opening tag.
428	<code>)}</code>	Logic or UI structure — read with surrounding lines.
429	<code></div></code>	JSX element opening tag.
430	<code>/* KYC verification slider toggle */</code>	Blank line.
431	<code><div className="mt-auto pt-3 border-t border-surface-variant flex justify-between items-center"></code>	Logic or UI structure — read with surrounding lines.
432	<code>Verification Status</code>	CSS/Tailwind styling.
433	<code><Toggle</code>	JSX element opening tag.
434	<code>checked={doc.verified}</code>	Logic or UI structure — read with surrounding lines.
435	<code>onChange={() => onVerify(doc.id, doc.verified)}</code>	User event handler.
436	<code>label={doc.verified ? 'VERIFIED' : 'PENDING'}</code>	Logic or UI structure — read with surrounding lines.
437	<code></div></code>	Logic or UI structure — read with surrounding lines.
438	<code></Card></code>	JSX element opening tag.
439	<code>)}</code>	JSX element opening tag.
440	<code></div></code>	Logic or UI structure — read with surrounding lines.
441	<code>)</code>	JSX element opening tag.
442	<code>}</code>	Logic or UI structure — read with surrounding lines.
443		Blank line.
444	<code>// Deliveries tab showing recent orders assigned to this rider</code>	Comment: Deliveries tab showing recent orders assigned to this rider
445	<code>function DeliveriesTab({ riderId }) {</code>	Logic or UI structure — read with surrounding lines.
446	<code>const [orders, setOrders] = useState([])</code>	React state variable.
447	<code>const [loading, setLoading] = useState(true)</code>	React state variable.
448		Blank line.
449	<code>useEffect(() => {</code>	Side effect (fetch, subscribe, redirect).
450	<code>const fetchDeliveries = async () => {</code>	Async function for network calls.
451	<code>setLoading(true)</code>	Logic or UI structure — read with surrounding lines.
452	<code>try {</code>	Try block start.
453	<code>const { data, error } = await supabase</code>	Wait for async operation.
454	<code>.from('orders')</code>	Logic or UI structure — read with surrounding lines.
455	<code>.select('*', stores:store_id(store_name)')</code>	Logic or UI structure — read with surrounding lines.
456	<code>.eq('rider_id', riderId)</code>	Logic or UI structure — read with surrounding lines.
457	<code>.order('created_at', { ascending: false })</code>	Logic or UI structure — read with surrounding lines.
458	<code>.limit(20)</code>	Logic or UI structure — read with surrounding lines.
459		Blank line.
460	<code>if (error) throw error</code>	Logic or UI structure — read with surrounding lines.
461	<code>setOrders(data [])</code>	Logic or UI structure — read with surrounding lines.
462	<code>} catch (err) {</code>	Catch errors.
463		

Line	Code	Explanation
464	console.error(err)	Logic or UI structure — read with surrounding lines.
465	toast.error('Failed to load deliveries history')	Toast notification.
466	} finally {	Finally block (cleanup).
467	setLoading(false)	Logic or UI structure — read with surrounding lines.
468	}	Logic or UI structure — read with surrounding lines.
469	}	Logic or UI structure — read with surrounding lines.
470	fetchDeliveries()	Logic or UI structure — read with surrounding lines.
471	}, [riderId])	Logic or UI structure — read with surrounding lines.
472		Blank line.
473	if (loading) {	Logic or UI structure — read with surrounding lines.
474	return (	Return JSX UI.
475	<div className="flex justify-center items-center py-12">	CSS/Tailwind styling.
476	<Spinner size="md" />	Self-closing JSX element.
477	</div>	JSX element opening tag.
478	)	Logic or UI structure — read with surrounding lines.
479	}	Logic or UI structure — read with surrounding lines.
480		Blank line.
481	if (orders.length === 0) {	Logic or UI structure — read with surrounding lines.
482	return (	Return JSX UI.
483	<div className="flex flex-col items-center justify-center py-16 text-center animate-fade-in">	CSS/Tailwind styling.
484	<ShoppingBag className="w-16 h-16 text-secondary opacity-30 mb-4" />	CSS/Tailwind styling.
485	<h3 className="text-headline-sm text-on-surface mb-1">No Deliveries Logged</h3>	CSS/Tailwind styling.
486	<p className="text-body-md text-secondary">This rider has not delivered any orders yet.</p>	CSS/Tailwind styling.
487	</div>	JSX element opening tag.
488	)	Logic or UI structure — read with surrounding lines.
489	}	Logic or UI structure — read with surrounding lines.
490		Blank line.
491	return (	Return JSX UI.
492	<Card className="p-5 border border-surface-variant shadow-card animate-fade-in">	CSS/Tailwind styling.
493	<h3 className="text-headline-sm text-on-surface font-bold mb-4 flex items-center gap-2">	CSS/Tailwind styling.
494	<ShoppingBag className="w-5 h-5 text-primary" /> Delivery Run History	CSS/Tailwind styling.
495	</h3>	JSX element opening tag.
496	<div className="overflow-x-auto">	CSS/Tailwind styling.
497	<table className="w-full text-left border-collapse min-w-[600px]">	CSS/Tailwind styling.
498	<thead>	JSX element opening tag.
499	<tr className="bg-surface-container-low border-b border-surface-variant text-secondary font-label-sm uppe...	CSS/Tailwind styling.

Line	Code	Explanation
500	<code><th className="p-3 font-semibold">Order ID</th></code>	CSS/Tailwind styling.
501	<code><th className="p-3 font-semibold">Store</th></code>	CSS/Tailwind styling.
502	<code><th className="p-3 font-semibold">Date</th></code>	CSS/Tailwind styling.
503	<code><th className="p-3 font-semibold">Pay Method</th></code>	CSS/Tailwind styling.
504	<code><th className="p-3 font-semibold text-right">Value</th></code>	CSS/Tailwind styling.
505	<code><th className="p-3 font-semibold">Status</th></code>	CSS/Tailwind styling.
506	<code></tr></code>	JSX element opening tag.
507	<code></thead></code>	JSX element opening tag.
508	<code><tbody className="divide-y divide-surface-variant text-body-md"></code>	CSS/Tailwind styling.
509	<code>{orders.map((o) => (</code>	Logic or UI structure — read with surrounding lines.
510	<code><tr key={o.id} className="hover:bg-surface-container-lowest transition-colors"></code>	CSS/Tailwind styling.
511	<code><td className="p-3 font-semibold text-on-surface"></code>	CSS/Tailwind styling.
512	<code>#{o.id.slice(0, 8).toUpperCase()}></code>	Logic or UI structure — read with surrounding lines.
513	<code></td></code>	JSX element opening tag.
514	<code><td className="p-3 text-secondary">{o.stores?.store_name '-'}</td></code>	CSS/Tailwind styling.
515	<code><td className="p-3 text-secondary">{formatDate(o.created_at)}</td></code>	CSS/Tailwind styling.
516	<code><td className="p-3"></code>	CSS/Tailwind styling.
517	<code><Badge variant={o.payment_method === 'cod' ? 'warning' : 'info'}></code>	JSX element opening tag.
518	<code>{o.payment_method?.toUpperCase() 'PREPAID'}></code>	Logic or UI structure — read with surrounding lines.
519	<code></Badge></code>	JSX element opening tag.
520	<code></td></code>	JSX element opening tag.
521	<code><td className="p-3 text-right font-bold text-on-surface"></code>	CSS/Tailwind styling.
522	<code>{formatCurrency(o.total_amount 0)}></code>	Logic or UI structure — read with surrounding lines.
523	<code></td></code>	JSX element opening tag.
524	<code><td className="p-3"></code>	CSS/Tailwind styling.
525	<code><Badge variant={o.status === 'delivered' ? 'success' : o.status === 'cancelled' ? 'danger' : 'warni...}></code>	JSX element opening tag.
526	<code>{o.status}></code>	Logic or UI structure — read with surrounding lines.
527	<code></Badge></code>	JSX element opening tag.
528	<code></td></code>	JSX element opening tag.
529	<code></tr></code>	JSX element opening tag.
530	<code>)))></code>	Logic or UI structure — read with surrounding lines.
531	<code></tbody></code>	JSX element opening tag.
532	<code></table></code>	JSX element opening tag.
533	<code></div></code>	JSX element opening tag.
534	<code></Card></code>	JSX element opening tag.
535	<code>)</code>	Logic or UI structure — read with surrounding lines.
536	<code>}</code>	Logic or UI structure — read with surrounding lines.
537		Blank line.
538	<code>// Earnings tab</code>	Comment: Earnings tab

Line	Code	Explanation
539	function EarningsTab({ rider }) {	Logic or UI structure — read with surrounding lines.
540	return (	Return JSX UI.
541	<div className="grid grid-cols-1 lg:grid-cols-2 gap-6 animate-fade-in">	CSS/Tailwind styling.
542	<Card className="p-5 flex flex-col gap-4 border border-surface-variant">	CSS/Tailwind styling.
543	<h3 className="text-headline-sm text-on-surface font-bold border-b border-surface-variant pb-2 flex items-cen...	CSS/Tailwind styling.
544	<TrendingUp className="w-5 h-5 text-primary" /> Earnings Breakdown	CSS/Tailwind styling.
545	</h3>	JSX element opening tag.
546	<div className="space-y-3 text-body-md">	CSS/Tailwind styling.
547	<InfoRow label="Daily Earnings" value={formatCurrency(rider.daily_delivery_earnings 0)} />	Self-closing JSX element.
548	<InfoRow label="Weekly Earnings" value={formatCurrency(rider.weekly_delivery_earnings 0)} />	Self-closing JSX element.
549	<InfoRow label="Lifetime Gross" value={formatCurrency(rider.total_earnings 0)} />	Self-closing JSX element.
550	<InfoRow label="Total Completed Deliveries" value={formatNumber(rider.total_deliveries 0)} />	Self-closing JSX element.
551	<InfoRow label="Average Payout per Order" value={rider.total_deliveries ? formatCurrency(Math.round(rider.t...	Self-closing JSX element.
552	</div>	JSX element opening tag.
553	</Card>	JSX element opening tag.
554		Blank line.
555	<Card className="p-5 border border-surface-variant text-center flex flex-col items-center justify-center py-10 ...	CSS/Tailwind styling.
556	<CreditCard className="w-12 h-12 text-secondary opacity-35" />	CSS/Tailwind styling.
557	<h4 className="text-headline-sm font-bold text-on-surface">Payout Account Details</h4>	CSS/Tailwind styling.
558	<p className="text-body-sm text-secondary max-w-sm">	CSS/Tailwind styling.
559	Delivery earnings are disbursed weekly directly to the rider's designated bank account.	Logic or UI structure — read with surrounding lines.
560	</p>	JSX element opening tag.
561	<div className="bg-surface-container-low p-4 rounded-xl border border-surface-variant w-full max-w-sm space-y...	CSS/Tailwind styling.
562	<div className="flex justify-between text-body-sm">Bank Account: <s...	CSS/Tailwind styling.
563	<div className="flex justify-between text-body-sm">IFSC Code: <span...	CSS/Tailwind styling.
564	<div className="flex justify-between text-body-sm">Holder Name: <sp...	CSS/Tailwind styling.
565	</div>	JSX element opening tag.
566	</Card>	JSX element opening tag.
567	</div>	JSX element opening tag.
568	)	Logic or UI structure — read with surrounding lines.
569	}	Logic or UI structure — read with surrounding lines.
570		Blank line.

Line	Code	Explanation
571	// Reviews tab	Comment: Reviews tab
572	function ReviewsTab({ rider }) {	Logic or UI structure — read with surrounding lines.
573	return (	Return JSX UI.
574	<Card className="p-5 border border-surface-variant shadow-card animate-fade-in">	CSS/Tailwind styling.
575	<h3 className="text-headline-sm text-on-surface font-bold mb-4 flex items-center gap-2">	CSS/Tailwind styling.
576	<Star className="w-5 h-5 text-[#FBBC04] fill-[#FBBC04]" /> Customer Reviews	CSS/Tailwind styling.
577	</h3>	JSX element opening tag.
578	<div className="space-y-4">	CSS/Tailwind styling.
579	{/* Mocking highly professional compliant reviews */}	Logic or UI structure — read with surrounding lines.
580	<ReviewRow	JSX element opening tag.
581	customer="Rahul Sharma"	Logic or UI structure — read with surrounding lines.
582	rating={5}	Logic or UI structure — read with surrounding lines.
583	date="2 hours ago"	Logic or UI structure — read with surrounding lines.
584	comment="Super quick delivery, extremely polite rider!"	Logic or UI structure — read with surrounding lines.
585	/>	Logic or UI structure — read with surrounding lines.
586	<ReviewRow	JSX element opening tag.
587	customer="Priya Patel"	Logic or UI structure — read with surrounding lines.
588	rating={4.5}	Logic or UI structure — read with surrounding lines.
589	date="1 day ago"	Logic or UI structure — read with surrounding lines.
590	comment="Handled the fresh produce very carefully. Highly recommended."	Logic or UI structure — read with surrounding lines.
591	/>	Logic or UI structure — read with surrounding lines.
592	<ReviewRow	JSX element opening tag.
593	customer="Amit K."	Logic or UI structure — read with surrounding lines.
594	rating={5}	Logic or UI structure — read with surrounding lines.
595	date="3 days ago"	Logic or UI structure — read with surrounding lines.
596	comment="Prompt and followed delivery instructions exactly."	Logic or UI structure — read with surrounding lines.
597	/>	Logic or UI structure — read with surrounding lines.
598	</div>	JSX element opening tag.
599	</Card>	JSX element opening tag.
600	)	Logic or UI structure — read with surrounding lines.
601	}	Logic or UI structure — read with surrounding lines.
602		Blank line.
603	// Review row item helper	Comment: Review row item helper
604	function ReviewRow({ customer, rating, date, comment }) {	Logic or UI structure — read with surrounding lines.
605	return (	Return JSX UI.
606	<div className="py-3 border-b border-surface-variant last:border-0 flex flex-col gap-1 text-body-md">	CSS/Tailwind styling.

Line	Code	Explanation
607	<code><div className="flex justify-between items-center flex-wrap gap-1"></code>	CSS/Tailwind styling.
608	<code>{customer}</code>	CSS/Tailwind styling.
609	<code><div className="flex items-center gap-2"></code>	CSS/Tailwind styling.
610	<code><div className="flex items-center text-[#FBBC04]"></code>	CSS/Tailwind styling.
611	<code><Star className="w-3.5 h-3.5 fill-[#FBBC04]" /></code>	CSS/Tailwind styling.
612	<code>{rating}</code>	CSS/Tailwind styling.
613	<code></div></code>	JSX element opening tag.
614	<code>{date}</code>	CSS/Tailwind styling.
615	<code></div></code>	JSX element opening tag.
616	<code></div></code>	JSX element opening tag.
617	<code><p className="text-secondary text-body-sm">{comment}</p></code>	CSS/Tailwind styling.
618	<code></div></code>	JSX element opening tag.
619	<code>)</code>	Logic or UI structure — read with surrounding lines.
620	<code>}</code>	Logic or UI structure — read with surrounding lines.
621		Blank line.

OrdersPage (src/pages/OrdersPage.jsx)

Total lines: 462

Route: /orders

Purpose: Order list/kanban, filters, realtime updates.

Lin Code	Explanation
1 import React, { useState, useEffect, useCallback, useRef } from 'react'	Import React hooks.
2 import { useNavigate } from 'react-router-dom'	Import routing.
3 import {	Import dependency.
4 List, LayoutGrid, Search, RefreshCw, Filter,	Logic or UI structure — read with surrounding lines.
5 ShoppingBag, ChevronRight, User, Store, Bike, CreditCard, Clock,	Logic or UI structure — read with surrounding lines.
6 } from 'lucide-react'	Logic or UI structure — read with surrounding lines.
7 import { supabase } from	Import API/database service.
8 '../services/supabase'	
9 import { getOrders } from	Import API/database service.
10 '../services/orderService'	
11 import { ORDER_STATUSES, PAYMENT_METHODS } from	Import constants.
12 '../constants/orderStatuses'	
13 import { formatCurrency, formatDateTime, formatRelativeTime, truncateText } from	Import helper utilities.
14 '../utils/formatters'	
15 import OrderStatusBadge from	Import UI component.
16 '../components/orders/OrderStatusBadge'	
17 import OrderCard from	Import UI component.
18 '../components/orders/OrderCard'	
19 import Skeleton from	Import UI component.
20 '../components/ui/Skeleton'	
21 import EmptyState from	Import UI component.
22 '../components/ui/EmptyState'	
23 import Pagination from	Import UI component.
24 '../components/ui/Pagination'	
25	Blank line.
26 /**	Doc comment.
27 * OrdersPage – full order management with	Doc comment.
28 * toggleable list and kanban views,	
29 * live status filters, search, date range,	Doc comment.
30 * and Supabase realtime updates.	
31 */	Doc comment.
32	Blank line.
33 // Kanban columns – the statuses to show as	Comment: Kanban columns — the statuses to show as
34 board columns (excludes delivered/cancelled to	board columns (excludes delivered/cancelled to keep
35 keep board lean)	board lean)
36 const KANBAN_COLS = ['placed', 'confirmed',	Logic or UI structure — read with surrounding lines.
37 'packed', 'picked', 'out_for_delivery']	
38	Blank line.
39 // Rows shown per page in list view	Comment: Rows shown per page in list view
40 const PAGE_SIZE = 20	Logic or UI structure — read with surrounding lines.
41	Blank line.
42 export default function OrdersPage() {	Default export (main module).
43 const navigate = useNavigate()	Programmatic navigation hook.
44	Blank line.
45 // View mode: 'list' or 'kanban'	Comment: View mode: 'list' or 'kanban'
46 const [viewMode, setViewMode] =	React state variable.
47 useState('list')	
48	Blank line.
49 // Filter state	Comment: Filter state
50 const [statusFilter, setStatusFilter] =	React state variable.
51 useState('all')	

Lin Code	Explanation
36 const [searchQuery, setSearchQuery] = useState('')	React state variable.
37 const [dateFrom, setDateFrom] = useState('')	React state variable.
38 const [dateTo, setDateTo] = useState('')	React state variable.
39 const [page, setPage] = useState(1)	React state variable.
40	Blank line.
41 // Data state	Comment: Data state
42 const [orders, setOrders] = useState([])	React state variable.
43 const [total, setTotal] = useState(0)	React state variable.
44 const [loading, setLoading] = useState(true)	React state variable.
45 const [error, setError] = useState(null)	React state variable.
46	Blank line.
47 // Kanban orders grouped by status	Comment: Kanban orders grouped by status
48 const [kanbanOrders, setKanbanOrders] = useState({})	React state variable.
49 const [kanbanLoading, setKanbanLoading] = useState(false)	React state variable.
50 const [kanbanError, setKanbanError] = useState(null)	React state variable.
51	Blank line.
52 // Debounce ref for search	Comment: Debounce ref for search
53 const searchDebounce = useRef(null)	Ref (value without re-render).
54	Blank line.
55 // Fetches paginated orders for list view	Comment: Fetches paginated orders for list view
56 const fetchListOrders = useCallback(async () => {	Memoized callback function.
57 setLoading(true)	Logic or UI structure — read with surrounding lines.
58 setError(null)	Logic or UI structure — read with surrounding lines.
59 try {	Try block start.
60 const result = await getOrders({	Wait for async operation.
61 status: statusFilter,	Logic or UI structure — read with surrounding lines.
62 search: searchQuery,	Logic or UI structure — read with surrounding lines.
63 dateFrom: dateFrom undefined,	Logic or UI structure — read with surrounding lines.
64 dateTo: dateTo ? `\${dateTo}T23:59:59` : undefined,	Logic or UI structure — read with surrounding lines.
65 page,	Logic or UI structure — read with surrounding lines.
66 pageSize: PAGE_SIZE,	Logic or UI structure — read with surrounding lines.
67 })	Logic or UI structure — read with surrounding lines.
68 setOrders(result.orders [])	Logic or UI structure — read with surrounding lines.
69 setTotal(result.total 0)	Logic or UI structure — read with surrounding lines.
70 } catch (err) {	Catch errors.
71 setError(err.message 'Failed to load orders.')	Logic or UI structure — read with surrounding lines.
72 } finally {	Finally block (cleanup).
73 setLoading(false)	Logic or UI structure — read with surrounding lines.
74 }	Logic or UI structure — read with surrounding lines.
75 }, [statusFilter, searchQuery, dateFrom, dateTo, page])	Logic or UI structure — read with surrounding lines.
76	Blank line.
77 // Fetches active orders for kanban view (no pagination; only active statuses)	Comment: Fetches active orders for kanban view (no pagination; only active statuses)
78 const fetchKanbanOrders = useCallback(async () => {	Memoized callback function.
79 setKanbanLoading(true)	Logic or UI structure — read with surrounding lines.
80 setKanbanError(null)	Logic or UI structure — read with surrounding lines.
81 try {	Try block start.
82 const { data, error: fetchError } = await supabase	Wait for async operation.
83 .from('orders')	Logic or UI structure — read with surrounding lines.
84 .select(	Logic or UI structure — read with surrounding lines.

Lin Code	Explanation
85	'id, status, total, payment_method, created_at, ' +
86	'customers:customer_id(name), stores:store_id(store_name), riders:rider_id(name)'
87	)
88	.in('status', KANBAN_COLS)
89	.order('created_at', { ascending: false })
90	.limit(200)
91	Blank line.
92	if (fetchError) throw fetchError
93	Blank line.
94	// Group orders by status for column rendering
95	const grouped = {}
96	KANBAN_COLS.forEach((col) => { grouped[col] = [] })
97	; (data []).forEach((o) => {
98	if (grouped[o.status]) grouped[o.status].push(o)
99	})
10	setKanbanOrders(grouped)
0	
10	} catch (err) {
1	
10	setKanbanError(err.message 'Failed to load kanban board.')
2	
10	} finally {
3	
10	setKanbanLoading(false)
4	
10	}
5	
10	}, [])
6	
10	Blank line.
7	
10	// Load data when view mode or filters change
8	
10	useEffect(() => {
9	
11	if (viewMode === 'list') fetchListOrders()
0	
11	else fetchKanbanOrders()
1	
11	}, [viewMode, fetchListOrders, fetchKanbanOrders])
2	
11	Blank line.
3	
11	// Reset page to 1 when filters change
4	
11	useEffect(() => { setPage(1) }, [statusFilter, searchQuery, dateFrom, dateTo])
5	
11	Blank line.
6	
11	// Supabase realtime – refresh active view when orders table changes
7	
11	useEffect(() => {
8	

Lin e	Code	Explanation
11 9	const channel = supabase	Logic or UI structure — read with surrounding lines.
12 0	.channel('orders-page-realtime')	Logic or UI structure — read with surrounding lines.
12 1	.on('postgres_changes', { event: '*', schema: 'public', table: 'orders' }, () => {	Logic or UI structure — read with surrounding lines.
12 2	if (viewMode === 'list') fetchListOrders()	Logic or UI structure — read with surrounding lines.
12 3	else fetchKanbanOrders()	Logic or UI structure — read with surrounding lines.
12 4	})	Logic or UI structure — read with surrounding lines.
12 5	.subscribe()	Logic or UI structure — read with surrounding lines.
12 6		Blank line.
12 7	return () => { supabase.removeChannel(channel) }	Return JSX UI.
12 8	}, [viewMode, fetchListOrders, fetchKanbanOrders])	Logic or UI structure — read with surrounding lines.
12 9		Blank line.
13 0	// Debounced search handler	Comment: Debounced search handler
13 1	function handleSearchChange(e) {	Logic or UI structure — read with surrounding lines.
13 2	const val = e.target.value	Logic or UI structure — read with surrounding lines.
13 3	if (searchDebounce.current) clearTimeout(searchDebounce.current)	Logic or UI structure — read with surrounding lines.
13 4	searchDebounce.current = setTimeout(() => setSearchQuery(val), 350)	Logic or UI structure — read with surrounding lines.
13 5	}	Logic or UI structure — read with surrounding lines.
13 6		Blank line.
13 7	// Total page count for pagination	Comment: Total page count for pagination
13 8	const totalPages = Math.ceil(total / PAGE_SIZE)	Logic or UI structure — read with surrounding lines.
13 9		Blank line.
14 0	// — RENDER	Comment: — RENDER
14 1		Blank line.
14 2	return (	Return JSX UI.
14 3	<div className="space-y-6 animate-fade- in">	CSS/Tailwind styling.
14 4		Blank line.
14 5	{/* Page header */}	Logic or UI structure — read with surrounding lines.
14 6	<div className="flex flex-col sm:flex- row sm:items-center sm:justify-between gap-3">	CSS/Tailwind styling.
14 7	<div>	JSX element opening tag.
14 8	<h1 className="text-2xl font-bold text-on-surface">Orders</h1>	CSS/Tailwind styling.

Lin e	Code	Explanation
14 9	<code><p className="text-sm text-secondary mt-0.5"></code>	CSS/Tailwind styling.
15 0	<code> {total > 0 ? `\${total.toLocaleString('en-IN')} orders     found` : 'All platform orders'}</code>	Logic or UI structure — read with surrounding lines.
15 1	<code></p></code>	JSX element opening tag.
15 2	<code></div></code>	JSX element opening tag.
15 3		Blank line.
15 4	<code> {/* View toggle + refresh */}</code>	Logic or UI structure — read with surrounding lines.
15 5	<code><div className="flex items-center gap-2"></code>	CSS/Tailwind styling.
15 6	<code> <button</code>	JSX element opening tag.
15 7	<code> onClick={() => { setViewModel('list'); setPage(1) }}</code>	User event handler.
15 8	<code> className={`p-2 rounded-lg border transition-colors \${</code>	CSS/Tailwind styling.
15 9	<code> viewModel === 'list'</code>	Logic or UI structure — read with surrounding lines.
16 0	<code> ? 'bg-brand text-white border- brand'</code>	Logic or UI structure — read with surrounding lines.
16 1	<code> : 'bg-white text-secondary border-border hover:bg-surface'</code>	Logic or UI structure — read with surrounding lines.
16 2	<code> }`}</code>	Logic or UI structure — read with surrounding lines.
16 3	<code> title="List view"</code>	Logic or UI structure — read with surrounding lines.
16 4	<code>></code>	Logic or UI structure — read with surrounding lines.
16 5	<code><List className="w-4 h-4" /></code>	CSS/Tailwind styling.
16 6	<code></button></code>	JSX element opening tag.
16 7	<code><button</code>	JSX element opening tag.
16 8	<code> onClick={() => setViewModel('kanban')}</code>	User event handler.
16 9	<code> className={`p-2 rounded-lg border transition-colors \${</code>	CSS/Tailwind styling.
17 0	<code> viewModel === 'kanban'</code>	Logic or UI structure — read with surrounding lines.
17 1	<code> ? 'bg-brand text-white border- brand'</code>	Logic or UI structure — read with surrounding lines.
17 2	<code> : 'bg-white text-secondary border-border hover:bg-surface'</code>	Logic or UI structure — read with surrounding lines.
17 3	<code> }`}</code>	Logic or UI structure — read with surrounding lines.
17 4	<code> title="Kanban view"</code>	Logic or UI structure — read with surrounding lines.
17 5	<code>></code>	Logic or UI structure — read with surrounding lines.
17 6	<code><LayoutGrid className="w-4 h-4" /></code>	CSS/Tailwind styling.
17 7	<code></button></code>	JSX element opening tag.
17 8	<code><button</code>	JSX element opening tag.

Lin Code	Explanation
17 9 ? fetchListOrders() : fetchKanbanOrders() }	User event handler.
18 0 className="p-2 rounded-lg border border-border bg-white text-secondary hover:bg-surface transition-colors"	CSS/Tailwind styling.
18 1 title="Refresh"	Logic or UI structure — read with surrounding lines.
18 2 >	Logic or UI structure — read with surrounding lines.
18 3 <RefreshCw className="w-4 h-4" />	CSS/Tailwind styling.
18 4 </button>	JSX element opening tag.
18 5 </div>	JSX element opening tag.
18 6 </div>	JSX element opening tag.
18 7	Blank line.
18 8 /* Filters bar */	Logic or UI structure — read with surrounding lines.
18 9 <div className="bg-white rounded-xl border border-border p-4 space-y-3">	CSS/Tailwind styling.
19 0 /* Search + date range */	Logic or UI structure — read with surrounding lines.
19 1 <div className="flex flex-col sm:flex-row gap-3">	CSS/Tailwind styling.
19 2 <div className="relative flex-1">	CSS/Tailwind styling.
19 3 <Search className="absolute left-3 top-1/2 -translate-y-1/2 w-4 h-4 text-secondary pointer-events-none" />	CSS/Tailwind styling.
19 4 <input	JSX element opening tag.
19 5 type="text"	Logic or UI structure — read with surrounding lines.
19 6 defaultValue={searchQuery}	Logic or UI structure — read with surrounding lines.
19 7 onChange={handleSearchChange}	User event handler.
19 8 placeholder="Search by order ID..."	Logic or UI structure — read with surrounding lines.
19 9 className="w-full pl-9 pr-4 py-2 border border-border rounded-lg text-sm focus:outline-none focus:ring-..."	CSS/Tailwind styling.
20 0 />	Logic or UI structure — read with surrounding lines.
20 1 </div>	JSX element opening tag.
20 2 <div className="flex items-center gap-2">	CSS/Tailwind styling.
20 3 <Filter className="w-4 h-4 text-secondary shrink-0" />	CSS/Tailwind styling.
20 4 <input	JSX element opening tag.
20 5 type="date"	Logic or UI structure — read with surrounding lines.
20 6 value={dateFrom}	Logic or UI structure — read with surrounding lines.
20 7 onChange={(e) => setDateFrom(e.target.value)}	User event handler.

Lin Code	Explanation
20 8 e rounded-lg px-3 py-2 text-sm focus:outline-none focus:ring-2 focus:ring...	CSS/Tailwind styling.
20 9 />	Logic or UI structure — read with surrounding lines.
21 0 to	CSS/Tailwind styling.
21 1 <input	JSX element opening tag.
21 2 type="date"	Logic or UI structure — read with surrounding lines.
21 3 value={dateTo}	Logic or UI structure — read with surrounding lines.
21 4 onChange={(e) => setDateTo(e.target.value)}	User event handler.
21 5 rounded-lg px-3 py-2 text-sm focus:outline-none focus:ring-2 focus:ring...	CSS/Tailwind styling.
21 6 />	Logic or UI structure — read with surrounding lines.
21 7 </div>	JSX element opening tag.
21 8 </div>	JSX element opening tag.
21 9 	Blank line.
22 0 {/* Status filter pills */}	Logic or UI structure — read with surrounding lines.
22 1 <div className="flex flex-wrap gap-2">	CSS/Tailwind styling.
22 2 <button	JSX element opening tag.
22 3 onClick={() => setStatusFilter('all')}	User event handler.
22 4 className={`px-3 py-1 rounded-full text-xs font-semibold border transition-colors \${`	CSS/Tailwind styling.
22 5 statusFilter === 'all'	Logic or UI structure — read with surrounding lines.
22 6 ? 'bg-brand text-white border-brand'	Logic or UI structure — read with surrounding lines.
22 7 : 'bg-white text-secondary border-border hover:bg-surface'	Logic or UI structure — read with surrounding lines.
22 8 }`}	Logic or UI structure — read with surrounding lines.
22 9 >	Logic or UI structure — read with surrounding lines.
23 0 All	Logic or UI structure — read with surrounding lines.
23 1 </button>	JSX element opening tag.
23 2 {Object.values(ORDER_STATUSES).map((s) => (	Logic or UI structure — read with surrounding lines.
23 3 <button	JSX element opening tag.
23 4 key={s.key}	Logic or UI structure — read with surrounding lines.
23 5 onClick={() => setStatusFilter(s.key)}	User event handler.

Lin e	Code	Explanation
23 6	className="px-3 py-1 rounded-full text-xs font-semibold border transition-colors"	CSS/Tailwind styling.
23 7	style={	Logic or UI structure — read with surrounding lines.
23 8	statusFilter === s.key	Logic or UI structure — read with surrounding lines.
23 9	? { backgroundColor: s.text, color: '#fff', borderColor: s.text }	Logic or UI structure — read with surrounding lines.
24 0	: { backgroundColor: s.bg, color: s.text, borderColor: `\${s.text}40` }	Logic or UI structure — read with surrounding lines.
24 1	}	Logic or UI structure — read with surrounding lines.
24 2	>	Logic or UI structure — read with surrounding lines.
24 3	{s.label}	Logic or UI structure — read with surrounding lines.
24 4	</button>	JSX element opening tag.
24 5	))}	Logic or UI structure — read with surrounding lines.
24 6	</div>	JSX element opening tag.
24 7	</div>	JSX element opening tag.
24 8		Blank line.
24 9	/* — LIST VIEW	Logic or UI structure — read with surrounding lines.
	*/	
25 0	{viewModel === 'list' && (	Logic or UI structure — read with surrounding lines.
25 1	<>	JSX element opening tag.
25 2	{loading ? (	Logic or UI structure — read with surrounding lines.
25 3	<div className="space-y-3">	CSS/Tailwind styling.
25 4	{Array.from({ length: 8 }).map((_, i) => (	Logic or UI structure — read with surrounding lines.
25 5	<Skeleton key={i} className="h-16 rounded-xl" />	CSS/Tailwind styling.
25 6	))}	Logic or UI structure — read with surrounding lines.
25 7	</div>	JSX element opening tag.
25 8	) : error ? (	Logic or UI structure — read with surrounding lines.
25 9	<div className="bg-red-50 border border-red-200 rounded-xl p-6 text-center">	CSS/Tailwind styling.
26 0	<p className="text-red-600 font-medium">{error}</p>	CSS/Tailwind styling.
26 1	<button	JSX element opening tag.
26 2	onClick={fetchListOrders}	User event handler.
26 3	className="mt-3 text-sm font-semibold text-brand underline"	CSS/Tailwind styling.
26 4	>	Logic or UI structure — read with surrounding lines.

Lin Code	Explanation
26 5	Retry
26 6	</button>
26 7	</div>
26 8	) : orders.length === 0 ? (
26 9	<EmptyState
27 0	icon={ShoppingBag}
27 1	title="No orders found"
27 2	description="No orders match the current filters. Try adjusting the date range or status."
27 3	/>
27 4	) : (
27 5	<>
27 6	{/* Orders table */}
27 7	<div className="bg-white rounded-xl border border-border overflow-hidden shadow-sm">
27 8	{/* Desktop table header */}
27 9	<div className="hidden md:grid grid-cols-[1.5fr_1fr_1fr_0.8fr_0.8fr_0.7fr_1fr_40px] gap-4 px-5 py-3 b...
28 0	Order
28 1	Customer
28 2	Store
28 3	Amount
28 4	Payment
28 5	Status
28 6	Time
28 7	
28 8	</div>
28 9	
29 0	{/* Order rows */}
29 1	<div className="divide-y divide-border">
29 2	{orders.map((order) => (

Lin Code		Explanation
29 3	<OrderRow	JSX element opening tag.
29 4	key={order.id}	Logic or UI structure — read with surrounding lines.
29 5	order={order}	Logic or UI structure — read with surrounding lines.
29 6	onClick={() => navigate(`/orders/\${order.id}`)}	User event handler.
29 7	/>	Logic or UI structure — read with surrounding lines.
29 8	))}	Logic or UI structure — read with surrounding lines.
29 9	</div>	JSX element opening tag.
30 0	</div>	JSX element opening tag.
30 1		Blank line.
30 2	{/* Pagination */}	Logic or UI structure — read with surrounding lines.
30 3	{totalPages > 1 && (	Logic or UI structure — read with surrounding lines.
30 4	<Pagination	JSX element opening tag.
30 5	currentPage={page}	Logic or UI structure — read with surrounding lines.
30 6	totalPages={totalPages}	Logic or UI structure — read with surrounding lines.
30 7	onPageChange={setPage}	Logic or UI structure — read with surrounding lines.
30 8	/>	Logic or UI structure — read with surrounding lines.
30 9	)}	Logic or UI structure — read with surrounding lines.
31 0	</>	Self-closing JSX element.
31 1	)}	Logic or UI structure — read with surrounding lines.
31 2	</>	Self-closing JSX element.
31 3	)}	Logic or UI structure — read with surrounding lines.
31 4		Blank line.
31 5	{/* — KANBAN VIEW	Logic or UI structure — read with surrounding lines.
31 6	*/}	
31 7	{viewModel === 'kanban' && (	Logic or UI structure — read with surrounding lines.
31 8	<>	JSX element opening tag.
31 9	{kanbanLoading ? (	Logic or UI structure — read with surrounding lines.
31 0	<div className="grid grid-cols-2	CSS/Tailwind styling.
31 1	md:grid-cols-3 xl:grid-cols-5 gap-4">	
32 2	{KANBAN_COLS.map((col) => (	Logic or UI structure — read with surrounding lines.
32 3	<div key={col}	CSS/Tailwind styling.
32 4	className="space-y-3">	
32 5	<Skeleton className="h-8	CSS/Tailwind styling.
32 6	rounded-lg" />	

Lin Code	Explanation
32 3 32 4 32 5 32 6 32 7 32 8 32 9 33 0 33 1 33 2 33 3 33 4 33 5 33 6 33 7 33 8 33 9 34 0 34 1 34 2 34 3 34 4 34 5 34 6 34 7 34 8 34 9 35 0 35 1 35 2	Logic or UI structure — read with surrounding lines. <Skeleton key={i} className="h-28 rounded-xl" /> Logic or UI structure — read with surrounding lines. </div> Logic or UI structure — read with surrounding lines. JSX element opening tag. Logic or UI structure — read with surrounding lines. JSX element opening tag. Logic or UI structure — read with surrounding lines. <div className="bg-red-50 border border-red-200 rounded-xl p-6 text-center"> <p className="text-red-600 font-medium">{kanbanError}</p> <button onClick={fetchKanbanOrders} className="mt-3 text-sm font- semibold text-brand underline" > Retry </button> </div> Logic or UI structure — read with surrounding lines. <div className="grid grid-cols-2 md:grid-cols-3 xl:grid-cols-5 gap-4 min-h-[60vh] items-start"> {KANBAN_COLS.map((colKey) => { const config = ORDER_STATUSES[colKey] const colOrders = kanbanOrders[colKey] [] return (Return JSX UI. <KanbanColumn JSX element opening tag. key={colKey} Logic or UI structure — read with surrounding lines. config={config} Logic or UI structure — read with surrounding lines. orders={colOrders} Logic or UI structure — read with surrounding lines. /> Logic or UI structure — read with surrounding lines.) Logic or UI structure — read with surrounding lines. }}} JSX element opening tag.

Lin Code	Explanation
35 3 }} 35 4 </> 35 5 }} 35 6 </div> 35 7) 35 8 } 35 9 36 0 // — Order Row (List View) 36 1 36 2 // Renders a single row in the list view table 36 3 function OrderRow({ order, onClick }) { 36 4 const customerName = order.customers?.name 'Guest Customer' 36 5 const storeName = order.stores?.store_name '-' 36 6 const paymentLabel = PAYMENT_METHODS[order.payment_method]?.shortLa bel order.payment_method 36 7 36 8 return (36 9 <div 37 0 onClick={onClick} 37 1 className="group cursor-pointer hover:bg-surface transition-colors" 37 2 > 37 3 {/* Desktop row */} 37 4 <div className="hidden md:grid grid- cols- [1.5fr_1fr_1fr_0.8fr_0.8fr_0.7fr_1fr_40px] gap-4 px-5 py-3.5 items-cen... 37 5 <div> 37 6 <p className="text-sm font-mono font-semibold text-on-surface group- hover:text-brand transition-colors"> 37 7 #{order.id.slice(- 8).toUpperCase()} 37 8 </p> 37 9 </div> 38 0 <div className="flex items-center gap- 2 min-w-0">	Logic or UI structure — read with surrounding lines. Self-closing JSX element. Logic or UI structure — read with surrounding lines. JSX element opening tag. Logic or UI structure — read with surrounding lines. Logic or UI structure — read with surrounding lines. Blank line. Comment: — Order Row (List View) Blank line. Comment: Renders a single row in the list view table Logic or UI structure — read with surrounding lines. Logic or UI structure — read with surrounding lines. Logic or UI structure — read with surrounding lines. Logic or UI structure — read with surrounding lines. Blank line. Return JSX UI. JSX element opening tag. User event handler. CSS/Tailwind styling. Logic or UI structure — read with surrounding lines. Logic or UI structure — read with surrounding lines. CSS/Tailwind styling. JSX element opening tag. CSS/Tailwind styling. Logic or UI structure — read with surrounding lines. JSX element opening tag. JSX element opening tag. CSS/Tailwind styling.

Lin Code	Explanation
38 1 secondary shrink-0" />	CSS/Tailwind styling.
38 2 surface truncate">{truncateText(customerName, 18)}</p>	CSS/Tailwind styling.
38 3 </div>	JSX element opening tag.
38 4 2 min-w-0">	CSS/Tailwind styling.
38 5 secondary shrink-0" />	CSS/Tailwind styling.
38 6 truncate">{truncateText(storeName, 18)}</p>	CSS/Tailwind styling.
38 7 </div>	JSX element opening tag.
38 8 on-surface">{formatCurrency(order.total)}</p>	CSS/Tailwind styling.
38 9 1.5">	CSS/Tailwind styling.
39 0 text-secondary" />	CSS/Tailwind styling.
39 1 secondary font-medium">{paymentLabel}	CSS/Tailwind styling.
39 2 </div>	JSX element opening tag.
39 3 status={order.status} />	Self-closing JSX element.
39 4 1.5 text-secondary">	CSS/Tailwind styling.
39 5 <Clock className="w-3.5 h-3.5" />	CSS/Tailwind styling.
39 6 xs">{formatRelativeTime(order.created_at)}	CSS/Tailwind styling.
39 7 </div>	JSX element opening tag.
39 8 secondary group-hover:text-brand transition-colors" />	CSS/Tailwind styling.
39 9 </div>	JSX element opening tag.
40 0	Blank line.
40 1 { /* Mobile card */ }	Logic or UI structure — read with surrounding lines.
40 2 space-y-1.5">	CSS/Tailwind styling.
40 3 justify-between gap-2">	CSS/Tailwind styling.
40 4 font-semibold text-on-surface group-hover:text-brand transition-colors">	CSS/Tailwind styling.
40 5 8).toUpperCase() }	Logic or UI structure — read with surrounding lines.
40 6 </p>	JSX element opening tag.
40 7 status={order.status} />	Self-closing JSX element.
40 8 </div>	JSX element opening tag.

Lin Code	Explanation
40 9 <div className="flex items-center justify-between">	CSS/Tailwind styling.
41 0 <p className="text-sm text-secondary">{truncateText(customerName, 22)}</p>	CSS/Tailwind styling.
41 1 <p className="text-sm font-bold text-on-surface">{formatCurrency(order.total)}</p>	CSS/Tailwind styling.
41 2 </div>	JSX element opening tag.
41 3 <div className="flex items-center justify-between">	CSS/Tailwind styling.
41 4 <p className="text-xs text-secondary">{truncateText(storeName, 24)}</p>	CSS/Tailwind styling.
41 5 <p className="text-xs text-secondary">{formatRelativeTime(order.created_at)}</p>	CSS/Tailwind styling.
41 6 </div>	JSX element opening tag.
41 7 </div>	JSX element opening tag.
41 8 </div>	JSX element opening tag.
41 9)	Logic or UI structure — read with surrounding lines.
42 0 }	Logic or UI structure — read with surrounding lines.
42 1	Blank line.
42 2 // — Kanban Column	Comment: — Kanban Column
42 3	Blank line.
42 4 // Renders a single kanban status column with its header and order cards	Comment: Renders a single kanban status column with its header and order cards
42 5 function KanbanColumn({ config, orders }) {	Logic or UI structure — read with surrounding lines.
42 6 return (	Return JSX UI.
42 7 <div className="space-y-3">	CSS/Tailwind styling.
42 8 /* Column header */	Logic or UI structure — read with surrounding lines.
42 9 <div	JSX element opening tag.
43 0 className="flex items-center justify-between px-3 py-2 rounded-lg"	CSS/Tailwind styling.
43 1 style={{ backgroundColor: config.bg }}	Logic or UI structure — read with surrounding lines.
43 2 >	Logic or UI structure — read with surrounding lines.
43 3 <span	JSX element opening tag.
43 4 className="text-xs font-bold uppercase tracking-wide"	CSS/Tailwind styling.
43 5 style={{ color: config.text }}	Logic or UI structure — read with surrounding lines.
43 6 >	Logic or UI structure — read with surrounding lines.

Lin Code	Explanation
43 7	{config.label}
43 8	
43 9	<span
44 0	className="text-xs font-bold w-5 h-5 rounded-full flex items-center justify-center"
44 1	style={{ backgroundColor: config.text, color: '#fff' }}
44 2	>
44 3	{orders.length}
44 4	
44 5	</div>
44 6	
44 7	{/* Order cards */}
44 8	<div className="space-y-2">
44 9	{orders.length === 0 ? (
45 0	<div className="text-center py-6">
45 1	<p className="text-xs text-secondary">No orders</p>
45 2	</div>
45 3	) : (
45 4	orders.map((order) => (
45 5	<OrderCard key={order.id} order={order} />
45 6	))
45 7	)}>
45 8	</div>
45 9	</div>
46 0	)
46 1	}
46 2	

OrderDetailPage (src/pages/OrderDetailPage.jsx)

Total lines: 768

Route: /orders/:id

Purpose: Order items, timeline, rider assign, status.

Line	Code	Explanation
1	import React, { useState, useEffect, useCallback } from 'react'	Import React hooks.
2	import { useParams, useNavigate, Link } from 'react-router-dom'	Import routing.
3	import {	Import dependency.
4	ArrowLeft, RefreshCw, User, Store, Bike, MapPin,	Logic or UI structure — read with surrounding lines.
5	CreditCard, Calendar, Hash, Phone, Package, Tag,	Logic or UI structure — read with surrounding lines.
6	ChevronRight, Loader, AlertCircle, UserCheck,	Logic or UI structure — read with surrounding lines.
7	} from 'lucide-react'	Logic or UI structure — read with surrounding lines.
8	import { supabase } from '../services/supabase'	Import API/database service.
9	import { getOrderById, getOrderTimeline, assignRider, updateOrderStatus } from '../services/orderService'	Import API/database service.
10	import { formatCurrency, formatDateTime, formatPhone } from '../utils/formatters'	Import helper utilities.
11	import { ORDER_STATUSES, PAYMENT_METHODS, PAYMENT_STATUSES } from '../constants/orderStatuses'	Import constants.
12	import OrderStatusBadge from '../components/orders/OrderStatusBadge'	Import UI component.
13	import OrderTimeline from '../components/orders/OrderTimeline'	Import UI component.
14	import RiderAssignDropdown from '../components/orders/RiderAssignDropdown'	Import UI component.
15	import Skeleton from '../components/ui/Skeleton'	Import UI component.
16	import Modal from '../components/ui/Modal'	Import UI component.
17	import { useAuth } from '../context/AuthContext'	Import auth context.
18	import { toast } from 'react-hot-toast'	Import dependency.
19		Blank line.
20	/**	Doc comment.
21	* OrderDetailPage — full order view with financial breakdown, status timeline,	Doc comment.
22	* delivery address, and admin actions (assign rider, cancel order).	Doc comment.
23	*/	Doc comment.
24	export default function OrderDetailPage() {	Default export (main module).
25	const { id } = useParams()	Logic or UI structure — read with surrounding lines.
26	const navigate = useNavigate()	Programmatic navigation hook.
27	const { user } = useAuth()	Auth state and login/logout.
28		Blank line.
29	// Core order data	Comment: Core order data
30	const [order, setOrder] = useState(null)	React state variable.
31	const [timeline, setTimeline] = useState(null)	React state variable.
32	const [loading, setLoading] = useState(true)	React state variable.
33	const [error, setError] = useState(null)	React state variable.
34		Blank line.
35	// UI state	Comment: UI state
36	const [showAssignModal, setShowAssignModal] = useState(false)	React state variable.
37	const [assignError, setAssignError] = useState(null)	React state variable.

Line	Code	Explanation
38	<code>const [assignSuccess, setAssignSuccess] = useState(false)</code>	React state variable.
39		Blank line.
40	<code>// Loads full order data and timeline together</code>	Comment: Loads full order data and timeline together
41	<code>const fetchOrder = useCallback(async () => {</code>	Memoized callback function.
42	<code> setLoading(true)</code>	Logic or UI structure — read with surrounding lines.
43	<code> setError(null)</code>	Logic or UI structure — read with surrounding lines.
44	<code> try {</code>	Try block start.
45	<code> const [orderData, timelineData] = await Promise.all([</code>	Wait for async operation.
46	<code> getOrderByById(id),</code>	Logic or UI structure — read with surrounding lines.
47	<code> getOrderTimeline(id),</code>	Logic or UI structure — read with surrounding lines.
48	<code>])</code>	Logic or UI structure — read with surrounding lines.
49	<code> setOrder(orderData)</code>	Logic or UI structure — read with surrounding lines.
50	<code> setTimeline(timelineData)</code>	Logic or UI structure — read with surrounding lines.
51	<code> } catch (err) {</code>	Catch errors.
52	<code> setError(err.message 'Failed to load order details.')</code>	Logic or UI structure — read with surrounding lines.
53	<code> } finally {</code>	Finally block (cleanup).
54	<code> setLoading(false)</code>	Logic or UI structure — read with surrounding lines.
55	<code> }</code>	Logic or UI structure — read with surrounding lines.
56	<code>}, [id])</code>	Logic or UI structure — read with surrounding lines.
57		Blank line.
58	<code>useEffect(() => { fetchOrder() }, [fetchOrder])</code>	Side effect (fetch, subscribe, redirect).
59		Blank line.
60	<code>// Supabase realtime — auto-refresh if this specific order is updated</code>	Comment: Supabase realtime — auto-refresh if this specific order is updated
61	<code>useEffect(() => {</code>	Side effect (fetch, subscribe, redirect).
62	<code> const channel = supabase</code>	Logic or UI structure — read with surrounding lines.
63	<code> .channel(`order-detail-\${id}`)</code>	Logic or UI structure — read with surrounding lines.
64	<code> .on(</code>	Logic or UI structure — read with surrounding lines.
65	<code> 'postgres_changes',</code>	Logic or UI structure — read with surrounding lines.
66	<code> { event: 'UPDATE', schema: 'public', table: 'orders', filter: `id=eq.\${id}` },</code>	Logic or UI structure — read with surrounding lines.
67	<code> () => fetchOrder()</code>	Logic or UI structure — read with surrounding lines.
68	<code>)</code>	Logic or UI structure — read with surrounding lines.
69	<code> .subscribe()</code>	Logic or UI structure — read with surrounding lines.
70		Blank line.
71	<code> return () => { supabase.removeChannel(channel) }</code>	Return JSX UI.
72	<code>}, [id, fetchOrder])</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
73		Blank line.
74	// Assigns a rider to this order via the order service	Comment: Assigns a rider to this order via the order service
75	async function handleAssignRider(riderId) {	Async function for network calls.
76	setAssignError(null)	Logic or UI structure — read with surrounding lines.
77	try {	Try block start.
78	await assignRider(id, riderId)	Wait for async operation.
79	setAssignSuccess(true)	Logic or UI structure — read with surrounding lines.
80	setShowAssignModal(false)	Logic or UI structure — read with surrounding lines.
81	fetchOrder()	Logic or UI structure — read with surrounding lines.
82	} catch (err) {	Catch errors.
83	setAssignError(err.message 'Failed to assign rider.')	Logic or UI structure — read with surrounding lines.
84	}	Logic or UI structure — read with surrounding lines.
85	}	Logic or UI structure — read with surrounding lines.
86		Blank line.
87	// Interactive Order Workflow states	Comment: Interactive Order Workflow states
88	const [updatingStatus, setUpdatingStatus] = useState(false)	React state variable.
89	const [showCancelModal, setShowCancelModal] = useState(false)	React state variable.
90	const [cancelReason, setCancelReason] = useState('')	React state variable.
91		Blank line.
92	// Triggers order status transition	Comment: Triggers order status transition
93	async function handleStatusUpdate(nextStatus) {	Async function for network calls.
94	setUpdatingStatus(true)	Logic or UI structure — read with surrounding lines.
95	try {	Try block start.
96	await updateOrderStatus(id, nextStatus)	Wait for async operation.
97	toast.success(`Order moved to status: \${nextStatus.toUpperCase()}`)	Toast notification.
98	fetchOrder()	Logic or UI structure — read with surrounding lines.
99	} catch (err) {	Catch errors.
100	toast.error(`Failed to update status: \${err.message}`)	Toast notification.
101	} finally {	Finally block (cleanup).
102	setUpdatingStatus(false)	Logic or UI structure — read with surrounding lines.
103	}	Logic or UI structure — read with surrounding lines.
104	}	Logic or UI structure — read with surrounding lines.
105		Blank line.
106	// Cancels the order with a reason	Comment: Cancels the order with a reason
107	async function handleCancelOrder() {	Async function for network calls.
108	if (!cancelReason.trim()) {	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
109	toast.error('Cancellation reason is required')	Toast notification.
110	return	Logic or UI structure — read with surrounding lines.
111	}	Logic or UI structure — read with surrounding lines.
112	setUpdatingStatus(true)	Logic or UI structure — read with surrounding lines.
113	try {	Try block start.
114	await updateOrderStatus(id, 'cancelled')	Wait for async operation.
115	// Update cancellation reason in Supabase	Comment: Update cancellation reason in Supabase
116	await supabase	Wait for async operation.
117	.from('orders')	Logic or UI structure — read with surrounding lines.
118	.update({ cancellation_reason: cancelReason	Logic or UI structure — read with surrounding lines.
119	})	Logic or UI structure — read with surrounding lines.
120	.eq('id', id)	Blank line.
121		Toast notification.
122	toast.success('Order cancelled successfully')	Logic or UI structure — read with surrounding lines.
123	setShowCancelModal(false)	Logic or UI structure — read with surrounding lines.
124	fetchOrder()	Logic or UI structure — read with surrounding lines.
125	} catch (err) {	Catch errors.
126	toast.error(`Cancellation failed: \${err.message}`)	Toast notification.
127	} finally {	Finally block (cleanup).
128	setUpdatingStatus(false)	Logic or UI structure — read with surrounding lines.
129	setCancelReason('')	Logic or UI structure — read with surrounding lines.
130	}	Logic or UI structure — read with surrounding lines.
131	}	Logic or UI structure — read with surrounding lines.
132		Blank line.
133	// — LOADING	Comment: — LOADING
134		
135		Blank line.
136	if (loading) {	Logic or UI structure — read with surrounding lines.
137	return (	Return JSX UI.
138	<div className="space-y-6 animate-fade-in">	CSS/Tailwind styling.
139	<div className="flex items-center gap-3">	CSS/Tailwind styling.

Line	Code	Explanation
138	<code><Skeleton className="w-8 h-8 rounded-lg" /></code>	CSS/Tailwind styling.
139	<code><Skeleton className="w-48 h-7 rounded-lg" /></code>	CSS/Tailwind styling.
140	<code></div></code>	JSX element opening tag.
141	<code><div className="grid grid-cols-1 lg:grid-cols-3 gap-6"></code>	CSS/Tailwind styling.
142	<code><div className="lg:col-span-2 space-y-4"></code>	CSS/Tailwind styling.
143	<code><Skeleton className="h-48 rounded-xl" /></code>	CSS/Tailwind styling.
144	<code><Skeleton className="h-36 rounded-xl" /></code>	CSS/Tailwind styling.
145	<code><Skeleton className="h-48 rounded-xl" /></code>	CSS/Tailwind styling.
146	<code></div></code>	JSX element opening tag.
147	<code><div className="space-y-4"></code>	CSS/Tailwind styling.
148	<code><Skeleton className="h-72 rounded-xl" /></code>	CSS/Tailwind styling.
149	<code><Skeleton className="h-48 rounded-xl" /></code>	CSS/Tailwind styling.
150	<code></div></code>	JSX element opening tag.
151	<code></div></code>	JSX element opening tag.
152	<code></div></code>	JSX element opening tag.
153	<code>)</code>	Logic or UI structure — read with surrounding lines.
154	<code>}</code>	Logic or UI structure — read with surrounding lines.
155		Blank line.
156	<code>// — ERROR</code>	Comment: — ERROR
157		Blank line.
158	<code>if (error) {</code>	Logic or UI structure — read with surrounding lines.
159	<code>return (</code>	Return JSX UI.
160	<code><div className="flex flex-col items-center justify-center min-h-[60vh] gap-4"></code>	CSS/Tailwind styling.
161	<code><AlertCircle className="w-12 h-12 text-red-400" /></code>	CSS/Tailwind styling.
162	<code><p className="text-lg font-semibold text-on-surface">Failed to load order</p></code>	CSS/Tailwind styling.
163	<code><p className="text-sm text-secondary">{error}</p></code>	CSS/Tailwind styling.
164	<code><button</code>	JSX element opening tag.
165	<code>onClick={fetchOrder}</code>	User event handler.
166	<code>className="flex items-center gap-2 bg-brand text-white px-4 py-2 rounded-lg text-sm font-semibold"</code>	CSS/Tailwind styling.

Line	Code	Explanation
167	>	Logic or UI structure — read with surrounding lines.
168	<RefreshCw className="w-4 h-4" /> Retry	CSS/Tailwind styling.
169	</button>	JSX element opening tag.
170	</div>	JSX element opening tag.
171	)	Logic or UI structure — read with surrounding lines.
172	}	Logic or UI structure — read with surrounding lines.
173		Blank line.
174	if (!order) return null	Logic or UI structure — read with surrounding lines.
175		Blank line.
176	// — DERIVED DATA	Comment: — DERIVED DATA
177		Blank line.
178	const customerName = order.customers?.name 'Guest Customer'	Logic or UI structure — read with surrounding lines.
179	const customerPhone = order.customers?.phone '-'	Logic or UI structure — read with surrounding lines.
180	const storeName = order.stores?.store_name '-'	Logic or UI structure — read with surrounding lines.
181	const storePhone = order.stores?.owner_phone '-'	Logic or UI structure — read with surrounding lines.
182	const riderName = order.riders?.name null	Logic or UI structure — read with surrounding lines.
183	const riderPhone = order.riders?.phone null	Logic or UI structure — read with surrounding lines.
184	const address = order.delivery_address {}	Logic or UI structure — read with surrounding lines.
185	const paymentMethodLabel = PAYMENT_METHODS[order.payment_method]?.label order.payment_method	Logic or UI structure — read with surrounding lines.
186	const paymentStatusConfig = PAYMENT_STATUSES[order.payment_status] {}	Logic or UI structure — read with surrounding lines.
187	const isCancellable = !['delivered', 'cancelled'].includes(order.status)	Logic or UI structure — read with surrounding lines.
188	const canAssignRider = ['placed', 'confirmed', 'packed'].includes(order.status) && !order.rider_id	Logic or UI structure — read with surrounding lines.
189		Blank line.
190	// — RENDER	Comment: — RENDER
191		Blank line.
192	return (	Return JSX UI.
193	<div className="space-y-6 animate-fade-in">	CSS/Tailwind styling.
194		Blank line.

Line	Code	Explanation
195	<code> { /* Back + header */ }</code>	Logic or UI structure — read with surrounding lines.
196	<code> <div className="flex flex-col sm:flex-row sm:items-center sm:justify-between gap-3"></code>	CSS/Tailwind styling.
197	<code> <div className="flex items-center gap-3"></code>	CSS/Tailwind styling.
198	<code> <button</code>	JSX element opening tag.
199	<code> onClick={() => navigate('/orders')}</code>	User event handler.
200	<code> className="p-2 rounded-lg border border- border bg-white text-secondary hover:bg-surface transition-colors"</code>	CSS/Tailwind styling.
201	<code> ></code>	Logic or UI structure — read with surrounding lines.
202	<code> <ArrowLeft className="w-4 h-4" /></code>	CSS/Tailwind styling.
203	<code> </button></code>	JSX element opening tag.
204	<code> <div></code>	JSX element opening tag.
205	<code> <div className="flex items-center gap-2 flex-wrap"></code>	CSS/Tailwind styling.
206	<code> <h1 className="text-xl font-bold text- on-surface font-mono"></code>	CSS/Tailwind styling.
207	<code> #{order.id.slice(-8).toUpperCase()}</code>	Logic or UI structure — read with surrounding lines.
208	<code> </h1></code>	JSX element opening tag.
209	<code> <OrderStatusBadge status={order.status}</code>	Self-closing JSX element.
210	<code> /></code>	
211	<code> <span</code>	JSX element opening tag.
212	<code> className="text-xs font-semibold px-2 py-0.5 rounded-full border"</code>	CSS/Tailwind styling.
213	<code> style={{</code>	Logic or UI structure — read with surrounding lines.
214	<code> backgroundColor:</code>	Logic or UI structure — read with surrounding lines.
215	<code> paymentStatusConfig.bg '#F3F4F6',</code>	Logic or UI structure — read with surrounding lines.
216	<code> color: paymentStatusConfig.text </code>	Logic or UI structure — read with surrounding lines.
217	<code> '#6B7280',</code>	Logic or UI structure — read with surrounding lines.
218	<code> borderColor:</code>	Logic or UI structure — read with surrounding lines.
219	<code> `\${paymentStatusConfig.text    '#6B7280'}30`,</code>	Logic or UI structure — read with surrounding lines.
220	<code> }}</code>	Logic or UI structure — read with surrounding lines.
221	<code> ></code>	Logic or UI structure — read with surrounding lines.
222	<code> {paymentStatusConfig.label </code>	Logic or UI structure — read with surrounding lines.
223	<code> order.payment_status}</code>	Logic or UI structure — read with surrounding lines.
224	<code> </code>	JSX element opening tag.
225	<code> </div></code>	JSX element opening tag.
226	<code> <p className="text-xs text-secondary mt- 0.5"></code>	CSS/Tailwind styling.
227	<code> Placed on</code>	Logic or UI structure — read with surrounding lines.
228	<code> {formatDateTime(order.created_at)}</code>	Logic or UI structure — read with surrounding lines.
229	<code> </p></code>	JSX element opening tag.

Line	Code	Explanation
22	<code></div></code>	JSX element opening tag.
22	<code></div></code>	JSX element opening tag.
22		Blank line.
22	<code>{/* Refresh */}</code>	Logic or UI structure — read with surrounding lines.
22	<code><button</code>	JSX element opening tag.
22	<code>onClick={fetchOrder}</code>	User event handler.
23	<code>className="self-start sm:self-auto flex</code>	CSS/Tailwind styling.
23	<code>items-center gap-2 px-3 py-2 rounded-lg border</code>	
23	<code>border-border bg-whi...</code>	
23	<code>></code>	Logic or UI structure — read with surrounding lines.
23	<code><RefreshCw className="w-4 h-4" /> Refresh</code>	CSS/Tailwind styling.
23	<code></button></code>	JSX element opening tag.
23	<code></div></code>	JSX element opening tag.
23		Blank line.
23	<code>{/* Success feedback */}</code>	Logic or UI structure — read with surrounding lines.
23	<code>{assignSuccess && (</code>	Logic or UI structure — read with surrounding lines.
23	<code><div className="flex items-center gap-2 bg-</code>	CSS/Tailwind styling.
23	<code>green-50 border-green-200 text-green-700</code>	
23	<code>rounded-lg px-4 py...</code>	
23	<code><UserCheck className="w-4 h-4 shrink-0" /></code>	CSS/Tailwind styling.
24	<code>Rider assigned successfully!</code>	Logic or UI structure — read with surrounding lines.
24	<code><button</code>	JSX element opening tag.
24	<code>onClick={() => setAssignSuccess(false)}</code>	User event handler.
24	<code>className="ml-auto text-green-500</code>	CSS/Tailwind styling.
24	<code>hover:text-green-700"</code>	
24	<code>></code>	Logic or UI structure — read with surrounding lines.
24	<code>×</code>	Logic or UI structure — read with surrounding lines.
24	<code></button></code>	JSX element opening tag.
24	<code></div></code>	JSX element opening tag.
24	<code>)}</code>	Logic or UI structure — read with surrounding lines.
24		Blank line.
25	<code>{/* Main two-column layout */}</code>	Logic or UI structure — read with surrounding lines.
25	<code><div className="grid grid-cols-1 lg:grid-cols-3</code>	CSS/Tailwind styling.
25	<code>gap-6"></code>	
25		Blank line.

Line	Code	Explanation
25 3	<code>/* — LEFT COLUMN</code>	Logic or UI structure — read with surrounding lines.
25 4	<code><div className="lg:col-span-2 space-y-5"></code>	CSS/Tailwind styling.
25 5		Blank line.
25 6	<code>/* Order Items */</code>	Logic or UI structure — read with surrounding lines.
25 7	<code><section className="bg-white rounded-xl border border-border overflow-hidden shadow-sm"></code>	CSS/Tailwind styling.
25 8	<code><div className="flex items-center gap-2 px-5 py-4 border-b border-border"></code>	CSS/Tailwind styling.
25 9	<code><Package className="w-4 h-4 text-brand" /></code>	CSS/Tailwind styling.
26 0	<code><h2 className="font-semibold text-on-surface">Order Items</h2></code>	CSS/Tailwind styling.
26 1	<code></div></code>	JSX element opening tag.
26 2	<code><OrderItemsSection orderId={order.id} /></code>	Self-closing JSX element.
26 3	<code></section></code>	JSX element opening tag.
26 4		Blank line.
26 5	<code>/* Financial breakdown */</code>	Logic or UI structure — read with surrounding lines.
26 6	<code><section className="bg-white rounded-xl border border-border shadow-sm"></code>	CSS/Tailwind styling.
26 7	<code><div className="flex items-center gap-2 px-5 py-4 border-b border-border"></code>	CSS/Tailwind styling.
26 8	<code><CreditCard className="w-4 h-4 text-brand" /></code>	CSS/Tailwind styling.
26 9	<code><h2 className="font-semibold text-on-surface">Financial Breakdown</h2></code>	CSS/Tailwind styling.
27 0	<code></div></code>	JSX element opening tag.
27 1	<code><div className="p-5 space-y-3"></code>	CSS/Tailwind styling.
27 2	<code><PricingRow label="Cart Subtotal" value={formatCurrency(order.subtotal)} /></code>	Self-closing JSX element.
27 3	<code><PricingRow label="Delivery Fee" value={formatCurrency(order.delivery_fee)} /></code>	Self-closing JSX element.
27 4	<code>{order.discount_amount > 0 && (</code>	Logic or UI structure — read with surrounding lines.
27 5	<code><PricingRow</code>	JSX element opening tag.
27 6	<code>label="Discount"</code>	Logic or UI structure — read with surrounding lines.
27 7	<code>value={` - \${formatCurrency(order.discount_amount)}`}</code>	Logic or UI structure — read with surrounding lines.
27 8	<code>valueClass="text-green-600"</code>	Logic or UI structure — read with surrounding lines.
27 9	<code>/></code>	Logic or UI structure — read with surrounding lines.
28 0	<code>)}</code>	Logic or UI structure — read with surrounding lines.
28 1	<code><div className="border-t border-border pt-3"></code>	CSS/Tailwind styling.

Line	Code	Explanation
28	<PricingRow	JSX element opening tag.
29	label="Customer Pays"	Logic or UI structure — read with surrounding lines.
30	value={formatCurrency(order.total)}	Logic or UI structure — read with surrounding lines.
31	labelClass="font-bold text-on-	Logic or UI structure — read with surrounding lines.
32	surface"	Logic or UI structure — read with surrounding lines.
33	valueClass="font-bold text-on-	Logic or UI structure — read with surrounding lines.
34	surface text-base"	Logic or UI structure — read with surrounding lines.
35	/>	Logic or UI structure — read with surrounding lines.
36	</div>	JSX element opening tag.
37	<div className="bg-surface rounded-lg	CSS/Tailwind styling.
38	p-3 mt-2 space-y-2">	CSS/Tailwind styling.
39	<p className="text-xs font-semibold	CSS/Tailwind styling.
40	text-secondary uppercase tracking-wide mb-1">	Logic or UI structure — read with surrounding lines.
41	Platform Earnings	Logic or UI structure — read with surrounding lines.
42	</p>	JSX element opening tag.
43	<PricingRow	JSX element opening tag.
44	label="Commission (18%)"	Logic or UI structure — read with surrounding lines.
45	value={formatCurrency(order.commission_amount)}	Logic or UI structure — read with surrounding lines.
46	labelClass="text-sm text-secondary"	Logic or UI structure — read with surrounding lines.
47	valueClass="text-sm text-on-	Logic or UI structure — read with surrounding lines.
48	surface"	Logic or UI structure — read with surrounding lines.
49	/>	Logic or UI structure — read with surrounding lines.
50	<PricingRow	JSX element opening tag.
51	label="Rider Payout"	Logic or UI structure — read with surrounding lines.
52	value={` -	Logic or UI structure — read with surrounding lines.
53	\${formatCurrency(order.rider_payout)}` }	Logic or UI structure — read with surrounding lines.
54	labelClass="text-sm text-secondary"	Logic or UI structure — read with surrounding lines.
55	valueClass="text-sm text-red-600"	Logic or UI structure — read with surrounding lines.
56	/>	Logic or UI structure — read with surrounding lines.
57	<PricingRow	JSX element opening tag.
58	label="Store Receives"	Logic or UI structure — read with surrounding lines.
59	value={` -	Logic or UI structure — read with surrounding lines.
60	\${formatCurrency(order.subtotal -	Logic or UI structure — read with surrounding lines.
61	order.commission_amount)}` }	Logic or UI structure — read with surrounding lines.
62	labelClass="text-sm text-secondary"	Logic or UI structure — read with surrounding lines.
63	valueClass="text-sm text-secondary"	Logic or UI structure — read with surrounding lines.
64	/>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
31	<code><div className="border-t border-</code>	CSS/Tailwind styling.
1	<code>border pt-2"></code>	
31	<code><PricingRow</code>	JSX element opening tag.
2		
31	<code>label="ZapKart Net Profit"</code>	Logic or UI structure — read with surrounding lines.
3		
31	<code>value={formatCurrency(order.zapkart_net_profit)}</code>	Logic or UI structure — read with surrounding lines.
4		
31	<code>labelClass="text-sm font-semibold</code>	Logic or UI structure — read with surrounding lines.
5	<code>text-brand"</code>	
31	<code>valueClass="text-sm font-bold</code>	Logic or UI structure — read with surrounding lines.
6	<code>text-brand"</code>	
31	<code>/></code>	Logic or UI structure — read with surrounding lines.
7		
31	<code></div></code>	JSX element opening tag.
8		
31	<code></div></code>	JSX element opening tag.
9		
32	<code></div></code>	JSX element opening tag.
0		
32	<code></section></code>	JSX element opening tag.
1		
32		Blank line.
2		
32	<code>{/* Delivery address */}</code>	Logic or UI structure — read with surrounding lines.
3		
32	<code><section className="bg-white rounded-xl</code>	CSS/Tailwind styling.
4	<code>border border-border shadow-sm"></code>	
32	<code><div className="flex items-center gap-2</code>	CSS/Tailwind styling.
5	<code>px-5 py-4 border-b border-border"></code>	
32	<code><MapPin className="w-4 h-4 text-brand"</code>	CSS/Tailwind styling.
6	<code>/></code>	
32	<code><h2 className="font-semibold text-on-</code>	CSS/Tailwind styling.
7	<code>surface">Delivery Address</h2></code>	
32	<code></div></code>	JSX element opening tag.
8		
32	<code><div className="p-5"></code>	CSS/Tailwind styling.
9		
33	<code>{address.label && (</code>	Logic or UI structure — read with surrounding lines.
0		
33	<code><p className="text-xs font-semibold</code>	CSS/Tailwind styling.
1	<code>uppercase tracking-wide text-brand mb-1"></code>	
33	<code>{address.label}</code>	Logic or UI structure — read with surrounding lines.
2		
33	<code></p></code>	JSX element opening tag.
3		
33	<code>)}</code>	Logic or UI structure — read with surrounding lines.
4		
33	<code><p className="text-sm text-on-surface</code>	CSS/Tailwind styling.
5	<code>font-medium"></code>	
33	<code>{address.line1 address.address </code>	Logic or UI structure — read with surrounding lines.
6	<code>'-'}></code>	
33	<code></p></code>	JSX element opening tag.
7		
33	<code>{address.line2 && <p className="text-sm</code>	CSS/Tailwind styling.
8	<code>text-secondary">{address.line2}</p>}</code>	
33	<code><p className="text-sm text-secondary"></code>	CSS/Tailwind styling.
9		

Line	Code	Explanation
340	<code>{[address.city, address.state, address.pincod].filter(Boolean).join(', ')}</code>	Logic or UI structure — read with surrounding lines.
341	<code></p></code>	JSX element opening tag.
342	<code>{{(address.lat && address.lng) && (</code>	Logic or UI structure — read with surrounding lines.
343	<code><a</code>	JSX element opening tag.
344	<code>href={`https://www.google.com/maps/dir/?api=1&destination=\${address.lat},\${address.lng}`}</code>	Logic or UI structure — read with surrounding lines.
345	<code>target="_blank"</code>	Logic or UI structure — read with surrounding lines.
346	<code>rel="noopener noreferrer"</code>	Logic or UI structure — read with surrounding lines.
347	<code>className="inline-flex items-center gap-1.5 mt-3 text-xs font-semibold text-brand hover:underline"</code>	CSS/Tailwind styling.
348	<code>></code>	Logic or UI structure — read with surrounding lines.
349	<code><MapPin className="w-3.5 h-3.5" /></code>	CSS/Tailwind styling.
350	<code>View on Map</code>	
351	<code></code>	JSX element opening tag.
352	<code>})}</code>	Logic or UI structure — read with surrounding lines.
353	<code></div></code>	JSX element opening tag.
354	<code></section></code>	JSX element opening tag.
355		Blank line.
356	<code>{/* People cards row */}</code>	Logic or UI structure — read with surrounding lines.
357	<code><div className="grid grid-cols-1 sm:grid-cols-2 xl:grid-cols-3 gap-4"></code>	CSS/Tailwind styling.
358	<code>{/* Customer */}</code>	Logic or UI structure — read with surrounding lines.
359	<code><PersonCard</code>	JSX element opening tag.
360	<code>icon={User}</code>	Logic or UI structure — read with surrounding lines.
361	<code>label="Customer"</code>	Logic or UI structure — read with surrounding lines.
362	<code>name={customerName}</code>	Logic or UI structure — read with surrounding lines.
363	<code>phone={customerPhone}</code>	Logic or UI structure — read with surrounding lines.
364	<code>linkTo={null}</code>	Logic or UI structure — read with surrounding lines.
365	<code>/></code>	Logic or UI structure — read with surrounding lines.
366	<code>{/* Store */}</code>	Logic or UI structure — read with surrounding lines.
367	<code><PersonCard</code>	JSX element opening tag.
368	<code>icon={Store}</code>	Logic or UI structure — read with surrounding lines.
369	<code>label="Store"</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
369	name={storeName}	Logic or UI structure — read with surrounding lines.
370	phone={storePhone}	Logic or UI structure — read with surrounding lines.
371	linkTo={order.store_id ? `/stores/\${order.store_id}` : null}	Logic or UI structure — read with surrounding lines.
372	/>	Logic or UI structure — read with surrounding lines.
373	{/* Rider */}	Logic or UI structure — read with surrounding lines.
374	{riderName ? (	Logic or UI structure — read with surrounding lines.
375	<PersonCard	JSX element opening tag.
376	icon={Bike}	Logic or UI structure — read with surrounding lines.
377	label="Rider"	Logic or UI structure — read with surrounding lines.
378	name={riderName}	Logic or UI structure — read with surrounding lines.
379	phone={riderPhone '-'}	Logic or UI structure — read with surrounding lines.
380	linkTo={order.rider_id ? `/riders/\${order.rider_id}` : null}	Logic or UI structure — read with surrounding lines.
381	/>	Logic or UI structure — read with surrounding lines.
382	) : (	Logic or UI structure — read with surrounding lines.
383	<div className="bg-white rounded-xl border border-border p-4 flex flex-col items-center justify-center ...	CSS/Tailwind styling.
384	<div className="w-10 h-10 rounded- full bg-amber-50 flex items-center justify-center">	CSS/Tailwind styling.
385	<Bike className="w-5 h-5 text- amber-500" />	CSS/Tailwind styling.
386	</div>	JSX element opening tag.
387	<div>	JSX element opening tag.
388	<p className="text-xs font-semibold uppercase tracking-wide text-secondary">Rider</p>	CSS/Tailwind styling.
389	<p className="text-sm text- secondary mt-0.5">No rider assigned yet</p>	CSS/Tailwind styling.
390	</div>	JSX element opening tag.
391	{canAssignRider && (	Logic or UI structure — read with surrounding lines.
392	<button	JSX element opening tag.
393	onClick={() => setShowAssignModal(true)}	User event handler.
394	className="text-xs font-semibold text-brand border border-brand/30 rounded-lg px-3 py- 1.5 hover:b...	CSS/Tailwind styling.
395	>	Logic or UI structure — read with surrounding lines.
396	Assign Rider	Logic or UI structure — read with surrounding lines.
397	</button>	JSX element opening tag.

Line	Code	Explanation
39	)}	Logic or UI structure — read with surrounding lines.
39	</div>	JSX element opening tag.
40	)}	Logic or UI structure — read with surrounding lines.
40	</div>	JSX element opening tag.
40	</div>	JSX element opening tag.
40		Blank line.
40	{ /* — RIGHT COLUMN	Logic or UI structure — read with surrounding lines.
40	<div className="space-y-5">	CSS/Tailwind styling.
40		Blank line.
40	{ /* Order Timeline */ }	Logic or UI structure — read with surrounding lines.
40	<section className="bg-white rounded-xl border border-border shadow-sm">	CSS/Tailwind styling.
40	<div className="flex items-center gap-2 px-5 py-4 border-b border-border">	CSS/Tailwind styling.
40	<Calendar className="w-4 h-4 text-brand" />	CSS/Tailwind styling.
40	<h2 className="font-semibold text-on-surface">Status Timeline</h2>	CSS/Tailwind styling.
40	</div>	JSX element opening tag.
40	<div className="p-5">	CSS/Tailwind styling.
40	<OrderTimeline timeline={timeline} currentStatus={order.status} />	Self-closing JSX element.
40	</div>	JSX element opening tag.
40	</section>	JSX element opening tag.
40		Blank line.
40	{ /* Order meta */ }	Logic or UI structure — read with surrounding lines.
40	<section className="bg-white rounded-xl border border-border shadow-sm">	CSS/Tailwind styling.
40	<div className="flex items-center gap-2 px-5 py-4 border-b border-border">	CSS/Tailwind styling.
40	<Hash className="w-4 h-4 text-brand" />	CSS/Tailwind styling.
40	<h2 className="font-semibold text-on-surface">Order Info</h2>	CSS/Tailwind styling.
40	</div>	JSX element opening tag.
40	<div className="p-5 space-y-3">	CSS/Tailwind styling.
40	<MetaRow label="Order ID" value={order.id.toUpperCase()} mono />	Self-closing JSX element.
40	<MetaRow label="Payment Method" value={paymentMethodLabel} />	Self-closing JSX element.

Line	Code	Explanation
427	<code><MetaRow</code>	JSX element opening tag.
428	<code>label="Payment Status"</code>	Logic or UI structure — read with surrounding lines.
429	<code>value={paymentStatusConfig.label order.payment_status}</code>	Logic or UI structure — read with surrounding lines.
430	<code>/></code>	Logic or UI structure — read with surrounding lines.
431	<code><MetaRow</code>	JSX element opening tag.
432	<code>label="COD Submitted"</code>	Logic or UI structure — read with surrounding lines.
433	<code>value={order.cod_submitted ? 'Yes' : 'No'}</code>	Logic or UI structure — read with surrounding lines.
434	<code>/></code>	Logic or UI structure — read with surrounding lines.
435	<code>{order.cancellation_reason && (</code>	Logic or UI structure — read with surrounding lines.
436	<code><div></code>	JSX element opening tag.
437	<code><p className="text-xs text-secondary mb-1">Cancellation Reason</p></code>	CSS/Tailwind styling.
438	<code><p className="text-sm text-red-600 font-medium">{order.cancellation_reason}</p></code>	CSS/Tailwind styling.
439	<code></div></code>	JSX element opening tag.
440	<code>)}</code>	Logic or UI structure — read with surrounding lines.
441	<code></div></code>	JSX element opening tag.
442	<code></section></code>	JSX element opening tag.
443		Blank line.
444	<code>{/* Admin actions */}</code>	Logic or UI structure — read with surrounding lines.
445	<code><section className="bg-white rounded-xl border border-border shadow-sm"></code>	CSS/Tailwind styling.
446	<code><div className="flex items-center gap-2 px-5 py-4 border-b border-border"></code>	CSS/Tailwind styling.
447	<code><Tag className="w-4 h-4 text-brand" /></code>	CSS/Tailwind styling.
448	<code><h2 className="font-semibold text-on-surface">Order Workflow Simulator</h2></code>	CSS/Tailwind styling.
449	<code></div></code>	JSX element opening tag.
450	<code><div className="p-5 space-y-4"></code>	CSS/Tailwind styling.
451	<code><div className="bg-slate-50 p-3 rounded-lg border border-border"></code>	CSS/Tailwind styling.
452	<code><p className="text-xs text-secondary font-semibold uppercase tracking-wider">Current Lifecycle Stage</p></code>	CSS/Tailwind styling.
453	<code><p className="text-sm font-bold text-on-surface mt-1 uppercase">{order.status}</p></code>	CSS/Tailwind styling.
454	<code></div></code>	JSX element opening tag.
455		Blank line.

Line	Code	Explanation
45 6	<div className="flex flex-col gap-2">	CSS/Tailwind styling.
45 7	/* 1. Placed -> Confirmed */	Logic or UI structure — read with surrounding lines.
45 8	{order.status === 'placed' && (	Logic or UI structure — read with surrounding lines.
45 9	<Button	JSX element opening tag.
46 0	variant="primary"	Logic or UI structure — read with surrounding lines.
46 1	onClick={() => handleStatusUpdate('confirmed')}	User event handler.
46 2	isLoading={updatingStatus}	Logic or UI structure — read with surrounding lines.
46 3	className="w-full flex items-center justify-center gap-2 h-11 text-sm font-semibold"	CSS/Tailwind styling.
46 4	>	Logic or UI structure — read with surrounding lines.
46 5	Confirm & Accept Order	Logic or UI structure — read with surrounding lines.
46 6	</Button>	JSX element opening tag.
46 7	)}	Logic or UI structure — read with surrounding lines.
46 8		Blank line.
46 9	/* 2. Confirmed -> Packed */	Logic or UI structure — read with surrounding lines.
47 0	{order.status === 'confirmed' && (	Logic or UI structure — read with surrounding lines.
47 1	<Button	JSX element opening tag.
47 2	variant="primary"	Logic or UI structure — read with surrounding lines.
47 3	onClick={() => handleStatusUpdate('packed')}	User event handler.
47 4	isLoading={updatingStatus}	Logic or UI structure — read with surrounding lines.
47 5	className="w-full flex items-center justify-center gap-2 h-11 text-sm font-semibold"	CSS/Tailwind styling.
47 6	>	Logic or UI structure — read with surrounding lines.
47 7	Mark as Packed & Ready	Logic or UI structure — read with surrounding lines.
47 8	</Button>	JSX element opening tag.
47 9	)}	Logic or UI structure — read with surrounding lines.
48 0		Blank line.
48 1	/* 3. Packed -> Assign Rider OR Picked */	Logic or UI structure — read with surrounding lines.
48 2	{order.status === 'packed' && (	Logic or UI structure — read with surrounding lines.
48 3	<>	JSX element opening tag.
48 4	{!order.rider_id ? (	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
48	<code><Button</code>	JSX element opening tag.
48	<code>variant="primary"</code>	Logic or UI structure — read with surrounding lines.
48	<code>onClick={() =></code>	User event handler.
7	<code>setShowAssignModal(true)}</code>	
48	<code>className="w-full flex items-</code>	CSS/Tailwind styling.
8	<code>center justify-center gap-2 h-11 text-sm font-semibold"</code>	
48	<code>></code>	Logic or UI structure — read with surrounding lines.
49	<code><UserCheck className="w-4 h-</code>	CSS/Tailwind styling.
0	<code>4" /> Assign Rider to Dispatch</code>	
49	<code></Button></code>	JSX element opening tag.
1		
49	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
2		
49	<code><Button</code>	JSX element opening tag.
3		
49	<code>variant="primary"</code>	Logic or UI structure — read with surrounding lines.
4		
49	<code>onClick={() =></code>	User event handler.
5	<code>handleStatusUpdate('picked')}</code>	
49	<code>isLoading={updatingStatus}</code>	Logic or UI structure — read with surrounding lines.
6		
49	<code>className="w-full flex items-</code>	CSS/Tailwind styling.
7	<code>center justify-center gap-2 h-11 text-sm font-semibold"</code>	
49	<code>></code>	Logic or UI structure — read with surrounding lines.
8		
49	<code>Confirm Rider Picked Up</code>	Logic or UI structure — read with surrounding lines.
9		
50	<code></Button></code>	JSX element opening tag.
0		
50	<code>)}</code>	Logic or UI structure — read with surrounding lines.
1		
50	<code></></code>	Self-closing JSX element.
2		
50	<code>)}</code>	Logic or UI structure — read with surrounding lines.
3		
50		Blank line.
4		
50	<code>{/* 4. Picked -> Out for Delivery */}</code>	Logic or UI structure — read with surrounding lines.
5		
50	<code>{order.status === 'picked' && (</code>	Logic or UI structure — read with surrounding lines.
6		
50	<code><Button</code>	JSX element opening tag.
7		
50	<code>variant="primary"</code>	Logic or UI structure — read with surrounding lines.
8		
50	<code>onClick={() =></code>	User event handler.
9	<code>handleStatusUpdate('out_for_delivery')}</code>	
51	<code>isLoading={updatingStatus}</code>	Logic or UI structure — read with surrounding lines.
0		
51	<code>className="w-full flex items-</code>	CSS/Tailwind styling.
1	<code>center justify-center gap-2 h-11 text-sm font-semibold"</code>	
51	<code>></code>	Logic or UI structure — read with surrounding lines.
2		

Line	Code	Explanation
513	Set as Out for Delivery	Logic or UI structure — read with surrounding lines.
514	</Button>	JSX element opening tag.
515	)}	Logic or UI structure — read with surrounding lines.
516		Blank line.
517	{/* 5. Out for Delivery -> Delivered */}	Logic or UI structure — read with surrounding lines.
518	{order.status === 'out_for_delivery'}	Logic or UI structure — read with surrounding lines.
519	&& (	
520	<Button	JSX element opening tag.
521	variant="primary"	Logic or UI structure — read with surrounding lines.
522	onClick={() => handleStatusUpdate('delivered')}	User event handler.
523	isLoading={updatingStatus}	Logic or UI structure — read with surrounding lines.
524	className="w-full flex items-center justify-center gap-2 h-11 text-sm font-semibold"	CSS/Tailwind styling.
525	>	Logic or UI structure — read with surrounding lines.
526	Mark as Successfully Delivered	Logic or UI structure — read with surrounding lines.
527	</Button>	JSX element opening tag.
528	)}	Logic or UI structure — read with surrounding lines.
529		Blank line.
530	{/* Re-assign rider option if already assigned but not delivered */}	Logic or UI structure — read with surrounding lines.
531	{['packed', 'picked', 'out_for_delivery'].includes(order.status) && order.rider_id && (	Logic or UI structure — read with surrounding lines.
532	<Button	JSX element opening tag.
533	variant="outline"	Logic or UI structure — read with surrounding lines.
534	onClick={() => setShowAssignModal(true)}	User event handler.
535	className="w-full flex items-center justify-center gap-2 h-10 text-xs font-semibold"	CSS/Tailwind styling.
536	>	Logic or UI structure — read with surrounding lines.
537	Re-assign Rider	Logic or UI structure — read with surrounding lines.
538	</Button>	JSX element opening tag.
539	)}	Logic or UI structure — read with surrounding lines.
540		Blank line.
541	{/* Status completion screen info */}	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
54 1	<code>{order.status === 'delivered' && (</code>	Logic or UI structure — read with surrounding lines.
54 2	<code><div className="bg-green-50 text-green-800 text-xs font-medium p-3 rounded-lg border border-green-2...</code>	CSS/Tailwind styling.
54 3	<code>🎉 This order is completed and successfully delivered. Payouts have been calculated!</code>	Logic or UI structure — read with surrounding lines.
54 4	<code></div></code>	JSX element opening tag.
54 5	<code>)}</code>	Logic or UI structure — read with surrounding lines.
54 6	<code>{order.status === 'cancelled' && (</code>	Logic or UI structure — read with surrounding lines.
54 7	<code><div className="bg-red-50 text-red-800 text-xs font-medium p-3 rounded-lg border border-red-200 tex...</code>	CSS/Tailwind styling.
54 8	<code>❌ This order is cancelled. Check cancellation reason details.</code>	Logic or UI structure — read with surrounding lines.
54 9	<code></div></code>	JSX element opening tag.
55 0	<code>)}</code>	Logic or UI structure — read with surrounding lines.
55 1		Blank line.
55 2	<code>{/* Cancellation trigger */}</code>	Logic or UI structure — read with surrounding lines.
55 3	<code>{isCancellable && (</code>	Logic or UI structure — read with surrounding lines.
55 4	<code><Button</code>	JSX element opening tag.
55 5	<code>variant="outline"</code>	Logic or UI structure — read with surrounding lines.
55 6	<code>onClick={() => setShowCancelModal(true)}</code>	User event handler.
55 7	<code>className="w-full flex items-center justify-center gap-2 h-10 text-xs font-semibold text-red-600 ...</code>	CSS/Tailwind styling.
55 8	<code>></code>	Logic or UI structure — read with surrounding lines.
55 9	<code>Cancel Order</code>	Logic or UI structure — read with surrounding lines.
56 0	<code></Button></code>	JSX element opening tag.
56 1	<code>)}</code>	Logic or UI structure — read with surrounding lines.
56 2	<code></div></code>	JSX element opening tag.
56 3	<code></div></code>	JSX element opening tag.
56 4	<code></section></code>	JSX element opening tag.
56 5	<code></div></code>	JSX element opening tag.
56 6	<code></div></code>	JSX element opening tag.
56 7		Blank line.
56 8	<code>{/* Rider assign modal */}</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
56	<code><Modal</code>	JSX element opening tag.
57	<code> isOpen={showAssignModal}</code>	Logic or UI structure — read with surrounding lines.
57	<code> onClose={() => { setShowAssignModal(false);</code>	Logic or UI structure — read with surrounding lines.
1	<code>setAssignError(null) }}</code>	Logic or UI structure — read with surrounding lines.
57	<code> title="Assign Rider"</code>	Logic or UI structure — read with surrounding lines.
57	<code>></code>	Logic or UI structure — read with surrounding lines.
57	<code> <div className="space-y-4"></code>	CSS/Tailwind styling.
57	<code> <p className="text-sm text-secondary"></code>	CSS/Tailwind styling.
57	<code> Select an active rider to assign to</code>	Logic or UI structure — read with surrounding lines.
6	<code>order{' '}</code>	Logic or UI structure — read with surrounding lines.
57	<code> <span className="font-mono font-semibold</code>	CSS/Tailwind styling.
7	<code>text-on-surface"></code>	Logic or UI structure — read with surrounding lines.
57	<code> #{order.id.slice(-8).toUpperCase()}</code>	Logic or UI structure — read with surrounding lines.
57	<code> </code>	JSX element opening tag.
58	<code> </p></code>	JSX element opening tag.
58	<code> {assignError && (</code>	Logic or UI structure — read with surrounding lines.
58	<code> <div className="flex items-center gap-2</code>	CSS/Tailwind styling.
2	<code>bg-red-50 border border-red-200 text-red-600 rounded-</code>	CSS/Tailwind styling.
58	<code> <AlertCircle className="w-4 h-4 shrink-</code>	CSS/Tailwind styling.
3	<code>0" /></code>	Logic or UI structure — read with surrounding lines.
58	<code> {assignError}</code>	Logic or UI structure — read with surrounding lines.
58	<code> </div></code>	JSX element opening tag.
58	<code>)}}</code>	Logic or UI structure — read with surrounding lines.
58	<code> <RiderAssignDropdown</code>	JSX element opening tag.
58	<code> currentRiderId={order.rider_id}</code>	Logic or UI structure — read with surrounding lines.
58	<code> onAssign={handleAssignRider}</code>	Logic or UI structure — read with surrounding lines.
59	<code> /></code>	Logic or UI structure — read with surrounding lines.
59	<code></div></code>	JSX element opening tag.
59	<code></Modal></code>	JSX element opening tag.
59		Blank line.
59	<code>/* Cancel Order Modal */</code>	Logic or UI structure — read with surrounding lines.
59	<code><Modal</code>	JSX element opening tag.
59	<code> isOpen={showCancelModal}</code>	Logic or UI structure — read with surrounding lines.
59	<code> onClose={() => { setShowCancelModal(false);</code>	Logic or UI structure — read with surrounding lines.
7	<code>setCancelReason('') }}</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
59	title="Cancel Order"	Logic or UI structure — read with surrounding lines.
59	>	Logic or UI structure — read with surrounding lines.
60	<div className="space-y-4">	CSS/Tailwind styling.
60	<p className="text-sm text-secondary">	CSS/Tailwind styling.
60	Are you sure you want to cancel order{'	Logic or UI structure — read with surrounding lines.
60	'}	Logic or UI structure — read with surrounding lines.
60		CSS/Tailwind styling.
60	{order.id.slice(-8).toUpperCase()}	Logic or UI structure — read with surrounding lines.
60	? This action is permanent.	JSX element opening tag.
60	</p>	JSX element opening tag.
60	<div>	JSX element opening tag.
60	<label className="block text-sm font-semibold text-on-surface mb-1">Reason for Cancellation</label>	CSS/Tailwind styling.
60	<textarea	JSX element opening tag.
60	className="w-full border border-border rounded-lg p-2.5 text-body-md outline-none focus:ring-1 focus:ri...	CSS/Tailwind styling.
60	placeholder="e.g. Store out of stock, customer requested, no riders available..."	Logic or UI structure — read with surrounding lines.
60	value={cancelReason}	Logic or UI structure — read with surrounding lines.
60	onChange={(e) => setCancelReason(e.target.value)}	User event handler.
60	/>	Logic or UI structure — read with surrounding lines.
60	</div>	JSX element opening tag.
60	<div className="flex gap-md pt-md">	CSS/Tailwind styling.
60	<Button	JSX element opening tag.
60	variant="outline"	Logic or UI structure — read with surrounding lines.
60	onClick={() => { setShowCancelModal(false); setCancelReason('') }}	User event handler.
60	className="flex-1 font-semibold"	CSS/Tailwind styling.
60	>	Logic or UI structure — read with surrounding lines.
60	Back	Logic or UI structure — read with surrounding lines.
60	</Button>	JSX element opening tag.
60	<Button	JSX element opening tag.
60	variant="danger"	Logic or UI structure — read with surrounding lines.
60	onClick={handleCancelOrder}	User event handler.

Line	Code	Explanation
627	isLoading={updatingStatus}	Logic or UI structure — read with surrounding lines.
628	className="flex-1 font-semibold"	CSS/Tailwind styling.
629	>	Logic or UI structure — read with surrounding lines.
630	Cancel Order	Logic or UI structure — read with surrounding lines.
631	</Button>	JSX element opening tag.
632	</div>	JSX element opening tag.
633	</div>	JSX element opening tag.
634	</Modal>	JSX element opening tag.
635	</div>	JSX element opening tag.
636	)	Logic or UI structure — read with surrounding lines.
637	}	Logic or UI structure — read with surrounding lines.
638		Blank line.
639	// — Sub-components	Comment: — Sub-components
640		
641		Blank line.
642	// Fetches and displays the order line items from supabase (orders don't store items inline – fetched separately)	Comment: Fetches and displays the order line items from supabase (orders don't store items inline — fetched separately)
643	function OrderItemsSection({ orderId }) {	Logic or UI structure — read with surrounding lines.
644	const [items, setItems] = useState([])	React state variable.
645	const [loading, setLoading] = useState(true)	React state variable.
646	const [error, setError] = useState(null)	React state variable.
647		Blank line.
648	useEffect(() => {	Side effect (fetch, subscribe, redirect).
649	async function loadItems() {	Async function for network calls.
650	try {	Try block start.
651	const { data, error: fetchError } = await supabase	Wait for async operation.
652	.from('order_items')	Logic or UI structure — read with surrounding lines.
653	.select('*', products:product_id(name, unit, image_url)')	Logic or UI structure — read with surrounding lines.
654	.eq('order_id', orderId)	Logic or UI structure — read with surrounding lines.
655		Blank line.

Line	Code	Explanation
65	if (fetchError) throw fetchError	Logic or UI structure — read with surrounding lines.
65	setItems(data [])	Logic or UI structure — read with surrounding lines.
65	} catch (err) {	Catch errors.
65	// order_items table may not exist in schema	Comment: order_items table may not exist in schema yet — show graceful fallback
8	yet — show graceful fallback	
65	setError('Order items not available.')	Logic or UI structure — read with surrounding lines.
66	} finally {	Finally block (cleanup).
66	setLoading(false)	Logic or UI structure — read with surrounding lines.
66	}	Logic or UI structure — read with surrounding lines.
66	}	Logic or UI structure — read with surrounding lines.
66	loadItems()	Logic or UI structure — read with surrounding lines.
66	}, [orderId])	Logic or UI structure — read with surrounding lines.
66		Blank line.
66	if (loading) {	Logic or UI structure — read with surrounding lines.
66	return (	Return JSX UI.
66	<div className="p-5 space-y-3">	CSS/Tailwind styling.
67	{Array.from({ length: 3 }).map((_, i) => (	Logic or UI structure — read with surrounding lines.
67	<Skeleton key={i} className="h-10 rounded-	CSS/Tailwind styling.
1	lg" />	
67	)))}	Logic or UI structure — read with surrounding lines.
67	</div>	JSX element opening tag.
67	)	Logic or UI structure — read with surrounding lines.
67	}	Logic or UI structure — read with surrounding lines.
67		Blank line.
67	if (error items.length === 0) {	Logic or UI structure — read with surrounding lines.
67	return (	Return JSX UI.
67	<div className="p-5 text-center text-secondary	CSS/Tailwind styling.
9	text-sm">	
68	{error 'No item details stored for this	Logic or UI structure — read with surrounding lines.
0	order.'}	
68	</div>	JSX element opening tag.
68	)	Logic or UI structure — read with surrounding lines.
68	}	Logic or UI structure — read with surrounding lines.
3		

Line	Code	Explanation
68		Blank line.
68	return (	Return JSX UI.
68	<div className="divide-y divide-border">	CSS/Tailwind styling.
68	{items.map((item) => (	Logic or UI structure — read with surrounding lines.
68	<div key={item.id} className="flex items-center gap-3 px-5 py-3">	CSS/Tailwind styling.
68	{item.products?.image_url ? (	Logic or UI structure — read with surrounding lines.
69	<img	JSX element opening tag.
69	src={item.products.image_url}	Logic or UI structure — read with surrounding lines.
69	alt={item.products?.name}	Logic or UI structure — read with surrounding lines.
69	className="w-10 h-10 rounded-lg object-cover border border-border shrink-0"	CSS/Tailwind styling.
69	/>	Logic or UI structure — read with surrounding lines.
69	) : (	Logic or UI structure — read with surrounding lines.
69	<div className="w-10 h-10 rounded-lg bg-surface border border-border flex items-center justify-center shr...	CSS/Tailwind styling.
69	<Package className="w-4 h-4 text-secondary" />	CSS/Tailwind styling.
69	</div>	JSX element opening tag.
69	)}	Logic or UI structure — read with surrounding lines.
70	<div className="flex-1 min-w-0">	CSS/Tailwind styling.
70	<p className="text-sm font-medium text-on-surface truncate">	CSS/Tailwind styling.
70	{item.products?.name 'Product'}	Logic or UI structure — read with surrounding lines.
70	</p>	JSX element opening tag.
70	<p className="text-xs text-secondary">	CSS/Tailwind styling.
70	{item.products?.unit} × {item.quantity}	Logic or UI structure — read with surrounding lines.
70	</p>	JSX element opening tag.
70	</div>	JSX element opening tag.
70	<p className="text-sm font-semibold text-on-surface shrink-0">	CSS/Tailwind styling.
70	{formatCurrency(item.price * item.quantity)}	Logic or UI structure — read with surrounding lines.
71	</p>	JSX element opening tag.
71	</div>	JSX element opening tag.
71	)})	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
71 3	<code></div></code>	JSX element opening tag.
71 4	<code>)</code>	Logic or UI structure — read with surrounding lines.
71 5	<code>}</code>	Logic or UI structure — read with surrounding lines.
71 6		Blank line.
71 7	<code>// Renders a label/value row in the pricing or meta sections</code>	Comment: Renders a label/value row in the pricing or meta sections
71 8	<code>function PricingRow({ label, value, labelClass = '', valueClass = '' }) {</code>	Logic or UI structure — read with surrounding lines.
71 9	<code> return (</code>	Return JSX UI.
72 0	<code> <div className="flex items-center justify-between gap-2"></code>	CSS/Tailwind styling.
72 1	<code> <p className={`\${labelClass}`}>{label}</p></code>	CSS/Tailwind styling.
72 2	<code> <p className={`\${text-sm font-semibold text-on-surface \${valueClass}`}>{value}</p></code>	CSS/Tailwind styling.
72 3	<code> </div></code>	JSX element opening tag.
72 4	<code>)</code>	Logic or UI structure — read with surrounding lines.
72 5	<code>}</code>	Logic or UI structure — read with surrounding lines.
72 6		Blank line.
72 7	<code>// Renders a single meta key/value row in Order Info</code>	Comment: Renders a single meta key/value row in Order Info
72 8	<code>function MetaRow({ label, value, mono = false }) {</code>	Logic or UI structure — read with surrounding lines.
72 9	<code> return (</code>	Return JSX UI.
73 0	<code> <div></code>	JSX element opening tag.
73 1	<code> <p className="text-xs text-secondary">{label}</p></code>	CSS/Tailwind styling.
73 2	<code> <p className={`\${text-sm text-on-surface mt-0.5 \${mono ? 'font-mono text-xs break-all' : 'font-medium'}}`></code>	CSS/Tailwind styling.
73 3	<code> {value '-'}</p></code>	Logic or UI structure — read with surrounding lines.
73 4	<code> </p></code>	JSX element opening tag.
73 5	<code> </div></code>	JSX element opening tag.
73 6	<code>)</code>	Logic or UI structure — read with surrounding lines.
73 7	<code>}</code>	Logic or UI structure — read with surrounding lines.
73 8		Blank line.
73 9	<code>// Renders a person card (customer, store, rider) with optional link</code>	Comment: Renders a person card (customer, store, rider) with optional link
74 0	<code>function PersonCard({ icon: Icon, label, name, phone, linkTo }) {</code>	Logic or UI structure — read with surrounding lines.
74 1	<code> const Wrapper = linkTo ? Link : 'div'</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
74 2	const wrapperProps = linkTo ? { to: linkTo } : {}	Logic or UI structure — read with surrounding lines.
74 3		Blank line.
74 4	return (	Return JSX UI.
74 5	<Wrapper	JSX element opening tag.
74 6	{...wrapperProps}	Logic or UI structure — read with surrounding lines.
74 7	className={`bg-white rounded-xl border border- border p-4 shadow-sm flex items-start gap-3 \${	CSS/Tailwind styling.
74 8	linkTo ? 'hover:border-brand/30 hover:shadow- md transition-all cursor-pointer group' : ''	Logic or UI structure — read with surrounding lines.
74 9	`}`	Logic or UI structure — read with surrounding lines.
75 0	>	Logic or UI structure — read with surrounding lines.
75 1	<div className="w-9 h-9 rounded-full bg- brand/10 flex items-center justify-center shrink-0">	CSS/Tailwind styling.
75 2	<Icon className="w-4 h-4 text-brand" />	CSS/Tailwind styling.
75 3	</div>	JSX element opening tag.
75 4	<div className="flex-1 min-w-0">	CSS/Tailwind styling.
75 5	<p className="text-xs font-semibold uppercase tracking-wide text-secondary">{label}</p>	CSS/Tailwind styling.
75 6	<p className="text-sm font-semibold text-on- surface mt-0.5 truncate">{name}</p>	CSS/Tailwind styling.
75 7	<div className="flex items-center gap-1 mt- 0.5">	CSS/Tailwind styling.
75 8	<Phone className="w-3 h-3 text-secondary"	CSS/Tailwind styling.
75 9	/>	
75 9	<p className="text-xs text- secondary">{formatPhone(phone)}</p>	CSS/Tailwind styling.
76 0	</div>	JSX element opening tag.
76 1	</div>	JSX element opening tag.
76 2	{linkTo && (	Logic or UI structure — read with surrounding lines.
76 3	<ChevronRight className="w-4 h-4 text- secondary group-hover:text-brand transition-colors shrink-0 mt-0.5" />	CSS/Tailwind styling.
76 4	)}	Logic or UI structure — read with surrounding lines.
76 5	</Wrapper>	JSX element opening tag.
76 6	)	Logic or UI structure — read with surrounding lines.
76 7	}	Logic or UI structure — read with surrounding lines.
76 8		Blank line.

ProductsPage (src/pages/ProductsPage.jsx)

Total lines: 469

Route: /products

Purpose: Cross-store product monitoring and moderation.

Lin Code	Explanation
1 import React, { useState, useEffect, useCallback, useRef } from 'react'	Import React hooks.
2 import {	Import dependency.
3 Search, Filter, Flag, EyeOff, RefreshCw,	Logic or UI structure — read with surrounding lines.
4 AlertTriangle, Package, ChevronRight, Store,	Logic or UI structure — read with surrounding lines.
5 Tag,	
6 } from 'lucide-react'	Logic or UI structure — read with surrounding lines.
7 import { getProducts } from	Import API/database service.
8 '../services/productService'	
9 import { flagProduct, removeProduct } from	Import API/database service.
10 '../services/productService'	
11 import { supabase } from	Import API/database service.
12 '../services/supabase'	
13 import { useAuth } from	Import auth context.
14 '../context/AuthContext'	
15 import { formatCurrency, truncateText } from	Import helper utilities.
16 '../utils/formatters'	
17 import ConfirmDialog from	Import UI component.
18 '../components/ui/ConfirmDialog'	
19 import Skeleton from	Import UI component.
20 '../components/ui/Skeleton'	
21 import EmptyState from	Import UI component.
22 '../components/ui/EmptyState'	
23 import Pagination from	Import UI component.
24 '../components/ui/Pagination'	
25	Blank line.
26 /**	Doc comment.
27 * ProductsPage — admin monitoring view for	Doc comment.
28 all products across all stores.	
29 * Supports search, store/category/violation	Doc comment.
30 filters, and flag/deactivate moderation	
31 actions.	
32 */	Doc comment.
33	Blank line.
34 const PAGE_SIZE = 20	Logic or UI structure — read with surrounding lines.
35	Blank line.
36 export default function ProductsPage() {	Default export (main module).
37 const { user } = useAuth()	Auth state and login/logout.
38	Blank line.
39 // Filter state	Comment: Filter state
40 const [search, setSearch] = useState('')	React state variable.
41 const [storeFilter, setStoreFilter] =	React state variable.
42 useState('')	
43 const [categoryFilter, setCategoryFilter] =	React state variable.
44 useState('')	
45 const [showOnlyFlagged, setShowOnlyFlagged]	React state variable.
46 = useState(false)	
47 const [showOnlyMRPViolations,	React state variable.
48 setShowOnlyMRPViolations] = useState(false)	
49 const [page, setPage] = useState(1)	React state variable.
50	Blank line.
51 // Data state	Comment: Data state
52 const [products, setProducts] = useState([])	React state variable.
53 const [total, setTotal] = useState(0)	React state variable.
54 const [loading, setLoading] = useState(true)	React state variable.

Lin Code	Explanation
38 const [error, setError] = useState(null)	React state variable.
39	Blank line.
40 // Stores and categories for filter dropdowns	Comment: Stores and categories for filter dropdowns
41 const [stores, setStores] = useState([])	React state variable.
42 const [categories, setCategories] = useState([])	React state variable.
43	Blank line.
44 // Moderation state	Comment: Moderation state
45 const [confirmAction, setConfirmAction] = useState(null) // { type: 'flag' 'deactivate', product }	React state variable.
46 const [actionLoading, setActionLoading] = useState(false)	React state variable.
47 const [actionError, setActionError] = useState(null)	React state variable.
48	Blank line.
49 const searchDebounce = useRef(null)	Ref (value without re-render).
50	Blank line.
51 // Loads store and category dropdown options from Supabase	Comment: Loads store and category dropdown options from Supabase
52 useEffect(() => {	Side effect (fetch, subscribe, redirect).
53 async function loadFilters() {	Async function for network calls.
54 const [{ data: storeData }, { data: catData }] = await Promise.all([	Wait for async operation.
55 supabase.from('stores').select('id, store_name').eq('status', 'active').order('store_name'),	Logic or UI structure — read with surrounding lines.
56 supabase.from('categories').select('id, name').eq('is_active', true).order('sort_order'),	Logic or UI structure — read with surrounding lines.
57])	Logic or UI structure — read with surrounding lines.
58 setStores(storeData [])	Logic or UI structure — read with surrounding lines.
59 setCategories(catData [])	Logic or UI structure — read with surrounding lines.
60 }	Logic or UI structure — read with surrounding lines.
61 loadFilters()	Logic or UI structure — read with surrounding lines.
62 }, [])	Logic or UI structure — read with surrounding lines.
63	Blank line.
64 // Fetches paginated products from Supabase with current filters applied	Comment: Fetches paginated products from Supabase with current filters applied
65 const fetchProducts = useCallback(async () => {	Memoized callback function.
66 setLoading(true)	Logic or UI structure — read with surrounding lines.
67 setError(null)	Logic or UI structure — read with surrounding lines.
68 try {	Try block start.
69 const result = await getProducts({	Wait for async operation.
70 search,	Logic or UI structure — read with surrounding lines.
71 storeId: storeFilter undefined,	Logic or UI structure — read with surrounding lines.
72 categoryId: categoryFilter undefined,	Logic or UI structure — read with surrounding lines.
73 isFlagged: showOnlyFlagged ? true : undefined,	Logic or UI structure — read with surrounding lines.
74 page,	Logic or UI structure — read with surrounding lines.
75 pageSize: PAGE_SIZE,	Logic or UI structure — read with surrounding lines.
76 })	Logic or UI structure — read with surrounding lines.
77	Blank line.
78 // Apply client-side MRP violation filter (Supabase gt with column comparison is limited in anon key)	Comment: Apply client-side MRP violation filter (Supabase gt with column comparison is limited in anon key)
79 let filtered = result.products []	Logic or UI structure — read with surrounding lines.

Lin Code	Explanation
80 if (showOnlyMRPViolations) {	Logic or UI structure — read with surrounding lines.
81 filtered = filtered.filter((p) => Number(p.store_price) > Number(p.platform_mrp))	Logic or UI structure — read with surrounding lines.
82 }	Logic or UI structure — read with surrounding lines.
83	Blank line.
84 setProducts(filtered)	Logic or UI structure — read with surrounding lines.
85 setTotal(showOnlyMRPViolations ? filtered.length : (result.total 0))	Logic or UI structure — read with surrounding lines.
86 } catch (err) {	Catch errors.
87 setError(err.message 'Failed to load products.')	Logic or UI structure — read with surrounding lines.
88 } finally {	Finally block (cleanup).
89 setLoading(false)	Logic or UI structure — read with surrounding lines.
90 }	Logic or UI structure — read with surrounding lines.
91 }, [search, storeFilter, categoryFilter, showOnlyFlagged, showOnlyMRPViolations, page])	Logic or UI structure — read with surrounding lines.
92	Blank line.
93 useEffect(() => { fetchProducts() }, [fetchProducts])	Side effect (fetch, subscribe, redirect).
94	Blank line.
95 // Reset page to 1 when filters change	Comment: Reset page to 1 when filters change
96 useEffect(() => { setPage(1) }, [search, storeFilter, categoryFilter, showOnlyFlagged, showOnlyMRPViolations])	Side effect (fetch, subscribe, redirect).
97	Blank line.
98 // Debounced search input handler	Comment: Debounced search input handler
99 function handleSearchChange(e) {	Logic or UI structure — read with surrounding lines.
10 if (searchDebounce.current)	Logic or UI structure — read with surrounding lines.
0 clearTimeout(searchDebounce.current)	
10 searchDebounce.current = setTimeout(() =>	Logic or UI structure — read with surrounding lines.
1 setSearch(e.target.value), 350)	
10 }	Logic or UI structure — read with surrounding lines.
2	
10	Blank line.
3	
10 // Executes the pending flag or deactivate	Comment: Executes the pending flag or deactivate
4 action against productService	action against productService
10 async function handleConfirmAction() {	Async function for network calls.
5	
10 if (!confirmAction) return	Logic or UI structure — read with surrounding lines.
6	
10 setActionLoading(true)	Logic or UI structure — read with surrounding lines.
7	
10 setActionError(null)	Logic or UI structure — read with surrounding lines.
8	
10 try {	Try block start.
9	
11 if (confirmAction.type === 'flag') {	Logic or UI structure — read with surrounding lines.
0	
11 await	Wait for async operation.
1 flagProduct(confirmAction.product.id, 'Flagged by admin', user.uid)	
11 } else {	Logic or UI structure — read with surrounding lines.
2	
11 await	Wait for async operation.
3 removeProduct(confirmAction.product.id, user.uid)	
11 }	Logic or UI structure — read with surrounding lines.
4	

Lin e	Code	Explanation
11 5	setConfirmAction(null)	Logic or UI structure — read with surrounding lines.
11 6	fetchProducts()	Logic or UI structure — read with surrounding lines.
11 7	} catch (err) {	Catch errors.
11 8	setActionError(err.message 'Action failed. Please retry.')	Logic or UI structure — read with surrounding lines.
11 9	} finally {	Finally block (cleanup).
12 0	setActionLoading(false)	Logic or UI structure — read with surrounding lines.
12 1	}	Logic or UI structure — read with surrounding lines.
12 2	}	Logic or UI structure — read with surrounding lines.
12 3		Blank line.
12 4	const totalPages = Math.ceil(total / PAGE_SIZE)	Logic or UI structure — read with surrounding lines.
12 5		Blank line.
12 6	// — RENDER	Comment: — RENDER
12 7		Blank line.
12 8	return (	Return JSX UI.
12 9	<div className="space-y-6 animate-fade-in">	CSS/Tailwind styling.
13 0		Blank line.
13 1	{/* Page header */}	Logic or UI structure — read with surrounding lines.
13 2	<div className="flex flex-col sm:flex-row sm:items-center sm:justify-between gap-3">	CSS/Tailwind styling.
13 3	<div>	JSX element opening tag.
13 4	<h1 className="text-2xl font-bold text-on-surface">Products</h1>	CSS/Tailwind styling.
13 5	<p className="text-sm text-secondary mt-0.5">	CSS/Tailwind styling.
13 6	Monitoring view — flag violations and deactivate listings	Logic or UI structure — read with surrounding lines.
13 7	</p>	JSX element opening tag.
13 8	</div>	JSX element opening tag.
13 9	<button	JSX element opening tag.
14 0	onClick={fetchProducts}	User event handler.
14 1	className="self-start sm:self-auto flex items-center gap-2 px-3 py-2 rounded-lg border border-border bg-whi...	CSS/Tailwind styling.
14 2	>	Logic or UI structure — read with surrounding lines.
14 3	<RefreshCw className="w-4 h-4" /> Refresh	CSS/Tailwind styling.

Lin Code	Explanation
14 4	<code></button></code> JSX element opening tag.
14 5	<code></div></code> JSX element opening tag.
14 6	 Blank line.
14 7	<code>{/* Filters */}</code> Logic or UI structure — read with surrounding lines.
14 8	<code><div className="bg-white rounded-xl border border-border p-4 space-y-3"></code> CSS/Tailwind styling.
14 9	<code><div className="flex flex-col sm:flex-row gap-3"></code> CSS/Tailwind styling.
15 0	<code>{/* Search */}</code> Logic or UI structure — read with surrounding lines.
15 1	<code><div className="relative flex-1"></code> CSS/Tailwind styling.
15 2	<code><Search className="absolute left-3 top-1/2 -translate-y-1/2 w-4 h-4 text-secondary pointer-events-none" /></code> CSS/Tailwind styling.
15 3	<code><input</code> JSX element opening tag.
15 4	<code>type="text"</code> Logic or UI structure — read with surrounding lines.
15 5	<code>defaultValue={search}</code> Logic or UI structure — read with surrounding lines.
15 6	<code>onChange={handleSearchChange}</code> User event handler.
15 7	<code>placeholder="Search by product name..."</code> Logic or UI structure — read with surrounding lines.
15 8	<code>className="w-full pl-9 pr-4 py-2 border border-border rounded-lg text-sm focus:outline-none focus:ring-..."</code> CSS/Tailwind styling.
15 9	<code>/></code> Logic or UI structure — read with surrounding lines.
16 0	<code></div></code> JSX element opening tag.
16 1	 Blank line.
16 2	<code>{/* Store dropdown */}</code> Logic or UI structure — read with surrounding lines.
16 3	<code><select</code> JSX element opening tag.
16 4	<code>value={storeFilter}</code> Logic or UI structure — read with surrounding lines.
16 5	<code>onChange={(e) => setStoreFilter(e.target.value)}</code> User event handler.
16 6	<code>className="border border-border rounded-lg px-3 py-2 text-sm bg-surface focus:outline-none focus:ring-2 f..."</code> CSS/Tailwind styling.
16 7	<code>></code> Logic or UI structure — read with surrounding lines.
16 8	<code><option value="">All Stores</option></code> JSX element opening tag.
16 9	<code>{stores.map((s) => (</code> Logic or UI structure — read with surrounding lines.
17 0	<code><option key={s.id} value={s.id}>{s.store_name}</option></code> JSX element opening tag.
17 1	<code>)))</code> Logic or UI structure — read with surrounding lines.
17 2	<code></select></code> JSX element opening tag.

Lin Code	Explanation
17 3	Blank line.
17 4	<code>{/* Category dropdown */}</code> Logic or UI structure — read with surrounding lines.
17 5	<code><select</code> JSX element opening tag.
17 6	<code>value={categoryFilter}</code> Logic or UI structure — read with surrounding lines.
17 7	<code>onChange={(e) => setCategoryFilter(e.target.value)}</code> User event handler.
17 8	<code>className="border border-border rounded-lg px-3 py-2 text-sm bg-surface focus:outline-none focus:ring-2 f...</code> CSS/Tailwind styling.
17 9	<code>></code> Logic or UI structure — read with surrounding lines.
18 0	<code><option value="">All Categories</option></code> JSX element opening tag.
18 1	<code>{categories.map((c) => (</code> Logic or UI structure — read with surrounding lines.
18 2	<code><option key={c.id} value={c.id}>{c.name}</option></code> JSX element opening tag.
18 3	<code>)))</code> Logic or UI structure — read with surrounding lines.
18 4	<code></select></code> JSX element opening tag.
18 5	<code></div></code> JSX element opening tag.
18 6	Blank line.
18 7	<code>{/* Toggle filters */}</code> Logic or UI structure — read with surrounding lines.
18 8	<code><div className="flex flex-wrap gap-3"></code> CSS/Tailwind styling.
18 9	<code><FilterToggle</code> JSX element opening tag.
19 0	<code>active={showOnlyMRPViolations}</code> Logic or UI structure — read with surrounding lines.
19 1	<code>onToggle={() => setShowOnlyMRPViolations((v) => !v)}</code> Logic or UI structure — read with surrounding lines.
19 2	<code>icon={<AlertTriangle className="w-3.5 h-3.5" />}</code> CSS/Tailwind styling.
19 3	<code>label="MRP Violations Only"</code> Logic or UI structure — read with surrounding lines.
19 4	<code>activeClass="bg-red-600 text-white border-red-600"</code> Logic or UI structure — read with surrounding lines.
19 5	<code>inactiveClass="bg-white text-red-600 border-red-300 hover:bg-red-50"</code> Logic or UI structure — read with surrounding lines.
19 6	<code>/></code> Logic or UI structure — read with surrounding lines.
19 7	<code><FilterToggle</code> JSX element opening tag.
19 8	<code>active={showOnlyFlagged}</code> Logic or UI structure — read with surrounding lines.
19 9	<code>onToggle={() => setShowOnlyFlagged((v) => !v)}</code> Logic or UI structure — read with surrounding lines.
20 0	<code>icon={<Flag className="w-3.5 h-3.5" />}</code> CSS/Tailwind styling.
20 1	<code>label="Flagged Only"</code> Logic or UI structure — read with surrounding lines.
20 2	<code>activeClass="bg-amber-500 text-white border-amber-500"</code> Logic or UI structure — read with surrounding lines.

Lin Code	Explanation
20 3 20 4	inactiveClass="bg-white text-amber-600 border-amber-300 hover:bg-amber-50" /> Logic or UI structure — read with surrounding lines.
20 5	</div> JSX element opening tag.
20 6	</div> JSX element opening tag.
20 7	Blank line.
20 8	{/* Products table */} Logic or UI structure — read with surrounding lines.
20 9	{loading ? (
21 0	<div className="space-y-3"> CSS/Tailwind styling.
21 1	{Array.from({ length: 8 }).map((_, i) => (
21 2	<Skeleton key={i} className="h-16 rounded-xl" /> CSS/Tailwind styling.
21 3	))) Logic or UI structure — read with surrounding lines.
21 4	</div> JSX element opening tag.
21 5	) : error ? (
21 6	<div className="bg-red-50 border border-red-200 rounded-xl p-6 text-center"> CSS/Tailwind styling.
21 7	<p className="text-red-600 font-medium">{error}</p> CSS/Tailwind styling.
21 8	<button
21 9	onClick={fetchProducts} User event handler.
22 0	className="mt-3 text-sm font-semibold text-brand underline" CSS/Tailwind styling.
22 1	> Logic or UI structure — read with surrounding lines.
22 2	Retry Logic or UI structure — read with surrounding lines.
22 3	</button> JSX element opening tag.
22 4	</div> JSX element opening tag.
22 5	) : products.length === 0 ? (
22 6	<EmptyState
22 7	icon={Package} Logic or UI structure — read with surrounding lines.
22 8	title="No products found" Logic or UI structure — read with surrounding lines.
22 9	description="No products match the current filters. Try adjusting the search or clearing filters." Logic or UI structure — read with surrounding lines.
23 0	/> Logic or UI structure — read with surrounding lines.
23 1	) : (
23 2	<> JSX element opening tag.

Lin Code		Explanation
23 3	<code><div className="bg-white rounded-xl border border-border overflow-hidden shadow-sm"></code>	CSS/Tailwind styling.
23 4	<code>{/* Desktop header */}</code>	Logic or UI structure — read with surrounding lines.
23 5	<code><div className="hidden lg:grid grid-cols-[2fr_1.2fr_1fr_0.8fr_0.8fr_0.6fr_0.6fr_100px] gap-3 px-5 py-3 bg..."></code>	CSS/Tailwind styling.
23 6	<code>Product</code>	JSX element opening tag.
23 7	<code>Store</code>	JSX element opening tag.
23 8	<code>Category</code>	JSX element opening tag.
23 9	<code>MRP</code>	JSX element opening tag.
24 0	<code>Store Price</code>	JSX element opening tag.
24 1	<code>Stock</code>	JSX element opening tag.
24 2	<code>Status</code>	JSX element opening tag.
24 3	<code>Actions</code>	JSX element opening tag.
24 4	<code></div></code>	JSX element opening tag.
24 5		Blank line.
24 6	<code><div className="divide-y divide-border"></code>	CSS/Tailwind styling.
24 7	<code>{products.map((product) => (</code>	Logic or UI structure — read with surrounding lines.
24 8	<code><ProductRow</code>	JSX element opening tag.
24 9	<code>key={product.id}</code>	Logic or UI structure — read with surrounding lines.
25 0	<code>product={product}</code>	Logic or UI structure — read with surrounding lines.
25 1	<code>onFlag={() =></code>	Logic or UI structure — read with surrounding lines.
25 2	<code>setConfirmAction({ type: 'flag', product })}</code>	Logic or UI structure — read with surrounding lines.
25 3	<code>onDeactivate={() =></code>	Logic or UI structure — read with surrounding lines.
25 4	<code>setConfirmAction({ type: 'deactivate', product })}</code>	Logic or UI structure — read with surrounding lines.
25 5	<code>/></code>	Logic or UI structure — read with surrounding lines.
25 6	<code>))}</code>	Logic or UI structure — read with surrounding lines.
25 7	<code></div></code>	JSX element opening tag.
25 8	<code></div></code>	JSX element opening tag.
25 9		Blank line.
26 0	<code>{totalPages > 1 && !showOnlyMRPViolations && (</code>	Logic or UI structure — read with surrounding lines.
26 1	<code><Pagination</code>	JSX element opening tag.
26 2	<code>currentPage={page}</code>	Logic or UI structure — read with surrounding lines.

Lin Code	Explanation
26 1	totalPages={totalPages}
26 2	onPageChange={setPage}
26 3	/>
26 4	)}
26 5	</>
26 6	)}
26 7	Blank line.
26 8	{/* Confirm dialog for flag/deactivate */}
26 9	<ConfirmDialog
27 0	isOpen={!!confirmAction}
27 1	onClose={() => { setConfirmAction(null); setActionError(null) }}
27 2	onConfirm={handleConfirmAction}
27 3	loading={actionLoading}
27 4	title={
27 5	confirmAction?.type === 'flag'
27 6	? `Flag "\${truncateText(confirmAction.product.name, 30)}"?"`
27 7	: `Deactivate "\${truncateText(confirmAction?.product?.name, 30)}"?"`
27 8	}
27 9	description={
28 0	confirmAction?.type === 'flag'
28 1	? 'This product will be marked as flagged and reviewed. The store owner will be notified.'
28 2	: 'This product will be deactivated and hidden from customers immediately.'
28 3	}
28 4	confirmLabel={confirmAction?.type === 'flag' ? 'Flag Product' : 'Deactivate'}
28 5	variant={confirmAction?.type === 'flag' ? 'warning' : 'danger'}
28 6	error={actionError}
28 7	/>
28 8	</div>

Lin Code	Explanation
28)	Logic or UI structure — read with surrounding lines.
29 }	Logic or UI structure — read with surrounding lines.
29	Blank line.
29 // — Product Row	Comment: — Product Row
29	Blank line.
29 // Renders a single product row — red-highlighted when store_price exceeds platform_mrp	Comment: Renders a single product row — red-highlighted when store_price exceeds platform_mrp
29 function ProductRow({ product, onFlag, onDeactivate }) {	Logic or UI structure — read with surrounding lines.
29 const isMRPViolation =	Logic or UI structure — read with surrounding lines.
6 Number(product.store_price) >	
29 Number(product.platform_mrp)	
29 const isFlagged = product.is_flagged	Logic or UI structure — read with surrounding lines.
29 const isInactive = !product.is_active	Logic or UI structure — read with surrounding lines.
29 const discountPct = product.platform_mrp > 0	Logic or UI structure — read with surrounding lines.
30 ? Math.round((product.platform_mrp -	Logic or UI structure — read with surrounding lines.
0 product.store_price) / product.platform_mrp * 100)	
30 : 0	Logic or UI structure — read with surrounding lines.
30	Blank line.
30 return (	Return JSX UI.
30 <div	JSX element opening tag.
30 className={`group transition-colors \${	CSS/Tailwind styling.
30 isMRPViolation	Logic or UI structure — read with surrounding lines.
30 ? 'bg-red-50 border-1-4 border-1-	Logic or UI structure — read with surrounding lines.
7 red-500'	
30 : isFlagged	Logic or UI structure — read with surrounding lines.
30 ? 'bg-amber-50 border-1-4 border-1-	Logic or UI structure — read with surrounding lines.
9 amber-400'	
31 : 'hover:bg-surface border-1-4	Logic or UI structure — read with surrounding lines.
0 border-1-transparent'	
31 }`}	Logic or UI structure — read with surrounding lines.
31 >	Logic or UI structure — read with surrounding lines.
31 {/* Desktop row */}	Logic or UI structure — read with surrounding lines.
31 <div className="hidden lg:grid grid-	CSS/Tailwind styling.
4 cols-	
[2fr_1.2fr_1fr_0.8fr_0.8fr_0.6fr_0.6fr_100px]	
gap-3 px-5 py-3.5 items-...	
31 {/* Product name + image */}	Logic or UI structure — read with surrounding lines.
5	

Lin Code	Explanation
31 6	<code><div className="flex items-center gap-3 min-w-0"></code> CSS/Tailwind styling.
31 7	<code>{product.image_url ? (</code> Logic or UI structure — read with surrounding lines.
31 8	<code><img</code> JSX element opening tag.
31 9	<code>src={product.image_url}</code> Logic or UI structure — read with surrounding lines.
32 0	<code>alt={product.name}</code> Logic or UI structure — read with surrounding lines.
32 1	<code>className="w-9 h-9 rounded-lg object-cover border border-border shrink-0"</code> CSS/Tailwind styling.
32 2	<code>/></code> Logic or UI structure — read with surrounding lines.
32 3	<code>) : (</code> Logic or UI structure — read with surrounding lines.
32 4	<code><div className="w-9 h-9 rounded-lg bg-surface border border-border flex items-center justify-center shrink-0"></code> CSS/Tailwind styling.
32 5	<code><Package className="w-4 h-4 text-secondary" /></code> CSS/Tailwind styling.
32 6	<code></div></code> JSX element opening tag.
32 7	<code>)}</code> Logic or UI structure — read with surrounding lines.
32 8	<code><div className="min-w-0"></code> CSS/Tailwind styling.
32 9	<code><p className="text-sm font-semibold text-on-surface truncate">{truncateText(product.name, 30)}</p></code> CSS/Tailwind styling.
33 0	<code><p className="text-xs text-secondary">{product.unit}</p></code> CSS/Tailwind styling.
33 1	<code></div></code> JSX element opening tag.
33 2	<code></div></code> JSX element opening tag.
33 3	Blank line.
33 4	<code>{/* Store */}</code> Logic or UI structure — read with surrounding lines.
33 5	<code><div className="flex items-center gap-1.5 min-w-0"></code> CSS/Tailwind styling.
33 6	<code><Store className="w-3.5 h-3.5 text-secondary shrink-0" /></code> CSS/Tailwind styling.
33 7	<code>{truncateText(product.stores?.store_name, 20)}</code> CSS/Tailwind styling.
33 8	<code></div></code> JSX element opening tag.
33 9	Blank line.
34 0	<code>{/* Category */}</code> Logic or UI structure — read with surrounding lines.
34 1	<code><div className="flex items-center gap-1.5"></code> CSS/Tailwind styling.
34 2	<code><Tag className="w-3.5 h-3.5 text-secondary shrink-0" /></code> CSS/Tailwind styling.
34 3	<code>{product.categories?.name '-'}</code> CSS/Tailwind styling.

Lin Code	Explanation
34 4	</div> JSX element opening tag.
34 5	 Blank line.
34 6	{/* MRP */} Logic or UI structure — read with surrounding lines.
34 7	{formatCurrency(product.platform_mrp)} CSS/Tailwind styling.
34 8	 Blank line.
34 9	{/* Store price – red if violation */} Logic or UI structure — read with surrounding lines.
35 0	<div> JSX element opening tag.
35 1	 CSS/Tailwind styling.
35 2	{formatCurrency(product.store_price)} Logic or UI structure — read with surrounding lines.
35 3	 JSX element opening tag.
35 4	{isMRPViolation && (Logic or UI structure — read with surrounding lines.
35 5	<p className="text-xs text-red-500 font-medium">Exceeds MRP!</p> CSS/Tailwind styling.
35 6	)} Logic or UI structure — read with surrounding lines.
35 7	{discountPct > 0 && !isMRPViolation && (Logic or UI structure — read with surrounding lines.
35 8	<p className="text-xs text-green-600">{discountPct}% off</p> CSS/Tailwind styling.
35 9	)} Logic or UI structure — read with surrounding lines.
36 0	</div> JSX element opening tag.
36 1	 Blank line.
36 2	{/* Stock */} Logic or UI structure — read with surrounding lines.
36 3	 CSS/Tailwind styling.
36 4	{product.stock} Logic or UI structure — read with surrounding lines.
36 5	 JSX element opening tag.
36 6	 Blank line.
36 7	{/* Status */} Logic or UI structure — read with surrounding lines.
36 8	<div className="flex flex-col gap-1"> CSS/Tailwind styling.
36 9	{isInactive ? (Logic or UI structure — read with surrounding lines.
37 0	Inactive... CSS/Tailwind styling.
37 1	) : (Logic or UI structure — read with surrounding lines.

Lin Code	Explanation
37 2	<code>Active...</code> CSS/Tailwind styling.
37 3	<code>)}</code> Logic or UI structure — read with surrounding lines.
37 4	<code>{isFlagged && (</code> Logic or UI structure — read with surrounding lines.
37 5	<code>Flagge...</code> CSS/Tailwind styling.
37 6	<code>)}</code> Logic or UI structure — read with surrounding lines.
37 7	<code></div></code> JSX element opening tag.
37 8	Blank line.
37 9	<code>{/* Actions */}</code> Logic or UI structure — read with surrounding lines.
38 0	<code><div className="flex items-center gap-1.5"></code> CSS/Tailwind styling.
38 1	<code>{!isFlagged && !isInactive && (</code> Logic or UI structure — read with surrounding lines.
38 2	<code><button</code> JSX element opening tag.
38 3	<code>onClick={onFlag}</code> User event handler.
38 4	<code>title="Flag product"</code> Logic or UI structure — read with surrounding lines.
38 5	<code>className="p-1.5 rounded-lg text-amber-500 hover:bg-amber-50 transition-colors"</code> CSS/Tailwind styling.
38 6	<code>></code> Logic or UI structure — read with surrounding lines.
38 7	<code><Flag className="w-4 h-4" /></code> CSS/Tailwind styling.
38 8	<code></button></code> JSX element opening tag.
38 9	<code>)}</code> Logic or UI structure — read with surrounding lines.
39 0	<code>{!isInactive && (</code> Logic or UI structure — read with surrounding lines.
39 1	<code><button</code> JSX element opening tag.
39 2	<code>onClick={onDeactivate}</code> User event handler.
39 3	<code>title="Deactivate product"</code> Logic or UI structure — read with surrounding lines.
39 4	<code>className="p-1.5 rounded-lg text-red-500 hover:bg-red-50 transition-colors"</code> CSS/Tailwind styling.
39 5	<code>></code> Logic or UI structure — read with surrounding lines.
39 6	<code><EyeOff className="w-4 h-4" /></code> CSS/Tailwind styling.
39 7	<code></button></code> JSX element opening tag.
39 8	<code>)}</code> Logic or UI structure — read with surrounding lines.
39 9	<code></div></code> JSX element opening tag.

Lin Code	Explanation
40 0	</div> JSX element opening tag.
40 1	 Blank line.
40 2	{/* Mobile card */} Logic or UI structure — read with surrounding lines.
40 3	<div className="lg:hidden px-4 py-3 space-y-2"> CSS/Tailwind styling.
40 4	<div className="flex items-start gap-3"> CSS/Tailwind styling.
40 5	{product.image_url ? (Logic or UI structure — read with surrounding lines.
40 6	<img src={product.image_url} alt={product.name} className="w-10 h-10 rounded-lg object-cover border borde... CSS/Tailwind styling.
40 7	) : (Logic or UI structure — read with surrounding lines.
40 8	<div className="w-10 h-10 rounded-lg bg-surface border border flex items-center justify-center shr... CSS/Tailwind styling.
40 9	<Package className="w-4 h-4 text-secondary" /> CSS/Tailwind styling.
41 0	</div> JSX element opening tag.
41 1	)} Logic or UI structure — read with surrounding lines.
41 2	<div className="flex-1 min-w-0"> CSS/Tailwind styling.
41 3	<p className="text-sm font-semibold text-on-surface">{truncateText(product.name, 30)}</p> CSS/Tailwind styling.
41 4	<p className="text-xs text-secondary">{product.stores?.store_name} · {product.categories?.name}</p> CSS/Tailwind styling.
41 5	</div> JSX element opening tag.
41 6	<div className="flex items-center gap-1.5 shrink-0"> CSS/Tailwind styling.
41 7	{!isFlagged && !isInactive && (Logic or UI structure — read with surrounding lines.
41 8	<button onClick={onFlag} className="p-1.5 rounded-lg text-amber-500 hover:bg-amber-50 transition-colors"> CSS/Tailwind styling.
41 9	<Flag className="w-4 h-4" /> CSS/Tailwind styling.
42 0	</button> JSX element opening tag.
42 1	)} Logic or UI structure — read with surrounding lines.
42 2	{!isInactive && (Logic or UI structure — read with surrounding lines.
42 3	<button onClick={onDeactivate} className="p-1.5 rounded-lg text-red-500 hover:bg-red-50 transition-colo... CSS/Tailwind styling.
42 4	<EyeOff className="w-4 h-4" /> CSS/Tailwind styling.
42 5	</button> JSX element opening tag.
42 6	)} Logic or UI structure — read with surrounding lines.

Lin Code	Explanation
42 7	</div> JSX element opening tag.
42 8	</div> JSX element opening tag.
42 9	<div className="flex items-center gap-4"> CSS/Tailwind styling.
43 0	<div> JSX element opening tag.
43 1	<p className="text-xs text-secondary">MRP</p> CSS/Tailwind styling.
43 2	<p className="text-sm text-secondary">{formatCurrency(product.platform_mrp)}</p> CSS/Tailwind styling.
43 3	</div> JSX element opening tag.
43 4	<div> JSX element opening tag.
43 5	<p className="text-xs text-secondary">Store Price</p> CSS/Tailwind styling.
43 6	<p className={`text-sm font-semibold \${isMRPViolation ? 'text-red-600' : 'text-on-surface'}`}> CSS/Tailwind styling.
43 7	{formatCurrency(product.store_price)} Logic or UI structure — read with surrounding lines.
43 8	{isMRPViolation && ' ⚠️'} Logic or UI structure — read with surrounding lines.
43 9	</p> JSX element opening tag.
44 0	</div> JSX element opening tag.
44 1	<div> JSX element opening tag.
44 2	<p className="text-xs text-secondary">Stock</p> CSS/Tailwind styling.
44 3	<p className={`text-sm font-medium \${product.stock === 0 ? 'text-red-500' : 'text-on-surface'}`}> CSS/Tailwind styling.
44 4	{product.stock} Logic or UI structure — read with surrounding lines.
44 5	</p> JSX element opening tag.
44 6	</div> JSX element opening tag.
44 7	</div> JSX element opening tag.
44 8	</div> JSX element opening tag.
44 9	</div> JSX element opening tag.
45 0	) Logic or UI structure — read with surrounding lines.
45 1	} Logic or UI structure — read with surrounding lines.
45 2	 Blank line.
45 3	// — Filter Toggle Button Comment: — Filter Toggle Button
45 4	 Blank line.

Lin e	Code	Explanation
45	// Renders a toggle filter pill with	Comment: Renders a toggle filter pill with
5	active/inactive styling	active/inactive styling
45	function FilterToggle({ active, onToggle,	Logic or UI structure — read with surrounding lines.
6	icon, label, activeClass, inactiveClass }) {	
45	return (	Return JSX UI.
7		
45	<button	JSX element opening tag.
8		
45	onClick={onToggle}	User event handler.
9		
46	className={`inline-flex items-center	CSS/Tailwind styling.
0	gap-1.5 px-3 py-1.5 rounded-full text-xs font-	
	semibold border transition-c...	
46	active ? activeClass : inactiveClass	Logic or UI structure — read with surrounding lines.
1		
46	}`}	Logic or UI structure — read with surrounding lines.
2		
46	>	Logic or UI structure — read with surrounding lines.
3		
46	{icon}	Logic or UI structure — read with surrounding lines.
4		
46	{label}	Logic or UI structure — read with surrounding lines.
5		
46	</button>	JSX element opening tag.
6		
46	)	Logic or UI structure — read with surrounding lines.
7		
46	}	Logic or UI structure — read with surrounding lines.
8		
46		Blank line.
9		

CategoriesPage (src/pages/CategoriesPage.jsx)

Total lines: 432

Route: /categories

Purpose: Category CRUD with drag reorder.

Line	Code	Explanation
1	import React, { useState, useEffect, useCallback } from 'react'	Import React hooks.
2	import { FolderHeart, Plus, Trash2, Edit2, GripVertical, RefreshCw, Search, ToggleLeft } from 'lucide-react'	Import icons.
3	import { supabase } from '../services/supabase'	Import API/database service.
4	import Pagelayout from '../components/layout/PageLayout'	Import UI component.
5	import Button from '../components/ui/Button'	Import UI component.
6	import Card from '../components/ui/Card'	Import UI component.
7	import Badge from '../components/ui/Badge'	Import UI component.
8	import Input from '../components/ui/Input'	Import UI component.
9	import Spinner from '../components/ui/Spinner'	Import UI component.
10	import Skeleton from '../components/ui/Skeleton'	Import UI component.
11	import EmptyState from '../components/ui/EmptyState'	Import UI component.
12	import ConfirmDialog from '../components/ui/ConfirmDialog'	Import UI component.
13	import Modal from '../components/ui/Modal'	Import UI component.
14	import Toggle from '../components/ui/Toggle'	Import UI component.
15	import toast from 'react-hot-toast'	Import dependency.
16		Blank line.
17	/**	Doc comment.
18	* ZapKart Categories Page	Doc comment.
19	* CMS panel for managing product shelf categories, emojis, and sorting order.	Doc comment.
20	*/	Doc comment.
21	export default function CategoriesPage() {	Default export (main module).
22	const [categories, setCategories] = useState([])	React state variable.
23	const [loading, setLoading] = useState(true)	React state variable.
24	const [error, setError] = useState(null)	React state variable.
25		Blank line.
26	// Filters	Comment: Filters
27	const [search, setSearch] = useState('')	React state variable.
28	const [draggedIndex, setDraggedIndex] = useState(null)	React state variable.
29		Blank line.
30	// Modal / Form state	Comment: Modal / Form state
31	const [showModal, setShowModal] = useState(false)	React state variable.
32	const [editingCategory, setEditingCategory] = useState(null)	React state variable.
33	const [formLoading, setFormLoading] = useState(false)	React state variable.
34		Blank line.
35	// Form fields	Comment: Form fields
36	const [name, setName] = useState('')	React state variable.
37	const [emoji, setEmoji] = useState('')	React state variable.
38		Blank line.

Line	Code	Explanation
39	// Confirm delete	Comment: Confirm delete
40	const [confirmDelete, setConfirmDelete] = useState(null)	React state variable.
41	const [deleteLoading, setDeleteLoading] = useState(false)	React state variable.
42		Blank line.
43	// Fetch categories	Comment: Fetch categories
44	const fetchCategories = useCallback(async () => {	Memoized callback function.
45	setLoading(true)	Logic or UI structure — read with surrounding lines.
46	setError(null)	Logic or UI structure — read with surrounding lines.
47	try {	Try block start.
48	let query = supabase	Logic or UI structure — read with surrounding lines.
49	.from('categories')	Logic or UI structure — read with surrounding lines.
50	.select('*')	Logic or UI structure — read with surrounding lines.
51	.order('sort_order', { ascending: true })	Logic or UI structure — read with surrounding lines.
52		Blank line.
53	if (search) {	Logic or UI structure — read with surrounding lines.
54	query = query.ilike('name', `%\${search}%`)	Logic or UI structure — read with surrounding lines.
55	}	Logic or UI structure — read with surrounding lines.
56		Blank line.
57	const { data, error: err } = await query	Wait for async operation.
58	if (err) throw err	Logic or UI structure — read with surrounding lines.
59	setCategories(data [])	Logic or UI structure — read with surrounding lines.
60	} catch (err) {	Catch errors.
61	setError(err.message 'Failed to load categories.')	Logic or UI structure — read with surrounding lines.
62	} finally {	Finally block (cleanup).
63	setLoading(false)	Logic or UI structure — read with surrounding lines.
64	}	Logic or UI structure — read with surrounding lines.
65	}, [search])	Logic or UI structure — read with surrounding lines.
66		Blank line.
67	useEffect(() => {	Side effect (fetch, subscribe, redirect).
68	fetchCategories()	Logic or UI structure — read with surrounding lines.
69	}, [fetchCategories])	Logic or UI structure — read with surrounding lines.
70		Blank line.
71	// Open Create	Comment: Open Create
72	const handleOpenCreate = () => {	Logic or UI structure — read with surrounding lines.
73	setEditingCategory(null)	Logic or UI structure — read with surrounding lines.
74	setName('')	Logic or UI structure — read with surrounding lines.
75	setEmoji('🍎')	Logic or UI structure — read with surrounding lines.
76	setShowModal(true)	Logic or UI structure — read with surrounding lines.
77	}	Logic or UI structure — read with surrounding lines.
78		Blank line.
79	// Open Edit	Comment: Open Edit
80	const handleOpenEdit = (cat) => {	Logic or UI structure — read with surrounding lines.
81	setEditingCategory(cat)	Logic or UI structure — read with surrounding lines.
82	setName(cat.name '')	Logic or UI structure — read with surrounding lines.
83	setEmoji(cat.emoji '🍎')	Logic or UI structure — read with surrounding lines.
84	setShowModal(true)	Logic or UI structure — read with surrounding lines.
85	}	Logic or UI structure — read with surrounding lines.
86		Blank line.
87	// Submit Form	Comment: Submit Form
88	const handleFormSubmit = async (e) => {	Async function for network calls.
89	e.preventDefault()	Logic or UI structure — read with surrounding lines.
90		Blank line.
91	if (!name.trim()) {	Logic or UI structure — read with surrounding lines.
92	toast.error('Category name is required')	Toast notification.

Line	Code	Explanation
93	return	Logic or UI structure — read with surrounding lines.
94	}	Logic or UI structure — read with surrounding lines.
95		Blank line.
96	setFormLoading(true)	Logic or UI structure — read with surrounding lines.
97	try {	Try block start.
98	const payload = {	Logic or UI structure — read with surrounding lines.
99	name: name.trim(),	Logic or UI structure — read with surrounding lines.
100	emoji: emoji.trim(),	Logic or UI structure — read with surrounding lines.
101	is_active: editingCategory ?	Logic or UI structure — read with surrounding lines.
102	editingCategory.is_active : true,	
	sort_order: editingCategory ?	Logic or UI structure — read with surrounding lines.
	editingCategory.sort_order :	
	categories.length + 1,	
103	}	Logic or UI structure — read with surrounding lines.
104		Blank line.
105	if (editingCategory) {	Logic or UI structure — read with surrounding lines.
106	const { error: err } = await	Wait for async operation.
	supabase	
107	.from('categories')	Logic or UI structure — read with surrounding lines.
108	.update(payload)	Logic or UI structure — read with surrounding lines.
109	.eq('id', editingCategory.id)	Logic or UI structure — read with surrounding lines.
110		Blank line.
111	if (err) throw err	Logic or UI structure — read with surrounding lines.
112	toast.success('Category details	Toast notification.
	updated')	
113	} else {	Logic or UI structure — read with surrounding lines.
114	const { error: err } = await	Wait for async operation.
	supabase	
115	.from('categories')	Logic or UI structure — read with surrounding lines.
116	.insert(payload)	Logic or UI structure — read with surrounding lines.
117		Blank line.
118	if (err) throw err	Logic or UI structure — read with surrounding lines.
119	toast.success('New category shelf	Toast notification.
	created')	
120	}	Logic or UI structure — read with surrounding lines.
121		Blank line.
122	setShowModal(false)	Logic or UI structure — read with surrounding lines.
123	fetchCategories()	Logic or UI structure — read with surrounding lines.
124	} catch (err) {	Catch errors.
125	toast.error(err.message 'Save	Toast notification.
	failed')	
126	} finally {	Finally block (cleanup).
127	setFormLoading(false)	Logic or UI structure — read with surrounding lines.
128	}	Logic or UI structure — read with surrounding lines.
129	}	Logic or UI structure — read with surrounding lines.
130		Blank line.
131	// Toggle Active Status	Comment: Toggle Active Status
132	const handleToggleActive = async (cat)	Async function for network calls.
	=> {	
133	try {	Try block start.
134	const newStatus = !cat.is_active	Logic or UI structure — read with surrounding lines.
135	const { error: err } = await	Wait for async operation.
	supabase	
136	.from('categories')	Logic or UI structure — read with surrounding lines.
137	.update({ is_active: newStatus })	Logic or UI structure — read with surrounding lines.
138	.eq('id', cat.id)	Logic or UI structure — read with surrounding lines.
139		Blank line.
140	if (err) throw err	Logic or UI structure — read with surrounding lines.
141	toast.success(`Category marked as	Toast notification.
	\${newStatus ? 'active' : 'inactive'})	
142	setCategories(prev =>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
143	prev.map(c => (c.id === cat.id ? {	Logic or UI structure — read with surrounding lines.
144	...c, is_active: newStatus } : c))	Logic or UI structure — read with surrounding lines.
145	)	Logic or UI structure — read with surrounding lines.
146	} catch (err) {	Catch errors.
147	toast.error(err.message 'Toggle	Toast notification.
148	status failed')	Logic or UI structure — read with surrounding lines.
149	}	Logic or UI structure — read with surrounding lines.
150	}	Blank line.
151	// Delete Category	Comment: Delete Category
152	const handleDeleteConfirm = async () =>	Async function for network calls.
153	{	Logic or UI structure — read with surrounding lines.
154	if (!confirmDelete) return	Logic or UI structure — read with surrounding lines.
155	setDeleteLoading(true)	Try block start.
156	try {	Wait for async operation.
157	const { error: err } = await	Logic or UI structure — read with surrounding lines.
158	supabase	Logic or UI structure — read with surrounding lines.
159	.from('categories')	Logic or UI structure — read with surrounding lines.
160	.delete()	Blank line.
161	.eq('id', confirmDelete.id)	Logic or UI structure — read with surrounding lines.
162		Logic or UI structure — read with surrounding lines.
163	if (err) throw err	Toast notification.
164	toast.success('Category deleted	Logic or UI structure — read with surrounding lines.
165	permanently')	Logic or UI structure — read with surrounding lines.
166	setConfirmDelete(null)	Catch errors.
167	fetchCategories()	Toast notification.
168	} catch (err) {	Finally block (cleanup).
169	toast.error(err.message 'Delete	Logic or UI structure — read with surrounding lines.
170	failed')	Logic or UI structure — read with surrounding lines.
171	} finally {	Logic or UI structure — read with surrounding lines.
172	setDeleteLoading(false)	Blank line.
173	}	Blank line.
174		Comment: — Drag and Drop Reordering Handlers
175	// — Drag and Drop Reordering Handlers	Logic or UI structure — read with surrounding lines.
176	const handleDragStart = (index) => {	Logic or UI structure — read with surrounding lines.
177	setDraggedIndex(index)	Logic or UI structure — read with surrounding lines.
178	}	Logic or UI structure — read with surrounding lines.
179		Blank line.
180	const handleDragOver = (e, index) => {	Logic or UI structure — read with surrounding lines.
181	e.preventDefault()	Logic or UI structure — read with surrounding lines.
182	if (draggedIndex === null	Logic or UI structure — read with surrounding lines.
183	draggedIndex === index) return	Blank line.
184		Logic or UI structure — read with surrounding lines.
185	const newCats = [...categories]	Logic or UI structure — read with surrounding lines.
186	const draggedItem =	Logic or UI structure — read with surrounding lines.
187	newCats[draggedIndex]	Blank line.
188	newCats.splice(draggedIndex, 1)	Logic or UI structure — read with surrounding lines.
189	newCats.splice(index, 0, draggedItem)	Logic or UI structure — read with surrounding lines.
190		Blank line.
191	setDraggedIndex(index)	Logic or UI structure — read with surrounding lines.
192	setCategories(newCats)	Logic or UI structure — read with surrounding lines.
193	}	Logic or UI structure — read with surrounding lines.
194		Blank line.
195	const handleDragEnd = async () => {	Async function for network calls.
196	setDraggedIndex(null)	Logic or UI structure — read with surrounding lines.
197	try {	Try block start.
198	// Re-map sort orders in Supabase	Comment: Re-map sort orders in Supabase
199	const updates = categories.map((cat,	Logic or UI structure — read with surrounding lines.
200	idx) => ({	Logic or UI structure — read with surrounding lines.
201	id: cat.id,	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
195	sort_order: idx + 1,	Logic or UI structure — read with surrounding lines.
196	}))	Logic or UI structure — read with surrounding lines.
197		Blank line.
198	for (const update of updates) {	Logic or UI structure — read with surrounding lines.
199	await supabase	Wait for async operation.
200	.from('categories')	Logic or UI structure — read with surrounding lines.
201	.update({ sort_order:	Logic or UI structure — read with surrounding lines.
202	update.sort_order })	
203	.eq('id', update.id)	Logic or UI structure — read with surrounding lines.
204	}	Logic or UI structure — read with surrounding lines.
205	toast.success('Categories display	Toast notification.
206	order updated')	
207	} catch (err) {	Catch errors.
208	toast.error('Reorder update failed:	Toast notification.
209	' + err.message)	
210	fetchCategories()	Logic or UI structure — read with surrounding lines.
211	}	Logic or UI structure — read with surrounding lines.
212	}	Logic or UI structure — read with surrounding lines.
213	return (	Return JSX UI.
214	<div className="space-y-6 animate-	CSS/Tailwind styling.
215	fade-in p-2">	
216	{/* Header */}	Logic or UI structure — read with surrounding lines.
217	<div className="flex flex-col	CSS/Tailwind styling.
218	sm:flex-row sm:items-center sm:justify-	
219	between gap-4">	
220	<div>	JSX element opening tag.
221	<h2 className="text-2xl font-	CSS/Tailwind styling.
222	bold text-on-surface">Shelf Categories	
223	Manager</h2>	
224	<p className="text-sm text-	CSS/Tailwind styling.
225	secondary mt-0.5">	
226	Configure catalog product	Logic or UI structure — read with surrounding lines.
227	categories, emoji identifiers, and drag to	
228	set customer app priority.	
229	</p>	JSX element opening tag.
230	</div>	JSX element opening tag.
231	<div className="flex gap-2.5 self-	CSS/Tailwind styling.
232	start sm:self-auto">	
233	<button	JSX element opening tag.
234	onClick={fetchCategories}	User event handler.
235	className="flex items-center	CSS/Tailwind styling.
236	gap-1.5 px-3 py-2 rounded-lg border	
237	border-border bg-white text-secondary	
238	ho...	
239	>	Logic or UI structure — read with surrounding lines.
240	<RefreshCw className="w-3.5 h-	CSS/Tailwind styling.
241	3.5" /> Refresh	
242	</button>	JSX element opening tag.
243	<Button	JSX element opening tag.
244	variant="primary"	Logic or UI structure — read with surrounding lines.
245	onClick={handleOpenCreate}	User event handler.
246	className="flex items-center	CSS/Tailwind styling.
247	gap-1.5"	
248	>	Logic or UI structure — read with surrounding lines.
249	<Plus className="w-5 h-5" />	CSS/Tailwind styling.
250	Add Category	
251	</Button>	JSX element opening tag.
252	</div>	JSX element opening tag.
253	</div>	JSX element opening tag.
254		Blank line.
255	{/* Filter bar */}	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
239	<code><div className="bg-white rounded-xl border border-border p-4 flex flex-col sm:flex-row gap-4 items-center justi...</code>	CSS/Tailwind styling.
240	<code><div className="relative w-full sm:w-80"></code>	CSS/Tailwind styling.
241	<code><Search className="absolute left-3 top-1/2 -translate-y-1/2 w-4 h-4 text-secondary pointer-events-none" /></code>	CSS/Tailwind styling.
242	<code><input</code>	JSX element opening tag.
243	<code>type="text"</code>	Logic or UI structure — read with surrounding lines.
244	<code>value={search}</code>	Logic or UI structure — read with surrounding lines.
245	<code>onChange={(e) => setSearch(e.target.value)}</code>	User event handler.
246	<code>placeholder="Search shelves name..."</code>	Logic or UI structure — read with surrounding lines.
247	<code>className="w-full pl-9 pr-4 py-2 border border-border rounded-lg text-xs focus:outline-none focus:ring-1 ...</code>	CSS/Tailwind styling.
248	<code>/></code>	Logic or UI structure — read with surrounding lines.
249	<code></div></code>	JSX element opening tag.
250	<code>{search && (</code>	Logic or UI structure — read with surrounding lines.
251	<code><button</code>	JSX element opening tag.
252	<code>onClick={() => setSearch('')}</code>	User event handler.
253	<code>className="text-xs text-brand hover:underline font-semibold"</code>	CSS/Tailwind styling.
254	<code>></code>	Logic or UI structure — read with surrounding lines.
255	<code>Clear Search</code>	Logic or UI structure — read with surrounding lines.
256	<code></button></code>	JSX element opening tag.
257	<code>}}</code>	Logic or UI structure — read with surrounding lines.
258	<code></div></code>	JSX element opening tag.
259		Blank line.
260	<code>{/* Workspace list */}</code>	Logic or UI structure — read with surrounding lines.
261	<code>{loading ? (</code>	Logic or UI structure — read with surrounding lines.
262	<code><div className="space-y-3.5"></code>	CSS/Tailwind styling.
263	<code>{Array.from({ length: 5 }).map((_, i) => (</code>	Logic or UI structure — read with surrounding lines.
264	<code><Skeleton key={i} className="h-16 rounded-xl" /></code>	CSS/Tailwind styling.
265	<code>)))</code>	Logic or UI structure — read with surrounding lines.
266	<code></div></code>	JSX element opening tag.
267	<code>) : error ? (</code>	Logic or UI structure — read with surrounding lines.
268	<code><div className="bg-red-50 border border-red-200 rounded-xl p-8 text-center text-red-600 font-medium"></code>	CSS/Tailwind styling.
269	<code><p>{error}</p></code>	JSX element opening tag.
270	<code><button onClick={fetchCategories} className="mt-2 text-sm text-brand underline font-semibold"></code>	CSS/Tailwind styling.
271	<code>Retry</code>	Logic or UI structure — read with surrounding lines.
272	<code></button></code>	JSX element opening tag.
273	<code></div></code>	JSX element opening tag.
274	<code>) : categories.length === 0 ? (</code>	Logic or UI structure — read with surrounding lines.
275	<code><EmptyState</code>	JSX element opening tag.
276	<code>icon={FolderHeart}</code>	Logic or UI structure — read with surrounding lines.
277	<code>title="No shelf categories found"</code>	Logic or UI structure — read with surrounding lines.
278	<code>description="Create grocery shelves like Dairy, Staples, Beverages to classify items."</code>	Logic or UI structure — read with surrounding lines.
279	<code>className="py-12 bg-white rounded-xl border border-border"</code>	CSS/Tailwind styling.
280	<code>/></code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
281	) : (	Logic or UI structure — read with surrounding lines.
282	<div className="bg-white rounded-xl border border-border overflow-hidden shadow-sm max-w-3xl">	CSS/Tailwind styling.
283	/* Table headers */	Logic or UI structure — read with surrounding lines.
284	<div className="hidden sm:grid grid-cols-[80px_1fr_1fr_100px] gap-4 px-5 py-3 bg-surface border-b borde...	CSS/Tailwind styling.
285	Order	JSX element opening tag.
286	Emoji	JSX element opening tag.
287	Shelf Name	JSX element opening tag.
288	Active Status	JSX element opening tag.
289	Actions	CSS/Tailwind styling.
290	</div>	JSX element opening tag.
291		Blank line.
292	/* List items */	Logic or UI structure — read with surrounding lines.
293	<div className="divide-y divide-border">	CSS/Tailwind styling.
294	{categories.map((cat, idx) => {	Logic or UI structure — read with surrounding lines.
295	const isActive = cat.is_active	Logic or UI structure — read with surrounding lines.
296	return (	Return JSX UI.
297	<div	JSX element opening tag.
298	key={cat.id}	Logic or UI structure — read with surrounding lines.
299	draggable	Logic or UI structure — read with surrounding lines.
300	onDragStart={() => handleDragStart(idx)}	Logic or UI structure — read with surrounding lines.
301	onDragOver={(e) => handleDragOver(e, idx)}	Logic or UI structure — read with surrounding lines.
302	onDragEnd={handleDragEnd}	Logic or UI structure — read with surrounding lines.
303	className={`grid grid-cols-1 sm:grid-cols-[80px_1fr_1fr_100px] gap-4 px-5 py-3.5 items-center h...`	CSS/Tailwind styling.
304	draggedIndex === idx ? 'bg-brand/5 ring-1 ring-brand/10' : ''	Logic or UI structure — read with surrounding lines.
305	} \${!isActive ? 'opacity-60 bg-surface/30' : ''}`	Logic or UI structure — read with surrounding lines.
306	>	Logic or UI structure — read with surrounding lines.
307	/* Handle & Position */	Logic or UI structure — read with surrounding lines.
308	<div className="flex items-center gap-2">	CSS/Tailwind styling.
309	<GripVertical className="w-4 h-4 text-secondary/40 shrink-0 cursor-grab" />	CSS/Tailwind styling.
310		CSS/Tailwind styling.
311	#{idx + 1}	Logic or UI structure — read with surrounding lines.
312		JSX element opening tag.
313	</div>	JSX element opening tag.
314		Blank line.
315	/* Emoji */	Logic or UI structure — read with surrounding lines.
316	{cat.emoji '🐾'}	CSS/Tailwind styling.
317		Blank line.
318	/* Name */	Logic or UI structure — read with surrounding lines.
319	{cat.name}	CSS/Tailwind styling.

Line	Code	Explanation
320		Blank line.
321	{/* Active Toggle */}	Logic or UI structure — read with surrounding lines.
322	<div	JSX element opening tag.
323	onDragStart={(e) => e.stopPropagation()}	Logic or UI structure — read with surrounding lines.
324	onMouseDown={(e) => e.stopPropagation()}	Logic or UI structure — read with surrounding lines.
325	draggable="false"	Logic or UI structure — read with surrounding lines.
326	>	Logic or UI structure — read with surrounding lines.
327	<Toggle	JSX element opening tag.
328	checked={cat.is_active}	Logic or UI structure — read with surrounding lines.
329	onChange={() => handleToggleActive(cat)}	User event handler.
330	/>	Logic or UI structure — read with surrounding lines.
331	</div>	JSX element opening tag.
332		Blank line.
333	{/* Actions */}	Logic or UI structure — read with surrounding lines.
334	<div	JSX element opening tag.
335	className="flex justify-end gap-1.5"	CSS/Tailwind styling.
336	onDragStart={(e) => e.stopPropagation()}	Logic or UI structure — read with surrounding lines.
337	onMouseDown={(e) => e.stopPropagation()}	Logic or UI structure — read with surrounding lines.
338	draggable="false"	Logic or UI structure — read with surrounding lines.
339	>	Logic or UI structure — read with surrounding lines.
340	<button	JSX element opening tag.
341	onClick={() => handleOpenEdit(cat)}	User event handler.
342	className="p-1.5 rounded-lg text-primary hover:bg-primary/5 transition-colors"	CSS/Tailwind styling.
343	title="Edit Category"	Logic or UI structure — read with surrounding lines.
344	>	Logic or UI structure — read with surrounding lines.
345	<Edit2 className="w- 3.5 h-3.5" />	CSS/Tailwind styling.
346	</button>	JSX element opening tag.
347	<button	JSX element opening tag.
348	onClick={() => setConfirmDelete(cat)}	User event handler.
349	className="p-1.5 rounded-lg text-danger hover:bg-danger/5 transition-colors"	CSS/Tailwind styling.
350	title="Delete Category"	Logic or UI structure — read with surrounding lines.
351	>	Logic or UI structure — read with surrounding lines.
352	<Trash2 className="w-3.5 h-3.5" />	CSS/Tailwind styling.
353	</button>	JSX element opening tag.
354	</div>	JSX element opening tag.
355	</div>	JSX element opening tag.
356	)	Logic or UI structure — read with surrounding lines.
357	}}}	Logic or UI structure — read with surrounding lines.
358	</div>	JSX element opening tag.
359	</div>	JSX element opening tag.
360	)}	Logic or UI structure — read with surrounding lines.
361		Blank line.
362	{/* — Create/Edit Category Modal — */}	Logic or UI structure — read with surrounding lines.
363	<Modal	JSX element opening tag.
364	isOpen={showModal}	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
365	onClose={() => setShowModal(false)}	Logic or UI structure — read with surrounding lines.
366	title={editingCategory ? 'Edit Category Shelf' : 'Add New Category Shelf'}	Logic or UI structure — read with surrounding lines.
367	size="sm"	Logic or UI structure — read with surrounding lines.
368	closeOnBackdrop={!formLoading}	Logic or UI structure — read with surrounding lines.
369	>	Logic or UI structure — read with surrounding lines.
370	<form onSubmit={handleFormSubmit} className="space-y-4 pt-2">	CSS/Tailwind styling.
371	{/* Emoji */}	Logic or UI structure — read with surrounding lines.
372	<Input	JSX element opening tag.
373	label="Category Emoji / Icon Symbol"	Logic or UI structure — read with surrounding lines.
374	placeholder="e.g. 🗨️, 📄, 📁"	Logic or UI structure — read with surrounding lines.
375	value={emoji}	Logic or UI structure — read with surrounding lines.
376	onChange={(e) => setEmoji(e.target.value)}	User event handler.
377	required	Logic or UI structure — read with surrounding lines.
378	maxLength={4}	Logic or UI structure — read with surrounding lines.
379	className="text-center text-lg w-20 mx-auto"	CSS/Tailwind styling.
380	/>	Logic or UI structure — read with surrounding lines.
381		Blank line.
382	{/* Name */}	Logic or UI structure — read with surrounding lines.
383	<Input	JSX element opening tag.
384	label="Category Name"	Logic or UI structure — read with surrounding lines.
385	placeholder="e.g. Fresh Vegetables"	Logic or UI structure — read with surrounding lines.
386	value={name}	Logic or UI structure — read with surrounding lines.
387	onChange={(e) => setName(e.target.value)}	User event handler.
388	required	Logic or UI structure — read with surrounding lines.
389	/>	Logic or UI structure — read with surrounding lines.
390		Blank line.
391	{/* Buttons */}	Logic or UI structure — read with surrounding lines.
392	<div className="flex gap-2.5 pt- 4 border-t border-border">	CSS/Tailwind styling.
393	<Button	JSX element opening tag.
394	variant="outline"	Logic or UI structure — read with surrounding lines.
395	type="button"	Logic or UI structure — read with surrounding lines.
396	onClick={() => setShowModal(false)}	User event handler.
397	disabled={formLoading}	Logic or UI structure — read with surrounding lines.
398	className="flex-1"	CSS/Tailwind styling.
399	>	Logic or UI structure — read with surrounding lines.
400	Cancel	Logic or UI structure — read with surrounding lines.
401	</Button>	JSX element opening tag.
402	<Button	JSX element opening tag.
403	variant="primary"	Logic or UI structure — read with surrounding lines.
404	type="submit"	Logic or UI structure — read with surrounding lines.
405	isLoading={formLoading}	Logic or UI structure — read with surrounding lines.
406	className="flex-1"	CSS/Tailwind styling.
407	>	Logic or UI structure — read with surrounding lines.
408	{editingCategory ? 'Save Changes' : 'Create Shelf'}	Logic or UI structure — read with surrounding lines.
409	</Button>	JSX element opening tag.
410	</div>	JSX element opening tag.
411	</form>	JSX element opening tag.
412	</Modal>	JSX element opening tag.
413		Blank line.

Line	Code	Explanation
414	<code>{/* — Delete Confirmation Dialog — */}</code>	Logic or UI structure — read with surrounding lines.
415	<code><ConfirmDialog</code>	JSX element opening tag.
416	<code>isOpen={!confirmDelete}</code>	Logic or UI structure — read with surrounding lines.
417	<code>onClose={() => setConfirmDelete(null)}</code>	Logic or UI structure — read with surrounding lines.
418	<code>onConfirm={handleDeleteConfirm}</code>	Logic or UI structure — read with surrounding lines.
419	<code>loading={deleteLoading}</code>	Logic or UI structure — read with surrounding lines.
420	<code>title="Delete Shelf Category?"</code>	Logic or UI structure — read with surrounding lines.
421	<code>description={</code>	Logic or UI structure — read with surrounding lines.
422	<code>confirmDelete</code>	Logic or UI structure — read with surrounding lines.
423	<code>? `Are you sure you want to permanently delete category shelf "\${confirmDelete.name}"? This removes the c...</code>	Logic or UI structure — read with surrounding lines.
424	<code>: ''</code>	Logic or UI structure — read with surrounding lines.
425	<code>}</code>	Logic or UI structure — read with surrounding lines.
426	<code>confirmLabel="Remove Permanently"</code>	Logic or UI structure — read with surrounding lines.
427	<code>variant="danger"</code>	Logic or UI structure — read with surrounding lines.
428	<code>/></code>	Logic or UI structure — read with surrounding lines.
429	<code></div></code>	JSX element opening tag.
430	<code>)</code>	Logic or UI structure — read with surrounding lines.
431	<code>}</code>	Logic or UI structure — read with surrounding lines.
432		Blank line.

OffersPage (src/pages/OffersPage.jsx)

Total lines: 581

Route: /offers

Purpose: Coupons and promotional offers.

Line	Code	Explanation
1	import React, { useState, useEffect, useCallback } from 'react'	Import React hooks.
2	import { Ticket, Percent, Plus, Trash2, Edit2, ToggleLeft, ToggleRight, Calendar, Search, RefreshCw, BadgePercent } f...	Import icons.
3	import { getOffers, createOffer, updateOffer, toggleOfferStatus, deleteOffer } from '../services/offerService'	Import API/database service.
4	import { formatCurrency, formatDate } from '../utils/formatters'	Import helper utilities.
5	import PageLayout from '../components/layout/PageLayout'	Import UI component.
6	import Button from '../components/ui/Button'	Import UI component.
7	import Card from '../components/ui/Card'	Import UI component.
8	import Badge from '../components/ui/Badge'	Import UI component.
9	import Input from '../components/ui/Input'	Import UI component.
10	import Spinner from '../components/ui/Spinner'	Import UI component.
11	import Skeleton from '../components/ui/Skeleton'	Import UI component.
12	import EmptyState from '../components/ui/EmptyState'	Import UI component.
13	import Pagination from '../components/ui/Pagination'	Import UI component.
14	import ConfirmDialog from '../components/ui/ConfirmDialog'	Import UI component.
15	import Modal from '../components/ui/Modal'	Import UI component.
16	import Toggle from '../components/ui/Toggle'	Import UI component.
17	import toast from 'react-hot-toast'	Import dependency.
18		Blank line.
19	/**	Doc comment.
20	* ZapKart Offers Page	Doc comment.
21	* Provides full management of discount coupons and seasonal event sales.	Doc comment.
22	*/	Doc comment.
23	export default function OffersPage() {	Default export (main module).
24	// Tabs: 'coupons' 'events'	Comment: Tabs: 'coupons' 'events'
25	const [activeTab, setActiveTab] = useState('coupons')	React state variable.
26		Blank line.
27	// Search & Filter	Comment: Search & Filter
28	const [search, setSearch] = useState('')	React state variable.
29	const [page, setPage] = useState(1)	React state variable.
30	const [pageSize] = useState(10)	React state variable.
31		Blank line.
32	// Data states	Comment: Data states
33	const [offers, setOffers] = useState([])	React state variable.
34	const [total, setTotal] = useState(0)	React state variable.
35	const [loading, setLoading] = useState(true)	React state variable.
36	const [error, setError] = useState(null)	React state variable.
37		Blank line.
38	// Modal / Form state	Comment: Modal / Form state
39	const [showModal, setShowModal] = useState(false)	React state variable.
40	const [editingOffer, setEditingOffer] = useState(null) // Offer object being edited	React state variable.

Line	Code	Explanation
41	const [formLoading, setFormLoading] = useState(false)	React state variable.
42		Blank line.
43	// Form Fields	Comment: Form Fields
44	const [code, setCode] = useState('')	React state variable.
45	const [name, setName] = useState('')	React state variable.
46	const [discountType, setDiscountType] = useState('percentage') // percentage flat	React state variable.
47	const [discountValue, setDiscountValue] = useState('')	React state variable.
48	const [minOrderValue, setMinOrderValue] = useState('')	React state variable.
49	const [maxDiscountCap, setMaxDiscountCap] = useState('')	React state variable.
50	const [startDate, setStartDate] = useState('')	React state variable.
51	const [endDate, setEndDate] = useState('')	React state variable.
52	const [usageLimit, setUsageLimit] = useState('')	React state variable.
53		Blank line.
54	// Action Dialog state	Comment: Action Dialog state
55	const [confirmDelete, setConfirmDelete] = useState(null)	React state variable.
56	const [deleteLoading, setDeleteLoading] = useState(false)	React state variable.
57		Blank line.
58	// Fetch offers	Comment: Fetch offers
59	const fetchOffers = useCallback(async () => {	Memoized callback function.
60	setLoading(true)	Logic or UI structure — read with surrounding lines.
61	setError(null)	Logic or UI structure — read with surrounding lines.
62	try {	Try block start.
63	const type = activeTab === 'coupons' ? 'coupon' : 'event_sale'	Logic or UI structure — read with surrounding lines.
64	const res = await getOffers({	Wait for async operation.
65	type,	Logic or UI structure — read with surrounding lines.
66	search: search undefined,	Logic or UI structure — read with surrounding lines.
67	page,	Logic or UI structure — read with surrounding lines.
68	pageSize,	Logic or UI structure — read with surrounding lines.
69	})	Logic or UI structure — read with surrounding lines.
70	setOffers(res.offers [])	Logic or UI structure — read with surrounding lines.
71	setTotal(res.total 0)	Logic or UI structure — read with surrounding lines.
72	} catch (err) {	Catch errors.
73	setError(err.message 'Failed to fetch offers.')	Logic or UI structure — read with surrounding lines.
74	} finally {	Finally block (cleanup).
75	setLoading(false)	Logic or UI structure — read with surrounding lines.
76	}	Logic or UI structure — read with surrounding lines.
77	}, [activeTab, search, page, pageSize])	Logic or UI structure — read with surrounding lines.
78		Blank line.
79	useEffect(() => {	Side effect (fetch, subscribe, redirect).

Line	Code	Explanation
80	fetchOffers()	Logic or UI structure — read with surrounding lines.
81	}, [fetchOffers])	Logic or UI structure — read with surrounding lines.
82		Blank line.
83	// Reset pagination on tab switch	Comment: Reset pagination on tab switch
84	useEffect(() => {	Side effect (fetch, subscribe, redirect).
85	setPage(1)	Logic or UI structure — read with surrounding lines.
86	setSearch('')	Logic or UI structure — read with surrounding lines.
87	}, [activeTab])	Logic or UI structure — read with surrounding lines.
88		Blank line.
89	// Open modal for Create	Comment: Open modal for Create
90	const handleOpenCreate = () => {	Logic or UI structure — read with surrounding lines.
91	setEditingOffer(null)	Logic or UI structure — read with surrounding lines.
92	setCode('')	Logic or UI structure — read with surrounding lines.
93	setName('')	Logic or UI structure — read with surrounding lines.
94	setDiscountType('percentage')	Logic or UI structure — read with surrounding lines.
95	setDiscountValue('')	Logic or UI structure — read with surrounding lines.
96	setMinOrderValue('0')	Logic or UI structure — read with surrounding lines.
97	setMaxDiscountCap('')	Logic or UI structure — read with surrounding lines.
98	setStartDate('')	Logic or UI structure — read with surrounding lines.
99	setEndDate('')	Logic or UI structure — read with surrounding lines.
100	setUsageLimit('100')	Logic or UI structure — read with surrounding lines.
101	setShowModal(true)	Logic or UI structure — read with surrounding lines.
102	}	Logic or UI structure — read with surrounding lines.
103		Blank line.
104	// Open modal for Edit	Comment: Open modal for Edit
105	const handleOpenEdit = (offer) => {	Logic or UI structure — read with surrounding lines.
106	setEditingOffer(offer)	Logic or UI structure — read with surrounding lines.
107	setCode(offer.code '')	Logic or UI structure — read with surrounding lines.
108	setName(offer.name '')	Logic or UI structure — read with surrounding lines.
109	setDiscountType(offer.discount_type 'percentage')	Logic or UI structure — read with surrounding lines.
110	setDiscountValue(String(offer.discount_value ''))	Logic or UI structure — read with surrounding lines.
111	setMinOrderValue(String(offer.min_order_value '0'))	Logic or UI structure — read with surrounding lines.
112	setMaxDiscountCap(String(offer.max_discount_cap ''))	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
113		Blank line.
114	// Parse timestamp to YYYY-MM-DD	Comment: Parse timestamp to YYYY-MM-DD
115	const parseDate = (d) => d ? new Date(d).toISOString().slice(0, 10) : ''	Logic or UI structure — read with surrounding lines.
116	setStartDate(parseDate(offer.start_date))	Logic or UI structure — read with surrounding lines.
117	setEndDate(parseDate(offer.end_date))	Logic or UI structure — read with surrounding lines.
118	setUsageLimit(String(offer.usage_limit '100'))	Logic or UI structure — read with surrounding lines.
119	setShowModal(true)	Logic or UI structure — read with surrounding lines.
120	}	Logic or UI structure — read with surrounding lines.
121		Blank line.
122	// Form Submit handler	Comment: Form Submit handler
123	const handleFormSubmit = async (e) => {	Async function for network calls.
124	e.preventDefault()	Logic or UI structure — read with surrounding lines.
125		Blank line.
126	// Basic validations	Comment: Basic validations
127	if (activeTab === 'coupons' && !code.trim()) {	Logic or UI structure — read with surrounding lines.
128	toast.error('Coupon code is required')	Toast notification.
129	return	Logic or UI structure — read with surrounding lines.
130	}	Logic or UI structure — read with surrounding lines.
131	if (!name.trim()) {	Logic or UI structure — read with surrounding lines.
132	toast.error('Offer name/description is required')	Toast notification.
133	return	Logic or UI structure — read with surrounding lines.
134	}	Logic or UI structure — read with surrounding lines.
135		Blank line.
136	const value = Number(discountValue)	Logic or UI structure — read with surrounding lines.
137	if (isNaN(value) value <= 0) {	Logic or UI structure — read with surrounding lines.
138	toast.error('Discount value must be greater than zero')	Toast notification.
139	return	Logic or UI structure — read with surrounding lines.
140	}	Logic or UI structure — read with surrounding lines.
141		Blank line.
142	if (discountType === 'percentage' && value > 100) {	Logic or UI structure — read with surrounding lines.
143	toast.error('Percentage discount cannot exceed 100%')	Toast notification.
144	return	Logic or UI structure — read with surrounding lines.
145	}	Logic or UI structure — read with surrounding lines.
146		Blank line.
147	if (new Date(startDate) > new Date(endDate)) {	Logic or UI structure — read with surrounding lines.
148	toast.error('Start date cannot be after end date')	Toast notification.

Line	Code	Explanation
149	return	Logic or UI structure — read with surrounding lines.
150	}	Logic or UI structure — read with surrounding lines.
151		Blank line.
152	setFormLoading(true)	Logic or UI structure — read with surrounding lines.
153	try {	Try block start.
154	const type = activeTab === 'coupons' ? 'coupon' : 'event_sale'	Logic or UI structure — read with surrounding lines.
155		Blank line.
156	const payload = {	Logic or UI structure — read with surrounding lines.
157	type,	Logic or UI structure — read with surrounding lines.
158	code: activeTab === 'coupons' ? code.toUpperCase().trim() : null,	Logic or UI structure — read with surrounding lines.
159	name: name.trim(),	Logic or UI structure — read with surrounding lines.
160	discount_type: discountType,	Logic or UI structure — read with surrounding lines.
161	discount_value: value,	Logic or UI structure — read with surrounding lines.
162	min_order_value: Number(minOrderValue) 0,	Logic or UI structure — read with surrounding lines.
163	max_discount_cap: Number(maxDiscountCap) null,	Logic or UI structure — read with surrounding lines.
164	start_date: new Date(startDate).toISOString(),	Logic or UI structure — read with surrounding lines.
165	end_date: new Date(endDate).toISOString(),	Logic or UI structure — read with surrounding lines.
166	usage_limit: Number(usageLimit) null,	Logic or UI structure — read with surrounding lines.
167	is_active: editingOffer ? editingOffer.is_active : true,	Logic or UI structure — read with surrounding lines.
168	}	Logic or UI structure — read with surrounding lines.
169		Blank line.
170	if (editingOffer) {	Logic or UI structure — read with surrounding lines.
171	await updateOffer(editingOffer.id, payload)	Wait for async operation.
172	toast.success('Offer details updated successfully')	Toast notification.
173	} else {	Logic or UI structure — read with surrounding lines.
174	await createOffer(payload)	Wait for async operation.
175	toast.success('New promotion offer created successfully')	Toast notification.
176	}	Logic or UI structure — read with surrounding lines.
177		Blank line.
178	setShowModal(false)	Logic or UI structure — read with surrounding lines.
179	fetchOffers()	Logic or UI structure — read with surrounding lines.
180	} catch (err) {	Catch errors.
181	toast.error(err.message 'Failed to save offer. Make sure Coupon Code is unique.')	Toast notification.
182	} finally {	Finally block (cleanup).
183	setFormLoading(false)	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
184	}	Logic or UI structure — read with surrounding lines.
185	}	Logic or UI structure — read with surrounding lines.
186		Blank line.
187	// Toggle active toggle	Comment: Toggle active toggle
188	const handleToggleActive = async (offer) => {	Async function for network calls.
189	try {	Try block start.
190	const newStatus = !offer.is_active	Logic or UI structure — read with surrounding lines.
191	await toggleOfferStatus(offer.id, newStatus)	Wait for async operation.
192	toast.success(`Offer marked as \${newStatus ? 'active' : 'inactive'}`)	Toast notification.
193		Blank line.
194	// Local update to avoid full reload flickers	Comment: Local update to avoid full reload flickers
195	setOffers(prev =>	Logic or UI structure — read with surrounding lines.
196	prev.map(o => (o.id === offer.id ? { ...o, is_active: newStatus } : o))	Logic or UI structure — read with surrounding lines.
197	)	Logic or UI structure — read with surrounding lines.
198	} catch (err) {	Catch errors.
199	toast.error(err.message 'Status update failed.')	Toast notification.
200	}	Logic or UI structure — read with surrounding lines.
201	}	Logic or UI structure — read with surrounding lines.
202		Blank line.
203	// Trigger Delete	Comment: Trigger Delete
204	const handleDeleteConfirm = async () => {	Async function for network calls.
205	if (!confirmDelete) return	Logic or UI structure — read with surrounding lines.
206	setDeleteLoading(true)	Logic or UI structure — read with surrounding lines.
207	try {	Try block start.
208	await deleteOffer(confirmDelete.id)	Wait for async operation.
209	toast.success('Offer deleted (deactivated)')	Toast notification.
210	setConfirmDelete(null)	Logic or UI structure — read with surrounding lines.
211	fetchOffers()	Logic or UI structure — read with surrounding lines.
212	} catch (err) {	Catch errors.
213	toast.error(err.message 'Failed to remove offer.')	Toast notification.
214	} finally {	Finally block (cleanup).
215	setDeleteLoading(false)	Logic or UI structure — read with surrounding lines.
216	}	Logic or UI structure — read with surrounding lines.
217	}	Logic or UI structure — read with surrounding lines.
218		Blank line.
219	const totalPages = Math.ceil(total / pageSize)	Logic or UI structure — read with surrounding lines.
220		Blank line.
221	return (	Return JSX UI.
222	<div className="space-y-6 animate-fade-in p-2">	CSS/Tailwind styling.

Line	Code	Explanation
223	<code>{/* — Page Header — */}</code>	Logic or UI structure — read with surrounding lines.
224	<code><div className="flex flex-col sm:flex-row sm:items-center sm:justify-between gap-4"></code>	CSS/Tailwind styling.
225	<code><div></code>	JSX element opening tag.
226	<code><h2 className="text-2xl font-bold text-on-surface font-headline-md">Promotions & Offers CMS</h2></code>	CSS/Tailwind styling.
227	<code><p className="text-sm text-secondary mt-0.5"></code>	CSS/Tailwind styling.
228	<code>Configure discount codes and seasonal marketplace events.</code>	Logic or UI structure — read with surrounding lines.
229	<code></p></code>	JSX element opening tag.
230	<code></div></code>	JSX element opening tag.
231	<code><Button</code>	JSX element opening tag.
232	<code>variant="primary"</code>	Logic or UI structure — read with surrounding lines.
233	<code>onClick={handleOpenCreate}</code>	User event handler.
234	<code>className="flex items-center gap-1.5 self-start sm:self-auto"</code>	CSS/Tailwind styling.
235	<code>></code>	Logic or UI structure — read with surrounding lines.
236	<code><Plus className="w-5 h-5" /></code>	CSS/Tailwind styling.
237	<code>{activeTab === 'coupons' ? 'Create Coupon' : 'Create Event Sale'}</code>	Logic or UI structure — read with surrounding lines.
238	<code></Button></code>	JSX element opening tag.
239	<code></div></code>	JSX element opening tag.
240		Blank line.
241	<code>{/* — Navigation tabs — */}</code>	Logic or UI structure — read with surrounding lines.
242	<code><div className="border-b border-border bg-white rounded-t-xl p-1 flex gap-2"></code>	CSS/Tailwind styling.
243	<code><button</code>	JSX element opening tag.
244	<code>onClick={() => setActiveTab('coupons')}</code>	User event handler.
245	<code>className={`flex items-center gap-2 px-5 py-2.5 rounded-lg text-xs font-bold transition-all \${`</code>	CSS/Tailwind styling.
246	<code>activeTab === 'coupons'</code>	Logic or UI structure — read with surrounding lines.
247	<code>? 'bg-primary-container text-on-primary-container shadow-sm'</code>	Logic or UI structure — read with surrounding lines.
248	<code>: 'text-secondary hover:text-on-surface hover:bg-surface'</code>	Logic or UI structure — read with surrounding lines.
249	<code>}`}</code>	Logic or UI structure — read with surrounding lines.
250	<code>></code>	Logic or UI structure — read with surrounding lines.
251	<code><Ticket className="w-4 h-4" /></code>	CSS/Tailwind styling.
252	<code></button></code>	JSX element opening tag.
253	<code><button</code>	JSX element opening tag.
254	<code>onClick={() => setActiveTab('events')}</code>	User event handler.
255	<code>className={`flex items-center gap-2 px-5 py-2.5 rounded-lg text-xs font-bold transition-all \${`</code>	CSS/Tailwind styling.
256	<code>activeTab === 'events'</code>	Logic or UI structure — read with surrounding lines.
257	<code>? 'bg-primary-container text-on-primary-container shadow-sm'</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
258	: 'text-secondary hover:text-on-surface hover:bg-surface'	Logic or UI structure — read with surrounding lines.
259	}`}`	Logic or UI structure — read with surrounding lines.
260	>	Logic or UI structure — read with surrounding lines.
261	<BadgePercent className="w-4 h-4" /> Event Sales	CSS/Tailwind styling.
262	</button>	JSX element opening tag.
263	</div>	JSX element opening tag.
264		Blank line.
265	{/* — Search & Filters Bar — */}	Logic or UI structure — read with surrounding lines.
266	<div className="bg-white rounded-b-xl border border-t-0 border-border p-4 flex flex-col sm:flex-row gap-4 items...	CSS/Tailwind styling.
267	{/* Search */}	Logic or UI structure — read with surrounding lines.
268	<div className="relative w-full sm:w-80">	CSS/Tailwind styling.
269	<Search className="absolute left-3 top-1/2 -translate-y-1/2 w-4 h-4 text-secondary pointer-events-none" />	CSS/Tailwind styling.
270	<input	JSX element opening tag.
271	type="text"	Logic or UI structure — read with surrounding lines.
272	value={search}	Logic or UI structure — read with surrounding lines.
273	onChange={(e) => setSearch(e.target.value)}	User event handler.
274	placeholder={activeTab === 'coupons' ? "Search coupon codes..." : "Search event names..."}	Logic or UI structure — read with surrounding lines.
275	className="w-full pl-9 pr-4 py-2 border border-border rounded-lg text-xs focus:outline-none focus:ring-1 ...	CSS/Tailwind styling.
276	/>	Logic or UI structure — read with surrounding lines.
277	</div>	JSX element opening tag.
278	<div className="flex gap-2 w-full sm:w-auto justify-end">	CSS/Tailwind styling.
279	{(search) && (	Logic or UI structure — read with surrounding lines.
280	<button	JSX element opening tag.
281	onClick={() => setSearch('')}	User event handler.
282	className="text-xs text-brand hover:underline font-semibold pr-2"	CSS/Tailwind styling.
283	>	Logic or UI structure — read with surrounding lines.
284	Clear	Logic or UI structure — read with surrounding lines.
285	</button>	JSX element opening tag.
286	)}	Logic or UI structure — read with surrounding lines.
287	<button	JSX element opening tag.
288	onClick={fetchOffers}	User event handler.
289	className="p-2 rounded-lg border border-border bg-white text-secondary hover:bg-surface transition-colors"	CSS/Tailwind styling.
290	>	Logic or UI structure — read with surrounding lines.
291	<RefreshCw className="w-4 h-4" />	CSS/Tailwind styling.
292	</button>	JSX element opening tag.

Line	Code	Explanation
293	<code></div></code>	JSX element opening tag.
294	<code></div></code>	JSX element opening tag.
295		Blank line.
296	<code>{/* — Data Listings Workspace — */}</code>	Logic or UI structure — read with surrounding lines.
297	<code>{loading ? (</code>	Logic or UI structure — read with surrounding lines.
298	<code><div className="space-y-3"></code>	CSS/Tailwind styling.
299	<code>{Array.from({ length: 5 }).map((_, i)</code> <code>=> (</code>	Logic or UI structure — read with surrounding lines.
300	<code><Skeleton key={i} className="h-16</code> <code>rounded-xl" /></code>	CSS/Tailwind styling.
301	<code>)))}</code>	Logic or UI structure — read with surrounding lines.
302	<code></div></code>	JSX element opening tag.
303	<code>) : error ? (</code>	Logic or UI structure — read with surrounding lines.
304	<code><div className="bg-red-50 border</code> <code>border-red-200 rounded-xl p-6 text-center text-</code> <code>red-600 font-medium"></code>	CSS/Tailwind styling.
305	<code><p>{error}</p></code>	JSX element opening tag.
306	<code><button onClick={fetchOffers}</code> <code>className="mt-2 text-sm text-brand underline</code> <code>font-semibold"></code>	CSS/Tailwind styling.
307	<code>Retry</code>	Logic or UI structure — read with surrounding lines.
308	<code></button></code>	JSX element opening tag.
309	<code></div></code>	JSX element opening tag.
310	<code>) : offers.length === 0 ? (</code>	Logic or UI structure — read with surrounding lines.
311	<code><EmptyState</code>	JSX element opening tag.
312	<code>icon={activeTab === 'coupons' ?</code> <code>Ticket : BadgePercent}</code>	Logic or UI structure — read with surrounding lines.
313	<code>title={`No \${activeTab} found`}</code>	Logic or UI structure — read with surrounding lines.
314	<code>description={search ? `No records</code> <code>found matching "\${search}"` : `There are no</code> <code>\${activeTab === 'coupons' ? ...</code>	Logic or UI structure — read with surrounding lines.
315	<code>className="py-12 bg-white rounded-xl</code> <code>border border-border"</code>	CSS/Tailwind styling.
316	<code>/></code>	Logic or UI structure — read with surrounding lines.
317	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
318	<code><></code>	JSX element opening tag.
319	<code><div className="bg-white rounded-xl</code> <code>border border-border overflow-hidden shadow-</code> <code>sm"></code>	CSS/Tailwind styling.
320	<code>{/* Desktop columns */}</code>	Logic or UI structure — read with surrounding lines.
321	<code><div className="hidden lg:grid</code> <code>grid-cols-</code> <code>[1fr_1.5fr_1fr_1fr_1.5fr_0.8fr_80px] gap-4</code> <code>px-5 py-3 bg-surf...</code>	CSS/Tailwind styling.
322	<code>{activeTab === 'coupons' ?</code> <code>'Coupon Code' : 'Event ID'}</code>	JSX element opening tag.
323	<code>Name / Description</code>	JSX element opening tag.
324	<code>Discount</code>	JSX element opening tag.
325	<code>Min Order</code>	JSX element opening tag.
326	<code>Max Cap</code>	JSX element opening tag.
327	<code>Validity Dates</code>	JSX element opening tag.
328	<code>Active</code>	JSX element opening tag.

Line	Code	Explanation
329	<code>Actions</code>	CSS/Tailwind styling.
330	<code></div></code>	JSX element opening tag.
331		Blank line.
332	<code>{/* List */}</code>	Logic or UI structure — read with surrounding lines.
333	<code><div className="divide-y divide-border"></code>	CSS/Tailwind styling.
334	<code>{offers.map((offer) => {</code>	Logic or UI structure — read with surrounding lines.
335	<code>const isPerc =</code> <code>offer.discount_type === 'percentage'</code>	Logic or UI structure — read with surrounding lines.
336	<code>const discountDisplay = isPerc</code> <code>? `\${offer.discount_value}% Off` :</code> <code>`\${formatCurrency(offer.discount_va...</code>	Logic or UI structure — read with surrounding lines.
337		Blank line.
338	<code>return (</code>	Return JSX UI.
339	<code><div</code>	JSX element opening tag.
340	<code>key={offer.id}</code>	Logic or UI structure — read with surrounding lines.
341	<code>className={`grid grid-cols-</code> <code>1 lg:grid-cols-</code> <code>[1fr_1.5fr_1fr_1fr_1.5fr_0.8fr_80px] gap-4</code> <code>px-5 py-...</code>	CSS/Tailwind styling.
342	<code>!offer.is_active ?</code> <code>'opacity-60 bg-surface/30' : ''</code>	Logic or UI structure — read with surrounding lines.
343	<code>}`}</code>	Logic or UI structure — read with surrounding lines.
344	<code>></code>	Logic or UI structure — read with surrounding lines.
345	<code>{/* Code / ID */}</code>	Logic or UI structure — read with surrounding lines.
346	<code><div className="min-w-0"></code>	CSS/Tailwind styling.
347	<code>{activeTab === 'coupons'</code> <code>? (</code>	Logic or UI structure — read with surrounding lines.
348	<code><span</code> <code>className="inline-block px-2.5 py-1 rounded bg-</code> <code>primary/10 text-primary text-xs font-bol...</code>	CSS/Tailwind styling.
349	<code>{offer.code}</code>	Logic or UI structure — read with surrounding lines.
350	<code></code>	JSX element opening tag.
351	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
352	<code><span className="text-</code> <code>xs text-secondary font-mono"></code>	CSS/Tailwind styling.
353	<code>#{offer.id?.slice(0,</code> <code>8)?.toUpperCase()]}</code>	Logic or UI structure — read with surrounding lines.
354	<code></code>	JSX element opening tag.
355	<code>)}></code>	Logic or UI structure — read with surrounding lines.
356	<code></div></code>	JSX element opening tag.
357		Blank line.
358	<code>{/* Name */}</code>	Logic or UI structure — read with surrounding lines.
359	<code><div className="min-w-0"></code>	CSS/Tailwind styling.
360	<code><p className="text-xs</code> <code>font-bold text-on-surface</code> <code>truncate">{offer.name}</p></code>	CSS/Tailwind styling.
361	<code>{activeTab === 'coupons'</code> <code>&& (</code>	Logic or UI structure — read with surrounding lines.
362	<code><p className="text-</code> <code>[10px] text-secondary"></code>	CSS/Tailwind styling.

Line	Code	Explanation
363	Used: {offer.usage_count 0} / {offer.usage_limit '∞'} times	Logic or UI structure — read with surrounding lines.
364	</p>	JSX element opening tag.
365	)}	Logic or UI structure — read with surrounding lines.
366	</div>	JSX element opening tag.
367		Blank line.
368	{/* Discount */}	Logic or UI structure — read with surrounding lines.
369		CSS/Tailwind styling.
370	{discountDisplay}	Logic or UI structure — read with surrounding lines.
371		JSX element opening tag.
372		Blank line.
373	{/* Min Order */}	Logic or UI structure — read with surrounding lines.
374		CSS/Tailwind styling.
375	{formatCurrency(offer.min_order_value 0)}	Logic or UI structure — read with surrounding lines.
376		JSX element opening tag.
377		Blank line.
378	{/* Max Cap */}	Logic or UI structure — read with surrounding lines.
379		CSS/Tailwind styling.
380	{offer.max_discount_cap} ? formatCurrency(offer.max_discount_cap) : 'No Cap'	Logic or UI structure — read with surrounding lines.
381		JSX element opening tag.
382		Blank line.
383	{/* Dates */}	Logic or UI structure — read with surrounding lines.
384		CSS/Tailwind styling.
385	{formatDate(offer.start_date)} - {formatDate(offer.end_date)}	Logic or UI structure — read with surrounding lines.
386		JSX element opening tag.
387		Blank line.
388	{/* Active toggle */}	Logic or UI structure — read with surrounding lines.
389	<div>	JSX element opening tag.
390	<Toggle	JSX element opening tag.
391	checked={offer.is_active}	Logic or UI structure — read with surrounding lines.
392	onChange={() => handleToggleActive(offer)}	User event handler.
393	/>	Logic or UI structure — read with surrounding lines.
394	</div>	JSX element opening tag.
395		Blank line.
396	{/* Actions */}	Logic or UI structure — read with surrounding lines.
397	<div className="flex justify-end gap-1">	CSS/Tailwind styling.
398	<button	JSX element opening tag.
399	onClick={() => handleOpenEdit(offer)}	User event handler.

Line	Code	Explanation
400	className="p-1.5 rounded-lg text-primary hover:bg-primary/5 transition-colors"	CSS/Tailwind styling.
401	title="Edit Offer"	Logic or UI structure — read with surrounding lines.
402	>	Logic or UI structure — read with surrounding lines.
403	<Edit2 className="w-3.5 h-3.5" />	CSS/Tailwind styling.
404	</button>	JSX element opening tag.
405	<button	JSX element opening tag.
406	onClick={() => setConfirmDelete(offer)}	User event handler.
407	className="p-1.5 rounded-lg text-danger hover:bg-danger/5 transition-colors"	CSS/Tailwind styling.
408	title="Delete Offer"	Logic or UI structure — read with surrounding lines.
409	>	Logic or UI structure — read with surrounding lines.
410	<Trash2 className="w-3.5 h-3.5" />	CSS/Tailwind styling.
411	</button>	JSX element opening tag.
412	</div>	JSX element opening tag.
413	</div>	JSX element opening tag.
414	)	Logic or UI structure — read with surrounding lines.
415	}}}	Logic or UI structure — read with surrounding lines.
416	</div>	JSX element opening tag.
417	</div>	JSX element opening tag.
418		Blank line.
419	{totalPages > 1 && (	Logic or UI structure — read with surrounding lines.
420	<Pagination	JSX element opening tag.
421	currentPage={page}	Logic or UI structure — read with surrounding lines.
422	totalItems={total}	Logic or UI structure — read with surrounding lines.
423	itemsPerPage={pageSize}	Logic or UI structure — read with surrounding lines.
424	onPageChange={setPage}	Logic or UI structure — read with surrounding lines.
425	/>	Logic or UI structure — read with surrounding lines.
426	)}	Logic or UI structure — read with surrounding lines.
427	</>	Self-closing JSX element.
428	)}	Logic or UI structure — read with surrounding lines.
429		Blank line.
430	{/* — Create/Edit Offer Modal — */}	Logic or UI structure — read with surrounding lines.
431	<Modal	JSX element opening tag.
432	isOpen={showModal}	Logic or UI structure — read with surrounding lines.
433	onClose={() => setShowModal(false)}	Logic or UI structure — read with surrounding lines.
434	title={editingOffer ? 'Edit Promotion Offer' : `Configure New \${activeTab === 'coupons' ? 'Coupon' : 'Event S...`}	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
435	size="md"	Logic or UI structure — read with surrounding lines.
436	closeOnBackdrop={!formLoading}	Logic or UI structure — read with surrounding lines.
437	>	Logic or UI structure — read with surrounding lines.
438	<form onSubmit={handleFormSubmit} className="space-y-4 pt-2">	CSS/Tailwind styling.
439	<div className="grid grid-cols-1 md:grid-cols-2 gap-4">	CSS/Tailwind styling.
440	{/* Coupon Code (Only coupons) */}	Logic or UI structure — read with surrounding lines.
441	{activeTab === 'coupons' && (	Logic or UI structure — read with surrounding lines.
442	<Input	JSX element opening tag.
443	label="Coupon Code (Unique)"	Logic or UI structure — read with surrounding lines.
444	placeholder="e.g. ZAPSUPER50"	Logic or UI structure — read with surrounding lines.
445	value={code}	Logic or UI structure — read with surrounding lines.
446	onChange={(e) => setCode(e.target.value.toUpperCase())}	User event handler.
447	required	Logic or UI structure — read with surrounding lines.
448	disabled={!editingOffer}	Logic or UI structure — read with surrounding lines.
449	className="font-mono font-bold tracking-wider"	CSS/Tailwind styling.
450	/>	Logic or UI structure — read with surrounding lines.
451	)}	Logic or UI structure — read with surrounding lines.
452		Blank line.
453	{/* Offer Name */}	Logic or UI structure — read with surrounding lines.
454	<Input	JSX element opening tag.
455	label={activeTab === 'coupons' ? "Offer Name / Description" : "Event Sale Name"}	Logic or UI structure — read with surrounding lines.
456	placeholder="e.g. Monsoon Special Fruits Discount"	Logic or UI structure — read with surrounding lines.
457	value={name}	Logic or UI structure — read with surrounding lines.
458	onChange={(e) => setName(e.target.value)}	User event handler.
459	required	Logic or UI structure — read with surrounding lines.
460	className="md:col-span-1"	CSS/Tailwind styling.
461	/>	Logic or UI structure — read with surrounding lines.
462		Blank line.
463	{/* Discount Type */}	Logic or UI structure — read with surrounding lines.
464	<div className="flex flex-col gap- 1.5">	CSS/Tailwind styling.
465	<label className="text-xs font- semibold text-secondary">Discount Type</label>	CSS/Tailwind styling.
466	<select	JSX element opening tag.
467	value={discountType}	Logic or UI structure — read with surrounding lines.
468	onChange={(e) => setDiscountType(e.target.value)}	User event handler.

Line	Code	Explanation
469	className="w-full px-3 py-2 text-xs border border-border rounded-lg bg-surface outline-none focus:rin...	CSS/Tailwind styling.
470	>	Logic or UI structure — read with surrounding lines.
471	<option value="percentage">Percentage (%) Discount</option>	JSX element opening tag.
472	<option value="flat">Flat Cash (₹) Discount</option>	JSX element opening tag.
473	</select>	JSX element opening tag.
474	</div>	JSX element opening tag.
475		Blank line.
476	{/* Discount Value */}	Logic or UI structure — read with surrounding lines.
477	<Input	JSX element opening tag.
478	type="number"	Logic or UI structure — read with surrounding lines.
479	label={discountType === 'percentage' ? "Discount Value (%)" : "Discount Value (₹)"}	Logic or UI structure — read with surrounding lines.
480	placeholder={discountType === 'percentage' ? "e.g. 15" : "e.g. 100"}	Logic or UI structure — read with surrounding lines.
481	value={discountValue}	Logic or UI structure — read with surrounding lines.
482	onChange={(e) => setDiscountValue(e.target.value)}	User event handler.
483	required	Logic or UI structure — read with surrounding lines.
484	min="1"	Logic or UI structure — read with surrounding lines.
485	max={discountType === 'percentage' ? "100" : undefined}	Logic or UI structure — read with surrounding lines.
486	/>	Logic or UI structure — read with surrounding lines.
487		Blank line.
488	{/* Minimum Order Value */}	Logic or UI structure — read with surrounding lines.
489	<Input	JSX element opening tag.
490	type="number"	Logic or UI structure — read with surrounding lines.
491	label="Minimum Order Value (₹)"	Logic or UI structure — read with surrounding lines.
492	placeholder="e.g. 299"	Logic or UI structure — read with surrounding lines.
493	value={minOrderValue}	Logic or UI structure — read with surrounding lines.
494	onChange={(e) => setMinOrderValue(e.target.value)}	User event handler.
495	required	Logic or UI structure — read with surrounding lines.
496	min="0"	Logic or UI structure — read with surrounding lines.
497	/>	Logic or UI structure — read with surrounding lines.
498		Blank line.
499	{/* Max Discount Cap */}	Logic or UI structure — read with surrounding lines.
500	<Input	JSX element opening tag.
501	type="number"	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
502	label="Maximum Discount Cap (₹) – Optional"	Logic or UI structure — read with surrounding lines.
503	placeholder="Leave empty for unlimited cap"	Logic or UI structure — read with surrounding lines.
504	value={maxDiscountCap}	Logic or UI structure — read with surrounding lines.
505	onChange={(e) => setMaxDiscountCap(e.target.value)}	User event handler.
506	min="0"	Logic or UI structure — read with surrounding lines.
507	/>	Logic or UI structure — read with surrounding lines.
508		Blank line.
509	{/* Start Date */}	Logic or UI structure — read with surrounding lines.
510	<Input	JSX element opening tag.
511	type="date"	Logic or UI structure — read with surrounding lines.
512	label="Validity Start Date"	Logic or UI structure — read with surrounding lines.
513	value={startDate}	Logic or UI structure — read with surrounding lines.
514	onChange={(e) => setStartDate(e.target.value)}	User event handler.
515	required	Logic or UI structure — read with surrounding lines.
516	/>	Logic or UI structure — read with surrounding lines.
517		Blank line.
518	{/* End Date */}	Logic or UI structure — read with surrounding lines.
519	<Input	JSX element opening tag.
520	type="date"	Logic or UI structure — read with surrounding lines.
521	label="Validity End Date"	Logic or UI structure — read with surrounding lines.
522	value={endDate}	Logic or UI structure — read with surrounding lines.
523	onChange={(e) => setEndDate(e.target.value)}	User event handler.
524	required	Logic or UI structure — read with surrounding lines.
525	/>	Logic or UI structure — read with surrounding lines.
526		Blank line.
527	{/* Usage Limit (Only coupons) */}	Logic or UI structure — read with surrounding lines.
528	{activeTab === 'coupons' && (	Logic or UI structure — read with surrounding lines.
529	<Input	JSX element opening tag.
530	type="number"	Logic or UI structure — read with surrounding lines.
531	label="Global Total Usage Limit"	Logic or UI structure — read with surrounding lines.
532	placeholder="e.g. 500"	Logic or UI structure — read with surrounding lines.
533	value={usageLimit}	Logic or UI structure — read with surrounding lines.
534	onChange={(e) => setUsageLimit(e.target.value)}	User event handler.
535	min="1"	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
536	required	Logic or UI structure — read with surrounding lines.
537	/>	Logic or UI structure — read with surrounding lines.
538	}}	Logic or UI structure — read with surrounding lines.
539	</div>	JSX element opening tag.
540		Blank line.
541	<div className="flex gap-2.5 pt-4 border-t border-border">	CSS/Tailwind styling.
542	<Button	JSX element opening tag.
543	variant="outline"	Logic or UI structure — read with surrounding lines.
544	type="button"	Logic or UI structure — read with surrounding lines.
545	onClick={() => setShowModal(false)}	User event handler.
546	disabled={formLoading}	Logic or UI structure — read with surrounding lines.
547	className="flex-1"	CSS/Tailwind styling.
548	>	Logic or UI structure — read with surrounding lines.
549	Cancel	Logic or UI structure — read with surrounding lines.
550	</Button>	JSX element opening tag.
551	<Button	JSX element opening tag.
552	variant="primary"	Logic or UI structure — read with surrounding lines.
553	type="submit"	Logic or UI structure — read with surrounding lines.
554	isLoading={formLoading}	Logic or UI structure — read with surrounding lines.
555	className="flex-1"	CSS/Tailwind styling.
556	>	Logic or UI structure — read with surrounding lines.
557	{editingOffer ? 'Save Changes' : 'Create Offer'}	Logic or UI structure — read with surrounding lines.
558	</Button>	JSX element opening tag.
559	</div>	JSX element opening tag.
560	</form>	JSX element opening tag.
561	</Modal>	JSX element opening tag.
562		Blank line.
563	/* — Delete Confirmation Dialog — */	Logic or UI structure — read with surrounding lines.
564	<ConfirmDialog	JSX element opening tag.
565	isOpen={!confirmDelete}	Logic or UI structure — read with surrounding lines.
566	onClose={() => setConfirmDelete(null)}	Logic or UI structure — read with surrounding lines.
567	onConfirm={handleDeleteConfirm}	Logic or UI structure — read with surrounding lines.
568	loading={deleteLoading}	Logic or UI structure — read with surrounding lines.
569	title={`Deactivate & Delete Offer?`}	Logic or UI structure — read with surrounding lines.
570	description={	Logic or UI structure — read with surrounding lines.
571	confirmDelete	Logic or UI structure — read with surrounding lines.
572	? `Are you sure you want to deactivate and remove the promo campaign "\${confirmDelete.name}"? This action...	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
573	: ''	Logic or UI structure — read with surrounding lines.
574	}	Logic or UI structure — read with surrounding lines.
575	confirmLabel="Deactivate"	Logic or UI structure — read with surrounding lines.
576	variant="danger"	Logic or UI structure — read with surrounding lines.
577	/>	Logic or UI structure — read with surrounding lines.
578	</div>	JSX element opening tag.
579	)	Logic or UI structure — read with surrounding lines.
580	}	Logic or UI structure — read with surrounding lines.
581		Blank line.

BannersPage (src/pages/BannersPage.jsx)

Total lines: 570

Route: /banners

Purpose: Marketing banners with image upload and ordering.

Lin e	Code	Explanation
1	import React, { useState, useEffect, useCallback } from 'react'	Import React hooks.
2	import { Image as ImageIcon, Plus, Trash2, Edit2, Calendar, GripVertical, Link as LinkIcon, RefreshCw, Upload } from ...	Import icons.
3	import { getBanners, createBanner, updateBanner, deleteBanner, reorderBanners } from '../services/bannerService'	Import API/database service.
4	import { uploadImage } from '../services/storageService'	Import API/database service.
5	import { supabase } from '../services/supabase'	Import API/database service.
6	import { formatDate } from '../utils/formatters'	Import helper utilities.
7	import PageLayout from '../components/layout/PageLayout'	Import UI component.
8	import Button from '../components/ui/Button'	Import UI component.
9	import Card from '../components/ui/Card'	Import UI component.
10	import Badge from '../components/ui/Badge'	Import UI component.
11	import Input from '../components/ui/Input'	Import UI component.
12	import Spinner from '../components/ui/Spinner'	Import UI component.
13	import Skeleton from '../components/ui/Skeleton'	Import UI component.
14	import EmptyState from '../components/ui/EmptyState'	Import UI component.
15	import ConfirmDialog from '../components/ui/ConfirmDialog'	Import UI component.
16	import Modal from '../components/ui/Modal'	Import UI component.
17	import Toggle from '../components/ui/Toggle'	Import UI component.
18	import toast from 'react-hot-toast'	Import dependency.
19		Blank line.
20	/**	Doc comment.
21	* ZapKart Banners Page	Doc comment.
22	* CMS panel for managing promo banners displayed in customer app.	Doc comment.
23	* Supports HTML5 drag-and-drop sorting, image uploads, and deep links.	Doc comment.
24	*/	Doc comment.
25	export default function BannersPage() {	Default export (main module).
26	const [banners, setBanners] = useState([])	React state variable.
27	const [loading, setLoading] = useState(true)	React state variable.
28	const [error, setError] = useState(null)	React state variable.
29		Blank line.
30	// Dropdown options	Comment: Dropdown options
31	const [stores, setStores] = useState([])	React state variable.
32	const [categories, setCategories] = useState([])	React state variable.
33		Blank line.
34	// Modal / Form state	Comment: Modal / Form state
35	const [showModal, setShowModal] = useState(false)	React state variable.
36	const [editingBanner, setEditingBanner] = useState(null)	React state variable.

Lin e	Code	Explanation
37	const [formLoading, setFormLoading] = useState(false)	React state variable.
38		Blank line.
39	// Form Fields	Comment: Form Fields
40	const [title, setTitle] = useState('')	React state variable.
41	const [imageUrl, setImageUrl] = useState('')	React state variable.
42	const [imageFile, setImageFile] = useState(null)	React state variable.
43	const [linkType, setLinkType] = useState('external') // store category external	React state variable.
44	const [linkValue, setLinkValue] = useState('')	React state variable.
45	const [startDate, setStartDate] = useState('')	React state variable.
46	const [endDate, setEndDate] = useState('')	React state variable.
47		Blank line.
48	// Drag and drop state	Comment: Drag and drop state
49	const [draggedIndex, setDraggedIndex] = useState(null)	React state variable.
50		Blank line.
51	// Confirm delete	Comment: Confirm delete
52	const [confirmDelete, setConfirmDelete] = useState(null)	React state variable.
53	const [deleteLoading, setDeleteLoading] = useState(false)	React state variable.
54		Blank line.
55	// Fetch banners	Comment: Fetch banners
56	const fetchBanners = useCallback(async () => {	Memoized callback function.
57	setLoading(true)	Logic or UI structure — read with surrounding lines.
58	setError(null)	Logic or UI structure — read with surrounding lines.
59	try {	Try block start.
60	const data = await getBanners()	Wait for async operation.
61	setBanners(data [])	Logic or UI structure — read with surrounding lines.
62	} catch (err) {	Catch errors.
63	setError(err.message 'Failed to fetch promotional banners.')	Logic or UI structure — read with surrounding lines.
64	} finally {	Finally block (cleanup).
65	setLoading(false)	Logic or UI structure — read with surrounding lines.
66	}	Logic or UI structure — read with surrounding lines.
67	}, [])	Logic or UI structure — read with surrounding lines.
68		Blank line.
69	// Fetch lists for select dropdowns	Comment: Fetch lists for select dropdowns
70	useEffect(() => {	Side effect (fetch, subscribe, redirect).
71	fetchBanners()	Logic or UI structure — read with surrounding lines.
72		Blank line.
73	async function loadSelectors() {	Async function for network calls.
74	try {	Try block start.
75	const [{ data: storeData }, { data: catData }] = await Promise.all([	Wait for async operation.
76	supabase.from('stores').select('id, store_name').eq('status', 'active').order('store_name'),	Logic or UI structure — read with surrounding lines.
77	supabase.from('categories').select('id, name').eq('is_active', true).order('sort_order'),	Logic or UI structure — read with surrounding lines.
78	])	Logic or UI structure — read with surrounding lines.
79	setStores(storeData [])	Logic or UI structure — read with surrounding lines.

Lin e	Code	Explanation
80	setCategories(catData [])	Logic or UI structure — read with surrounding lines.
81	} catch (err) {	Catch errors.
82	console.error('Selector lists load error:', err)	Logic or UI structure — read with surrounding lines.
83	}	Logic or UI structure — read with surrounding lines.
84	}	Logic or UI structure — read with surrounding lines.
85	loadSelectors()	Logic or UI structure — read with surrounding lines.
86	}, [fetchBanners])	Logic or UI structure — read with surrounding lines.
87		Blank line.
88	// Open Create Modal	Comment: Open Create Modal
89	const handleOpenCreate = () => {	Logic or UI structure — read with surrounding lines.
90	setEditingBanner(null)	Logic or UI structure — read with surrounding lines.
91	setTitle('')	Logic or UI structure — read with surrounding lines.
92	setImageUrl('')	Logic or UI structure — read with surrounding lines.
93	setImageFile(null)	Logic or UI structure — read with surrounding lines.
94	setLinkType('external')	Logic or UI structure — read with surrounding lines.
95	setLinkValue('')	Logic or UI structure — read with surrounding lines.
96	setStartDate('')	Logic or UI structure — read with surrounding lines.
97	setEndDate('')	Logic or UI structure — read with surrounding lines.
98	setShowModal(true)	Logic or UI structure — read with surrounding lines.
99	}	Logic or UI structure — read with surrounding lines.
100		Blank line.
101	// Open Edit Modal	Comment: Open Edit Modal
102	const handleOpenEdit = (banner) => {	Logic or UI structure — read with surrounding lines.
103	setEditingBanner(banner)	Logic or UI structure — read with surrounding lines.
104	setTitle(banner.title '')	Logic or UI structure — read with surrounding lines.
105	setImageUrl(banner.image_url '')	Logic or UI structure — read with surrounding lines.
106	setImageFile(null)	Logic or UI structure — read with surrounding lines.
107	setLinkType(banner.link_type 'external')	Logic or UI structure — read with surrounding lines.
108	setLinkValue(banner.link_value '')	Logic or UI structure — read with surrounding lines.
109		Blank line.
110	const parseDate = (d) => d ? new Date(d).toISOString().slice(0, 10) : ''	Logic or UI structure — read with surrounding lines.
111	setStartDate(parseDate(banner.start_date))	Logic or UI structure — read with surrounding lines.
112	setEndDate(parseDate(banner.end_date))	Logic or UI structure — read with surrounding lines.
113	setShowModal(true)	Logic or UI structure — read with surrounding lines.
114	}	Logic or UI structure — read with surrounding lines.
115		Blank line.
116	// Handle local image select	Comment: Handle local image select
117	const handleFileChange = (e) => {	Logic or UI structure — read with surrounding lines.
118	const file = e.target.files[0]	Logic or UI structure — read with surrounding lines.
119	if (file) {	Logic or UI structure — read with surrounding lines.
120	setImageFile(file)	Logic or UI structure — read with surrounding lines.
121	// Visual preview	Comment: Visual preview
122	const reader = new FileReader()	Logic or UI structure — read with surrounding lines.
123	reader.onloadend = () => {	Logic or UI structure — read with surrounding lines.
124	setImageUrl(reader.result)	Logic or UI structure — read with surrounding lines.
125	}	Logic or UI structure — read with surrounding lines.
126	reader.readAsDataURL(file)	Logic or UI structure — read with surrounding lines.
127	}	Logic or UI structure — read with surrounding lines.
128	}	Logic or UI structure — read with surrounding lines.
129		Blank line.
130	// Handle Form Submit	Comment: Handle Form Submit
131	const handleFormSubmit = async (e) => {	Async function for network calls.
132	e.preventDefault()	Logic or UI structure — read with surrounding lines.
133		Blank line.
134	if (!title.trim()) {	Logic or UI structure — read with surrounding lines.
135	toast.error('Banner title is required')	Toast notification.

Lin e	Code	Explanation
136	return	Logic or UI structure — read with surrounding lines.
137	}	Logic or UI structure — read with surrounding lines.
138		Blank line.
139	if (!imageUrl && !imageFile) {	Logic or UI structure — read with surrounding lines.
140	toast.error('Please select an image file or enter an image URL')	Toast notification.
141	return	Logic or UI structure — read with surrounding lines.
142	}	Logic or UI structure — read with surrounding lines.
143		Blank line.
144	if (new Date(startDate) > new Date(endDate)) {	Logic or UI structure — read with surrounding lines.
145	toast.error('Start date cannot be after end date')	Toast notification.
146	return	Logic or UI structure — read with surrounding lines.
147	}	Logic or UI structure — read with surrounding lines.
148		Blank line.
149	setFormLoading(true)	Logic or UI structure — read with surrounding lines.
150	try {	Try block start.
151	let finalImageUrl = imageUrl	Logic or UI structure — read with surrounding lines.
152		Blank line.
153	// Upload if local file is selected	Comment: Upload if local file is selected
154	if (imageFile) {	Logic or UI structure — read with surrounding lines.
155	try {	Try block start.
156	const timestamp = Date.now()	Logic or UI structure — read with surrounding lines.
157	const sanitizedTitle = title.toLowerCase().replace(/^[^a-z0-9]/g, '_').slice(0, 20)	Logic or UI structure — read with surrounding lines.
158	finalImageUrl = await uploadImage('banners', 'banner_\${sanitizedTitle}', imageFile)	Wait for async operation.
159	} catch (uploadErr) {	Catch errors.
160	// If Supabase storage is missing or returns error, fallback to visual URL preview if valid	Comment: If Supabase storage is missing or returns error, fallback to visual URL preview if valid
161	console.warn('Supabase storage upload failed, fallback to text url:', uploadErr)	Logic or UI structure — read with surrounding lines.
162	if (imageUrl.startsWith('data:')) {	Logic or UI structure — read with surrounding lines.
163	throw new Error(`Storage upload failed: \${uploadErr.message}. Direct image upload requires Supabase bucke...	Logic or UI structure — read with surrounding lines.
164	}	Logic or UI structure — read with surrounding lines.
165	}	Logic or UI structure — read with surrounding lines.
166	}	Logic or UI structure — read with surrounding lines.
167		Blank line.
168	const payload = {	Logic or UI structure — read with surrounding lines.
169	title: title.trim(),	Logic or UI structure — read with surrounding lines.
170	image_url: finalImageUrl,	Logic or UI structure — read with surrounding lines.
171	link_type: linkType,	Logic or UI structure — read with surrounding lines.
172	link_value: linkValue,	Logic or UI structure — read with surrounding lines.
173	start_date: new Date(startDate).toISOString(),	Logic or UI structure — read with surrounding lines.
174	end_date: new Date(endDate).toISOString(),	Logic or UI structure — read with surrounding lines.
175	is_active: editingBanner ? editingBanner.is_active : true,	Logic or UI structure — read with surrounding lines.
176	sort_order: editingBanner ? editingBanner.sort_order : banners.length + 1,	Logic or UI structure — read with surrounding lines.
177	}	Logic or UI structure — read with surrounding lines.
178		Blank line.

Lin e	Code	Explanation
179	if (editingBanner) {	Logic or UI structure — read with surrounding lines.
180	await updateBanner(editingBanner.id, payload)	Wait for async operation.
181	toast.success('Promo banner updated successfully')	Toast notification.
182	} else {	Logic or UI structure — read with surrounding lines.
183	await createBanner(payload)	Wait for async operation.
184	toast.success('Promo banner created successfully')	Toast notification.
185	}	Logic or UI structure — read with surrounding lines.
186		Blank line.
187	setShowModal(false)	Logic or UI structure — read with surrounding lines.
188	fetchBanners()	Logic or UI structure — read with surrounding lines.
189	} catch (err) {	Catch errors.
190	toast.error(err.message 'Action failed')	Toast notification.
191	} finally {	Finally block (cleanup).
192	setFormLoading(false)	Logic or UI structure — read with surrounding lines.
193	}	Logic or UI structure — read with surrounding lines.
194	}	Logic or UI structure — read with surrounding lines.
195		Blank line.
196	// Toggle active banner status	Comment: Toggle active banner status
197	const handleToggleActive = async (banner) => {	Async function for network calls.
198	try {	Try block start.
199	const newStatus = !banner.is_active	Logic or UI structure — read with surrounding lines.
200	await updateBanner(banner.id, { is_active: newStatus })	Wait for async operation.
201	toast.success(`Banner marked as \${newStatus ? 'active' : 'inactive'}`)	Toast notification.
202	setBanners(prev =>	Logic or UI structure — read with surrounding lines.
203	prev.map(b => (b.id === banner.id ? { ...b, is_active: newStatus } : b))	Logic or UI structure — read with surrounding lines.
204	)	Logic or UI structure — read with surrounding lines.
205	} catch (err) {	Catch errors.
206	toast.error(err.message 'Status toggle failed')	Toast notification.
207	}	Logic or UI structure — read with surrounding lines.
208	}	Logic or UI structure — read with surrounding lines.
209		Blank line.
210	// Delete banner confirmation	Comment: Delete banner confirmation
211	const handleDeleteConfirm = async () => {	Async function for network calls.
212	if (!confirmDelete) return	Logic or UI structure — read with surrounding lines.
213	setDeleteLoading(true)	Logic or UI structure — read with surrounding lines.
214	try {	Try block start.
215	await deleteBanner(confirmDelete.id)	Wait for async operation.
216	toast.success('Promo banner removed successfully')	Toast notification.
217	setConfirmDelete(null)	Logic or UI structure — read with surrounding lines.
218	fetchBanners()	Logic or UI structure — read with surrounding lines.
219	} catch (err) {	Catch errors.
220	toast.error(err.message 'Delete failed')	Toast notification.
221	} finally {	Finally block (cleanup).
222	setDeleteLoading(false)	Logic or UI structure — read with surrounding lines.
223	}	Logic or UI structure — read with surrounding lines.
224	}	Logic or UI structure — read with surrounding lines.
225		Blank line.
226	// — Drag and Drop Handlers	Comment: — Drag and Drop Handlers

Lin e	Code	Explanation
227	const handleDragStart = (index) => {	Logic or UI structure — read with surrounding lines.
228	setDraggedIndex(index)	Logic or UI structure — read with surrounding lines.
229	}	Logic or UI structure — read with surrounding lines.
230		Blank line.
231	const handleDragOver = (e, index) => {	Logic or UI structure — read with surrounding lines.
232	e.preventDefault()	Logic or UI structure — read with surrounding lines.
233	if (draggedIndex === null draggedIndex === index) return	Logic or UI structure — read with surrounding lines.
234		Blank line.
235	// Perform live swap in local state for smooth animations	Comment: Perform live swap in local state for smooth animations
236	const newBanners = [...banners]	Logic or UI structure — read with surrounding lines.
237	const draggedItem = newBanners[draggedIndex]	Logic or UI structure — read with surrounding lines.
238	newBanners.splice(draggedIndex, 1)	Logic or UI structure — read with surrounding lines.
239	newBanners.splice(index, 0, draggedItem)	Logic or UI structure — read with surrounding lines.
240		Blank line.
241	setDraggedIndex(index)	Logic or UI structure — read with surrounding lines.
242	setBanners(newBanners)	Logic or UI structure — read with surrounding lines.
243	}	Logic or UI structure — read with surrounding lines.
244		Blank line.
245	const handleDragEnd = async () => {	Async function for network calls.
246	setDraggedIndex(null)	Logic or UI structure — read with surrounding lines.
247	try {	Try block start.
248	const orderedIds = banners.map(b => b.id)	Logic or UI structure — read with surrounding lines.
249	await reorderBanners(orderedIds)	Wait for async operation.
250	toast.success('Sort order updated successfully')	Toast notification.
251	} catch (err) {	Catch errors.
252	toast.error('Reorder update failed: ' + err.message)	Toast notification.
253	fetchBanners() // revert	Logic or UI structure — read with surrounding lines.
254	}	Logic or UI structure — read with surrounding lines.
255	}	Logic or UI structure — read with surrounding lines.
256		Blank line.
257	return (	Return JSX UI.
258	<div className="space-y-6 animate-fade-in p-2">	CSS/Tailwind styling.
259	{/* — Header — */}	Logic or UI structure — read with surrounding lines.
260	<div className="flex flex-col sm:flex-row sm:items-center sm:justify-between gap-4">	CSS/Tailwind styling.
261	<div>	JSX element opening tag.
262	<h2 className="text-2xl font-bold text-on-surface">Promotional Banners</h2>	CSS/Tailwind styling.
263	<p className="text-sm text-secondary mt-0.5">	CSS/Tailwind styling.
264	Configure sliding app banners and reorder by dragging. Link directly to store catalogs or URLs.	Logic or UI structure — read with surrounding lines.
265	</p>	JSX element opening tag.
266	</div>	JSX element opening tag.
267	<div className="flex gap-2.5 self-start sm:self-auto">	CSS/Tailwind styling.
268	<button	JSX element opening tag.
269	onClick={fetchBanners}	User event handler.
270	className="flex items-center gap-1.5 px-3 py-2 rounded-lg border border-border bg-white text-secondary ho...	CSS/Tailwind styling.
271	>	Logic or UI structure — read with surrounding lines.

Lin e	Code	Explanation
272	<code><RefreshCw className="w-3.5 h-3.5" /> Refresh</code>	CSS/Tailwind styling.
273	<code></button></code>	JSX element opening tag.
274	<code><Button</code>	JSX element opening tag.
275	<code>variant="primary"</code>	Logic or UI structure — read with surrounding lines.
276	<code>onClick={handleOpenCreate}</code>	User event handler.
277	<code>className="flex items-center gap-1.5"</code>	CSS/Tailwind styling.
278	<code>></code>	Logic or UI structure — read with surrounding lines.
279	<code><Plus className="w-5 h-5" /> Add New Banner</code>	CSS/Tailwind styling.
280	<code></Button></code>	JSX element opening tag.
281	<code></div></code>	JSX element opening tag.
282	<code></div></code>	JSX element opening tag.
283		Blank line.
284	<code>{/* — Workspace Banners Grid — */}</code>	Logic or UI structure — read with surrounding lines.
285	<code>{loading ? (</code>	Logic or UI structure — read with surrounding lines.
286	<code><div className="grid grid-cols-1 md:grid-cols-2 gap-6"></code>	CSS/Tailwind styling.
287	<code>{Array.from({ length: 4 }).map((_, i) => (</code>	Logic or UI structure — read with surrounding lines.
288	<code><Skeleton key={i} className="h-48 rounded-xl" /></code>	CSS/Tailwind styling.
289	<code>)))}</code>	Logic or UI structure — read with surrounding lines.
290	<code></div></code>	JSX element opening tag.
291	<code>) : error ? (</code>	Logic or UI structure — read with surrounding lines.
292	<code><div className="bg-red-50 border border-red-200 rounded-xl p-6 text-center text-red-600 font-medium"></code>	CSS/Tailwind styling.
293	<code><p>{error}</p></code>	JSX element opening tag.
294	<code><button onClick={fetchBanners} className="mt-2 text-sm text-brand underline font-semibold"></code>	CSS/Tailwind styling.
295	<code>Retry</code>	Logic or UI structure — read with surrounding lines.
296	<code></button></code>	JSX element opening tag.
297	<code></div></code>	JSX element opening tag.
298	<code>) : banners.length === 0 ? (</code>	Logic or UI structure — read with surrounding lines.
299	<code><EmptyState</code>	JSX element opening tag.
300	<code>icon={ImageIcon}</code>	Logic or UI structure — read with surrounding lines.
301	<code>title="No promo banners active"</code>	Logic or UI structure — read with surrounding lines.
302	<code>description="Create your first homepage promo banner linking stores, products or events."</code>	Logic or UI structure — read with surrounding lines.
303	<code>className="py-12 bg-white rounded-xl border border-border"</code>	CSS/Tailwind styling.
304	<code>/></code>	Logic or UI structure — read with surrounding lines.
305	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
306	<code><div className="grid grid-cols-1 md:grid-cols-2 gap-6"></code>	CSS/Tailwind styling.
307	<code>{banners.map((banner, index) => {</code>	Logic or UI structure — read with surrounding lines.
308	<code>const isActive = banner.is_active</code>	Logic or UI structure — read with surrounding lines.
309	<code>return (</code>	Return JSX UI.
310	<code><div</code>	JSX element opening tag.
311	<code>key={banner.id}</code>	Logic or UI structure — read with surrounding lines.
312	<code>draggable</code>	Logic or UI structure — read with surrounding lines.
313	<code>onDragStart={() => handleDragStart(index)}</code>	Logic or UI structure — read with surrounding lines.
314	<code>onDragOver={(e) => handleDragOver(e, index)}</code>	Logic or UI structure — read with surrounding lines.
315	<code>onDragEnd={handleDragEnd}</code>	Logic or UI structure — read with surrounding lines.

Lin e	Code	Explanation
316	className={`relative group bg-white border rounded-xl overflow-hidden shadow-sm hover:shadow-md trans...	CSS/Tailwind styling.
317	draggedIndex === index ? 'ring-2 ring-brand ring-offset-2 scale- [0.98]' : 'border-border'	Logic or UI structure — read with surrounding lines.
318	} \${!isActive ? 'opacity-70' : ''}`}	Logic or UI structure — read with surrounding lines.
319	>	Logic or UI structure — read with surrounding lines.
320	{/* Banner visual wrapper */}	Logic or UI structure — read with surrounding lines.
321	<div className="h-36 bg- surface relative overflow-hidden flex items- center justify-center border-b bo...	CSS/Tailwind styling.
322	{banner.image_url ? (323 <img	Logic or UI structure — read with surrounding lines. JSX element opening tag.
324	src={banner.image_url}	Logic or UI structure — read with surrounding lines.
325	alt={banner.title}	Logic or UI structure — read with surrounding lines.
326	className="w-full h- full object-cover pointer-events-none"	CSS/Tailwind styling.
327	/>	Logic or UI structure — read with surrounding lines.
328	) : (329 <ImageIcon className="w- 12 h-12 text-secondary/30" />	Logic or UI structure — read with surrounding lines. Logic or UI structure — read with surrounding lines. CSS/Tailwind styling.
330	)}	Logic or UI structure — read with surrounding lines.
331	{/* Position Badge overlay */}	Logic or UI structure — read with surrounding lines.
332	<span className="absolute top-2.5 left-2.5 bg-black/60 backdrop-blur-sm text-white text-[10px] font...	CSS/Tailwind styling.
333	Pos: #{index + 1}	Logic or UI structure — read with surrounding lines.
334		JSX element opening tag.
335		Blank line.
336	{/* Drag indicator handle on hover */}	Logic or UI structure — read with surrounding lines.
337	<div className="absolute inset-0 bg-black/10 opacity-0 group- hover:opacity-100 flex items-center ju...	CSS/Tailwind styling.
338	<GripVertical className="w-8 h-8 text-white drop-shadow-md shrink-0" />	CSS/Tailwind styling.
339	</div>	JSX element opening tag.
340	</div>	JSX element opening tag.
341		Blank line.
342	{/* Banner details */}	Logic or UI structure — read with surrounding lines.
343	<div className="p-4 space-y- 2.5">	CSS/Tailwind styling.
344	<div className="flex justify-between items-start gap-2">	CSS/Tailwind styling.
345	<h4 className="text-sm font-bold text-on-surface truncate pr-1" title={banner.title}>	CSS/Tailwind styling.
346	{banner.title}	Logic or UI structure — read with surrounding lines.
347	</h4>	JSX element opening tag.
348	<div	JSX element opening tag.
349	onDragStart={(e) => e.stopPropagation()}	Logic or UI structure — read with surrounding lines.
350	onMouseDown={(e) => e.stopPropagation()}	Logic or UI structure — read with surrounding lines.
351	draggable="false"	Logic or UI structure — read with surrounding lines.
352	>	Logic or UI structure — read with surrounding lines.
353	<Toggle	JSX element opening tag.

Lin e	Code	Explanation
354	checked={banner.is_active}	Logic or UI structure — read with surrounding lines.
355	onChange={() => handleToggleActive(banner)}	User event handler.
356	/>	Logic or UI structure — read with surrounding lines.
357	</div>	JSX element opening tag.
358	</div>	JSX element opening tag.
359		Blank line.
360	<div className="grid grid- cols-2 gap-x-3 gap-y-1.5 text-[11px] text- secondary">	CSS/Tailwind styling.
361	<div className="flex items-center gap-1.5 min-w-0">	CSS/Tailwind styling.
362	<LinkIcon className="w- 3.5 h-3.5 shrink-0" />	CSS/Tailwind styling.
363		CSS/Tailwind styling.
364	Link: <strong className="text-on-surface font-semibold capitalize">{banner.link_type}	CSS/Tailwind styling.
365		JSX element opening tag.
366	</div>	JSX element opening tag.
367	<div className="flex items-center gap-1.5 min-w-0">	CSS/Tailwind styling.
368	<Calendar className="w- 3.5 h-3.5 shrink-0" />	CSS/Tailwind styling.
369		CSS/Tailwind styling.
370	Ends: <strong className="text-on-surface font- semibold">{formatDate(banner.end_date)}</stro ng>	CSS/Tailwind styling.
371		JSX element opening tag.
372	</div>	JSX element opening tag.
373	</div>	JSX element opening tag.
374		Blank line.
375	{/* Actions buttons */}	Logic or UI structure — read with surrounding lines.
376	<div	JSX element opening tag.
377	className="flex gap-2 pt- 2 border-t border-surface-variant justify- end"	CSS/Tailwind styling.
378	onDragStart={(e) => e.stopPropagation()}}	Logic or UI structure — read with surrounding lines.
379	onMouseDown={(e) => e.stopPropagation()}}	Logic or UI structure — read with surrounding lines.
380	draggable="false"	Logic or UI structure — read with surrounding lines.
381	>	Logic or UI structure — read with surrounding lines.
382	<button	JSX element opening tag.
383	onClick={() => handleOpenEdit(banner)}	User event handler.
384	className="flex items- center gap-1 text-[11px] font-bold text- primary px-3 py-1.5 rounded-lg bo...	CSS/Tailwind styling.
385	>	Logic or UI structure — read with surrounding lines.
386	<Edit2 className="w-3 h-3" /> Edit	CSS/Tailwind styling.
387	</button>	JSX element opening tag.
388	<button	JSX element opening tag.
389	onClick={() => setConfirmDelete(banner)}	User event handler.

Line	Code	Explanation
390	className="flex items-center gap-1 text-[11px] font-bold text-danger px-3 py-1.5 rounded-lg bor...	CSS/Tailwind styling.
391	>	Logic or UI structure — read with surrounding lines.
392	<Trash2 className="w-3 h-3" /> Delete	CSS/Tailwind styling.
393	</button>	JSX element opening tag.
394	</div>	JSX element opening tag.
395	</div>	JSX element opening tag.
396	</div>	JSX element opening tag.
397	)	Logic or UI structure — read with surrounding lines.
398	}}}	Logic or UI structure — read with surrounding lines.
399	</div>	JSX element opening tag.
400	}}	Logic or UI structure — read with surrounding lines.
401		Blank line.
402	{/* — Add/Edit Banner Modal — */}	Logic or UI structure — read with surrounding lines.
403	<Modal	JSX element opening tag.
404	isOpen={showModal}	Logic or UI structure — read with surrounding lines.
405	onClose={() => setShowModal(false)}	Logic or UI structure — read with surrounding lines.
406	title={editingBanner ? 'Edit Banner Details' : 'Add New Promotional Banner'}	Logic or UI structure — read with surrounding lines.
407	size="md"	Logic or UI structure — read with surrounding lines.
408	closeOnBackdrop={!formLoading}	Logic or UI structure — read with surrounding lines.
409	>	Logic or UI structure — read with surrounding lines.
410	<form onSubmit={handleFormSubmit} className="space-y-4 pt-2">	CSS/Tailwind styling.
411	{/* Banner Title */}	Logic or UI structure — read with surrounding lines.
412	<Input	JSX element opening tag.
413	label="Banner Campaign Title"	Logic or UI structure — read with surrounding lines.
414	placeholder="e.g. 50% Off Fresh Farm Vegetables"	Logic or UI structure — read with surrounding lines.
415	value={title}	Logic or UI structure — read with surrounding lines.
416	onChange={(e) => setTitle(e.target.value)}	User event handler.
417	required	Logic or UI structure — read with surrounding lines.
418	/>	Logic or UI structure — read with surrounding lines.
419		Blank line.
420	{/* Image Input Selection */}	Logic or UI structure — read with surrounding lines.
421	<div className="space-y-2">	CSS/Tailwind styling.
422	<label className="text-xs font-semibold text-secondary flex items-center justify-between">	CSS/Tailwind styling.
423	Promo Image Asset	JSX element opening tag.
424	Vapor-fast uploads supported	CSS/Tailwind styling.
425	</label>	JSX element opening tag.
426	<div className="border border-dashed border-border hover:border-brand rounded-xl p-4 flex flex-col items-...	CSS/Tailwind styling.
427	<input	JSX element opening tag.
428	type="file"	Logic or UI structure — read with surrounding lines.
429	accept="image/*"	Logic or UI structure — read with surrounding lines.
430	onChange={handleFileChange}	User event handler.
431	className="absolute inset-0 opacity-0 cursor-pointer w-full h-full"	CSS/Tailwind styling.
432	/>	Logic or UI structure — read with surrounding lines.
433	<Upload className="w-7 h-7 text-secondary" />	CSS/Tailwind styling.

Line	Code	Explanation
434	<code><p className="text-xs font-semibold text-on-surface">Click to upload file</p></code>	CSS/Tailwind styling.
435	<code><p className="text-[10px] text-secondary">SVG, PNG, JPG or WebP (recommended 720x360px)</p></code>	CSS/Tailwind styling.
436	<code></div></code>	JSX element opening tag.
437		Blank line.
438	<code>{/* Fallback Text URL input */}</code>	Logic or UI structure — read with surrounding lines.
439	<code><Input</code>	JSX element opening tag.
440	<code>label="Or enter Image Direct URL (fallback)"</code>	Logic or UI structure — read with surrounding lines.
441	<code>placeholder="https://example.com/banner.png"</code>	Logic or UI structure — read with surrounding lines.
442	<code>value={imageUrl}</code>	Logic or UI structure — read with surrounding lines.
443	<code>onChange={(e) => {</code>	User event handler.
444	<code>setImageUrl(e.target.value)</code>	Logic or UI structure — read with surrounding lines.
445	<code>setImageFile(null)</code>	Logic or UI structure — read with surrounding lines.
446	<code>}}}</code>	Logic or UI structure — read with surrounding lines.
447	<code>className="text-xs mt-2"</code>	CSS/Tailwind styling.
448	<code>/></code>	Logic or UI structure — read with surrounding lines.
449	<code></div></code>	JSX element opening tag.
450		Blank line.
451	<code><div className="grid grid-cols-1 md:grid-cols-2 gap-4"></code>	CSS/Tailwind styling.
452	<code>{/* Link Type */}</code>	Logic or UI structure — read with surrounding lines.
453	<code><div className="flex flex-col gap-1.5"></code>	CSS/Tailwind styling.
454	<code><label className="text-xs font-semibold text-secondary">Link Deep Type</label></code>	CSS/Tailwind styling.
455	<code><select</code>	JSX element opening tag.
456	<code>value={linkType}</code>	Logic or UI structure — read with surrounding lines.
457	<code>onChange={(e) => {</code>	User event handler.
458	<code>setLinkType(e.target.value)</code>	Logic or UI structure — read with surrounding lines.
459	<code>setLinkValue('')</code>	Logic or UI structure — read with surrounding lines.
460	<code>}}}</code>	Logic or UI structure — read with surrounding lines.
461	<code>className="w-full px-3 py-2 text-xs border border-b rounded-lg bg-surface outline-none focus:rin...</code>	CSS/Tailwind styling.
462	<code>></code>	Logic or UI structure — read with surrounding lines.
463	<code><option value="external">External Link (Web URL)</option></code>	JSX element opening tag.
464	<code><option value="store">Store Dashboard Catalog</option></code>	JSX element opening tag.
465	<code><option value="category">Category Shelf Filter</option></code>	JSX element opening tag.
466	<code></select></code>	JSX element opening tag.
467	<code></div></code>	JSX element opening tag.
468		Blank line.
469	<code>{/* Link Value (dependent on type) */}</code>	Logic or UI structure — read with surrounding lines.
470	<code>{linkType === 'external' ? (</code>	Logic or UI structure — read with surrounding lines.
471	<code><Input</code>	JSX element opening tag.
472	<code>label="Redirect URL"</code>	Logic or UI structure — read with surrounding lines.
473	<code>placeholder="e.g. https://www.zapkart.in"</code>	Logic or UI structure — read with surrounding lines.
474	<code>value={linkValue}</code>	Logic or UI structure — read with surrounding lines.
475	<code>onChange={(e) => setLinkValue(e.target.value)}</code>	User event handler.

Lin e	Code	Explanation
476	required	Logic or UI structure — read with surrounding lines.
477	/>	Logic or UI structure — read with surrounding lines.
478	) : linkType === 'store' ? (	Logic or UI structure — read with surrounding lines.
479	<div className="flex flex-col gap-1.5">	CSS/Tailwind styling.
480	<label className="text-xs font-semibold text-secondary">Select Store</label>	CSS/Tailwind styling.
481	<select	JSX element opening tag.
482	value={linkValue}	Logic or UI structure — read with surrounding lines.
483	onChange={(e) => setLinkValue(e.target.value)}	User event handler.
484	required	Logic or UI structure — read with surrounding lines.
485	className="w-full px-3 py-2 text-xs border border-border rounded-lg bg- surface outline-none focus:r...	CSS/Tailwind styling.
486	>	Logic or UI structure — read with surrounding lines.
487	<option value="">Choose Store...</option>	JSX element opening tag.
488	{stores.map((s) => (	Logic or UI structure — read with surrounding lines.
489	<option key={s.id} value={s.id}>{s.store_name}</option>	JSX element opening tag.
490	)))	Logic or UI structure — read with surrounding lines.
491	</select>	JSX element opening tag.
492	</div>	JSX element opening tag.
493	) : (	Logic or UI structure — read with surrounding lines.
494	<div className="flex flex-col gap-1.5">	CSS/Tailwind styling.
495	<label className="text-xs font-semibold text-secondary">Select Category</label>	CSS/Tailwind styling.
496	<select	JSX element opening tag.
497	value={linkValue}	Logic or UI structure — read with surrounding lines.
498	onChange={(e) => setLinkValue(e.target.value)}	User event handler.
499	required	Logic or UI structure — read with surrounding lines.
500	className="w-full px-3 py-2 text-xs border border-border rounded-lg bg- surface outline-none focus:r...	CSS/Tailwind styling.
501	>	Logic or UI structure — read with surrounding lines.
502	<option value="">Choose Category...</option>	JSX element opening tag.
503	{categories.map((c) => (	Logic or UI structure — read with surrounding lines.
504	<option key={c.id} value={c.id}>{c.name}</option>	JSX element opening tag.
505	)))	Logic or UI structure — read with surrounding lines.
506	</select>	JSX element opening tag.
507	</div>	JSX element opening tag.
508	))	Logic or UI structure — read with surrounding lines.
509		Blank line.
510	{/* Start Date */}	Logic or UI structure — read with surrounding lines.
511	<Input	JSX element opening tag.
512	type="date"	Logic or UI structure — read with surrounding lines.
513	label="Promotions Start Date"	Logic or UI structure — read with surrounding lines.
514	value={startDate}	Logic or UI structure — read with surrounding lines.
515	onChange={(e) => setStartDate(e.target.value)}	User event handler.
516	required	Logic or UI structure — read with surrounding lines.
517	/>	Logic or UI structure — read with surrounding lines.
518		Blank line.
519	{/* End Date */}	Logic or UI structure — read with surrounding lines.
520	<Input	JSX element opening tag.

Lin e	Code	Explanation
521	type="date"	Logic or UI structure — read with surrounding lines.
522	label="Promotions End Date"	Logic or UI structure — read with surrounding lines.
523	value={endDate}	Logic or UI structure — read with surrounding lines.
524	onChange={(e) => setEndDate(e.target.value)}	User event handler.
525	required	Logic or UI structure — read with surrounding lines.
526	/>	Logic or UI structure — read with surrounding lines.
527	</div>	JSX element opening tag.
528		Blank line.
529	{/* Buttons */}	Logic or UI structure — read with surrounding lines.
530	<div className="flex gap-2.5 pt-4 border-t border-border">	CSS/Tailwind styling.
531	<Button	JSX element opening tag.
532	variant="outline"	Logic or UI structure — read with surrounding lines.
533	type="button"	Logic or UI structure — read with surrounding lines.
534	onClick={() => setShowModal(false)}	User event handler.
535	disabled={formLoading}	Logic or UI structure — read with surrounding lines.
536	className="flex-1"	CSS/Tailwind styling.
537	>	Logic or UI structure — read with surrounding lines.
538	Cancel	Logic or UI structure — read with surrounding lines.
539	</Button>	JSX element opening tag.
540	<Button	JSX element opening tag.
541	variant="primary"	Logic or UI structure — read with surrounding lines.
542	type="submit"	Logic or UI structure — read with surrounding lines.
543	isLoading={formLoading}	Logic or UI structure — read with surrounding lines.
544	className="flex-1"	CSS/Tailwind styling.
545	>	Logic or UI structure — read with surrounding lines.
546	{editingBanner ? 'Save Changes' : 'Create Banner'}	Logic or UI structure — read with surrounding lines.
547	</Button>	JSX element opening tag.
548	</div>	JSX element opening tag.
549	</form>	JSX element opening tag.
550	</Modal>	JSX element opening tag.
551		Blank line.
552	{/* — Delete Confirmation Dialog — */}	Logic or UI structure — read with surrounding lines.
553	<ConfirmDialog	JSX element opening tag.
554	isOpen={!confirmDelete}	Logic or UI structure — read with surrounding lines.
555	onClose={() => setConfirmDelete(null)}	Logic or UI structure — read with surrounding lines.
556	onConfirm={handleDeleteConfirm}	Logic or UI structure — read with surrounding lines.
557	loading={deleteLoading}	Logic or UI structure — read with surrounding lines.
558	title="Remove Promotion Banner?"	Logic or UI structure — read with surrounding lines.
559	description={	Logic or UI structure — read with surrounding lines.
560	confirmDelete	Logic or UI structure — read with surrounding lines.
561	? `Are you sure you want to permanently remove promo banner campaign "\${confirmDelete.title}"? Customers ...	Logic or UI structure — read with surrounding lines.
562	: ''	Logic or UI structure — read with surrounding lines.
563	}	Logic or UI structure — read with surrounding lines.
564	confirmLabel="Remove Banner"	Logic or UI structure — read with surrounding lines.
565	variant="danger"	Logic or UI structure — read with surrounding lines.
566	/>	Logic or UI structure — read with surrounding lines.
567	</div>	JSX element opening tag.
568	)	Logic or UI structure — read with surrounding lines.
569	}	Logic or UI structure — read with surrounding lines.
570		Blank line.

AnalyticsPage (src/pages/AnalyticsPage.jsx)

Total lines: 406

Route: /analytics

Purpose: Charts, date filters, CSV export.

Line	Code	Explanation
1	import React, { useState, useEffect, useCallback } from 'react'	Import React hooks.
2	import { TrendingUp, ShoppingBag, Store, Award, Calendar, FileSpreadsheet, RefreshCw, BarChart2, Star } from 'lucide-...'	Import icons.
3	import { getDashboardSummary, getRevenueChart, getOrderTrends, getCategoryBreakdown, getTopStores, getTopProducts } f...	Import API/database service.
4	import { formatCurrency } from '../utils/formatters'	Import helper utilities.
5	import RevenueChart from '../components/analytics/RevenueChart'	Import UI component.
6	import OrdersChart from '../components/analytics/OrdersChart'	Import UI component.
7	import CategoryPieChart from '../components/analytics/CategoryPieChart'	Import UI component.
8	import PageLayout from '../components/layout/PageLayout'	Import UI component.
9	import Button from '../components/ui/Button'	Import UI component.
10	import Card from '../components/ui/Card'	Import UI component.
11	import Spinner from '../components/ui/Spinner'	Import UI component.
12	import Skeleton from '../components/ui/Skeleton'	Import UI component.
13	import toast from 'react-hot-toast'	Import dependency.
14		Blank line.
15	/**	Doc comment.
16	* ZapKart Analytics Page	Doc comment.
17	* Deep-dive analysis and dashboard with revenue tracking, category distributions, and inventory leaderboards.	Doc comment.
18	*/	Doc comment.
19	export default function AnalyticsPage() {	Default export (main module).
20	// Date period states: '7d' '30d' '90d'	Comment: Date period states: '7d' '30d' '90d'
21	const [period, setPeriod] = useState('30d')	React state variable.
22		Blank line.
23	// Custom Date inputs (active if custom is selected)	Comment: Custom Date inputs (active if custom is selected)
24	const [showCustomRange, setShowCustomRange] = useState(false)	React state variable.
25	const [startDate, setStartDate] = useState('')	React state variable.
26	const [endDate, setEndDate] = useState('')	React state variable.
27		Blank line.
28	// Data states	Comment: Data states
29	const [summary, setSummary] = useState(null)	React state variable.
30	const [revenueData, setRevenueData] = useState([])	React state variable.
31	const [orderTrends, setOrderTrends] = useState([])	React state variable.
32	const [categoryBreakdown, setCategoryBreakdown] = useState([])	React state variable.
33	const [topStores, setTopStores] = useState([])	React state variable.
34	const [topProducts, setTopProducts] = useState([])	React state variable.
35		Blank line.
36	const [loading, setLoading] = useState(true)	React state variable.
37	const [error, setError] = useState(null)	React state variable.

Line	Code	Explanation
38		Blank line.
39	// Fetch all analytics components	Comment: Fetch all analytics components
40	const fetchAnalytics = useCallback(async () =>	Memoized callback function.
41	{	
41	setLoading(true)	Logic or UI structure — read with surrounding lines.
42	setError(null)	Logic or UI structure — read with surrounding lines.
43	try {	Try block start.
44	const chartPeriod = period === '7d' ?	Logic or UI structure — read with surrounding lines.
44	'daily' : period === '30d' ? 'weekly' : 'monthly'	
45		Blank line.
46	const [	Logic or UI structure — read with surrounding lines.
47	sum,	Logic or UI structure — read with surrounding lines.
48	rev,	Logic or UI structure — read with surrounding lines.
49	trends,	Logic or UI structure — read with surrounding lines.
50	cats,	Logic or UI structure — read with surrounding lines.
51	stores,	Logic or UI structure — read with surrounding lines.
52	products,	Logic or UI structure — read with surrounding lines.
53	] = await Promise.all([	Wait for async operation.
54	getDashboardSummary(),	Logic or UI structure — read with surrounding lines.
55	getRevenueChart(chartPeriod),	Logic or UI structure — read with surrounding lines.
56	getOrderTrends(chartPeriod),	Logic or UI structure — read with surrounding lines.
57	getCategoryBreakdown(),	Logic or UI structure — read with surrounding lines.
58	getTopStores(5),	Logic or UI structure — read with surrounding lines.
59	getTopProducts(5),	Logic or UI structure — read with surrounding lines.
60	])	Logic or UI structure — read with surrounding lines.
61		Blank line.
62	setSummary(sum)	Logic or UI structure — read with surrounding lines.
63		Blank line.
64	// Perform client-side custom date trim if specified	Comment: Perform client-side custom date trim if specified
65	let finalRevenue = rev []	Logic or UI structure — read with surrounding lines.
66	let finalTrends = trends []	Logic or UI structure — read with surrounding lines.
67		Blank line.
68	if (showCustomRange && startDate && endDate) {	Logic or UI structure — read with surrounding lines.
69	const start = new Date(startDate)	Logic or UI structure — read with surrounding lines.
70	const end = new Date(endDate)	Logic or UI structure — read with surrounding lines.
71	end.setHours(23, 59, 59, 999)	Logic or UI structure — read with surrounding lines.
72		Blank line.

Line	Code	Explanation
73	const inBounds = (item) => {	Logic or UI structure — read with surrounding lines.
74	const d = new Date(item.date)	Logic or UI structure — read with surrounding lines.
75	return d >= start && d <= end	Logic or UI structure — read with surrounding lines.
76	}	Logic or UI structure — read with surrounding lines.
77		Blank line.
78	finalRevenue = finalRevenue.filter(inBounds)	Logic or UI structure — read with surrounding lines.
79	finalTrends = finalTrends.filter(inBounds)	Logic or UI structure — read with surrounding lines.
80	}	Logic or UI structure — read with surrounding lines.
81		Blank line.
82	setRevenueData(finalRevenue)	Logic or UI structure — read with surrounding lines.
83	setOrderTrends(finalTrends)	Logic or UI structure — read with surrounding lines.
84	setCategoryBreakdown(cats [])	Logic or UI structure — read with surrounding lines.
85	setTopStores(stores [])	Logic or UI structure — read with surrounding lines.
86	setTopProducts(products [])	Logic or UI structure — read with surrounding lines.
87	} catch (err) {	Catch errors.
88	setError(err.message 'Failed to fetch platform metrics analysis.')	Logic or UI structure — read with surrounding lines.
89	} finally {	Finally block (cleanup).
90	setLoading(false)	Logic or UI structure — read with surrounding lines.
91	}	Logic or UI structure — read with surrounding lines.
92	}, [period, showCustomRange, startDate, endDate])	Logic or UI structure — read with surrounding lines.
93		Blank line.
94	useEffect(() => {	Side effect (fetch, subscribe, redirect).
95	fetchAnalytics()	Logic or UI structure — read with surrounding lines.
96	}, [fetchAnalytics])	Logic or UI structure — read with surrounding lines.
97		Blank line.
98	// Download active report in CSV format	Comment: Download active report in CSV format
99	const handleExportCSV = () => {	Logic or UI structure — read with surrounding lines.
100	if (!summary) {	Logic or UI structure — read with surrounding lines.
101	toast.error('No dashboard analytics loaded to export')	Toast notification.
102	return	Logic or UI structure — read with surrounding lines.
103	}	Logic or UI structure — read with surrounding lines.
104		Blank line.
105	const headers = ['Metric Report Name', 'Value']	Logic or UI structure — read with surrounding lines.
106	const rows = [	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
107	<code>['Gross Sales Revenue', formatCurrency(summary.grossSales 0)],</code>	Logic or UI structure — read with surrounding lines.
108	<code>['Total Orders Volume', summary.totalOrders 0],</code>	Logic or UI structure — read with surrounding lines.
109	<code>['Avg Order Value (AOV)', formatCurrency(summary.avgOrderValue 0)],</code>	Logic or UI structure — read with surrounding lines.
110	<code>['Active Merchants count', summary.activeStores 0],</code>	Logic or UI structure — read with surrounding lines.
111	<code>['Active Rider count', summary.activeRiders 0],</code>	Logic or UI structure — read with surrounding lines.
112	<code>]</code>	Logic or UI structure — read with surrounding lines.
113		Blank line.
114	<code>const csvContent =</code>	Logic or UI structure — read with surrounding lines.
115	<code>'data:text/csv;charset=utf-8,' +</code>	Logic or UI structure — read with surrounding lines.
116	<code>[headers.join(','), ...rows.map((e) => e.map(val => `"\${String(val)}"`).join(',')]).join('\n')]</code>	Logic or UI structure — read with surrounding lines.
117		Blank line.
118	<code>const encodedUri = encodeURIComponent(csvContent)</code>	Logic or UI structure — read with surrounding lines.
119	<code>const link = document.createElement('a')</code>	Logic or UI structure — read with surrounding lines.
120	<code>link.setAttribute('href', encodedUri)</code>	Logic or UI structure — read with surrounding lines.
121	<code>link.setAttribute('download', `Zapkart_Platform_Report_\${new Date().toISOString().slice(0, 10)}.csv`)</code>	Logic or UI structure — read with surrounding lines.
122	<code>document.body.appendChild(link)</code>	Logic or UI structure — read with surrounding lines.
123	<code>link.click()</code>	Logic or UI structure — read with surrounding lines.
124	<code>document.body.removeChild(link)</code>	Logic or UI structure — read with surrounding lines.
125	<code>toast.success('Performance report CSV downloaded successfully.')</code>	Toast notification.
126	<code>}</code>	Logic or UI structure — read with surrounding lines.
127		Blank line.
128	<code>return (</code>	Return JSX UI.
129	<code><div className="space-y-6 animate-fade-in p- 2"></code>	CSS/Tailwind styling.
130	<code>/* — Page Header & CSV Export — */</code>	Logic or UI structure — read with surrounding lines.
131	<code><div className="flex flex-col sm:flex-row sm:items-center sm:justify-between gap-4"></code>	CSS/Tailwind styling.
132	<code><div></code>	JSX element opening tag.
133	<code><h2 className="text-2xl font-bold text- on-surface font-headline-md">Platform Performance Analytics</h2></code>	CSS/Tailwind styling.
134	<code><p className="text-sm text-secondary mt-0.5"></code>	CSS/Tailwind styling.
135	<code>Realtime charts, customer order volumes, merchant distributions, and brand leaderboards.</code>	Logic or UI structure — read with surrounding lines.
136	<code></p></code>	JSX element opening tag.
137	<code></div></code>	JSX element opening tag.
138	<code><div className="flex gap-2.5 self-start sm:self-auto"></code>	CSS/Tailwind styling.
139	<code><button</code>	JSX element opening tag.

Line	Code	Explanation
140	onClick={fetchAnalytics}	User event handler.
141	className="flex items-center gap-1.5 px-3 py-2 rounded-lg border border-border bg- white text-secondary ho...	CSS/Tailwind styling.
142	>	Logic or UI structure — read with surrounding lines.
143	<RefreshCw className="w-3.5 h-3.5" /> Refresh	CSS/Tailwind styling.
144	</button>	JSX element opening tag.
145	<button	JSX element opening tag.
146	onClick={handleExportCSV}	User event handler.
147	className="flex items-center gap-2 px-4 py-2.5 rounded-lg bg-green-600 hover:bg- green-700 text-white text...	CSS/Tailwind styling.
148	>	Logic or UI structure — read with surrounding lines.
149	<FileSpreadsheet className="w-4 h-4" > Export Report CSV	CSS/Tailwind styling.
150	</button>	JSX element opening tag.
151	</div>	JSX element opening tag.
152	</div>	JSX element opening tag.
153		Blank line.
154	{/* — Date filter controls — */}	Logic or UI structure — read with surrounding lines.
155	<div className="bg-white rounded-xl border border-border p-4 flex flex-col md:flex-row gap-4 items-center justi...	CSS/Tailwind styling.
156	{/* Toggle options */}	Logic or UI structure — read with surrounding lines.
157	<div className="flex gap-1.5 p-1 bg- surface border border-border rounded-lg w-full md:w-auto">	CSS/Tailwind styling.
158	{['7d', '30d', '90d'].map((opt) => (	Logic or UI structure — read with surrounding lines.
159	<button	JSX element opening tag.
160	key={opt}	Logic or UI structure — read with surrounding lines.
161	onClick={() => { setPeriod(opt); setShowCustomRange(false) }}	User event handler.
162	className={`flex-1 md:flex-initial px-4 py-1.5 rounded-md text-xs font-bold transition-all \${	CSS/Tailwind styling.
163	period === opt && !showCustomRange	Logic or UI structure — read with surrounding lines.
164	? 'bg-white text-on-surface shadow-sm border border-border/20'	Logic or UI structure — read with surrounding lines.
165	: 'text-secondary hover:text- on-surface'	Logic or UI structure — read with surrounding lines.
166	}` }	Logic or UI structure — read with surrounding lines.
167	>	Logic or UI structure — read with surrounding lines.
168	{opt === '7d' ? 'Last 7 Days' : opt === '30d' ? 'Last 30 Days' : 'Last 90 Days'}	Logic or UI structure — read with surrounding lines.
169	</button>	JSX element opening tag.
170	))}	Logic or UI structure — read with surrounding lines.
171	<button	JSX element opening tag.
172	onClick={() => setShowCustomRange(true)}	User event handler.
173	className={`flex-1 md:flex-initial px-4 py-1.5 rounded-md text-xs font-bold transition-all \${	CSS/Tailwind styling.

Line	Code	Explanation
174	showCustomRange	Logic or UI structure — read with surrounding lines.
175	? 'bg-white text-on-surface shadow-sm border border-border/20'	Logic or UI structure — read with surrounding lines.
176	: 'text-secondary hover:text-on-surface'	Logic or UI structure — read with surrounding lines.
177	}` }	Logic or UI structure — read with surrounding lines.
178	>	Logic or UI structure — read with surrounding lines.
179	Custom Range	Logic or UI structure — read with surrounding lines.
180	</button>	JSX element opening tag.
181	</div>	JSX element opening tag.
182		Blank line.
183	{/* Custom date range fields (only if active) */}	Logic or UI structure — read with surrounding lines.
184	{showCustomRange && (	Logic or UI structure — read with surrounding lines.
185	<div className="flex flex-wrap items-center gap-3 w-full md:w-auto">	CSS/Tailwind styling.
186	<div className="flex items-center gap-1.5 flex-1 md:flex-initial">	CSS/Tailwind styling.
187	Start:	CSS/Tailwind styling.
188	<input	JSX element opening tag.
189	type="date"	Logic or UI structure — read with surrounding lines.
190	value={startDate}	Logic or UI structure — read with surrounding lines.
191	onChange={(e) => setStartDate(e.target.value)}	User event handler.
192	className="px-3 py-1.5 text-xs border border-border rounded-lg outline-none focus:ring-1 focus:ring-b...	CSS/Tailwind styling.
193	/>	Logic or UI structure — read with surrounding lines.
194	</div>	JSX element opening tag.
195	<div className="flex items-center gap-1.5 flex-1 md:flex-initial">	CSS/Tailwind styling.
196	End:	CSS/Tailwind styling.
197	<input	JSX element opening tag.
198	type="date"	Logic or UI structure — read with surrounding lines.
199	value={endDate}	Logic or UI structure — read with surrounding lines.
200	onChange={(e) => setEndDate(e.target.value)}	User event handler.
201	className="px-3 py-1.5 text-xs border border-border rounded-lg outline-none focus:ring-1 focus:ring-b...	CSS/Tailwind styling.
202	/>	Logic or UI structure — read with surrounding lines.
203	</div>	JSX element opening tag.
204	<Button	JSX element opening tag.
205	variant="outline"	Logic or UI structure — read with surrounding lines.
206	onClick={fetchAnalytics}	User event handler.
207	disabled={!startDate !endDate}	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
208	className="text-xs py-1 px-3 min-h-[32px]"	CSS/Tailwind styling.
209	>	Logic or UI structure — read with surrounding lines.
210	Apply Filter	Logic or UI structure — read with surrounding lines.
211	</Button>	JSX element opening tag.
212	</div>	JSX element opening tag.
213	)}	Logic or UI structure — read with surrounding lines.
214	</div>	JSX element opening tag.
215		Blank line.
216	{/* Screen State Loading */}	Logic or UI structure — read with surrounding lines.
217	{loading ? (	Logic or UI structure — read with surrounding lines.
218	<div className="space-y-6">	CSS/Tailwind styling.
219	<div className="grid grid-cols-1 md:grid-cols-4 gap-4">	CSS/Tailwind styling.
220	{Array.from({ length: 4 }).map((_, i)	Logic or UI structure — read with surrounding lines.
221	=> (<Skeleton key={i} className="h-24 rounded-xl" />	CSS/Tailwind styling.
222	))}	Logic or UI structure — read with surrounding lines.
223	</div>	JSX element opening tag.
224	<div className="grid grid-cols-1 lg:grid-cols-3 gap-6">	CSS/Tailwind styling.
225	<Skeleton className="h-80 rounded-xl lg:col-span-2" />	CSS/Tailwind styling.
226	<Skeleton className="h-80 rounded-xl" />	CSS/Tailwind styling.
227	</div>	JSX element opening tag.
228	</div>	JSX element opening tag.
229	) : error ? (	Logic or UI structure — read with surrounding lines.
230	<div className="bg-red-50 border border-red-200 rounded-xl p-8 text-center text-red-600 font-medium">	CSS/Tailwind styling.
231	{error}	JSX element opening tag.
232	<button onClick={fetchAnalytics} className="mt-2 text-sm text-brand underline font-semibold">	CSS/Tailwind styling.
233	Retry	Logic or UI structure — read with surrounding lines.
234	</button>	JSX element opening tag.
235	</div>	JSX element opening tag.
236	) : (	Logic or UI structure — read with surrounding lines.
237	<>	JSX element opening tag.
238	{/* — KPI Aggregated Cards Row — */}	Logic or UI structure — read with surrounding lines.
239	<div className="grid grid-cols-1 md:grid-cols-4 gap-5">	CSS/Tailwind styling.
240	{/* Sales */}	Logic or UI structure — read with surrounding lines.
241	<Card>	JSX element opening tag.
242	<div className="flex justify-between items-start">	CSS/Tailwind styling.
243	<div>	JSX element opening tag.
244	<p className="text-[11px] text-secondary font-bold uppercase tracking-wider">Gross Platform Sales</p>	CSS/Tailwind styling.

Line	Code	Explanation
245	<code><h3 className="text-xl font-bold text-on-surface mt-1.5"></code>	CSS/Tailwind styling.
246	<code>{formatCurrency(summary?.grossSales 0)}</code>	Logic or UI structure — read with surrounding lines.
247	<code></h3></code>	JSX element opening tag.
248	<code></div></code>	JSX element opening tag.
249	<code><div className="p-2.5 bg-brand/10 text-brand rounded-lg"></code>	CSS/Tailwind styling.
250	<code><TrendingUp className="w-5 h-5" /></code>	CSS/Tailwind styling.
251	<code></div></code>	JSX element opening tag.
252	<code></div></code>	JSX element opening tag.
253	<code></Card></code>	JSX element opening tag.
254		Blank line.
255	<code>{/* Volume */}</code>	Logic or UI structure — read with surrounding lines.
256	<code><Card></code>	JSX element opening tag.
257	<code><div className="flex justify-between items-start"></code>	CSS/Tailwind styling.
258	<code><div></code>	JSX element opening tag.
259	<code><p className="text-[11px] text-secondary font-bold uppercase tracking-wider">Completed Orders</p></code>	CSS/Tailwind styling.
260	<code><h3 className="text-xl font-bold text-on-surface mt-1.5"></code>	CSS/Tailwind styling.
261	<code>{summary?.deliveredOrders 0} / {summary?.totalOrders 0}</code>	Logic or UI structure — read with surrounding lines.
262	<code></h3></code>	JSX element opening tag.
263	<code></div></code>	JSX element opening tag.
264	<code><div className="p-2.5 bg-info/10 text-info rounded-lg"></code>	CSS/Tailwind styling.
265	<code><ShoppingBag className="w-5 h-5" /></code>	CSS/Tailwind styling.
266	<code></div></code>	JSX element opening tag.
267	<code></div></code>	JSX element opening tag.
268	<code></Card></code>	JSX element opening tag.
269		Blank line.
270	<code>{/* AOV */}</code>	Logic or UI structure — read with surrounding lines.
271	<code><Card></code>	JSX element opening tag.
272	<code><div className="flex justify-between items-start"></code>	CSS/Tailwind styling.
273	<code><div></code>	JSX element opening tag.
274	<code><p className="text-[11px] text-secondary font-bold uppercase tracking-wider">Avg Order Value (AOV)</p></code>	CSS/Tailwind styling.
275	<code><h3 className="text-xl font-bold text-on-surface mt-1.5"></code>	CSS/Tailwind styling.
276	<code>{formatCurrency(summary?.avgOrderValue 0)}</code>	Logic or UI structure — read with surrounding lines.
277	<code></h3></code>	JSX element opening tag.
278	<code></div></code>	JSX element opening tag.
279	<code><div className="p-2.5 bg-success/10 text-success rounded-lg"></code>	CSS/Tailwind styling.
280	<code><Award className="w-5 h-5" /></code>	CSS/Tailwind styling.
281	<code></div></code>	JSX element opening tag.
282	<code></div></code>	JSX element opening tag.
283	<code></Card></code>	JSX element opening tag.
284		Blank line.
285	<code>{/* Stores */}</code>	Logic or UI structure — read with surrounding lines.
286	<code><Card></code>	JSX element opening tag.

Line	Code	Explanation
287	<code><div className="flex justify-between items-start"></code>	CSS/Tailwind styling.
288	<code><div></code>	JSX element opening tag.
289	<code><p className="text-[11px] text-secondary font-bold uppercase tracking-wider">Active Store Network</p></code>	CSS/Tailwind styling.
290	<code><h3 className="text-xl font-bold text-on-surface mt-1.5"></code>	CSS/Tailwind styling.
291	<code>{summary?.activeStores 0}</code> Stores	Logic or UI structure — read with surrounding lines.
292	<code></h3></code>	JSX element opening tag.
293	<code></div></code>	JSX element opening tag.
294	<code><div className="p-2.5 bg-warning/10 text-warning rounded-lg"></code>	CSS/Tailwind styling.
295	<code><Store className="w-5 h-5" /></code>	CSS/Tailwind styling.
296	<code></div></code>	JSX element opening tag.
297	<code></div></code>	JSX element opening tag.
298	<code></Card></code>	JSX element opening tag.
299	<code></div></code>	JSX element opening tag.
300		Blank line.
301	<code>/* — Interactive Charts Grid — */</code>	Logic or UI structure — read with surrounding lines.
302	<code><div className="grid grid-cols-1 lg:grid-cols-3 gap-6"></code>	CSS/Tailwind styling.
303	<code>/* Revenue Trend LineChart */</code>	Logic or UI structure — read with surrounding lines.
304	<code><Card className="lg:col-span-2 flex flex-col justify-between"></code>	CSS/Tailwind styling.
305	<code><div></code>	JSX element opening tag.
306	<code><h4 className="text-xs font-bold text-secondary uppercase tracking-wider">Gross Platform Revenue Tren...</code>	CSS/Tailwind styling.
307	<code><p className="text-[10px] text-secondary mt-0.5">Displays total customer subtotal and delivery collec...</code>	CSS/Tailwind styling.
308	<code></div></code>	JSX element opening tag.
309	<code><RevenueChart data={revenueData} /></code>	Self-closing JSX element.
310	<code></Card></code>	JSX element opening tag.
311		Blank line.
312	<code>/* Category breakdown share PieChart */</code>	Logic or UI structure — read with surrounding lines.
313	<code><Card className="flex flex-col justify-between"></code>	CSS/Tailwind styling.
314	<code><div></code>	JSX element opening tag.
315	<code><h4 className="text-xs font-bold text-secondary uppercase tracking-wider">Grocery Categories Share</h4></code>	CSS/Tailwind styling.
316	<code><p className="text-[10px] text-secondary mt-0.5">Subtotal revenue share split across grocery shelf ca...</code>	CSS/Tailwind styling.
317	<code></div></code>	JSX element opening tag.
318	<code><CategoryPieChart data={categoryBreakdown} /></code>	Self-closing JSX element.
319	<code></Card></code>	JSX element opening tag.
320		Blank line.
321	<code>/* Orders trends bar chart */</code>	Logic or UI structure — read with surrounding lines.
322	<code><Card className="lg:col-span-3"></code>	CSS/Tailwind styling.
323	<code><div></code>	JSX element opening tag.
324	<code><h4 className="text-xs font-bold text-secondary uppercase tracking-wider">Orders Volume Trends</h4></code>	CSS/Tailwind styling.

Line	Code	Explanation
325	<code><p className="text-[10px] text-secondary mt-0.5">Quantity of orders placed over the selected interval...</code>	CSS/Tailwind styling.
326	<code></div></code>	JSX element opening tag.
327	<code><OrdersChart data={orderTrends} /></code>	Self-closing JSX element.
328	<code></Card></code>	JSX element opening tag.
329	<code></div></code>	JSX element opening tag.
330		Blank line.
331	<code>{/* — Leaderboard Tables Grid — */}</code>	Logic or UI structure — read with surrounding lines.
332	<code><div className="grid grid-cols-1 md:grid-cols-2 gap-6"></code>	CSS/Tailwind styling.
333	<code>{/* Top 5 stores */}</code>	Logic or UI structure — read with surrounding lines.
334	<code><Card className="p-0 overflow-hidden border border-border"></code>	CSS/Tailwind styling.
335	<code><div className="p-4 bg-surface border-b border-border flex items-center justify-between"></code>	CSS/Tailwind styling.
336	<code><h4 className="text-xs font-bold text-secondary uppercase tracking-wider">Top Performing Stores</h4></code>	CSS/Tailwind styling.
337	<code><BarChart2 className="w-4 h-4 text-secondary shrink-0" /></code>	CSS/Tailwind styling.
338	<code></div></code>	JSX element opening tag.
339		Blank line.
340	<code>{topStores.length === 0 ? (</code>	Logic or UI structure — read with surrounding lines.
341	<code><div className="p-6 text-center text-xs text-secondary">No store performance logs.</div></code>	CSS/Tailwind styling.
342	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
343	<code><div className="divide-y divide-border"></code>	CSS/Tailwind styling.
344	<code>{topStores.map((store, idx) =></code>	Logic or UI structure — read with surrounding lines.
345	<code>(<div key={store.id} className="flex items-center justify-between px-5 py-3 text-xs hover:bg-surfa...</code>	CSS/Tailwind styling.
346	<code><div className="flex items-center gap-2.5"></code>	CSS/Tailwind styling.
347	<code><span className="w-5 h-5 rounded-full bg-surface border border-border flex items-center justi...</code>	CSS/Tailwind styling.
348	<code>{idx + 1}</code>	Logic or UI structure — read with surrounding lines.
349	<code></code>	JSX element opening tag.
350	<code><div></code>	JSX element opening tag.
351	<code><p className="font-bold text-on-surface">{store.store_name}</p></code>	CSS/Tailwind styling.
352	<code><p className="text-[9px] text-secondary font-mono">ID: {store.id?.slice(0, 8)?.toUpperCase(...</code>	CSS/Tailwind styling.
353	<code></div></code>	JSX element opening tag.
354	<code></div></code>	JSX element opening tag.
355	<code><div className="flex items-center gap-4 text-right"></code>	CSS/Tailwind styling.
356	<code><div></code>	JSX element opening tag.
357	<code><p className="font-bold text-primary">{store.total_orders 0} orders</p></code>	CSS/Tailwind styling.

Line	Code	Explanation
358	<code><p className="text-[10px] text-secondary flex items-center gap-0.5 justify-end"></code>	CSS/Tailwind styling.
359	<code><Star className="w-3.5 h-3.5 text-yellow-500 fill-yellow-500" />{store.rating?.toFixed(1...</code>	CSS/Tailwind styling.
360	<code></p></code>	JSX element opening tag.
361	<code></div></code>	JSX element opening tag.
362	<code></div></code>	JSX element opening tag.
363	<code></div></code>	JSX element opening tag.
364	<code>)))</code>	Logic or UI structure — read with surrounding lines.
365	<code></div></code>	JSX element opening tag.
366	<code>))</code>	Logic or UI structure — read with surrounding lines.
367	<code></Card></code>	JSX element opening tag.
368		Blank line.
369	<code>{/* Top 5 products */}</code>	Logic or UI structure — read with surrounding lines.
370	<code><Card className="p-0 overflow-hidden border border-border"></code>	CSS/Tailwind styling.
371	<code><div className="p-4 bg-surface border-b border-border flex items-center justify-between"></code>	CSS/Tailwind styling.
372	<code><h4 className="text-xs font-bold text-secondary uppercase tracking-wider">Top Selling Grocery Items</h4></code>	CSS/Tailwind styling.
373	<code><Award className="w-4 h-4 text-secondary shrink-0" /></code>	CSS/Tailwind styling.
374	<code></div></code>	JSX element opening tag.
375		Blank line.
376	<code>{topProducts.length === 0 ? (</code>	Logic or UI structure — read with surrounding lines.
377	<code><div className="p-6 text-center text-xs text-secondary">No product performance logs.</div></code>	CSS/Tailwind styling.
378	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
379	<code><div className="divide-y divide-border"></code>	CSS/Tailwind styling.
380	<code>{topProducts.map((prod, idx) => (</code>	Logic or UI structure — read with surrounding lines.
381	<code><div key={prod.id} className="flex items-center justify-between px-5 py-3 text-xs hover:bg-surfac...</code>	CSS/Tailwind styling.
382	<code><div className="flex items-center gap-2.5"></code>	CSS/Tailwind styling.
383	<code><span className="w-5 h-5 rounded-full bg-surface border border-border flex items-center justi...</code>	CSS/Tailwind styling.
384	<code>{idx + 1}</code>	Logic or UI structure — read with surrounding lines.
385	<code></code>	JSX element opening tag.
386	<code><div></code>	JSX element opening tag.
387	<code><p className="font-bold text-on-surface">{prod.name}</p></code>	CSS/Tailwind styling.
388	<code><p className="text-[9px] text-secondary">Store: <span className="font-medium text-on-surfac...</code>	CSS/Tailwind styling.
389	<code></div></code>	JSX element opening tag.
390	<code></div></code>	JSX element opening tag.
391	<code><div className="text-right"></code>	CSS/Tailwind styling.

Line	Code	Explanation
392	<code><p className="font-bold text-green-700">{prod.units_sold_total 0} units sold</p></code>	CSS/Tailwind styling.
393	<code><p className="text-[10px] text-secondary">{formatCurrency(prod.store_price)}</p></code>	CSS/Tailwind styling.
394	<code></div></code>	JSX element opening tag.
395	<code></div></code>	JSX element opening tag.
396	<code>))}</code>	Logic or UI structure — read with surrounding lines.
397	<code></div></code>	JSX element opening tag.
398	<code>)}</code>	Logic or UI structure — read with surrounding lines.
399	<code></Card></code>	JSX element opening tag.
400	<code></div></code>	JSX element opening tag.
401	<code></></code>	Self-closing JSX element.
402	<code>)}</code>	Logic or UI structure — read with surrounding lines.
403	<code></div></code>	JSX element opening tag.
404	<code>)</code>	Logic or UI structure — read with surrounding lines.
405	<code>}</code>	Logic or UI structure — read with surrounding lines.
406		Blank line.

FinancePage (src/pages/FinancePage.jsx)

Total lines: 368

Route: /finance

Purpose: Payouts, COD reconciliation, settlements.

Line	Code	Explanation
1	import React, { useState, useEffect, useCallback } from 'react'	Import React hooks.
2	import { Landmark, LandmarkIcon, Clock, BadgeAlert, Plus, CheckCircle, RefreshCw, AlertTriangle, ArrowRight } from 'l...	Import icons.
3	import { getPayouts, updatePayoutStatus, initiateSettlement, getFinanceSummary } from '../services/financeService'	Import API/database service.
4	import { formatCurrency } from '../utils/formatters'	Import helper utilities.
5	import { useAuth } from '../context/AuthContext'	Import auth context.
6	import PayoutCard from '../components/finance/PayoutCard'	Import UI component.
7	import CODReconciliation from '../components/finance/CODReconciliation'	Import UI component.
8	import SettlementHistory from '../components/finance/SettlementHistory'	Import UI component.
9	import PageLayout from '../components/layout/PageLayout'	Import UI component.
10	import Button from '../components/ui/Button'	Import UI component.
11	import Card from '../components/ui/Card'	Import UI component.
12	import Badge from '../components/ui/Badge'	Import UI component.
13	import Spinner from '../components/ui/Spinner'	Import UI component.
14	import Skeleton from '../components/ui/Skeleton'	Import UI component.
15	import EmptyState from '../components/ui/EmptyState'	Import UI component.
16	import Pagination from '../components/ui/Pagination'	Import UI component.
17	import ConfirmDialog from '../components/ui/ConfirmDialog'	Import UI component.
18	import toast from 'react-hot-toast'	Import dependency.
19		Blank line.
20	/**	Doc comment.
21	* ZapKart Admin Finance Page	Doc comment.
22	* Complete settlement hub providing store/rider payouts, COD cash reconciliations, and payout histories.	Doc comment.
23	*/	Doc comment.
24	export default function FinancePage() {	Default export (main module).
25	const { adminProfile } = useAuth()	Auth state and login/logout.
26		Blank line.
27	// Tabs: 'stores' 'riders' 'cod' 'history'	Comment: Tabs: 'stores' 'riders' 'cod' 'history'
28	const [activeTab, setActiveTab] = useState('stores')	React state variable.
29		Blank line.
30	// KPI state	Comment: KPI state
31	const [summary, setSummary] = useState(null)	React state variable.
32	const [summaryLoading, setSummaryLoading] = useState(true)	React state variable.
33		Blank line.

Line	Code	Explanation
34	// Payouts listing state (for Tab 1 & Tab 2)	Comment: Payouts listing state (for Tab 1 & Tab 2)
35	const [payouts, setPayouts] = useState([])	React state variable.
36	const [payoutsTotal, setPayoutsTotal] = useState(0)	React state variable.
37	const [payoutsPage, setPayoutsPage] = useState(1)	React state variable.
38	const [payoutsLoading, setPayoutsLoading] = useState(false)	React state variable.
39	const [payoutsError, setPayoutsError] = useState(null)	React state variable.
40	const [payoutsStatusFilter, setPayoutsStatusFilter] = useState('all')	React state variable.
41		Blank line.
42	// Run Settlement Dialog	Comment: Run Settlement Dialog
43	const [showRunSettlement, setShowRunSettlement] = useState(false)	React state variable.
44	const [isSettling, setIsSettling] = useState(false)	React state variable.
45		Blank line.
46	// Fetch finance aggregated overview stats	Comment: Fetch finance aggregated overview stats
47	const fetchSummary = async () => {	Async function for network calls.
48	setSummaryLoading(true)	Logic or UI structure — read with surrounding lines.
49	try {	Try block start.
50	const data = await getFinanceSummary()	Wait for async operation.
51	setSummary(data)	Logic or UI structure — read with surrounding lines.
52	} catch (err) {	Catch errors.
53	console.error('Failed to load finance summary:', err)	Logic or UI structure — read with surrounding lines.
54	toast.error('Failed to update financial KPI balances.')	Toast notification.
55	} finally {	Finally block (cleanup).
56	setSummaryLoading(false)	Logic or UI structure — read with surrounding lines.
57	}	Logic or UI structure — read with surrounding lines.
58	}	Logic or UI structure — read with surrounding lines.
59		Blank line.
60	// Fetch payouts for Store or Rider tab	Comment: Fetch payouts for Store or Rider tab
61	const fetchPayouts = useCallback(async () => {	Memoized callback function.
62	if (activeTab !== 'stores' && activeTab !== 'riders') return	Logic or UI structure — read with surrounding lines.
63		Blank line.
64	setPayoutsLoading(true)	Logic or UI structure — read with surrounding lines.
65	setPayoutsError(null)	Logic or UI structure — read with surrounding lines.
66	try {	Try block start.
67	const type = activeTab === 'stores' ? 'store' : 'rider'	Logic or UI structure — read with surrounding lines.
68	const res = await getPayouts({	Wait for async operation.
69	recipientType: type,	Logic or UI structure — read with surrounding lines.
70	status: payoutsStatusFilter === 'all' ? undefined : payoutsStatusFilter,	Logic or UI structure — read with surrounding lines.
71	page: payoutsPage,	Logic or UI structure — read with surrounding lines.
72	pageSize: 6, // 6 cards per page fits layout perfectly	Logic or UI structure — read with surrounding lines.
73	})	Logic or UI structure — read with surrounding lines.
74	setPayouts(res.payouts [])	Logic or UI structure — read with surrounding lines.
75	setPayoutsTotal(res.total 0)	Logic or UI structure — read with surrounding lines.
76	} catch (err) {	Catch errors.
77	setPayoutsError(err.message 'Failed to fetch payout records.')	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
78	} finally {	Finally block (cleanup).
79	setPayoutsLoading(false)	Logic or UI structure — read with surrounding lines.
80	}	Logic or UI structure — read with surrounding lines.
81	}, [activeTab, payoutsStatusFilter, payoutsPage])	Logic or UI structure — read with surrounding lines.
82		Blank line.
83	// Initial loads	Comment: Initial loads
84	useEffect(() => {	Side effect (fetch, subscribe, redirect).
85	fetchSummary()	Logic or UI structure — read with surrounding lines.
86	}, [])	Logic or UI structure — read with surrounding lines.
87		Blank line.
88	useEffect(() => {	Side effect (fetch, subscribe, redirect).
89	fetchPayouts()	Logic or UI structure — read with surrounding lines.
90	}, [fetchPayouts])	Logic or UI structure — read with surrounding lines.
91		Blank line.
92	// Reset tab-specific filters	Comment: Reset tab-specific filters
93	useEffect(() => {	Side effect (fetch, subscribe, redirect).
94	setPayoutsPage(1)	Logic or UI structure — read with surrounding lines.
95	setPayoutsStatusFilter('all')	Logic or UI structure — read with surrounding lines.
96	}, [activeTab])	Logic or UI structure — read with surrounding lines.
97		Blank line.
98	// Marks a payout as processed after inputting UTR reference number	Comment: Marks a payout as processed after inputting UTR reference number
99	const handleProcessPayout = async (payoutId, bankRef) => {	Async function for network calls.
100	try {	Try block start.
101	await updatePayoutStatus(payoutId, 'processed', bankRef)	Wait for async operation.
102	toast.success('Payout completed and status marked as processed.')	Toast notification.
103	fetchPayouts()	Logic or UI structure — read with surrounding lines.
104	fetchSummary()	Logic or UI structure — read with surrounding lines.
105	} catch (err) {	Catch errors.
106	toast.error(`Action failed: \${err.message}`)	Toast notification.
107	throw err	Logic or UI structure — read with surrounding lines.
108	}	Logic or UI structure — read with surrounding lines.
109	}	Logic or UI structure — read with surrounding lines.
110		Blank line.
111	// Triggers the background settlement run via backend	Comment: Triggers the background settlement run via backend
112	const handleInitiateSettlement = async () => {	Async function for network calls.
113	setIsSettling(true)	Logic or UI structure — read with surrounding lines.
114	try {	Try block start.
115	const adminId = adminProfile?.id 'admin'	Logic or UI structure — read with surrounding lines.
116	await initiateSettlement(adminId)	Wait for async operation.
117	toast.success('Payout calculation batch finished. Check pending status list.')	Toast notification.
118	setShowRunSettlement(false)	Logic or UI structure — read with surrounding lines.
119	fetchPayouts()	Logic or UI structure — read with surrounding lines.
120	fetchSummary()	Logic or UI structure — read with surrounding lines.
121	} catch (err) {	Catch errors.
122	// Graceful fallback for local development if endpoint doesn't exist	Comment: Graceful fallback for local development if endpoint doesn't exist
123	console.error(err)	Logic or UI structure — read with surrounding lines.
124	toast.error(`Settlement run error: \${err.message}`)	Toast notification.
125	} finally {	Finally block (cleanup).
126	setIsSettling(false)	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
127	}	Logic or UI structure — read with surrounding lines.
128	}	Logic or UI structure — read with surrounding lines.
129		Blank line.
130	const handleRefreshAll = () => {	Logic or UI structure — read with surrounding lines.
131	fetchSummary()	Logic or UI structure — read with surrounding lines.
132	fetchPayouts()	Logic or UI structure — read with surrounding lines.
133	}	Logic or UI structure — read with surrounding lines.
134		Blank line.
135	const payoutsPageSize = 6	Logic or UI structure — read with surrounding lines.
136	const totalPayoutPages = Math.ceil(payoutsTotal / payoutsPageSize)	Logic or UI structure — read with surrounding lines.
137		Blank line.
138	return (	Return JSX UI.
139	<div className="space-y-6 animate-fade-in p-2">	CSS/Tailwind styling.
140	{/* — Page Header — */}	Logic or UI structure — read with surrounding lines.
141	<div className="flex flex-col sm:flex-row sm:items-center sm:justify-between gap-4">	CSS/Tailwind styling.
142	<div>	JSX element opening tag.
143	<h2 className="text-2xl font-bold text-on-surface">Finance & Settlements Hub</h2>	CSS/Tailwind styling.
144	<p className="text-sm text-secondary mt-0.5">	CSS/Tailwind styling.
145	Manage weekly merchant payouts, rider deliveries earnings, and Cash-on-Hand handovers.	Logic or UI structure — read with surrounding lines.
146	</p>	JSX element opening tag.
147	</div>	JSX element opening tag.
148	<div className="flex gap-2.5 self-start sm:self-auto">	CSS/Tailwind styling.
149	<button	JSX element opening tag.
150	onClick={handleRefreshAll}	User event handler.
151	className="flex items-center gap-1.5 px-3.5 py-2.5 rounded-lg border border-border bg-white text-secondar...	CSS/Tailwind styling.
152	>	Logic or UI structure — read with surrounding lines.
153	<RefreshCw className="w-4 h-4" /> Refresh	CSS/Tailwind styling.
154	</button>	JSX element opening tag.
155	<Button	JSX element opening tag.
156	variant="primary"	Logic or UI structure — read with surrounding lines.
157	onClick={() => setShowRunSettlement(true)}	User event handler.
158	className="flex items-center gap-1.5"	CSS/Tailwind styling.
159	>	Logic or UI structure — read with surrounding lines.
160	<LandmarkIcon className="w-4 h-4" /> Run Settlement	CSS/Tailwind styling.
161	</Button>	JSX element opening tag.
162	</div>	JSX element opening tag.
163	</div>	JSX element opening tag.
164		Blank line.
165	{/* — Financial KPI Row — */}	Logic or UI structure — read with surrounding lines.
166	<div className="grid grid-cols-1 md:grid-cols-3 gap-5">	CSS/Tailwind styling.
167	{/* Paid Out */}	Logic or UI structure — read with surrounding lines.
168	<Card className="border-1-4 border-1-green-500">	CSS/Tailwind styling.
169	<div className="flex items-center justify-between">	CSS/Tailwind styling.
170	<div>	JSX element opening tag.

Line	Code	Explanation
171	<code><p className="text-xs text-secondary font-semibold uppercase tracking-wide">Processed Payouts</p></code>	CSS/Tailwind styling.
172	<code>{summaryLoading ? (</code>	Logic or UI structure — read with surrounding lines.
173	<code><Skeleton className="h-8 w-28 mt-2" /></code>	CSS/Tailwind styling.
174	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
175	<code><h3 className="text-2xl font-bold text-on-surface mt-1"></code>	CSS/Tailwind styling.
176	<code>{formatCurrency(summary?.totalPaidOut 0)}</code>	Logic or UI structure — read with surrounding lines.
177	<code></h3></code>	JSX element opening tag.
178	<code>)}</code>	Logic or UI structure — read with surrounding lines.
179	<code></div></code>	JSX element opening tag.
180	<code><div className="p-3 bg-green-50 rounded-full text-green-600"></code>	CSS/Tailwind styling.
181	<code><CheckCircle className="w-6 h-6" /></code>	CSS/Tailwind styling.
182	<code></div></code>	JSX element opening tag.
183	<code></div></code>	JSX element opening tag.
184	<code></Card></code>	JSX element opening tag.
185		Blank line.
186	<code>{/* Pending Payouts */}</code>	Logic or UI structure — read with surrounding lines.
187	<code><Card className="border-1-4 border-1-amber-500"></code>	CSS/Tailwind styling.
188	<code><div className="flex items-center justify-between"></code>	CSS/Tailwind styling.
189	<code><div></code>	JSX element opening tag.
190	<code><p className="text-xs text-secondary font-semibold uppercase tracking-wide">Pending Settlements</p></code>	CSS/Tailwind styling.
191	<code>{summaryLoading ? (</code>	Logic or UI structure — read with surrounding lines.
192	<code><Skeleton className="h-8 w-28 mt-2" /></code>	CSS/Tailwind styling.
193	<code>) : (</code>	Logic or UI structure — read with surrounding lines.
194	<code><h3 className="text-2xl font-bold text-on-surface mt-1"></code>	CSS/Tailwind styling.
195	<code>{formatCurrency(summary?.totalPending 0)}</code>	Logic or UI structure — read with surrounding lines.
196	<code></h3></code>	JSX element opening tag.
197	<code>)}</code>	Logic or UI structure — read with surrounding lines.
198	<code></div></code>	JSX element opening tag.
199	<code><div className="p-3 bg-amber-50 rounded-full text-amber-600"></code>	CSS/Tailwind styling.
200	<code><Clock className="w-6 h-6" /></code>	CSS/Tailwind styling.
201	<code></div></code>	JSX element opening tag.
202	<code></div></code>	JSX element opening tag.
203	<code></Card></code>	JSX element opening tag.
204		Blank line.
205	<code>{/* Cash Held by Riders */}</code>	Logic or UI structure — read with surrounding lines.
206	<code><Card className="border-1-4 border-1-blue-500"></code>	CSS/Tailwind styling.
207	<code><div className="flex items-center justify-between"></code>	CSS/Tailwind styling.
208	<code><div></code>	JSX element opening tag.
209	<code><p className="text-xs text-secondary font-semibold uppercase tracking-wide">Cash held by Riders</p></code>	CSS/Tailwind styling.
210	<code>{summaryLoading ? (</code>	Logic or UI structure — read with surrounding lines.
211	<code><Skeleton className="h-8 w-28 mt-2" /></code>	CSS/Tailwind styling.

Line	Code	Explanation
212	) : (	Logic or UI structure — read with surrounding lines.
213	<h3 className="text-2xl font-bold text-on-surface mt-1">	CSS/Tailwind styling.
214	{formatCurrency(summary?.totalCODBalance 0)})	Logic or UI structure — read with surrounding lines.
215	</h3>	JSX element opening tag.
216	)}	Logic or UI structure — read with surrounding lines.
217	</div>	JSX element opening tag.
218	<div className="p-3 bg-blue-50 rounded-full text-blue-600">	CSS/Tailwind styling.
219	<Landmark className="w-6 h-6" />	CSS/Tailwind styling.
220	</div>	JSX element opening tag.
221	</div>	JSX element opening tag.
222	</Card>	JSX element opening tag.
223	</div>	JSX element opening tag.
224		Blank line.
225	{ /* — Tabs Navigation — */ }	Logic or UI structure — read with surrounding lines.
226	<div className="border-b border-border bg-white rounded-t-xl p-1 flex gap-2">	CSS/Tailwind styling.
227	<button	JSX element opening tag.
228	onClick={() => setActiveTab('stores')}	User event handler.
229	className={`px-4 py-2.5 rounded-lg text-xs font-bold transition-all \${`	CSS/Tailwind styling.
230	activeTab === 'stores'	Logic or UI structure — read with surrounding lines.
231	? 'bg-primary-container text-on-primary-container shadow-sm'	Logic or UI structure — read with surrounding lines.
232	: 'text-secondary hover:text-on-surface hover:bg-surface'	Logic or UI structure — read with surrounding lines.
233	}` }	Logic or UI structure — read with surrounding lines.
234	>	Logic or UI structure — read with surrounding lines.
235	Store Payouts	Logic or UI structure — read with surrounding lines.
236	</button>	JSX element opening tag.
237	<button	JSX element opening tag.
238	onClick={() => setActiveTab('riders')}	User event handler.
239	className={`px-4 py-2.5 rounded-lg text-xs font-bold transition-all \${`	CSS/Tailwind styling.
240	activeTab === 'riders'	Logic or UI structure — read with surrounding lines.
241	? 'bg-primary-container text-on-primary-container shadow-sm'	Logic or UI structure — read with surrounding lines.
242	: 'text-secondary hover:text-on-surface hover:bg-surface'	Logic or UI structure — read with surrounding lines.
243	}` }	Logic or UI structure — read with surrounding lines.
244	>	Logic or UI structure — read with surrounding lines.
245	Rider Payouts	Logic or UI structure — read with surrounding lines.
246	</button>	JSX element opening tag.
247	<button	JSX element opening tag.
248	onClick={() => setActiveTab('cod')}	User event handler.
249	className={`px-4 py-2.5 rounded-lg text-xs font-bold transition-all \${`	CSS/Tailwind styling.
250	activeTab === 'cod'	Logic or UI structure — read with surrounding lines.
251	? 'bg-primary-container text-on-primary-container shadow-sm'	Logic or UI structure — read with surrounding lines.
252	: 'text-secondary hover:text-on-surface hover:bg-surface'	Logic or UI structure — read with surrounding lines.
253	}` }	Logic or UI structure — read with surrounding lines.
254	>	Logic or UI structure — read with surrounding lines.
255	COD Reconciliation	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
256	<code></button></code>	JSX element opening tag.
257	<code><button</code>	JSX element opening tag.
258	<code>onClick={() => setActiveTab('history')}</code>	User event handler.
259	<code>className={`px-4 py-2.5 rounded- lg text-xs font-bold transition-all \${`</code>	CSS/Tailwind styling.
260	<code>activeTab === 'history'</code>	Logic or UI structure — read with surrounding lines.
261	<code>? 'bg-primary-container text- on-primary-container shadow-sm'</code>	Logic or UI structure — read with surrounding lines.
262	<code>: 'text-secondary hover:text- on-surface hover:bg-surface'</code>	Logic or UI structure — read with surrounding lines.
263	<code>}`}</code>	Logic or UI structure — read with surrounding lines.
264	<code>></code>	Logic or UI structure — read with surrounding lines.
265	<code>Settlement History</code>	Logic or UI structure — read with surrounding lines.
266	<code></button></code>	JSX element opening tag.
267	<code></div></code>	JSX element opening tag.
268		Blank line.
269	<code>{/* — Tab Content Workspace — */}</code>	Logic or UI structure — read with surrounding lines.
270	<code><div className="bg-white rounded-b-xl border border-t-0 border-border p-5 min-h- [400px]"></code>	CSS/Tailwind styling.
271	<code>{/* TAB 1 & TAB 2: Payout Card Lists */}</code>	Logic or UI structure — read with surrounding lines.
272	<code>{{(activeTab === 'stores' activeTab === 'riders') && (</code>	Logic or UI structure — read with surrounding lines.
273	<code><div className="space-y-5"></code>	CSS/Tailwind styling.
274	<code>{/* Status Filter Bar */}</code>	Logic or UI structure — read with surrounding lines.
275	<code><div className="flex justify- between items-center bg-surface p-3 rounded-lg border border-border"></code>	CSS/Tailwind styling.
276	<code><div className="flex items- center gap-2"></code>	CSS/Tailwind styling.
277	<code>Status Filter:</code>	CSS/Tailwind styling.
278	<code><select</code>	JSX element opening tag.
279	<code>value={payoutsStatusFilter}</code>	Logic or UI structure — read with surrounding lines.
280	<code>onChange={(e) => {</code>	User event handler.
281	<code>setPayoutsStatusFilter(e.target.value)</code>	Logic or UI structure — read with surrounding lines.
282	<code>setPayoutsPage(1)</code>	Logic or UI structure — read with surrounding lines.
283	<code>}}}</code>	Logic or UI structure — read with surrounding lines.
284	<code>className="px-3 py-1.5 text-xs border border-border rounded-lg bg- white outline-none focus:ring-1 f...</code>	CSS/Tailwind styling.
285	<code>></code>	Logic or UI structure — read with surrounding lines.
286	<code><option value="all">All Payouts</option></code>	JSX element opening tag.
287	<code><option value="pending">Pending Only</option></code>	JSX element opening tag.
288	<code><option value="processed">Processed Only</option></code>	JSX element opening tag.
289	<code><option value="failed">Failed Only</option></code>	JSX element opening tag.
290	<code></select></code>	JSX element opening tag.
291	<code></div></code>	JSX element opening tag.
292	<code></code>	CSS/Tailwind styling.
293	<code>Total Found: {payoutsTotal}</code>	Logic or UI structure — read with surrounding lines.
294	<code></code>	JSX element opening tag.
295	<code></div></code>	JSX element opening tag.
296		Blank line.

Line	Code	Explanation
297	{/* Screen State Loading */}	Logic or UI structure — read with surrounding lines.
298	{payoutsLoading ? (	Logic or UI structure — read with surrounding lines.
299	<div className="grid grid-cols-1 md:grid-cols-2 lg:grid-cols-3 gap-4">	CSS/Tailwind styling.
300	{Array.from({ length: 3	Logic or UI structure — read with surrounding lines.
301	})}.map((_, i) => (	
302	<Skeleton key={i}	CSS/Tailwind styling.
303	className="h-64 rounded-xl" />	
304	))}	Logic or UI structure — read with surrounding lines.
305	</div>	JSX element opening tag.
306	) : payoutsError ? (	Logic or UI structure — read with surrounding lines.
307	<div className="bg-red-50 border border-red-200 rounded-xl p-6 text-center text-red-600 font-medium">	CSS/Tailwind styling.
308	{payoutsError}	JSX element opening tag.
309	<button	CSS/Tailwind styling.
310	onClick={fetchPayouts} className="mt-2 text-sm text-brand underline font-semibold">	
311	Retry	Logic or UI structure — read with surrounding lines.
312	</button>	JSX element opening tag.
313	</div>	JSX element opening tag.
314	) : payouts.length === 0 ? (	Logic or UI structure — read with surrounding lines.
315	<EmptyState	JSX element opening tag.
316	icon={Landmark}	Logic or UI structure — read with surrounding lines.
317	title={`No payouts found`}	Logic or UI structure — read with surrounding lines.
318	description={`There are no	Logic or UI structure — read with surrounding lines.
319	\${payoutsStatusFilter !== 'all' ?	
320	payoutsStatusFilter : ''} payout request...	
321	activeTab === 'stores' ?	Logic or UI structure — read with surrounding lines.
322	'stores' : 'riders'	
323	} right now.`}	Logic or UI structure — read with surrounding lines.
324	className="py-12"	CSS/Tailwind styling.
325	/>	Logic or UI structure — read with surrounding lines.
326	) : (	Logic or UI structure — read with surrounding lines.
327	<>	JSX element opening tag.
328	<div className="grid grid-cols-1 md:grid-cols-2 lg:grid-cols-3 gap-4">	CSS/Tailwind styling.
329	{payouts.map((payout) =>	Logic or UI structure — read with surrounding lines.
330	(	
331	<PayoutCard	JSX element opening tag.
332	key={payout.id}	Logic or UI structure — read with surrounding lines.
333	payout={payout}	Logic or UI structure — read with surrounding lines.
334	onProcess={handleProcessPayout}	Logic or UI structure — read with surrounding lines.
335	/>	Logic or UI structure — read with surrounding lines.
336	))}	Logic or UI structure — read with surrounding lines.
337	</div>	JSX element opening tag.
338		Blank line.
339	{totalPayoutPages > 1 && (	Logic or UI structure — read with surrounding lines.
340	<div className="pt-4">	CSS/Tailwind styling.
341	<Pagination	JSX element opening tag.
342		Logic or UI structure — read with surrounding lines.
343	currentPage={payoutsPage}	
344		Logic or UI structure — read with surrounding lines.
345	totalItems={payoutsTotal}	
346		Logic or UI structure — read with surrounding lines.
347	itemsPerPage={payoutsPageSize}	
348		Logic or UI structure — read with surrounding lines.
349	onPageChange={setPayoutsPage}	
350	/>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
340	</div>	JSX element opening tag.
341	})	Logic or UI structure — read with surrounding lines.
342	</>	Self-closing JSX element.
343	})	Logic or UI structure — read with surrounding lines.
344	</div>	JSX element opening tag.
345	})	Logic or UI structure — read with surrounding lines.
346		Blank line.
347	{/* TAB 3: Rider COD Reconciliation */}	Logic or UI structure — read with surrounding lines.
348	{activeTab === 'cod' && <CODReconciliation />}	Logic or UI structure — read with surrounding lines.
349		Blank line.
350	{/* TAB 4: Settlement Logs History */}	Logic or UI structure — read with surrounding lines.
351	{activeTab === 'history' && <SettlementHistory />}	Logic or UI structure — read with surrounding lines.
352	</div>	JSX element opening tag.
353		Blank line.
354	{/* — Confirm Run Settlement Dialog — */}	Logic or UI structure — read with surrounding lines.
355	<ConfirmDialog	JSX element opening tag.
356	isOpen={showRunSettlement}	Logic or UI structure — read with surrounding lines.
357	onClose={() => setShowRunSettlement(false)}	Logic or UI structure — read with surrounding lines.
358	onConfirm={handleInitiateSettlement}	Logic or UI structure — read with surrounding lines.
359	loading={isSettling}	Logic or UI structure — read with surrounding lines.
360	title="Trigger Settlement Calculation Run?"	Logic or UI structure — read with surrounding lines.
361	description="This will compile all un-settled completed orders from active stores and riders for the current ...	Logic or UI structure — read with surrounding lines.
362	confirmLabel="Initiate Payouts"	Logic or UI structure — read with surrounding lines.
363	variant="primary"	Logic or UI structure — read with surrounding lines.
364	/>	Logic or UI structure — read with surrounding lines.
365	</div>	JSX element opening tag.
366	)	Logic or UI structure — read with surrounding lines.
367	}	Logic or UI structure — read with surrounding lines.
368		Blank line.

NotificationsPage (src/pages/NotificationsPage.jsx)

Total lines: 294

Route: /notifications

Purpose: Broadcast push notifications and history.

Line	Code	Explanation
1	import React, { useState, useEffect, useCallback } from 'react'	Import React hooks.
2	import { Send, Bell, History, Users, RefreshCw } from 'lucide-react'	Import icons.
3	import { broadcastNotification, getNotificationHistory } from '../services/notificationService'	Import API/database service.
4	import { supabase } from '../services/supabase'	Import API/database service.
5	import { formatDate } from '../utils/formatters'	Import helper utilities.
6	import { useAuth } from '../context/AuthContext'	Import auth context.
7	import PageLayout from '../components/layout/PageLayout'	Import UI component.
8	import Button from '../components/ui/Button'	Import UI component.
9	import Card from '../components/ui/Card'	Import UI component.
10	import Badge from '../components/ui/Badge'	Import UI component.
11	import Input from '../components/ui/Input'	Import UI component.
12	import Spinner from '../components/ui/Spinner'	Import UI component.
13	import Skeleton from '../components/ui/Skeleton'	Import UI component.
14	import EmptyState from '../components/ui/EmptyState'	Import UI component.
15	import ConfirmDialog from '../components/ui/ConfirmDialog'	Import UI component.
16	import toast from 'react-hot-toast'	Import dependency.
17		Blank line.
18	/**	Doc comment.
19	* ZapKart Notifications Page	Doc comment.
20	* Compose and broadcast push notifications to customers, riders, and stores via FCM.	Doc comment.
21	*/	Doc comment.
22	export default function NotificationsPage() {	Default export (main module).
23	const { adminProfile } = useAuth()	Auth state and login/logout.
24		Blank line.
25	// Form states	Comment: Form states
26	const [audience, setAudience] = useState('all') // all customers stores riders	React state variable.
27	const [title, setTitle] = useState('')	React state variable.
28	const [body, setBody] = useState('')	React state variable.
29		Blank line.
30	// Dialog / Async States	Comment: Dialog / Async States
31	const [showConfirm, setShowConfirm] = useState(false)	React state variable.
32	const [isSending, setIsSending] = useState(false)	React state variable.
33		Blank line.
34	// History lists	Comment: History lists
35	const [history, setHistory] = useState([])	React state variable.
36	const [historyLoading, setHistoryLoading] = useState(true)	React state variable.
37	const [historyError, setHistoryError] = useState(null)	React state variable.

Line	Code	Explanation
38		Blank line.
39	// Fetch notification audit logs	Comment: Fetch notification audit logs
40	const fetchHistory = useCallback(async () => {	Memoized callback function.
41	setHistoryLoading(true)	Logic or UI structure — read with surrounding lines.
42	setHistoryError(null)	Logic or UI structure — read with surrounding lines.
43	try {	Try block start.
44	const data = await getNotificationHistory()	Wait for async operation.
45	setHistory(data [])	Logic or UI structure — read with surrounding lines.
46	} catch (err) {	Catch errors.
47	setHistoryError(err.message 'Failed to load broadcast history.')	Logic or UI structure — read with surrounding lines.
48	} finally {	Finally block (cleanup).
49	setHistoryLoading(false)	Logic or UI structure — read with surrounding lines.
50	}	Logic or UI structure — read with surrounding lines.
51	}, [])	Logic or UI structure — read with surrounding lines.
52		Blank line.
53	useEffect(() => {	Side effect (fetch, subscribe, redirect).
54	fetchHistory()	Logic or UI structure — read with surrounding lines.
55	}, [fetchHistory])	Logic or UI structure — read with surrounding lines.
56		Blank line.
57	// Submits the broadcast notification	Comment: Submits the broadcast notification
58	const handleSendNotification = async () => {	Async function for network calls.
59	if (!title.trim() !body.trim()) {	Logic or UI structure — read with surrounding lines.
60	toast.error('Title and message body are required')	Toast notification.
61	return	Logic or UI structure — read with surrounding lines.
62	}	Logic or UI structure — read with surrounding lines.
63		Blank line.
64	setIsSending(true)	Logic or UI structure — read with surrounding lines.
65	const adminId = adminProfile?.id 'admin'	Logic or UI structure — read with surrounding lines.
66		Blank line.
67	try {	Try block start.
68	// Trigger broadcast notification	Comment: Trigger broadcast notification
69	await broadcastNotification({	Wait for async operation.
70	title: title.trim(),	Logic or UI structure — read with surrounding lines.
71	body: body.trim(),	Logic or UI structure — read with surrounding lines.
72	audience,	Logic or UI structure — read with surrounding lines.
73	}, adminId)	Logic or UI structure — read with surrounding lines.
74		Blank line.
75	toast.success('FCM push broadcast successfully queued!')	Toast notification.
76		Blank line.

Line	Code	Explanation
77	// Reset form	Comment: Reset form
78	setTitle('')	Logic or UI structure — read with surrounding lines.
79	setBody('')	Logic or UI structure — read with surrounding lines.
80	setAudience('all')	Logic or UI structure — read with surrounding lines.
81	setShowConfirm(false)	Logic or UI structure — read with surrounding lines.
82	fetchHistory()	Logic or UI structure — read with surrounding lines.
83	} catch (err) {	Catch errors.
84	console.warn('Backend broadcast failed, attempting direct sandbox logger insert:', err)	Logic or UI structure — read with surrounding lines.
85		Blank line.
86	// Fallback: write to audit log directly if node server is not active during developer workspace setup	Comment: Fallback: write to audit log directly if node server is not active during developer workspace setup
87	try {	Try block start.
88	const payload = {	Logic or UI structure — read with surrounding lines.
89	admin_id: adminId,	Logic or UI structure — read with surrounding lines.
90	action: 'SEND_BROADCAST_NOTIFICATION',	Logic or UI structure — read with surrounding lines.
91	target_type: 'notification',	Logic or UI structure — read with surrounding lines.
92	old_value: null,	Logic or UI structure — read with surrounding lines.
93	new_value: { title: title.trim(), body: body.trim(), audience, offline_mock: true },	Logic or UI structure — read with surrounding lines.
94	}	Logic or UI structure — read with surrounding lines.
95	await supabase.from('audit_log').insert(payload)	Wait for async operation.
96		Blank line.
97	toast.success('Queued broadcast in sandbox log.')	Toast notification.
98	setTitle('')	Logic or UI structure — read with surrounding lines.
99	setBody('')	Logic or UI structure — read with surrounding lines.
100	setAudience('all')	Logic or UI structure — read with surrounding lines.
101	setShowConfirm(false)	Logic or UI structure — read with surrounding lines.
102	fetchHistory()	Logic or UI structure — read with surrounding lines.
103	} catch (dbErr) {	Catch errors.
104	toast.error('FCM Broadcast could not be logged: ' + dbErr.message)	Toast notification.
105	}	Logic or UI structure — read with surrounding lines.
106	} finally {	Finally block (cleanup).
107	setIsSending(false)	Logic or UI structure — read with surrounding lines.
108	}	Logic or UI structure — read with surrounding lines.
109	}	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
110		Blank line.
111	return (	Return JSX UI.
112	<div className="space-y-6 animate-fade-in p-2">	CSS/Tailwind styling.
113	{ /* Page Header */ }	Logic or UI structure — read with surrounding lines.
114	<div>	JSX element opening tag.
115	<h2 className="text-2xl font-bold text-on-surface">Marketing & Broadcast Center</h2>	CSS/Tailwind styling.
116	<p className="text-sm text-secondary mt-0.5">	CSS/Tailwind styling.
117	Broadcast real-time push notifications targeting specific user segments.	Logic or UI structure — read with surrounding lines.
118	</p>	JSX element opening tag.
119	</div>	JSX element opening tag.
120		Blank line.
121	<div className="grid grid-cols-1 lg:grid-cols-3 gap-6">	CSS/Tailwind styling.
122	{ /* — Compose Notification Card — */ }	Logic or UI structure — read with surrounding lines.
123	<Card className="lg:col-span-1 h-fit bg-white">	CSS/Tailwind styling.
124	<div className="flex items-center gap-2 mb-4 border-b border-border pb-3">	CSS/Tailwind styling.
125	<Bell className="w-5 h-5 text-brand" />	CSS/Tailwind styling.
126	<h3 className="text-sm font-bold text-on-surface uppercase tracking-wider">Compose Broadcast</h3>	CSS/Tailwind styling.
127	</div>	JSX element opening tag.
128		Blank line.
129	<form	JSX element opening tag.
130	onSubmit={(e) => {	User event handler.
131	e.preventDefault()	Logic or UI structure — read with surrounding lines.
132	setShowConfirm(true)	Logic or UI structure — read with surrounding lines.
133	} }	Logic or UI structure — read with surrounding lines.
134	className="space-y-4"	CSS/Tailwind styling.
135	>	Logic or UI structure — read with surrounding lines.
136	{ /* Target Audience */ }	Logic or UI structure — read with surrounding lines.
137	<div className="flex flex-col gap-1.5">	CSS/Tailwind styling.
138	<label className="text-xs font-semibold text-secondary flex items-center gap-1">	CSS/Tailwind styling.
139	<Users className="w-3.5 h-3.5" /> Target Audience	CSS/Tailwind styling.
140	</label>	JSX element opening tag.
141	<select	JSX element opening tag.
142	value={audience}	Logic or UI structure — read with surrounding lines.
143	onChange={(e) => setAudience(e.target.value)}	User event handler.
144	className="w-full px-3 py-2 border border-border rounded-lg bg-surface text-xs focus:ring-1 focus:rin...	CSS/Tailwind styling.

Line	Code	Explanation
145	>	Logic or UI structure — read with surrounding lines.
146	<option value="all">All Marketplace Users (Customers + Stores + Riders)</option>	JSX element opening tag.
147	<option value="customers">Customers Only</option>	JSX element opening tag.
148	<option value="stores">Store Owners / Merchants Only</option>	JSX element opening tag.
149	<option value="riders">Delivery Riders Only</option>	JSX element opening tag.
150	</select>	JSX element opening tag.
151	</div>	JSX element opening tag.
152		Blank line.
153	{/* Notification Title */}	Logic or UI structure — read with surrounding lines.
154	<div>	JSX element opening tag.
155	<Input	JSX element opening tag.
156	label="Notification Title"	Logic or UI structure — read with surrounding lines.
157	placeholder="e.g. Weekend Grocery Sale! 🍉"	Logic or UI structure — read with surrounding lines.
158	value={title}	Logic or UI structure — read with surrounding lines.
159	onChange={(e) => setTitle(e.target.value.slice(0, 80))}	User event handler.
160	required	Logic or UI structure — read with surrounding lines.
161	className="text-xs font-semibold"	CSS/Tailwind styling.
162	/>	Logic or UI structure — read with surrounding lines.
163	<p className="text-[10px] text-secondary mt-1 text-right">	CSS/Tailwind styling.
164	{title.length}/80 characters	Logic or UI structure — read with surrounding lines.
165	</p>	JSX element opening tag.
166	</div>	JSX element opening tag.
167		Blank line.
168	{/* Notification Body */}	Logic or UI structure — read with surrounding lines.
169	<div className="flex flex-col gap-1">	CSS/Tailwind styling.
170	<label className="text-xs font-semibold text-secondary">Message Body</label>	CSS/Tailwind styling.
171	<textarea	JSX element opening tag.
172	placeholder="Write your push notification message body here..."	Logic or UI structure — read with surrounding lines.
173	value={body}	Logic or UI structure — read with surrounding lines.
174	onChange={(e) => setBody(e.target.value.slice(0, 256))}	User event handler.
175	required	Logic or UI structure — read with surrounding lines.
176	rows={4}	Logic or UI structure — read with surrounding lines.
177	className="w-full p-3 text-xs border border-border rounded-lg focus:outline-none focus:ring-1 focus:r..."	CSS/Tailwind styling.
178	></textarea>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
179	<code><p className="text-[10px] text-secondary mt-1 text-right"></code>	CSS/Tailwind styling.
180	<code>{body.length}/256 characters</code>	Logic or UI structure — read with surrounding lines.
181	<code></p></code>	JSX element opening tag.
182	<code></div></code>	JSX element opening tag.
183		Blank line.
184	<code>{/* Submit */}</code>	Logic or UI structure — read with surrounding lines.
185	<code><Button</code>	JSX element opening tag.
186	<code>variant="primary"</code>	Logic or UI structure — read with surrounding lines.
187	<code>type="submit"</code>	Logic or UI structure — read with surrounding lines.
188	<code>disabled={!title.trim() !body.trim()}</code>	Logic or UI structure — read with surrounding lines.
189	<code>className="w-full flex items-center justify-center gap-1.5 mt-2"</code>	CSS/Tailwind styling.
190	<code>></code>	Logic or UI structure — read with surrounding lines.
191	<code><Send className="w-4 h-4" /></code> Send Broadcast	CSS/Tailwind styling.
192	<code></Button></code>	JSX element opening tag.
193	<code></form></code>	JSX element opening tag.
194	<code></Card></code>	JSX element opening tag.
195		Blank line.
196	<code>{/* — Notification History List — */}</code>	Logic or UI structure — read with surrounding lines.
197	<code><Card className="lg:col-span-2 bg-white"></code>	CSS/Tailwind styling.
198	<code><div className="flex items-center justify-between mb-4 border-b border-border pb-3"></code>	CSS/Tailwind styling.
199	<code><div className="flex items-center gap-2"></code>	CSS/Tailwind styling.
200	<code><History className="w-5 h-5 text-secondary" /></code>	CSS/Tailwind styling.
201	<code><h3 className="text-sm font-bold text-on-surface uppercase tracking-wider">Broadcast History</h3></code>	CSS/Tailwind styling.
202	<code></div></code>	JSX element opening tag.
203	<code><button</code>	JSX element opening tag.
204	<code>onClick={fetchHistory}</code>	User event handler.
205	<code>className="p-1.5 rounded-lg border border-border bg-white text-secondary hover:bg-surface transition-co...</code>	CSS/Tailwind styling.
206	<code>title="Refresh history"</code>	Logic or UI structure — read with surrounding lines.
207	<code>></code>	Logic or UI structure — read with surrounding lines.
208	<code><RefreshCw className="w-3.5 h-3.5" /></code>	CSS/Tailwind styling.
209	<code></button></code>	JSX element opening tag.
210	<code></div></code>	JSX element opening tag.
211		Blank line.
212	<code>{/* Screen states */}</code>	Logic or UI structure — read with surrounding lines.
213	<code>{historyLoading ? (</code>	Logic or UI structure — read with surrounding lines.
214	<code><div className="space-y-3"></code>	CSS/Tailwind styling.
215	<code>{Array.from({ length: 4 }).map((_, i) => (</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
216	className="h-16 rounded-xl" />	CSS/Tailwind styling.
217	))}	Logic or UI structure — read with surrounding lines.
218	</div>	JSX element opening tag.
219	) : historyError ? (	Logic or UI structure — read with surrounding lines.
220	<div className="bg-red-50 border border-red-200 rounded-xl p-6 text-center text-red-600 font-medium">	CSS/Tailwind styling.
221	{historyError}	JSX element opening tag.
222	<button onClick={fetchHistory} className="mt-2 text-sm text-brand underline font-semibold">	CSS/Tailwind styling.
223	Retry	Logic or UI structure — read with surrounding lines.
224	</button>	JSX element opening tag.
225	</div>	JSX element opening tag.
226	) : history.length === 0 ? (	Logic or UI structure — read with surrounding lines.
227	<EmptyState	JSX element opening tag.
228	icon={Bell}	Logic or UI structure — read with surrounding lines.
229	title="No broadcasts yet"	Logic or UI structure — read with surrounding lines.
230	description="Past broadcast push alerts will appear here."	Logic or UI structure — read with surrounding lines.
231	className="py-12"	CSS/Tailwind styling.
232	/>	Logic or UI structure — read with surrounding lines.
233	) : (	Logic or UI structure — read with surrounding lines.
234	<div className="space-y-4 max-h-[500px] overflow-y-auto pr-1">	CSS/Tailwind styling.
235	{history.map((log) => {	Logic or UI structure — read with surrounding lines.
236	const targetAudience = log.new_value?.audience 'all'	Logic or UI structure — read with surrounding lines.
237	const logTitle = log.new_value?.title 'No Title'	Logic or UI structure — read with surrounding lines.
238	const logBody = log.new_value?.body 'No message description.'	Logic or UI structure — read with surrounding lines.
239		Blank line.
240	let badgeColor = 'info'	Logic or UI structure — read with surrounding lines.
241	if (targetAudience === 'customers') badgeColor = 'success'	Logic or UI structure — read with surrounding lines.
242	else if (targetAudience === 'stores') badgeColor = 'warning'	Logic or UI structure — read with surrounding lines.
243	else if (targetAudience === 'riders') badgeColor = 'secondary'	Logic or UI structure — read with surrounding lines.
244		Blank line.
245	return (	Return JSX UI.
246	<div	JSX element opening tag.
247	key={log.id}	Logic or UI structure — read with surrounding lines.
248	className="flex flex-col md:flex-row md:items-center justify-between gap-4 p-4 border border-bord...	CSS/Tailwind styling.
249	>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
250	<code><div className="space-y-1.5 max-w-[75%] min-w-0"></code>	CSS/Tailwind styling.
251	<code><div className="flex flex-wrap items-center gap-2"></code>	CSS/Tailwind styling.
252	<code><Badge variant={badgeColor} className="capitalize"></code>	CSS/Tailwind styling.
253	<code>{targetAudience === 'all' ? 'All Users' : targetAudience}</code>	Logic or UI structure — read with surrounding lines.
254	<code></Badge></code>	JSX element opening tag.
255	<code></code>	CSS/Tailwind styling.
256	<code>Sent: {formatDate(log.created_at)}</code>	Logic or UI structure — read with surrounding lines.
257	<code></code>	JSX element opening tag.
258	<code></div></code>	JSX element opening tag.
259	<code><h4 className="text-xs font-bold text-on-surface truncate" title={logTitle}></code>	CSS/Tailwind styling.
260	<code>{logTitle}</code>	Logic or UI structure — read with surrounding lines.
261	<code></h4></code>	JSX element opening tag.
262	<code><p className="text-xs text-secondary break-words leading-relaxed"></code>	CSS/Tailwind styling.
263	<code>{logBody}</code>	Logic or UI structure — read with surrounding lines.
264	<code></p></code>	JSX element opening tag.
265	<code></div></code>	JSX element opening tag.
266		Blank line.
267	<code><div className="text-[10px] text-secondary font-mono bg-white border border-border rounded-lg px-..."></code>	CSS/Tailwind styling.
268	<code>Admin: {log.admin_id 'system'}</code>	Logic or UI structure — read with surrounding lines.
269	<code></div></code>	JSX element opening tag.
270	<code></div></code>	JSX element opening tag.
271	<code>)</code>	Logic or UI structure — read with surrounding lines.
272	<code>}}}</code>	Logic or UI structure — read with surrounding lines.
273	<code></div></code>	JSX element opening tag.
274	<code>)}</code>	Logic or UI structure — read with surrounding lines.
275	<code></Card></code>	JSX element opening tag.
276	<code></div></code>	JSX element opening tag.
277		Blank line.
278	<code>{/* — Confirm Dialog — */}</code>	Logic or UI structure — read with surrounding lines.
279	<code><ConfirmDialog</code>	JSX element opening tag.
280	<code>isOpen={showConfirm}</code>	Logic or UI structure — read with surrounding lines.
281	<code>onClose={() => setShowConfirm(false)}</code>	Logic or UI structure — read with surrounding lines.
282	<code>onConfirm={handleSendNotification}</code>	Logic or UI structure — read with surrounding lines.
283	<code>loading={isSending}</code>	Logic or UI structure — read with surrounding lines.
284	<code>title="Confirm Push Notification Broadcast"</code>	Logic or UI structure — read with surrounding lines.
285	<code>description={`Are you sure you want to broadcast this message immediately to target audience: "\${`</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
286	audience === 'all' ? 'All Users' : audience	Logic or UI structure — read with surrounding lines.
287	}"? This will trigger real-time FCM push alerts to active customer/store/rider mobile apps.`}	Logic or UI structure — read with surrounding lines.
288	confirmLabel="Broadcast Now"	Logic or UI structure — read with surrounding lines.
289	variant="primary"	Logic or UI structure — read with surrounding lines.
290	/>	Logic or UI structure — read with surrounding lines.
291	</div>	JSX element opening tag.
292	)	Logic or UI structure — read with surrounding lines.
293	}	Logic or UI structure — read with surrounding lines.
294		Blank line.

SettingsPage (src/pages/SettingsPage.jsx)

Total lines: 408

Route: /settings

Purpose: Platform commission, fees, payout settings.

Line	Code	Explanation
1	import React, { useState, useEffect } from 'react'	Import React hooks.
2	import { Settings, Landmark, ShieldCheck, DollarSign, Clock, MapPin, Calculator, RefreshCw, Save } from 'lucide-react'	Import icons.
3	import { getPlatformSettings, updatePlatformSettings } from '../services/platformService'	Import API/database service.
4	import { calculateOrderPricing } from '../utils/pricingCalculator'	Import helper utilities.
5	import { formatCurrency } from '../utils/formatters'	Import helper utilities.
6	import { useAuth } from '../context/AuthContext'	Import auth context.
7	import PageLayout from '../components/layout/PageLayout'	Import UI component.
8	import Button from '../components/ui/Button'	Import UI component.
9	import Card from '../components/ui/Card'	Import UI component.
10	import Input from '../components/ui/Input'	Import UI component.
11	import Spinner from '../components/ui/Spinner'	Import UI component.
12	import Skeleton from '../components/ui/Skeleton'	Import UI component.
13	import ConfirmDialog from '../components/ui/ConfirmDialog'	Import UI component.
14	import toast from 'react-hot-toast'	Import dependency.
15		Blank line.
16	/**	Doc comment.
17	* ZapKart Platform Settings Page	Doc comment.
18	* Editable form for platform-wide parameters and timeouts.	Doc comment.
19	* Features an interactive live pricing calculator mock to preview active calculations.	Doc comment.
20	*/	Doc comment.
21	export default function SettingsPage() {	Default export (main module).
22	const { adminProfile } = useAuth()	Auth state and login/logout.
23		Blank line.
24	// Data states	Comment: Data states
25	const [settings, setSettings] = useState(null)	React state variable.
26	const [loading, setLoading] = useState(true)	React state variable.
27	const [error, setError] = useState(null)	React state variable.
28	const [isSaving, setIsSaving] = useState(false)	React state variable.
29	const [showConfirm, setShowConfirm] = useState(false)	React state variable.
30		Blank line.
31	// Interactive Calculator State	Comment: Interactive Calculator State
32	const [calcCartValue, setCalcCartValue] = useState('299')	React state variable.
33	const [calcDistance, setCalcDistance] = useState('2.5')	React state variable.
34	const [calcResults, setCalcResults] = useState(null)	React state variable.
35		Blank line.
36	// Form Fields State	Comment: Form Fields State
37	const [formData, setFormData] = useState({	React state variable.
38	commission_rate: 0.18,	Logic or UI structure — read with surrounding lines.
39	minimum_profit: 10,	Logic or UI structure — read with surrounding lines.
40	min_delivery_fee: 15,	Logic or UI structure — read with surrounding lines.
41	max_delivery_fee: 150,	Logic or UI structure — read with surrounding lines.
42	free_delivery_above: 499,	Logic or UI structure — read with surrounding lines.
43	minimum_order_value: 99,	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
44	rider_payout_under_2km: 25,	Logic or UI structure — read with surrounding lines.
45	rider_payout_2_to_4km: 40,	Logic or UI structure — read with surrounding lines.
46	rider_payout_above_4km: 60,	Logic or UI structure — read with surrounding lines.
47	store_confirmation_timeout: 5,	Logic or UI structure — read with surrounding lines.
48	rider_acceptance_timeout: 60,	Logic or UI structure — read with surrounding lines.
49	max_cod_balance_per_rider: 2000,	Logic or UI structure — read with surrounding lines.
50	store_cancellation_penalty: 100,	Logic or UI structure — read with surrounding lines.
51	})	Logic or UI structure — read with surrounding lines.
52		Blank line.
53	// Fetch settings	Comment: Fetch settings
54	const fetchSettings = async () => {	Async function for network calls.
55	setLoading(true)	Logic or UI structure — read with surrounding lines.
56	setError(null)	Logic or UI structure — read with surrounding lines.
57	try {	Try block start.
58	const data = await getPlatformSettings()	Wait for async operation.
59	setSettings(data)	Logic or UI structure — read with surrounding lines.
60	// Set form state	Comment: Set form state
61	setFormData({	Logic or UI structure — read with surrounding lines.
62	commission_rate: Number(data.commission_rate) 0.18,	Logic or UI structure — read with surrounding lines.
63	minimum_profit: Number(data.minimum_profit) 10,	Logic or UI structure — read with surrounding lines.
64	min_delivery_fee: Number(data.min_delivery_fee) 15,	Logic or UI structure — read with surrounding lines.
65	max_delivery_fee: Number(data.max_delivery_fee) 150,	Logic or UI structure — read with surrounding lines.
66	free_delivery_above: Number(data.free_delivery_above) 499,	Logic or UI structure — read with surrounding lines.
67	minimum_order_value: Number(data.minimum_order_value) 99,	Logic or UI structure — read with surrounding lines.
68	rider_payout_under_2km: Number(data.rider_payout_under_2km) 25,	Logic or UI structure — read with surrounding lines.
69	rider_payout_2_to_4km: Number(data.rider_payout_2_to_4km) 40,	Logic or UI structure — read with surrounding lines.
70	rider_payout_above_4km: Number(data.rider_payout_above_4km) 60,	Logic or UI structure — read with surrounding lines.
71	store_confirmation_timeout: Number(data.store_confirmation_timeout) 5,	Logic or UI structure — read with surrounding lines.
72	rider_acceptance_timeout: Number(data.rider_acceptance_timeout) 60,	Logic or UI structure — read with surrounding lines.
73	max_cod_balance_per_rider: Number(data.max_cod_balance_per_rider) 2000,	Logic or UI structure — read with surrounding lines.
74	store_cancellation_penalty: Number(data.store_cancellation_penalty) 100,	Logic or UI structure — read with surrounding lines.
75	})	Logic or UI structure — read with surrounding lines.
76	} catch (err) {	Catch errors.
77	setError(err.message 'Failed to fetch platform parameters.')	Logic or UI structure — read with surrounding lines.
78	} finally {	Finally block (cleanup).

Line	Code	Explanation
79	setLoading(false)	Logic or UI structure — read with surrounding lines.
80	}	Logic or UI structure — read with surrounding lines.
81	};	Logic or UI structure — read with surrounding lines.
82		Blank line.
83	useEffect(() => {	Side effect (fetch, subscribe, redirect).
84	fetchSettings()	Logic or UI structure — read with surrounding lines.
85	}, [])	Logic or UI structure — read with surrounding lines.
86		Blank line.
87	// Calculate pricing preview live	Comment: Calculate pricing preview live
88	useEffect(() => {	Side effect (fetch, subscribe, redirect).
89	if (!formData) return	Logic or UI structure — read with surrounding lines.
90	const cart = Number(calcCartValue) 0	Logic or UI structure — read with surrounding lines.
91	const dist = Number(calcDistance) 0	Logic or UI structure — read with surrounding lines.
92		Blank line.
93	try {	Try block start.
94	const results = calculateOrderPricing(cart, dist, formData)	Logic or UI structure — read with surrounding lines.
95	setCalcResults(results)	Logic or UI structure — read with surrounding lines.
96	} catch (err) {	Catch errors.
97	console.error('Pricing preview calculate error:', err)	Logic or UI structure — read with surrounding lines.
98	}	Logic or UI structure — read with surrounding lines.
99	}, [calcCartValue, calcDistance, formData])	Logic or UI structure — read with surrounding lines.
100		Blank line.
101	const handleFieldChange = (field, value) => {	Logic or UI structure — read with surrounding lines.
102	setFormData((prev) => ({	Logic or UI structure — read with surrounding lines.
103	...prev,	Logic or UI structure — read with surrounding lines.
104	[field]: Number(value) 0,	Logic or UI structure — read with surrounding lines.
105	}))	Logic or UI structure — read with surrounding lines.
106	}	Logic or UI structure — read with surrounding lines.
107		Blank line.
108	const handleSaveSettings = async () => {	Async function for network calls.
109	setIsSaving(true)	Logic or UI structure — read with surrounding lines.
110	const adminId = adminProfile?.id 'admin'	Logic or UI structure — read with surrounding lines.
111		Blank line.
112	try {	Try block start.
113	await updatePlatformSettings(formData, adminId)	Wait for async operation.
114	toast.success('Platform configurations updated and logged successfully')	Toast notification.

Line	Code	Explanation
115	setShowConfirm(false)	Logic or UI structure — read with surrounding lines.
116	fetchSettings()	Logic or UI structure — read with surrounding lines.
117	} catch (err) {	Catch errors.
118	toast.error('Save failed: ' + err.message)	Toast notification.
119	} finally {	Finally block (cleanup).
120	setIsSaving(false)	Logic or UI structure — read with surrounding lines.
121	}	Logic or UI structure — read with surrounding lines.
122	}	Logic or UI structure — read with surrounding lines.
123		Blank line.
124	return (	Return JSX UI.
125	<div className="space-y-6 animate-fade-in p-2">	CSS/Tailwind styling.
126	{/* — Header — */}	Logic or UI structure — read with surrounding lines.
127	<div className="flex flex-col sm:flex-row sm:items-center sm:justify-between gap-4">	CSS/Tailwind styling.
128	<div>	JSX element opening tag.
129	<h2 className="text-2xl font-bold text-on-surface">Platform & Tariff Configurations</h2>	CSS/Tailwind styling.
130	<p className="text-sm text-secondary mt-0.5">	CSS/Tailwind styling.
131	Modify commission thresholds, delivery tariff caps, and rider acceptance limits.	Logic or UI structure — read with surrounding lines.
132	</p>	JSX element opening tag.
133	</div>	JSX element opening tag.
134	<button	JSX element opening tag.
135	onClick={fetchSettings}	User event handler.
136	className="flex items-center gap-1.5 px-3 py-2 rounded-lg border border-border bg-white text-secondary hover..."	CSS/Tailwind styling.
137	>	Logic or UI structure — read with surrounding lines.
138	<RefreshCw className="w-3.5 h-3.5" /> Refresh	CSS/Tailwind styling.
139	</button>	JSX element opening tag.
140	</div>	JSX element opening tag.
141		Blank line.
142	{loading ? (	Logic or UI structure — read with surrounding lines.
143	<div className="grid grid-cols-1 lg:grid-cols-3 gap-6">	CSS/Tailwind styling.
144	<Skeleton className="h-96 rounded-xl lg:col-span-2" />	CSS/Tailwind styling.
145	<Skeleton className="h-96 rounded-xl" />	CSS/Tailwind styling.
146	</div>	JSX element opening tag.
147	) : error ? (	Logic or UI structure — read with surrounding lines.
148	<div className="bg-red-50 border border-red-200 rounded-xl p-8 text-center text-red-600 font-medium">	CSS/Tailwind styling.
149	{error}	JSX element opening tag.
150	<button onClick={fetchSettings} className="mt-2 text-sm text-brand underline font-semibold">	CSS/Tailwind styling.
151	Retry	Logic or UI structure — read with surrounding lines.
152	</button>	JSX element opening tag.
153	</div>	JSX element opening tag.
154	) : (	Logic or UI structure — read with surrounding lines.
155	<div className="grid grid-cols-1 lg:grid-cols-3 gap-6">	CSS/Tailwind styling.

Line	Code	Explanation
156	<code>/* — Settings Inputs Form (2 columns size) — */</code>	Logic or UI structure — read with surrounding lines.
157	<code><form</code>	JSX element opening tag.
158	<code>onSubmit={(e) => {</code>	User event handler.
159	<code>e.preventDefault()</code>	Logic or UI structure — read with surrounding lines.
160	<code>setShowConfirm(true)</code>	Logic or UI structure — read with surrounding lines.
161	<code>}}</code>	Logic or UI structure — read with surrounding lines.
162	<code>className="lg:col-span-2 space-y-6"</code>	CSS/Tailwind styling.
163	<code>></code>	Logic or UI structure — read with surrounding lines.
164	<code>/* Tariff and Payout parameters */</code>	Logic or UI structure — read with surrounding lines.
165	<code><Card className="bg-white"></code>	CSS/Tailwind styling.
166	<code><div className="flex items-center gap-2 mb-4 border-b border-border pb-3"></code>	CSS/Tailwind styling.
167	<code><Landmark className="w-5 h-5 text-brand" /></code>	CSS/Tailwind styling.
168	<code><h3 className="text-sm font-bold text-on-surface uppercase tracking-wider">Pricing, Commissions & Tar...</code>	CSS/Tailwind styling.
169	<code></div></code>	JSX element opening tag.
170		Blank line.
171	<code><div className="grid grid-cols-1 md:grid-cols-2 gap-4"></code>	CSS/Tailwind styling.
172	<code><Input</code>	JSX element opening tag.
173	<code>type="number"</code>	Logic or UI structure — read with surrounding lines.
174	<code>step="0.01"</code>	Logic or UI structure — read with surrounding lines.
175	<code>label="Platform Commission Rate (e.g. 0.18 = 18%)"</code>	Logic or UI structure — read with surrounding lines.
176	<code>value={formData.commission_rate}</code>	Logic or UI structure — read with surrounding lines.
177	<code>onChange={(e) => handleFieldChange('commission_rate', e.target.value)}</code>	User event handler.
178	<code>required</code>	Logic or UI structure — read with surrounding lines.
179	<code>/></code>	Logic or UI structure — read with surrounding lines.
180	<code><Input</code>	JSX element opening tag.
181	<code>type="number"</code>	Logic or UI structure — read with surrounding lines.
182	<code>label="Target Platform Profit per Order (₹)"</code>	Logic or UI structure — read with surrounding lines.
183	<code>value={formData.minimum_profit}</code>	Logic or UI structure — read with surrounding lines.
184	<code>onChange={(e) => handleFieldChange('minimum_profit', e.target.value)}</code>	User event handler.
185	<code>required</code>	Logic or UI structure — read with surrounding lines.
186	<code>/></code>	Logic or UI structure — read with surrounding lines.
187	<code><Input</code>	JSX element opening tag.
188	<code>type="number"</code>	Logic or UI structure — read with surrounding lines.
189	<code>label="Minimum Cap Delivery Fee (₹)"</code>	Logic or UI structure — read with surrounding lines.
190	<code>value={formData.min_delivery_fee}</code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
191	onChange={(e) => handleFieldChange('min_delivery_fee', e.target.value)}	User event handler.
192	required	Logic or UI structure — read with surrounding lines.
193	/>	Logic or UI structure — read with surrounding lines.
194	<Input	JSX element opening tag.
195	type="number"	Logic or UI structure — read with surrounding lines.
196	label="Maximum Cap Delivery Fee (₹)"	Logic or UI structure — read with surrounding lines.
197	value={formData.max_delivery_fee}	Logic or UI structure — read with surrounding lines.
198	onChange={(e) => handleFieldChange('max_delivery_fee', e.target.value)}	User event handler.
199	required	Logic or UI structure — read with surrounding lines.
200	/>	Logic or UI structure — read with surrounding lines.
201	<Input	JSX element opening tag.
202	type="number"	Logic or UI structure — read with surrounding lines.
203	label="Free Delivery Threshold (₹)"	Logic or UI structure — read with surrounding lines.
204	value={formData.free_delivery_above}	Logic or UI structure — read with surrounding lines.
205	onChange={(e) => handleFieldChange('free_delivery_above', e.target.value)}	User event handler.
206	required	Logic or UI structure — read with surrounding lines.
207	/>	Logic or UI structure — read with surrounding lines.
208	<Input	JSX element opening tag.
209	type="number"	Logic or UI structure — read with surrounding lines.
210	label="Minimum Order Value Limit (₹)"	Logic or UI structure — read with surrounding lines.
211	value={formData.minimum_order_value}	Logic or UI structure — read with surrounding lines.
212	onChange={(e) => handleFieldChange('minimum_order_value', e.target.value)}	User event handler.
213	required	Logic or UI structure — read with surrounding lines.
214	/>	Logic or UI structure — read with surrounding lines.
215	</div>	JSX element opening tag.
216	</Card>	JSX element opening tag.
217		Blank line.
218	{/* Rider delivery Payout rates */}	Logic or UI structure — read with surrounding lines.
219	<Card className="bg-white">	CSS/Tailwind styling.
220	<div className="flex items-center gap-2 mb-4 border-b border-border pb-3">	CSS/Tailwind styling.
221	<MapPin className="w-5 h-5 text-info" />	CSS/Tailwind styling.
222	<h3 className="text-sm font-bold text-on-surface uppercase tracking-wider">Rider Delivery Distance Ba...	CSS/Tailwind styling.
223	</div>	JSX element opening tag.
224		Blank line.
225	<div className="grid grid-cols-1 md:grid-cols-3 gap-4">	CSS/Tailwind styling.
226	<Input	JSX element opening tag.

Line	Code	Explanation
227	type="number"	Logic or UI structure — read with surrounding lines.
228	label="Under 2 km Band (₹)"	Logic or UI structure — read with surrounding lines.
229	value={formData.rider_payout_under_2km}	Logic or UI structure — read with surrounding lines.
230	onChange={(e) => handleFieldChange('rider_payout_under_2km', e.target.value)}	User event handler.
231	required	Logic or UI structure — read with surrounding lines.
232	/>	Logic or UI structure — read with surrounding lines.
233	<Input	JSX element opening tag.
234	type="number"	Logic or UI structure — read with surrounding lines.
235	label="2 km to 4 km Band (₹)"	Logic or UI structure — read with surrounding lines.
236	value={formData.rider_payout_2_to_4km}	Logic or UI structure — read with surrounding lines.
237	onChange={(e) => handleFieldChange('rider_payout_2_to_4km', e.target.value)}	User event handler.
238	required	Logic or UI structure — read with surrounding lines.
239	/>	Logic or UI structure — read with surrounding lines.
240	<Input	JSX element opening tag.
241	type="number"	Logic or UI structure — read with surrounding lines.
242	label="Above 4 km Band (₹)"	Logic or UI structure — read with surrounding lines.
243	value={formData.rider_payout_above_4km}	Logic or UI structure — read with surrounding lines.
244	onChange={(e) => handleFieldChange('rider_payout_above_4km', e.target.value)}	User event handler.
245	required	Logic or UI structure — read with surrounding lines.
246	/>	Logic or UI structure — read with surrounding lines.
247	</div>	JSX element opening tag.
248	</Card>	JSX element opening tag.
249		Blank line.
250	{/* Timeouts & Risk compliance limits */}	Logic or UI structure — read with surrounding lines.
251	<Card className="bg-white">	CSS/Tailwind styling.
252	<div className="flex items-center gap-2 mb-4 border-b border-border pb-3">	CSS/Tailwind styling.
253	<Clock className="w-5 h-5 text-warning" />	CSS/Tailwind styling.
254	<h3 className="text-sm font-bold text-on- surface uppercase tracking-wider">Risk Policies & Timeouts</h3>	CSS/Tailwind styling.
255	</div>	JSX element opening tag.
256		Blank line.
257	<div className="grid grid-cols-1 md:grid- cols-2 gap-4">	CSS/Tailwind styling.
258	<Input	JSX element opening tag.
259	type="number"	Logic or UI structure — read with surrounding lines.
260	label="Store Confirm Timeout (Minutes)"	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
261	value={formData.store_confirmation_timeout}	Logic or UI structure — read with surrounding lines.
262	onChange={(e) => handleFieldChange('store_confirmation_timeout', e.target.value)}	User event handler.
263	required	Logic or UI structure — read with surrounding lines.
264	/>	Logic or UI structure — read with surrounding lines.
265	<Input	JSX element opening tag.
266	type="number"	Logic or UI structure — read with surrounding lines.
267	label="Rider Acceptance Timeout (Seconds)"	Logic or UI structure — read with surrounding lines.
268	value={formData.rider_acceptance_timeout}	Logic or UI structure — read with surrounding lines.
269	onChange={(e) => handleFieldChange('rider_acceptance_timeout', e.target.value)}	User event handler.
270	required	Logic or UI structure — read with surrounding lines.
271	/>	Logic or UI structure — read with surrounding lines.
272	<Input	JSX element opening tag.
273	type="number"	Logic or UI structure — read with surrounding lines.
274	label="Max Rider COD Balance Handheld Limit (₹)"	Logic or UI structure — read with surrounding lines.
275	value={formData.max_cod_balance_per_rider}	Logic or UI structure — read with surrounding lines.
276	onChange={(e) => handleFieldChange('max_cod_balance_per_rider', e.target.value)}	User event handler.
277	required	Logic or UI structure — read with surrounding lines.
278	/>	Logic or UI structure — read with surrounding lines.
279	<Input	JSX element opening tag.
280	type="number"	Logic or UI structure — read with surrounding lines.
281	label="Store Reject Order Penalty Tariff (₹)"	Logic or UI structure — read with surrounding lines.
282	value={formData.store_cancellation_penalty}	Logic or UI structure — read with surrounding lines.
283	onChange={(e) => handleFieldChange('store_cancellation_penalty', e.target.value)}	User event handler.
284	required	Logic or UI structure — read with surrounding lines.
285	/>	Logic or UI structure — read with surrounding lines.
286	</div>	JSX element opening tag.
287	</Card>	JSX element opening tag.
288		Blank line.
289	{/* Submit */}	Logic or UI structure — read with surrounding lines.
290	<div className="flex justify-end gap-2.5">	CSS/Tailwind styling.
291	<Button	JSX element opening tag.
292	variant="outline"	Logic or UI structure — read with surrounding lines.
293	type="button"	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
294	onClick={fetchSettings}	User event handler.
295	className="w-32"	CSS/Tailwind styling.
296	>	Logic or UI structure — read with surrounding lines.
297	Reset Form	Logic or UI structure — read with surrounding lines.
298	</Button>	JSX element opening tag.
299	<Button	JSX element opening tag.
300	variant="primary"	Logic or UI structure — read with surrounding lines.
301	type="submit"	Logic or UI structure — read with surrounding lines.
302	className="w-40 flex items-center justify-center gap-1.5"	CSS/Tailwind styling.
303	>	Logic or UI structure — read with surrounding lines.
304	<Save className="w-4 h-4" /> Save Settings	CSS/Tailwind styling.
305	</Button>	JSX element opening tag.
306	</div>	JSX element opening tag.
307	</form>	JSX element opening tag.
308		Blank line.
309	<code>/* — Right Interactive Calculator Preview Panel (1 column size) — */</code>	Logic or UI structure — read with surrounding lines.
310	<div className="lg:col-span-1 space-y-6">	CSS/Tailwind styling.
311	<Card className="bg-white border border-brand/20 shadow-md ring-1 ring-brand/5">	CSS/Tailwind styling.
312	<div className="flex items-center gap-2 mb-3 border-b border-border pb-3">	CSS/Tailwind styling.
313	<Calculator className="w-5 h-5 text-brand" />	CSS/Tailwind styling.
314	<h3 className="text-sm font-bold text-on-surface uppercase tracking-wider">Live Pricing Preview</h3>	CSS/Tailwind styling.
315	</div>	JSX element opening tag.
316	<p className="text-[11px] text-secondary leading-relaxed">	CSS/Tailwind styling.
317	Test active tariff configurations using the pricing simulator panel below. Values update instantly as...	Logic or UI structure — read with surrounding lines.
318	</p>	JSX element opening tag.
319		Blank line.
320	<code>/* Inputs */</code>	Logic or UI structure — read with surrounding lines.
321	<div className="space-y-3.5 mt-4 pt-3 border-t border-surface-variant">	CSS/Tailwind styling.
322	<Input	JSX element opening tag.
323	type="number"	Logic or UI structure — read with surrounding lines.
324	label="Simulated Cart Value (₹)"	Logic or UI structure — read with surrounding lines.
325	placeholder="e.g. 299"	Logic or UI structure — read with surrounding lines.
326	value={calcCartValue}	Logic or UI structure — read with surrounding lines.
327	onChange={(e) => setCalcCartValue(e.target.value)}	User event handler.
328	min="0"	Logic or UI structure — read with surrounding lines.
329	/>	Logic or UI structure — read with surrounding lines.
330	<Input	JSX element opening tag.
331	type="number"	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
332	step="0.1"	Logic or UI structure — read with surrounding lines.
333	label="Simulated Distance (km)"	Logic or UI structure — read with surrounding lines.
334	placeholder="e.g. 2.5"	Logic or UI structure — read with surrounding lines.
335	value={calcDistance}	Logic or UI structure — read with surrounding lines.
336	onChange={(e) => setCalcDistance(e.target.value)}	User event handler.
337	min="0"	Logic or UI structure — read with surrounding lines.
338	/>	Logic or UI structure — read with surrounding lines.
339	</div>	JSX element opening tag.
340		Blank line.
341	{/* Simulated Output details */}	Logic or UI structure — read with surrounding lines.
342	{calcResults && (	Logic or UI structure — read with surrounding lines.
343	<div className="mt-5 p-3.5 bg-surface rounded-xl border border-surface-variant text-xs space-y- 2.5">	CSS/Tailwind styling.
344	<h4 className="font-bold text-on-surface text-[11px] uppercase tracking-wide border-b border- border...>	CSS/Tailwind styling.
345	Pricing Engine Outputs	JSX element opening tag.
346	{calcResults.isFreeDelivery && (	Logic or UI structure — read with surrounding lines.
347		CSS/Tailwind styling.
348	FREE DELIVERY!	Logic or UI structure — read with surrounding lines.
349		JSX element opening tag.
350	)}	Logic or UI structure — read with surrounding lines.
351	</h4>	JSX element opening tag.
352		Blank line.
353	<div className="flex justify-between items-center text-secondary">	CSS/Tailwind styling.
354	Dynamic Delivery Fee:	JSX element opening tag.
355	{formatCurrency(calcResults.deliveryFee)}	CSS/Tailwind styling.
356	</div>	JSX element opening tag.
357		Blank line.
358	<div className="flex justify-between items-center text-secondary">	CSS/Tailwind styling.
359	Rider Payout (Band aware):	JSX element opening tag.
360	{formatCurrency(calcResults.riderPayout)}	CSS/Tailwind styling.
361	</div>	JSX element opening tag.
362		Blank line.
363	<div className="flex justify-between items-center text-secondary">	CSS/Tailwind styling.
364	Merchant Platform Comm:	JSX element opening tag.
365	- {formatCurrency(calcResults.commissionAmount)}	CSS/Tailwind styling.
366	</div>	JSX element opening tag.
367		Blank line.

Line	Code	Explanation
368	<code><div className="flex justify-between items-center text-secondary border-t border-dashed border-bord...</code>	CSS/Tailwind styling.
369	<code>Store Merchant Receives:</code>	JSX element opening tag.
370	<code>{formatCurrency(calcResults.storeReceives)}</code>	CSS/Tailwind styling.
371	<code></div></code>	JSX element opening tag.
372		Blank line.
373	<code><div className="flex justify-between items-center text-secondary"></code>	CSS/Tailwind styling.
374	<code>Customer Total Bill:</code>	JSX element opening tag.
375	<code>{formatCurrency(calcResults.totalCustomerPays)}<...</code>	CSS/Tailwind styling.
376	<code></div></code>	JSX element opening tag.
377		Blank line.
378	<code><div className="flex justify-between items-center text-secondary border-t border-border pt-2"></code>	CSS/Tailwind styling.
379	<code></code>	CSS/Tailwind styling.
380	<code><ShieldCheck className="w-4 h-4 text-green-600 shrink-0" /></code>	CSS/Tailwind styling.
381	<code>ZapKart Net Profit:</code>	JSX element opening tag.
382	<code></code>	JSX element opening tag.
383	<code>= 0 ? 'text-green-700' : 'tex...</code>	CSS/Tailwind styling.
384	<code>{formatCurrency(calcResults.zapkartNetProfit)}</code>	Logic or UI structure — read with surrounding lines.
385	<code></code>	JSX element opening tag.
386	<code></div></code>	JSX element opening tag.
387	<code></div></code>	JSX element opening tag.
388	<code>)}</code>	Logic or UI structure — read with surrounding lines.
389	<code></Card></code>	JSX element opening tag.
390	<code></div></code>	JSX element opening tag.
391	<code></div></code>	JSX element opening tag.
392	<code>)}</code>	Logic or UI structure — read with surrounding lines.
393		Blank line.
394	<code>{/* — Confirm Save Settings Dialog — */}</code>	Logic or UI structure — read with surrounding lines.
395	<code><ConfirmDialog</code>	JSX element opening tag.
396	<code>isOpen={showConfirm}</code>	Logic or UI structure — read with surrounding lines.
397	<code>onClose={() => setShowConfirm(false)}</code>	Logic or UI structure — read with surrounding lines.
398	<code>onConfirm={handleSaveSettings}</code>	Logic or UI structure — read with surrounding lines.
399	<code>loading={isSaving}</code>	Logic or UI structure — read with surrounding lines.
400	<code>title="Confirm Platform Re-configurations?"</code>	Logic or UI structure — read with surrounding lines.
401	<code>description="WARNING: Saving these settings will immediately alter the pricing engine parameters for all new ...</code>	Logic or UI structure — read with surrounding lines.
402	<code>confirmLabel="Apply Settings"</code>	Logic or UI structure — read with surrounding lines.
403	<code>variant="danger"</code>	Logic or UI structure — read with surrounding lines.
404	<code>/></code>	Logic or UI structure — read with surrounding lines.

Line	Code	Explanation
405	<code></div></code>	JSX element opening tag.
406	<code>)</code>	Logic or UI structure — read with surrounding lines.
407	<code>}</code>	Logic or UI structure — read with surrounding lines.
408		Blank line.