Practica estadística

Zaret Norymi

2022-06-06

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see http://rmarkdown.rstudio.com.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed           dist
##  Min.   : 4.0   Min.   :  2.00
##  1st Qu.:12.0   1st Qu.: 26.00
##  Median :15.0   Median : 36.00
##  Mean   :15.4   Mean   : 42.98
##  3rd Qu.:19.0   3rd Qu.: 56.00
##  Max.   :25.0   Max.   :120.00
```

Including Plots

You can also embed plots, for example:
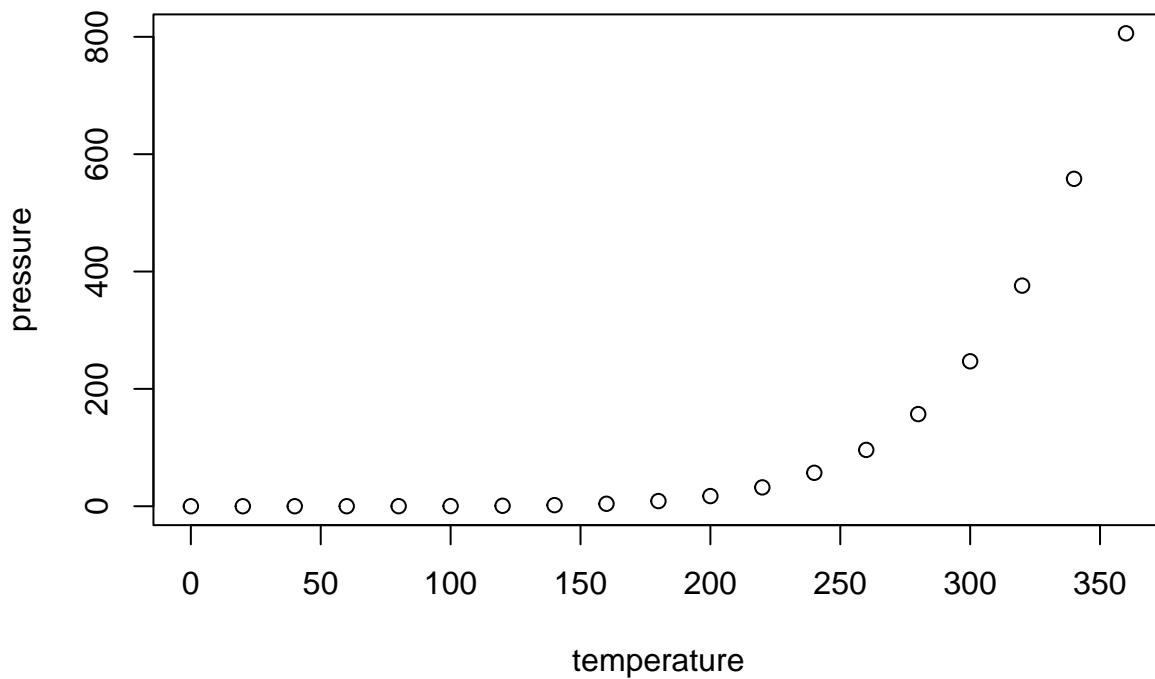
Matriz penguins, se encuentra en classroom

#———————————————— # Importación de matriz #——————————————-

import data / from excel /browse / seleccionar archivo / aceptar

#———————————— # Exploración #————————————

```
library(readxl)
```

```
penguins<-read_excel("penguins.xlsx")
```

```
dim(penguins)
```

```
## [1] 344   9
```

Nombre de las variables

```
colnames(penguins)
```

```
## [1] "ID"              "especie"         "isla"            "largo_pico_mm"
## [5] "grosor_pico_mm"  "largo_aleta_mm"  "masa_corporal_g" "genero"
## [9] "año"
```

Tipo de variables

```
str(penguins)
```

```
## tibble [344 x 9] (S3: tbl_df/tbl/data.frame)
##  $ ID             : chr [1:344] "i1" "i2" "i3" "i4" ...
##  $ especie        : chr [1:344] "Adelie" "Adelie" "Adelie" "Adelie" ...
##  $ isla           : chr [1:344] "Torgersen" "Torgersen" "Torgersen" "Torgersen" ...
##  $ largo_pico_mm  : num [1:344] 39.1 39.5 40.3 37.8 36.7 39.3 38.9 39.2 34.1 42 ...
##  $ grosor_pico_mm : num [1:344] 18.7 17.4 18 18.1 19.3 20.6 17.8 19.6 18.1 20.2 ...
##  $ largo_aleta_mm : num [1:344] 181 186 195 190 193 190 181 195 193 190 ...
##  $ masa_corporal_g: num [1:344] 3750 3800 3250 3700 3450 ...
##  $ genero         : chr [1:344] "male" "female" "female" "female" ...
##  $ año            : num [1:344] 2007 2007 2007 2007 2007 ...
```

En busca de valores perdidos (NA's)

```
anyNA(penguins)
```

```
## [1] FALSE
```

Estadística descriptiva

```
summary(penguins)
```

```
##        ID                especie               isla            largo_pico_mm
## Length:344          Length:344          Length:344          Min.   :32.10
## Class :character    Class :character    Class :character    1st Qu.:39.20
## Mode  :character    Mode  :character    Mode  :character    Median :44.45
##                                                             Mean   :43.92
##                                                             3rd Qu.:48.50
##                                                             Max.   :59.60
##   grosor_pico_mm  largo_aleta_mm  masa_corporal_g     genero
## Min.   :13.10   Min.   :172.0   Min.   :2700     Length:344
## 1st Qu.:15.60   1st Qu.:190.0   1st Qu.:3550     Class :character
## Median :17.30   Median :197.0   Median :4050     Mode  :character
## Mean   :17.15   Mean   :200.9   Mean   :4202
## 3rd Qu.:18.70   3rd Qu.:213.2   3rd Qu.:4756
## Max.   :21.50   Max.   :231.0   Max.   :6300
##       año
## Min.   :2007
## 1st Qu.:2007
## Median :2008
## Mean   :2008
## 3rd Qu.:2009
## Max.   :2009
```

#———————————————— # Configuración de la matriz #————————————————

```
penguins$especie
```

```
##   [1] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##   [7] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [13] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [19] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [25] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [31] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [37] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [43] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [49] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [55] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [61] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [67] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [73] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [79] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [85] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [91] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
##  [97] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
## [103] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
## [109] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
## [115] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
## [121] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
## [127] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
## [133] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
## [139] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
## [145] "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"    "Adelie"
## [151] "Adelie"    "Adelie"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [157] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [163] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [169] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
```

```
## [175] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [181] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [187] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [193] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [199] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [205] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [211] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [217] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [223] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [229] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [235] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [241] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [247] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [253] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [259] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [265] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [271] "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"    "Gentoo"
## [277] "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap"
## [283] "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap"
## [289] "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap"
## [295] "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap"
## [301] "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap"
## [307] "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap"
## [313] "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap"
## [319] "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap"
## [325] "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap"
## [331] "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap"
## [337] "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap" "Chinstrap"
## [343] "Chinstrap" "Chinstrap"
```

#1.- Convertir las variables categóticas a factores

```r
penguins$especie<-factor(penguins$especie,
                         levels=c("Adelie", "Gentoo", "Chinstrap"))
```

```r
penguins$isla<-factor(penguins$isla,
                      levels=c("Torgersen", "Biscoe", "Dream"))
```

```r
penguins$genero
```

```
##   [1] "male"   "female" "female" "female" "female" "male"   "female" "male"
##   [9] "female" "male"   "female" "female" "female" "male"   "male"   "female"
##  [17] "female" "male"   "female" "male"   "female" "male"   "female" "male"
##  [25] "male"   "female" "male"   "female" "female" "male"   "female" "male"
##  [33] "female" "male"   "female" "male"   "male"   "female" "female" "male"
##  [41] "female" "male"   "female" "male"   "female" "male"   "male"   "female"
##  [49] "female" "male"   "female" "male"   "female" "male"   "female" "male"
##  [57] "female" "male"   "female" "male"   "female" "male"   "female" "male"
##  [65] "female" "male"   "female" "male"   "female" "male"   "female" "male"
##  [73] "female" "male"   "female" "male"   "female" "male"   "female" "male"
##  [81] "female" "male"   "female" "male"   "female" "male"   "male"   "female"
##  [89] "male"   "female" "female" "male"   "female" "male"   "female" "male"
##  [97] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [105] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [113] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [121] "female" "male"   "female" "male"   "female" "male"   "female" "male"
```

```
## [129] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [137] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [145] "female" "male"   "male"   "female" "female" "male"   "female" "male"
## [153] "female" "male"   "female" "male"   "male"   "female" "female" "male"
## [161] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [169] "female" "male"   "female" "male"   "male"   "female" "female" "male"
## [177] "female" "male"   "female" "male"   "female" "male"   "male"   "female"
## [185] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [193] "female" "male"   "female" "male"   "male"   "female" "female" "male"
## [201] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [209] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [217] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [225] "male"   "female" "female" "male"   "female" "male"   "female" "male"
## [233] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [241] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [249] "male"   "female" "female" "male"   "female" "male"   "female" "male"
## [257] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [265] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [273] "female" "male"   "female" "male"   "female" "male"   "male"   "female"
## [281] "male"   "female" "female" "male"   "female" "male"   "female" "male"
## [289] "female" "male"   "female" "male"   "male"   "female" "female" "male"
## [297] "female" "male"   "female" "male"   "female" "male"   "female" "male"
## [305] "female" "male"   "female" "male"   "female" "male"   "male"   "female"
## [313] "female" "male"   "female" "male"   "male"   "female" "male"   "female"
## [321] "female" "male"   "female" "male"   "male"   "female" "female" "male"
## [329] "female" "male"   "female" "male"   "female" "male"   "male"   "female"
## [337] "male"   "female" "female" "male"   "female" "male"   "male"   "female"
```

```
penguins$genero<-factor(penguins$genero,
                        levels=c("male", "female"))
```

```
penguins$año
```

```
##   [1] 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007
##  [16] 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007
##  [31] 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007
##  [46] 2007 2007 2007 2007 2007 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008
##  [61] 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008
##  [76] 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008
##  [91] 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2009 2009 2009 2009 2009
## [106] 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009
## [121] 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009
## [136] 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009
## [151] 2009 2009 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007
## [166] 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007
## [181] 2007 2007 2007 2007 2007 2007 2008 2008 2008 2008 2008 2008 2008 2008 2008
## [196] 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008
## [211] 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008
## [226] 2008 2008 2008 2008 2008 2008 2008 2009 2009 2009 2009 2009 2009 2009 2009
## [241] 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009
## [256] 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009
## [271] 2009 2009 2009 2009 2009 2009 2007 2007 2007 2007 2007 2007 2007 2007 2007
## [286] 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007 2007
## [301] 2007 2007 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008 2008
## [316] 2008 2008 2008 2008 2008 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009
```

```
## [331] 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009 2009
```
```r
penguins$año<-factor(penguins$año,
                     levels=c("2007", "2008", "2009"))
```
```r
str(penguins)
```
```
## tibble [344 x 9] (S3: tbl_df/tbl/data.frame)
##  $ ID             : chr [1:344] "i1" "i2" "i3" "i4" ...
##  $ especie        : Factor w/ 3 levels "Adelie","Gentoo",..: 1 1 1 1 1 1 1 1 1 1 ...
##  $ isla           : Factor w/ 3 levels "Torgersen","Biscoe",..: 1 1 1 1 1 1 1 1 1 1 ...
##  $ largo_pico_mm  : num [1:344] 39.1 39.5 40.3 37.8 36.7 39.3 38.9 39.2 34.1 42 ...
##  $ grosor_pico_mm : num [1:344] 18.7 17.4 18 18.1 19.3 20.6 17.8 19.6 18.1 20.2 ...
##  $ largo_aleta_mm : num [1:344] 181 186 195 190 193 190 181 195 193 190 ...
##  $ masa_corporal_g: num [1:344] 3750 3800 3250 3700 3450 ...
##  $ genero         : Factor w/ 2 levels "male","female": 1 2 2 2 2 1 2 1 2 1 ...
##  $ año            : Factor w/ 3 levels "2007","2008",..: 1 1 1 1 1 1 1 1 1 1 ...
```
```r
summary(penguins)
```
```
##       ID                especie          isla       largo_pico_mm
##  Length:344         Adelie   :152   Torgersen: 52   Min.   :32.10
##  Class :character   Gentoo   :124   Biscoe   :168   1st Qu.:39.20
##  Mode  :character   Chinstrap: 68   Dream    :124   Median :44.45
##                                                     Mean   :43.92
##                                                     3rd Qu.:48.50
##                                                     Max.   :59.60
##  grosor_pico_mm  largo_aleta_mm  masa_corporal_g    genero        año
##  Min.   :13.10   Min.   :172.0   Min.   :2700    male  :170   2007:110
##  1st Qu.:15.60   1st Qu.:190.0   1st Qu.:3550    female:174   2008:114
##  Median :17.30   Median :197.0   Median :4050                 2009:120
##  Mean   :17.15   Mean   :200.9   Mean   :4202
##  3rd Qu.:18.70   3rd Qu.:213.2   3rd Qu.:4756
##  Max.   :21.50   Max.   :231.0   Max.   :6300
```

—Este paso no es necesario.—

2.- Creamos una nueva matriz de datos donde se seleccionan las columnas de la 2 a la 9.

```r
penguins1<-penguins[,2:9]
colnames(penguins)
```
```
## [1] "ID"              "especie"         "isla"            "largo_pico_mm"
## [5] "grosor_pico_mm"  "largo_aleta_mm"  "masa_corporal_g" "genero"
## [9] "año"
```
```r
#——————————————— # Librerías #———————————————-
install.packages("ggplot2")
```
```
## Installing package into '/cloud/lib/x86_64-pc-linux-gnu-library/4.2'
## (as 'lib' is unspecified)
```

```
library(ggplot2)
```

Boxplot

\#——————————————————————

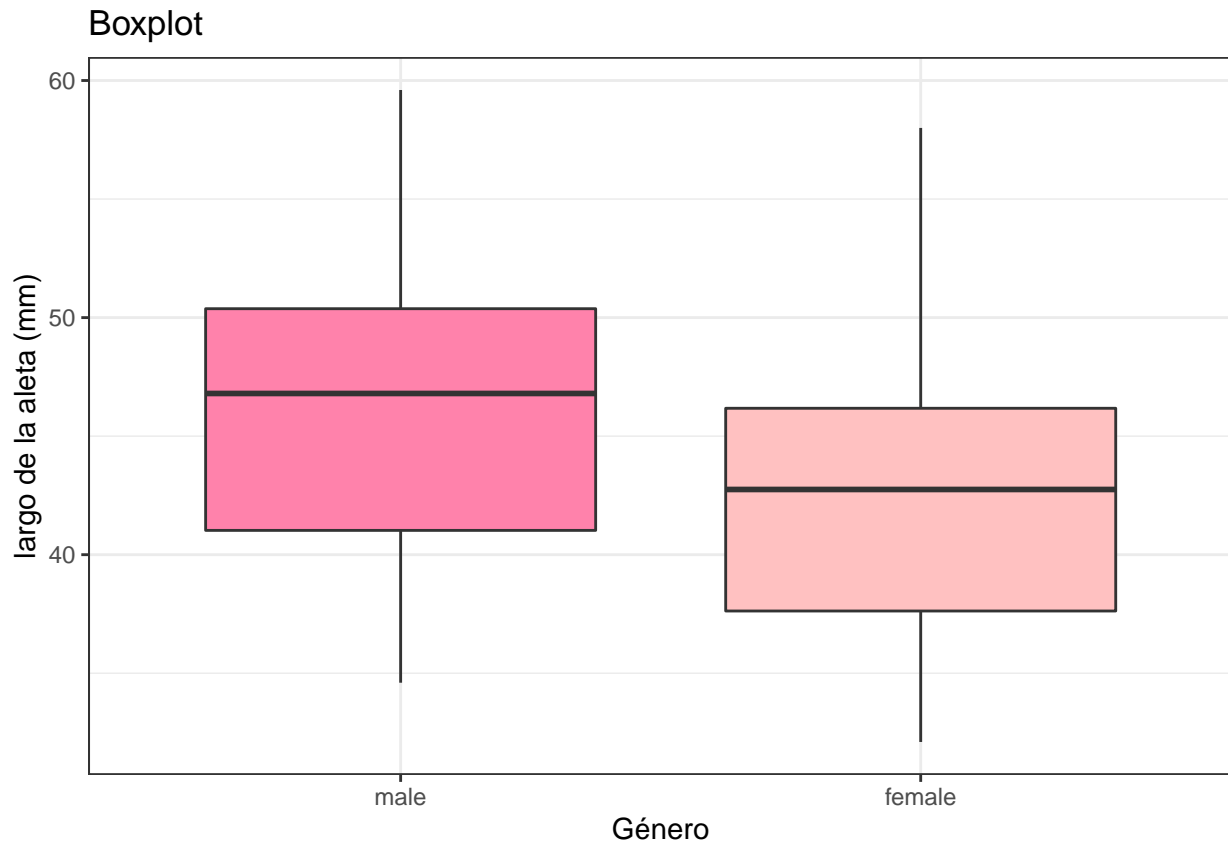## 1.- Creación de un vector de color

```
color=c("palevioletred1","rosybrown1")
```

2.- Creacion del grafico

```
BX<-ggplot(penguins, aes(x=genero, y=largo_pico_mm))+
  geom_boxplot(fill=color)+
  ggtitle("Boxplot")+
  xlab("Género")+
  ylab("largo de la aleta (mm)")+
  theme_bw()
```

3.- Visualización del boxplot
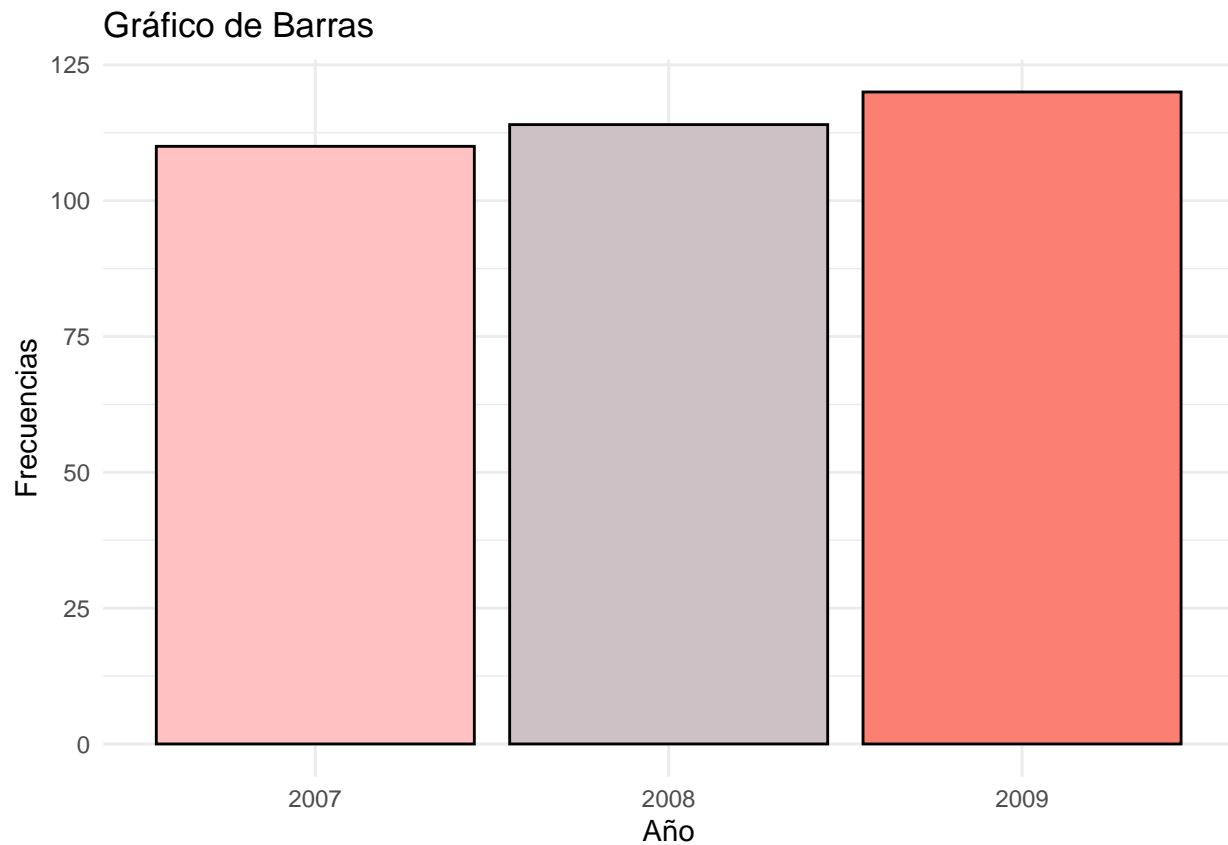
```
BX
```

Boxplot

1.- Creación de un vector de color

```
color=c("rosybrown1", "lavenderblush3", "salmon")
```

2.- Creación del gráfico

```
GB1<-ggplot(penguins, aes(x=año))+
  geom_bar(colour= "black", fill=color)+
  ggtitle("Gráfico de Barras")+
  xlab("Año")+
  ylab("Frecuencias")+
  theme_minimal()
```

3.- Visualizacion del grafico

```
GB1
```

Gráfico de Barras

4.- Barras horizontales

```
GB2<-ggplot(penguins, aes(x=año))+
  geom_bar(colour= "black", fill=color)+
  ggtitle("Gráfico de Barras")+
  xlab("Año")+
  ylab("Frecuencias")+
  coord_flip()+
  theme_minimal()
```

5. Visualizacion del objeto

```
GB2
```

Gráfico de Barras
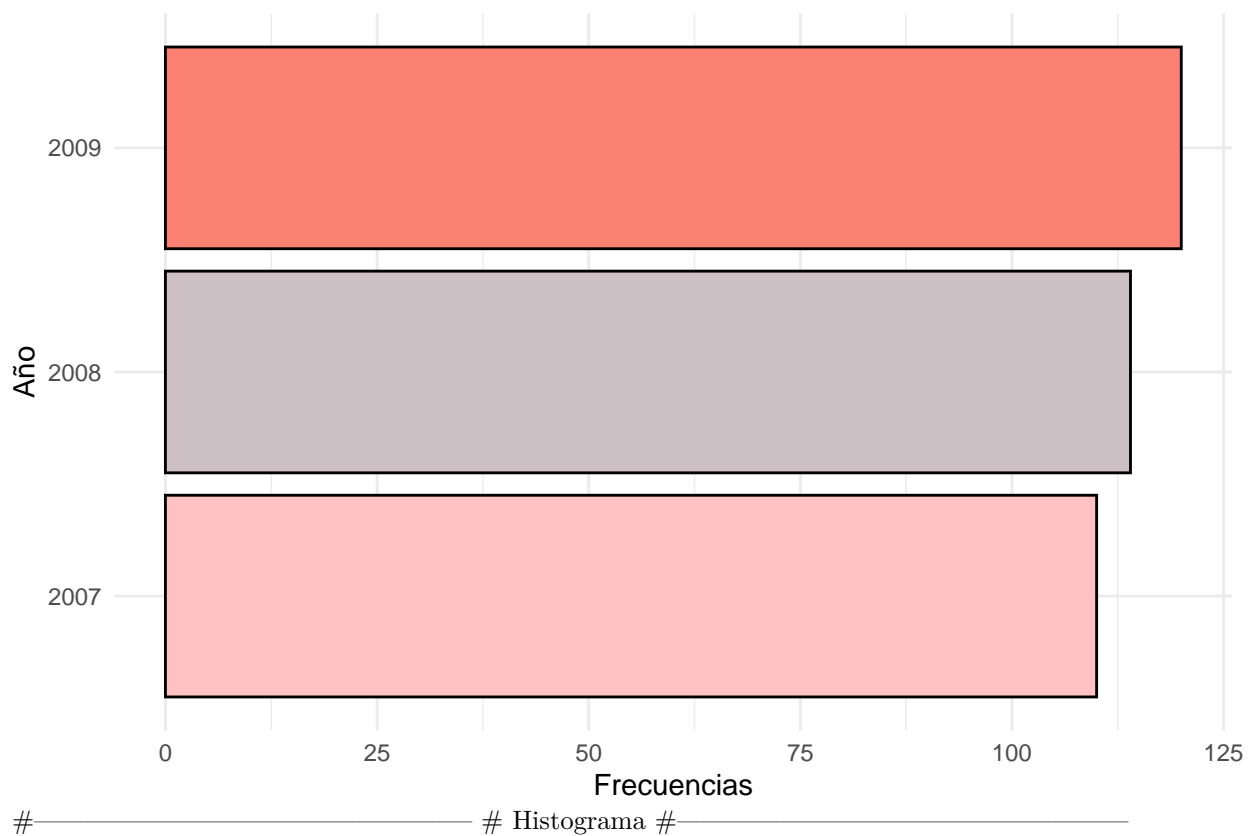
1.- Construccion del grafico

```
HG<-ggplot(penguins, aes(x=largo_aleta_mm))+
  geom_histogram(col="palevioletred4", fill="lavenderblush3")+
  ggtitle("Histograma")+
  xlab("Largo de la aleta (mm)")+
  ylab("Frecuencias")+
  theme_classic()
```

2.- Visualizacion del grafico

```
HG
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

Histograma
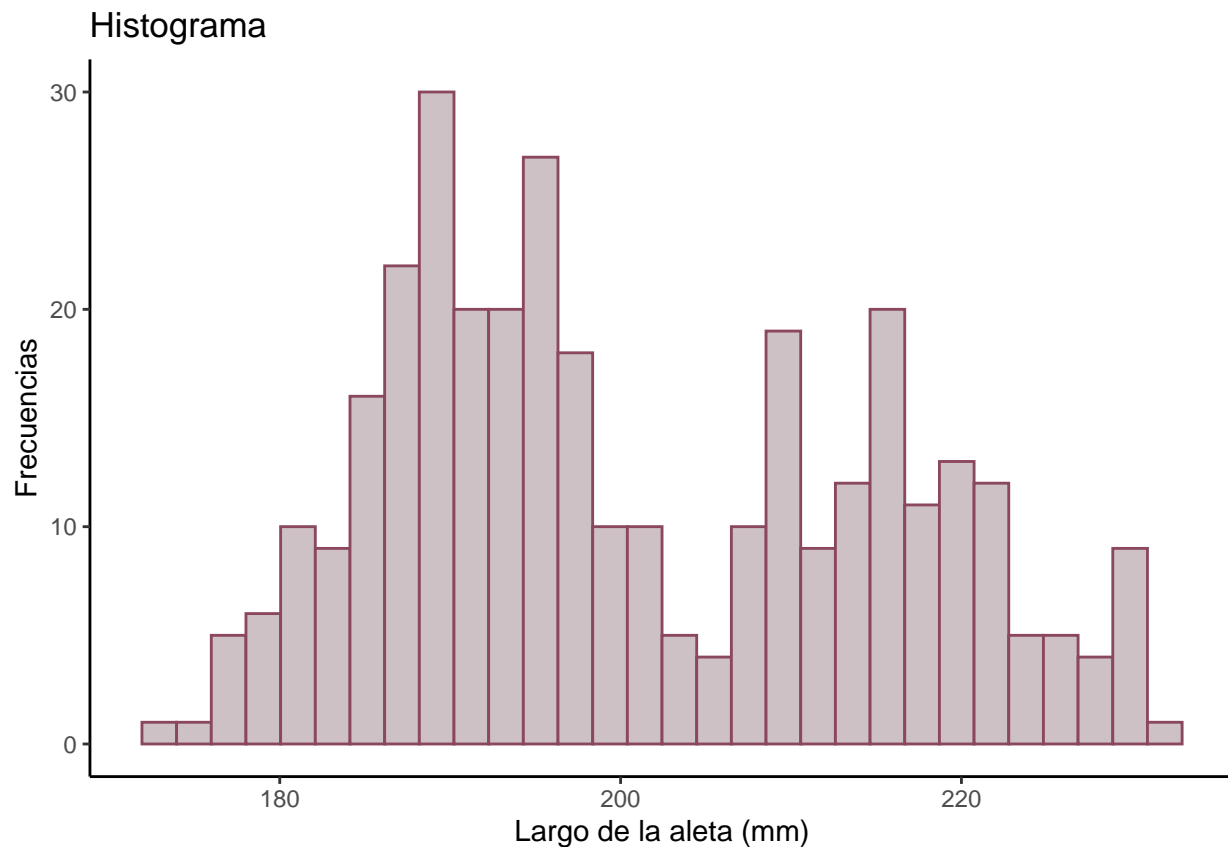
#————————————- # Grafico de dispersion #————————————

1.- Construccion del grafico

```
GD<-ggplot(penguins, aes(x=largo_pico_mm, y=grosor_pico_mm))+
  geom_point(aes(color=especie))+
  ggtitle("Gráfico de dispersión")+
  xlab("largo del pico (mm)")+
  ylab("grosor del pico (mm)")+
  theme_light()
```

2.- Visualizacion del objeto

```
GD
```

Gráfico de dispersión
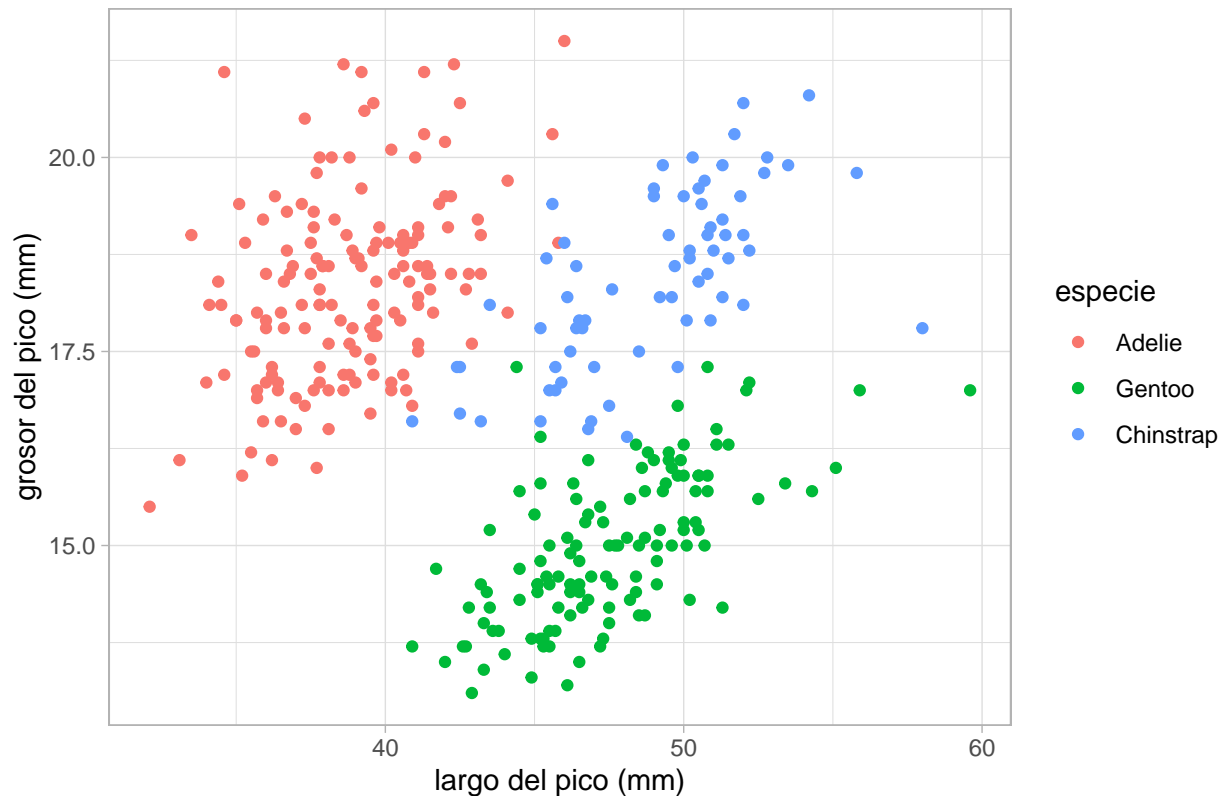
#────────────────── # Organizacion de graficos #────────────────-

1.- Descargar el paquete gridExtra

```
install.packages("gridExtra")
```

```
## Installing package into '/cloud/lib/x86_64-pc-linux-gnu-library/4.2'
## (as 'lib' is unspecified)
```

2.- Abrir la libreria

```
library(gridExtra)
```

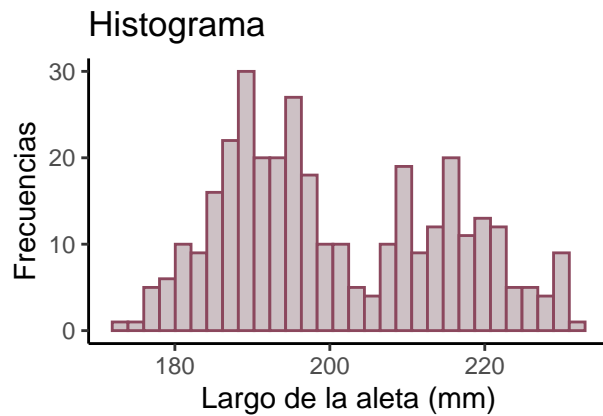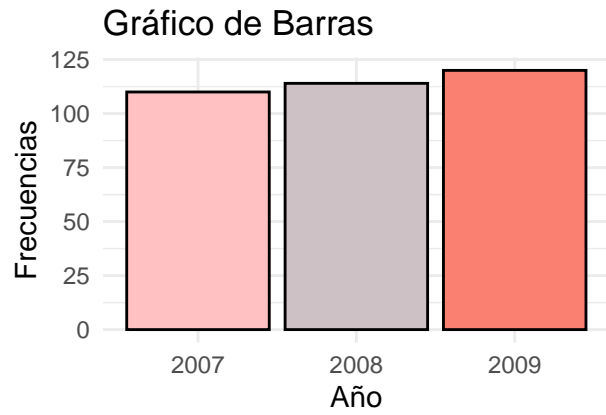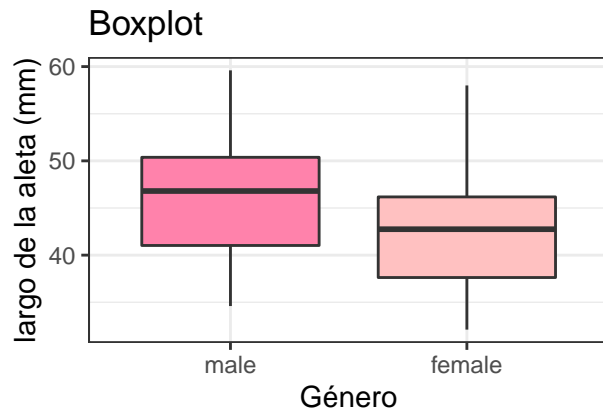# 3.- Organizacion 2 graficos en una fila y dos columnas

```
grid.arrange(BX,GB1, nrow=1, ncol=2)
```

Boxplot

largo de la aleta (mm)

Género: male, female

Gráfico de Barras

Frecuencias

Año: 2007, 2008, 2009
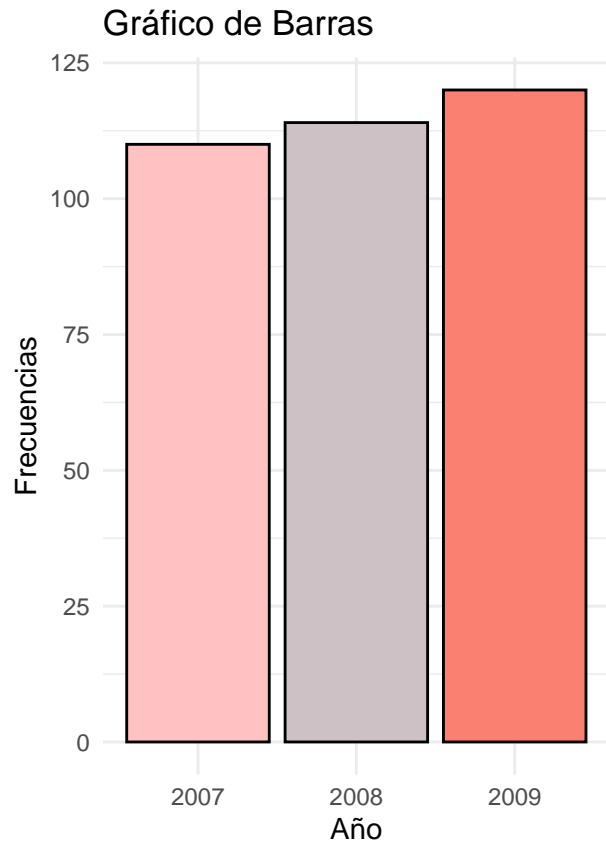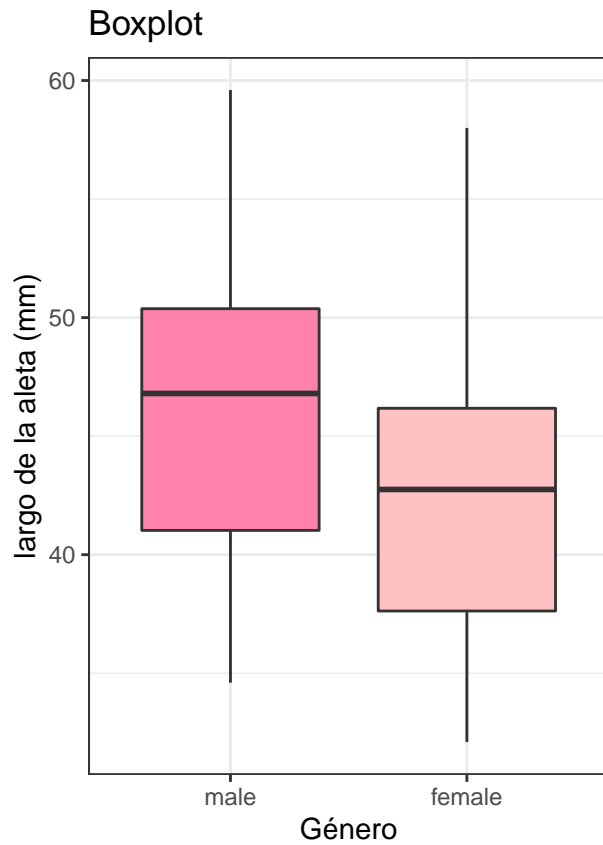
4.- Organizacion 3 graficos en dos filas y dos columnas

```
grid.arrange(BX,GB1,HG, nrow=2, ncol=2)
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

Boxplot

Gráfico de Barras

Histograma

5.- Organizacion 4 graficos en dos filas y dos columnas

```
grid.arrange(BX,GB1,HG,GD, nrow=2, ncol=2)
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```