# Program 1

**Problem Statement**
Use try/catch to detect and report a negative number entered by the user, throwing a custom exception when the value is below zero.

**Source Code:**

```
#include <iostream>
using namespace std;

int main()
{
float a, b;
cout << "Enter Your Number: " << endl;
cin >> a >> b;
try
{
if (a < 0 || b < 0)
throw 10;
cout << "Result= " << a / b;
}
catch (int q)
{
cout << " Negative Number" << endl;
}
try
{
if (b == 0)
throw 5.66666666666;
cout << "Result= " << a / b;
}
catch (double w)
{
cout << "Undefine! Something devided zero not possible" << endl;
}
return 0;
}
```

**Input:**

```
-5
```

**Output (Windows Terminal):**



# Program 2


**Problem Statement**
Write a header line and the numbers 39 through 72 into a text file using an ofstream, then read them back and print them.

**Source Code:**
```cpp
#include <iostream>
#include <fstream>
using namespace std;

int main()
{
ofstream mehedi("Data_input1.txt");
mehedi << "Mehedi Hasan, BAUET" << endl;
for (int i = 39; i < 73; i++)
{
mehedi << i << " ";
}
return 0;
}
```

**Input:**
(no input)

**Output:**

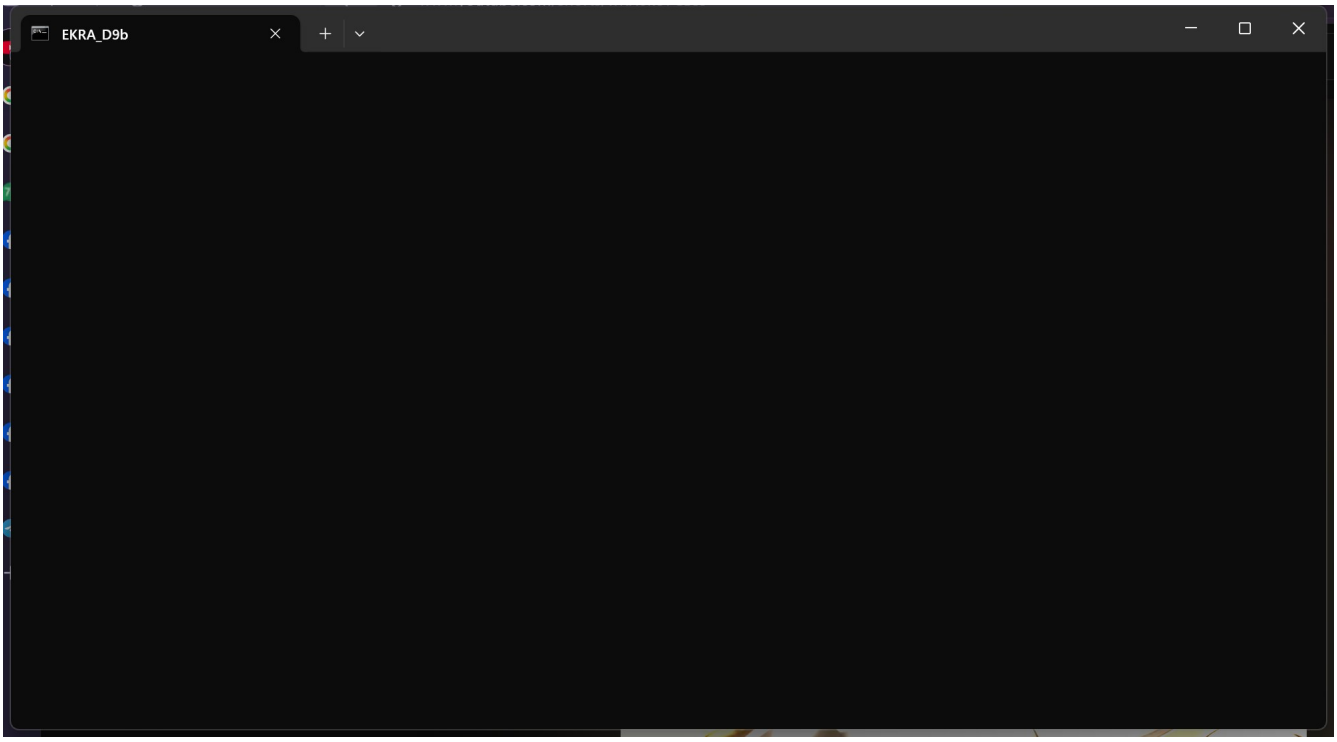

# Program 3


**Problem Statement**
Read integers from CSE21.txt using an ifstream and print each one with its position.

**Source Code:**
```
#include <iostream>
#include <fstream>
using namespace std;

int main()
{
ifstream pointer("CSE21.txt");
int x;
for (int i = 0; pointer >> x; i++)
cout << x << " ";
return 0;
}
```

**Input:**
(no input)

**Output:**

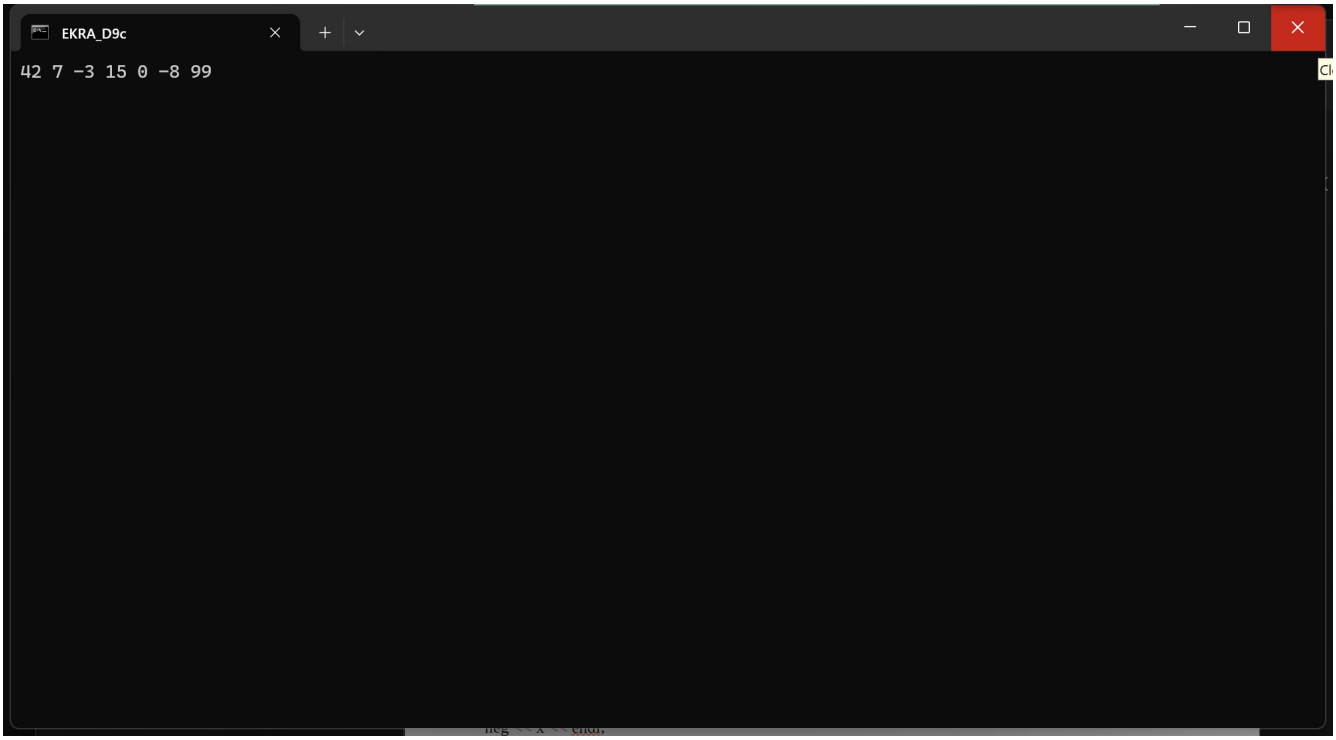

# Program 4

**Problem Statement**
Read integers from Shagor.txt, print each one, and report the total count of values read.

**Source Code:**

```
#include <iostream>
#include <fstream>
using namespace std;

int main()
{
ifstream boot("Shagor.txt");
ofstream pos("positive.txt");
ofstream neg("negative.txt");

int x;

for (int i = 0; boot >> x; i++)
{
cout << x << " ";

if (x > 0)
{
pos << x << endl;
}
else if (x < 0)
{
neg << x << endl;
}
}
return 0;
}
```

**Input:**
(no input)

**Output:**

