

Visoka skola strukovnih studija za
informacione i komunikacione
tehnologije

CodeFreakz

<https://code-freakz.herokuapp.com/>

Smer: Internet tehnologije

Modul: Web programiranje

Predmet: Web programiranje PHP 2

Andrej Zarkovski 22/18

Sadržaj

Visoka škola strukovnih studija za informacione i komunikacione tehnologije	1
1. Uvod.....	5
Korišćeni programski jezici	5
Opis funkcionalnosti	6
2. Organizacija.....	7
Organizaciona šema	7
Mapa sajta	9
Opis stranica sajta	11
Home	11
Courses	14
Cart.....	16
Contact	17
About.....	18
Login	19
Register	20
403	21
Admin/content/courses	22
Course/create	23
Course/details	25
3. Kodovi.....	27
Fajl organizacija	27
Controllers.....	32
AboutController	32
AccountController	32
AdminController	34
AuthorController.....	36
CategoryController	38
ContactController.....	40
CourseController.....	41
FrontendController.....	45
HomeController	46
LanguageController	47
StatusController	49
CartController	50

Requests	51
AuthorCreateRequest	51
AuthorUpdateRequest	52
CategoryCreateRequest	53
CategoryUpdateRequest	54
CourseCreateRequest	55
CourseEditRequest	57
LanguageCreateRequest	59
LanguageUpdateRequest	60
LoginRequest	61
RegisterRequest	62
Models	63
Author	63
Category	64
Course	65
CourseSection	66
Difficulty	67
Image	68
ImageType	69
Language	70
Menu	71
MenuItem	72
Receipt	73
ReceiptItem	74
Role	75
User	76
Migrations	77
Seeders	78
AuthorSeeder	78
CategorySeeder	79
DifficultySeeder	80
ImageTypeSeeder	81
LanguageSeeder	82
RoleSeeder	83
Views	84
Common	84
Fixed	84

Admin	84
Footer.blade.php	84
Head.blade.php	85
Header.blade.php	86
Head.blade.php	87
Footer.blade.php	88
Header.blade.php	91
Layouts	93
Admin.blade.php	93
Layout.blade.php	94
Pages	95
403.blade.php	95
About.blade.php	96
Contact.blade.php	99
Cart.blade.php	101
Home.blade.php	102
Login.blade.php	106
Register.blade.php	107
Admin	108
Logs.blade.php	108
Content	109
Authors.blade.php	109
Categories.blade.php	111
Courses.blade.php	113
Languages.blade.php	114
Authors	116
Create.blade.php	116
Edit.blade.php	117
Categories	118
Create.blade.php	118
Edit.blade.php	119
Courses	120
Create.blade.php	120
Edit.blade.php	123
Index.blade.php	126
Show.blade.php	129
Languages	131

Create.blade.php.....	131
Edit.blade.php	132
Routes	133
Web.php	133

1. Uvod

Korišćeni programski jezici

Za izradu sajta korišćene su sledeće tehnologije:

- PHP (Xampp)
- Laravel
- Amazon S3
- Heroku
- ClearDB Heroku Add-On
- HTML 5
- CSS 3/ SASS
- Bootstrap
- JavaScript
- jQuery
- phpStorm
- Photoshop

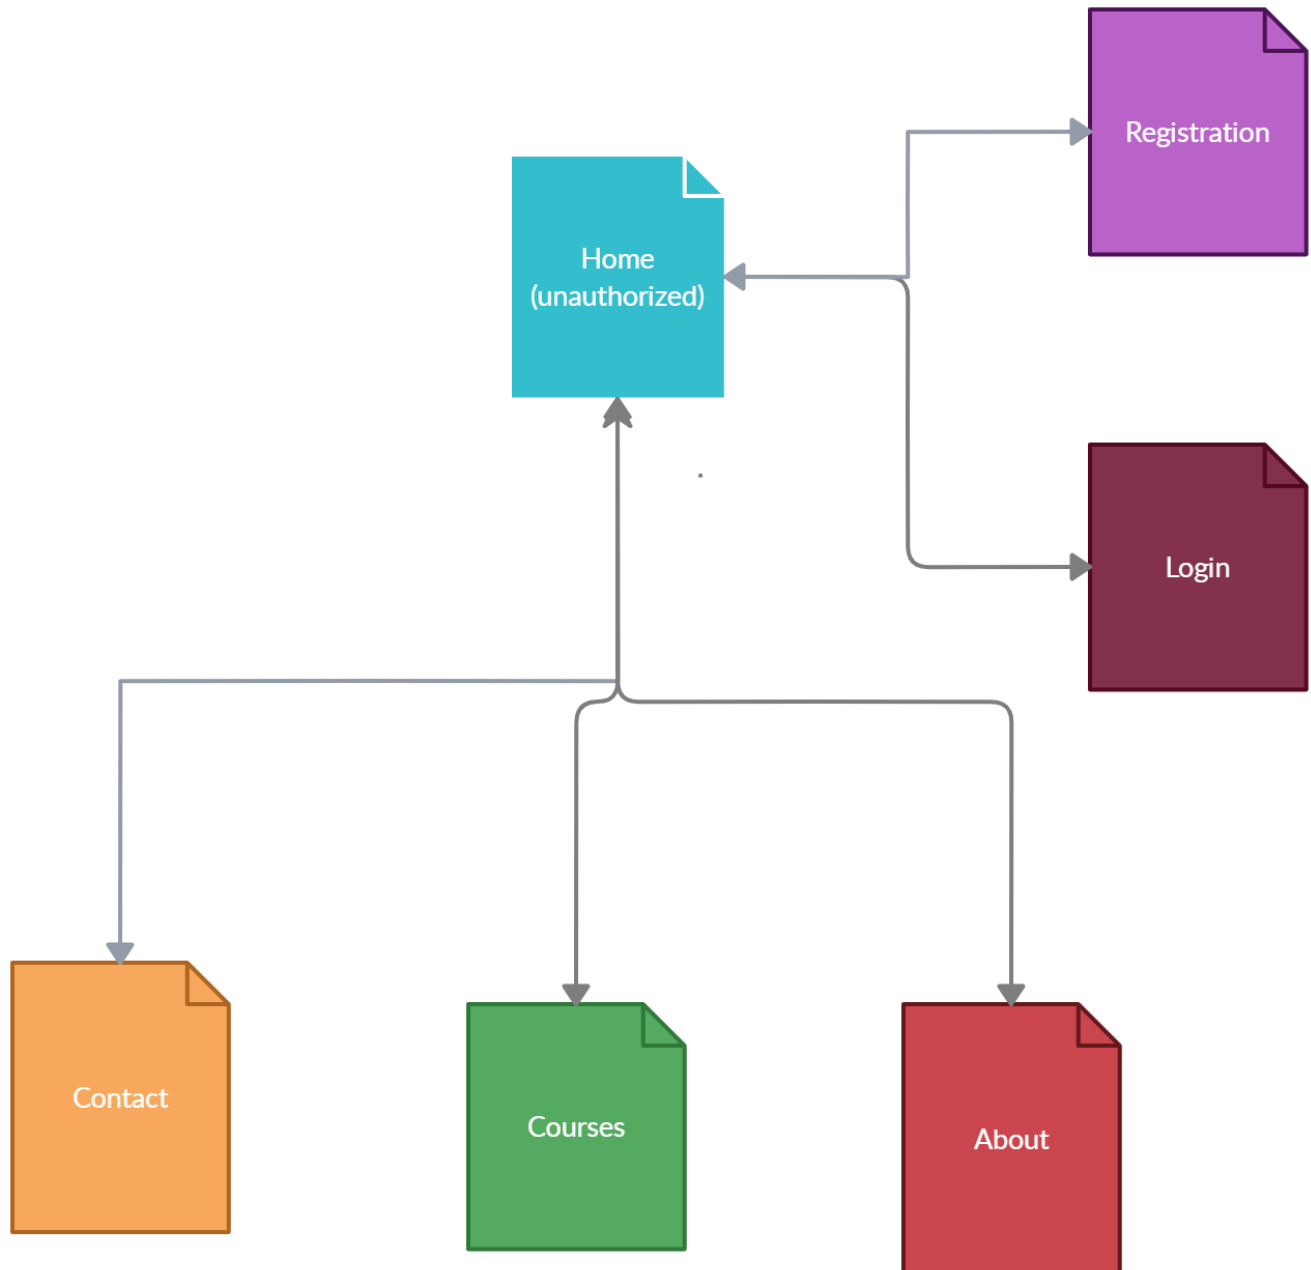
Opis funkcionalnosti

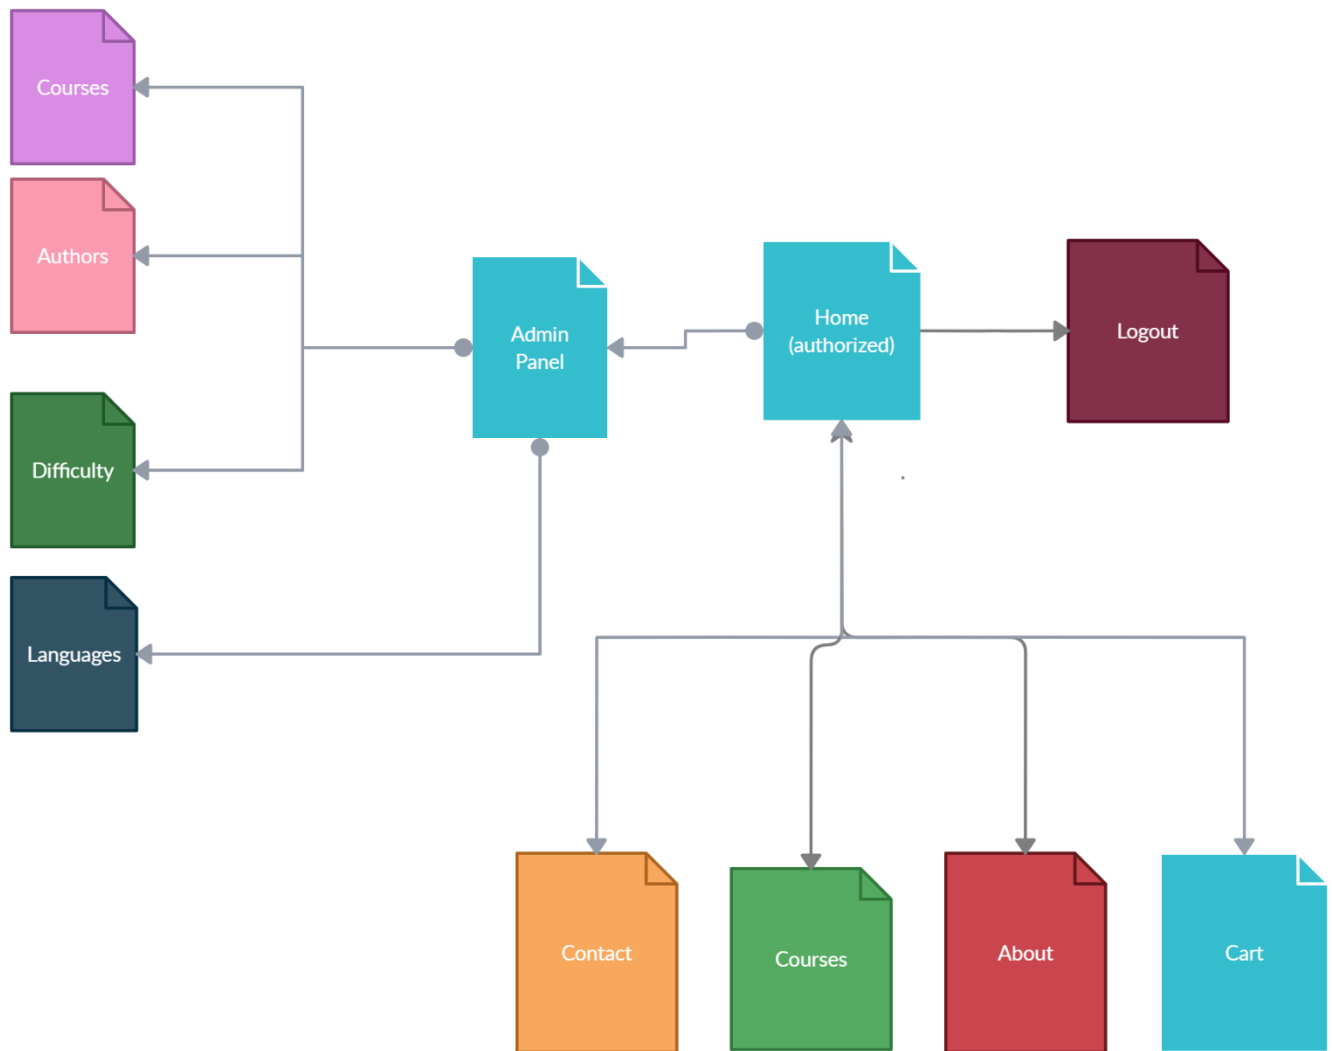
Sajt poseduje sledeće funkcionalnosti:

- Dinamicko učitavanje sadržaja iz baze i prikazivanje na stranicama
- Filtriranje proizvoda na stranici za kurseve
- Admin panel – dodavanje/izmena/brisanje sadržaja
- Logovanje/Registracija
- Dodavanje proizvoda u korpu

2. Organizacija

Organizaciona šema





Mapa sajta

```
<?xml version="1.0" encoding="UTF-8"?>
<urlset
  xmlns="http://www.sitemaps.org/schemas/sitemap/0.9"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://www.sitemaps.org/schemas/sitemap/0.9
    http://www.sitemaps.org/schemas/sitemap/0.9/sitemap.xsd">

  <url>
    <loc>https://code-freakz.herokuapp.com/</loc>
    <lastmod>2020-03-18</lastmod>
    <priority>1.00</priority>
    <changefreq>daily</changefreq>
  </url>
  <url>
    <loc>https://code-freakz.herokuapp.com/courses</loc>
    <lastmod>2020-03-18</lastmod>
    <priority>0.90</priority>
    <changefreq>daily</changefreq>
  </url>
  <url>
    <loc>https://code-freakz.herokuapp.com/contact</loc>
    <lastmod>2020-03-18</lastmod>
    <priority>0.90</priority>
    <changefreq>monthly</changefreq>
  </url>
  <url>
    <loc>https://code-freakz.herokuapp.com/about</loc>
    <lastmod>2019-02-18</lastmod>
    <priority>0.70</priority>
    <changefreq>yearly</changefreq>
  </url>
  <url>
    <loc>https://code-freakz.herokuapp.com/login</loc>
    <lastmod>2019-03-18</lastmod>
    <priority>0.50</priority>
    <changefreq>yearly</changefreq>
  </url>
  <url>
    <loc>https://code-freakz.herokuapp.com/register</loc>
    <lastmod>2019-03-18</lastmod>
    <priority>0.50</priority>
    <changefreq>yearly</changefreq>
```

```
</url>  
<url>  
  <loc>https://code-freakz.herokuapp.com/cart</loc>  
  <lastmod>2019-03-18</lastmod>  
  <priority>0.50</priority>  
  <changefreq>yearly</changefreq>  
</url>  
  
</urlset>
```

Opis stranica sajta

Home

Admin panel

logout

CODE FREAKZ
A PLACE TO PERFECT YOUR SKILLS

in

f

Home

Courses

Contact

About

Documentation

Recommended

2019-03-05

Machine Learning A-Z™: Hands-On Python & R In Data Science

2019-03-05

The Complete Web Developer Course 2.0

2019-03-05

The Complete Node.js Developer Course (3rd Edition)

2019-03-05

The Ultimate MySQL Bootcamp: Go from SQL Beginner to Expert

2019-03-05

Selenium WebDriver with Java - Basics to Advanced+Frameworks

On Discount

<

>

On Discount

<

>

node.js

The Complete Node.js Developer Course (3rd Edition)

© 2021-03-03

~~19.99\$~~ 16.99\$

JS

The Complete JavaScript Course 2021: From Zero to Expert!

© 2021-03-16

~~49.99\$~~ 42.49\$

Python

Python for Data Science and Machine Learning Bootcamp

© 2018-03-31

~~19.99\$~~ 16.99\$

FREE Courses

<

>

The Web Developer Bootcamp 2021

© 2020-04-04

Machine Learning A-Z™: Hands-On Python & R In Data Science

© 2019-03-05

A

Angular - The Complete Guide (2021 Edition)


© 2018-05-31

↑

1


Autorizovan izgled

On Discount




The Complete Node.js Developer Course (3rd Edition)
© 2021-03-03

Add to cart19.99\$ - 16.99\$



The Complete JavaScript Course 2021: From Zero to Expert!
© 2021-03-16


Add to cart49.99\$ - 42.49\$



Python for Data Science and Machine Learning Bootcamp
© 2018-03-31


Add to cart19.99\$ - 16.99\$

FREE Courses




The Web Developer Bootcamp 2021
© 2020-04-04

Add to cart



Machine Learning A-Z™: Hands-On Python & R in Data Science
© 2019-03-05


Add to cart



Angular - The Complete Guide (2021 Edition)
© 2018-05-31

Add to cart

Recently uploaded




The Complete JavaScript Course 2021: From Zero to Expert!
Tim Buchalka 2021-03-16

*** The #1 bestselling JavaScript course on Udemy! ***

*** Completely re-built from scratch in October ...

49.99\$




2021 Complete Python Bootcamp From Zero to Hero in Python
Jose Portilla 2021-03-09

Become a Python Programmer and learn one of employer's most requested skills of 2021!

This is the most comp ...


39.99\$



Modern React with Redux [2020 Update]
Ben Tristram 2021-03-09

Course Last Updated for React v16.6.3 and Redux v4.0.1! All content is brand new! Update includes detaile ...

9.99\$



The Complete Web Developer Course 2.0
Ben Tristram 2021-03-07

You're here because you're ready to start building professional, career-boosting websites.

Popular categories

Web Development

Mobile Development

Game Development


Desktop Development

Database


Software Tools

Programming Languages


PHP




The Web Developer Bootcamp 2021
2020-04-04



Angular - The Complete Guide (2021 Edition)
2018-05-31



The Complete 2021 Web Development Bootcamp
2017-04-06



The Complete Web Developer Course 2.0
2021-03-07

1

Autorizovan izgled

Recently uploaded



The Complete JavaScript Course 2021: From Zero to Expert!

Tim Buchalka · 2021-03-16

*** The #1 bestselling JavaScript course on Udemy! ***

*** Completely re-built from scratch in October ...

Add to cart

49.99\$



2021 Complete Python Bootcamp From Zero to Hero in Python

Jose Portilla · 2021-03-09

Become a Python Programmer and learn one of employer's most requested skills of 2021!

This is the most comp ...

Add to cart

39.99\$



Modern React with Redux [2020 Update]

Ben Tristram · 2021-03-09

Course Last Updated for React v16.6.3 and Redux v4.0.1! All content is brand new! Update includes detaile ...

Add to cart

9.99\$

The Complete Web Developer Course 2.0

Popular categories

Web Development

Mobile Development

Game Development

Desktop Development

Database

Software Tools

Programming Languages

PHP



The Web Developer Bootcamp 2021
2020-04-04



Angular - The Complete Guide (2021 Edition)
2018-05-31




The Complete 2021 Web Development Bootcamp
2017-04-06



The Complete Web Developer Course 2.0
2021-03-07




100% Satisfaction Guarantee

FREE



About

Welcome to CodeFreakz. Here you can perfect your skills in various programming areas. From web development to OS development. Video tutorials are made by top of the class programmers with in depth coverage of the material being presented. Tutorial difficulties range from beginner to advanced, and on top of all, we have best prices.

in   


Category

- > Web Development
- > Mobile Development
- > Game Development
- > Desktop Development
- > Database
- > Software Tools
- > Programming Languages

Recommended courses

- 2021-03-07
iOS & Swift - The Complete iOS App Development Bootcamp
- 2021-03-07
The Complete Web Developer Course 2.0
- 2020-04-02
The Data Science Course 2021: Complete Data Science Bootcamp
- 2020-04-04
Complete C# Unity Game Developer 2D

Our latest YouTube video



© Copyright 2021, Code Mastery. All rights reserved.

Home Courses Contact About

Na pocetnoj stranici se nalaze sekcije za prikaz preporucenih kurseva, besplatnih, na popustu, skoro izbacenih kao i kursevi random jezika.

Courses

[Home](#)[Courses](#)[Contact](#)[About](#)[Documentation](#)

Courses



2021 Complete Python Bootcamp From Zero to Hero in Python

Jose Portilla - 2021-03-09

Become a Python Programmer and learn one of employer's most requested skills of 2021!

This is the most comp ...

39.99\$



The Web Developer Bootcamp 2021

Jose Portilla - 2020-04-04

Hi! Welcome to the brand new version of The Web Developer Bootcamp, Udemy's most popular web development course.& ...

FREE



Machine Learning A-Z™: Hands-On Python & R In Data Science

Jose Portilla - 2019-03-05

Interested in the field of Machine Learning? Then this course is for you!

Filters

Language

- ☐ JavaScript - React.js and Node.js
- ☐ Python
- ☐ HTML
- ☐ CSS
- ☐ C++
- ☐ TypeScript
- ☐ Rust
- ☐ Scheme
- ☐ Java
- ☐ Kotlin
- ☐ C#
- ☐ Perl
- ☐ PHP

Autorizovan izgled

[Home](#)[Courses](#)[Contact](#)[About](#)[Documentation](#)

Courses



2021 Complete Python Bootcamp From Zero to Hero in Python

Jose Portilla - 2021-03-09

Become a Python Programmer and learn one of employer's most requested skills of 2021!

This is the most comp ...

Add to cart

39.99\$



The Web Developer Bootcamp 2021

Jose Portilla - 2020-04-04

Hi! Welcome to the brand new version of The Web Developer Bootcamp, Udemy's most popular web development course.& ...

Add to cart

FREE



Machine Learning A-Z™: Hands-On Python & R In Data Science

Jose Portilla - 2019-03-05

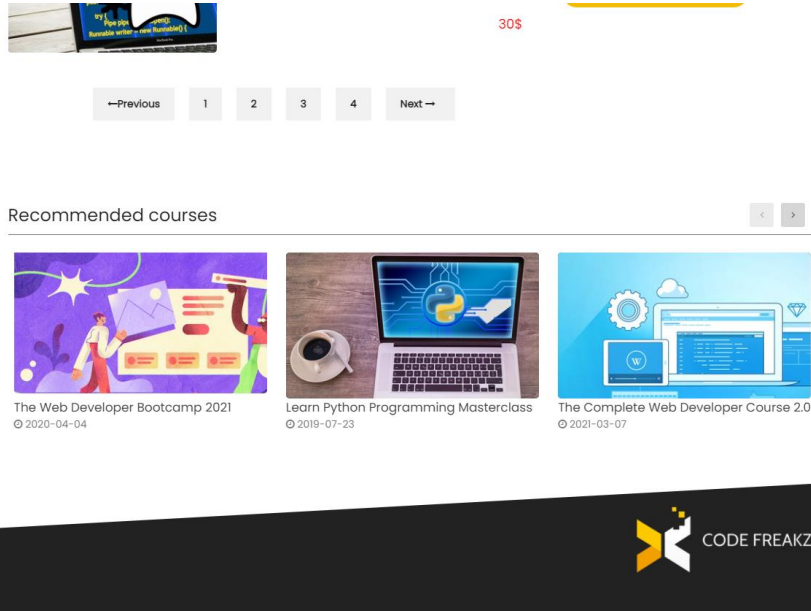
Interested in the field of Machine Learning? Then this course is for you!

This course has been designed by ...

Filters

Language

- ☐ JavaScript - React.js and Node.js
- ☐ Python
- ☐ HTML
- ☐ CSS
- ☐ C++
- ☐ TypeScript
- ☐ Rust
- ☐ Scheme
- ☐ Java
- ☐ Kotlin
- ☐ C#
- ☐ Perl
- ☐ PHP
- ☐ Scala
- ☐ Swift
- ☐ MATLAB
- ☐ SQL



Na stranici za kurseve se nalazi lista kurseva kao i filter opcije.
Odmah ispod se nalaze sekcija za preporucene kurseve.




Cart

[Logout](#)

CODE FREAKZ
A PLACE TO PERFECT YOUR SKILLS

[in](#) [dribbble](#) [twitter](#) [facebook](#)[Home](#)[Courses](#)[Contact](#)[About](#)[Documentation](#)

Cart


Image	Title	Price	Actions
	The Complete JavaScript Course 2021: From Zero to Expert!	49.99\$	Remove
	Python for Data Science and Machine Learning Bootcamp	19.99\$	Remove
	The Complete Node.js Developer Course (3rd Edition)	19.99\$	Remove
			Total: 89.97\$
			Confirm order



CODE FREAKZ

Stranica za korpu.

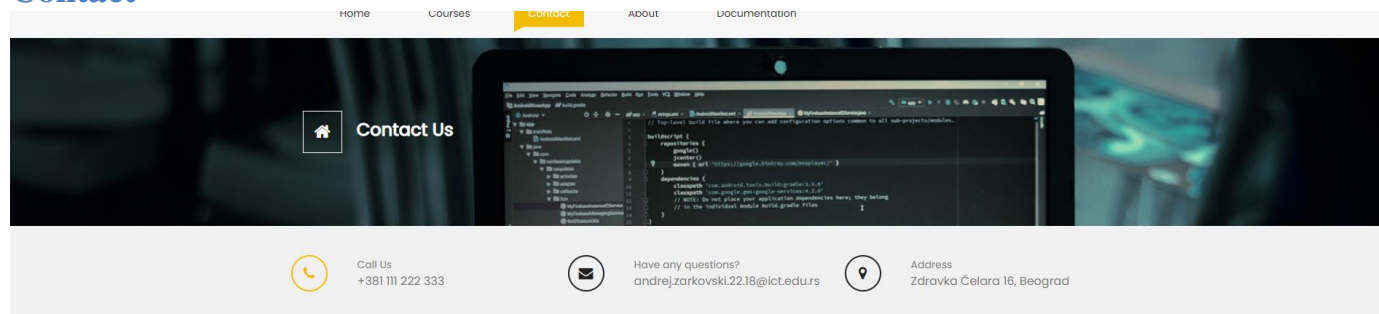Contact



Contact Us


Send Message

A Google Map of the Charleston Campus. The map shows several buildings and green spaces. Key locations marked include 'Googleplex', 'Google Visitor Center', 'Charleston Park', 'Amphitheatre Pkwy', 'Charleston Rd', and 'Permanent Creek Trail'. The map is oriented with North at the top.

Kontakt stranica za kontaktiranje administratora sajta.



ABOUT ME



My name is Andrej Zarkovski. I'm studying web programming at "Visoka ICT Škola" in Belgrade. In my early childhood I was very interested in how computers work and I continued to learn more about them. Now I am pursuing career in computer programming. I love computer related stuff and I love playing video games.

Portfolio: zarke998.github.io/web-portfolio
GitHub: github.com/zarke998
LinkedIn: linkedin.com/in/andrej-zarkovski-01b8a4188

FOLLOW US ON SOCIALS




OUR TWITTER FEED

Tweets by @Twitter

[Embed](#)[View on Twitter](#)

Stranica o autoru.

Login




CODE FREAKZ
A PLACE TO PERFECT YOUR SKILLS

[in](#) [yt](#) [tw](#) [f](#)

[Home](#) [Courses](#) [Contact](#) [About](#) [Documentation](#)

Login

Login



CODE FREAKZ

About

Welcome to CodeFreakz. Here you can perfect your skills in various programming areas. From web development to OS development. Video tutorials are made by top of


Category

- > Web Development
- > Mobile Development

Recommended courses

- 2017-04-06
The Complete 2021 Web Development Bootcamp
- 2020-03-07

Our latest YouTube video



User Authentication in We...
User Auth

Stranica za logovanje.

Register


[Register](#)[Login](#)[Home](#)[Courses](#)[Contact](#)[About](#)[Documentation](#)

Register

[About](#)[Category](#)[Recommended courses](#)[Our latest YouTube video](#)

Stranica za registraciju.

403 – FORBIDDEN



About

Welcome to CodeFreakz. Here you can perfect your skills in various programming areas. From web development to OS development. Video tutorials are made by top of the class programmers with in depth coverage of the material being presented. Tutorial difficulties range from beginner to advanced, and on top of all, we have best prices.

Category

> Web Development

> Mobile Development

> Game Development

> Desktop Development

> Database

> Software Tools

Recommended courses

2021-03-09

Modern React with Redux [2020 Update]


2021-03-07

IOS & Swift - The Complete IOS App Development Bootcamp

2020-04-04

Complete C# Unity Game Developer 2D

Our latest YouTube video



2

Admin/content/courses

CODE FREAKZ

Logout admin

Control panel

Content Management

Courses

















Authors

Languages

Categories

Logs

Courses

Id	Course	From Author	Actions
101	2021 Complete Python Bootcamp From Zero to Hero in Python	Jose Portilla	 
111	The Web Developer Bootcamp 2021	Jose Portilla	 
121	Machine Learning A-Z™: Hands-On Python & R In Data Science	Jose Portilla	 
131	Angular - The Complete Guide (2021 Edition)	Jose Portilla	 
141	Java Programming Masterclass for Software Developers	Jose Portilla	 
151	The Complete 2021 Web Development Bootcamp	Tim Buchalka	 
161	React - The Complete Guide (incl Hooks, React Router, Redux)	Jose Portilla	 
171	The Complete JavaScript Course 2021: From Zero to Expert!	Tim Buchalka	 

←Previous

Add Course

Next→

Admin panel stranica sa listom kurseva.

Ostale stranice admin panela su u istom formatu kao i stranica za kurseve.



Create

Author

Description

Release date

Price (\$)

Discount (%)

Category

Difficulty

Difficulty

Languages

- ☐ JavaScript - React.js and Node.js
- ☐ Python
- ☐ HTML
- ☐ CSS
- ☐ C++
- ☐ TypeScript
- ☐ Rust
- ☐ Scheme
- ☐ Java
- ☐ Kotlin
- ☐ C#
- ☐ Perl
- ☐ PHP
- ☐ Scala
- ☐ Swift
- ☐ MATLAB
- ☐ SQL
- ☐ R Programming Language
- ☐ Golang (Go)

Course cover

 No file chosen

480x320



480x320

Add course



About

Welcome to CodeFreakz. Here you can perfect your skills in various technologies and frameworks.

Category

> Web Development

Recommended courses

2021-03-02
Selenium WebDriver with Java - Basics to Advanced Frameworks

Our latest YouTube video

User Authentication in We...

Stranica za kreiranje kursa.




Isti format se koristi i za stranicu za izmenu kursa, kao i za stranice za autora, jezik itd.



Tags

- Database
- Beginner
- SQL

From the author

-  The Complete Node.js Developer Course (3rd Edition)
2021-03-03
-  The Ultimate MySQL Bootcamp: Go from SQL Beginner to Expert
2021-03-01
-  Build Responsive Real World Websites with HTML5 and CSS3
2021-03-03

Description

If you want to learn how to gain insights from data but are too intimidated by databases to know where to start, then this course is for you. This course is a gentle but comprehensive introduction to MySQL, one of the most highly in-demand skills in the business sector today.

Whether you work in sales or marketing, you run your own company, or you want to build your own apps, mastering MySQL is crucial to answering complex business problems and questions using insights from data. The Ultimate MySQL Bootcamp



Why This Course Is Different

This isn't going to be a course where you watch me code for 20 hours; it's a course with ample opportunity for you to get your hands dirty writing code (even within the first 7 minutes of the course).

My teaching experience is rooted in the classroom. I've spent years teaching programming, web development, and databases to my in-person bootcamp students. This course combines the best of my offline courses with the convenience of learning online, in a setting that's best for you.

Upon completing this course, you'll be able to interact with and query any SQL database out there. You'll also be able to generate reports with ease, answer company performance questions using data, and integrate MySQL into complete applications.

So let's do this! Enroll today and start learning SQL!

Price: 10.00\$

Add to cart



About

Welcome to Codefreakz. Here you can perfect your skills in various programming areas. From web development to OS development. Video tutorials are made by top of


Category

- > Web Development
- > Mobile Development

Recommended courses

- 2020-04-04
Complete C# Unity Game Developer 2D
- 2021-03-01


Our latest YouTube video






Stranica o detaljima kursa.



3. Kodovi

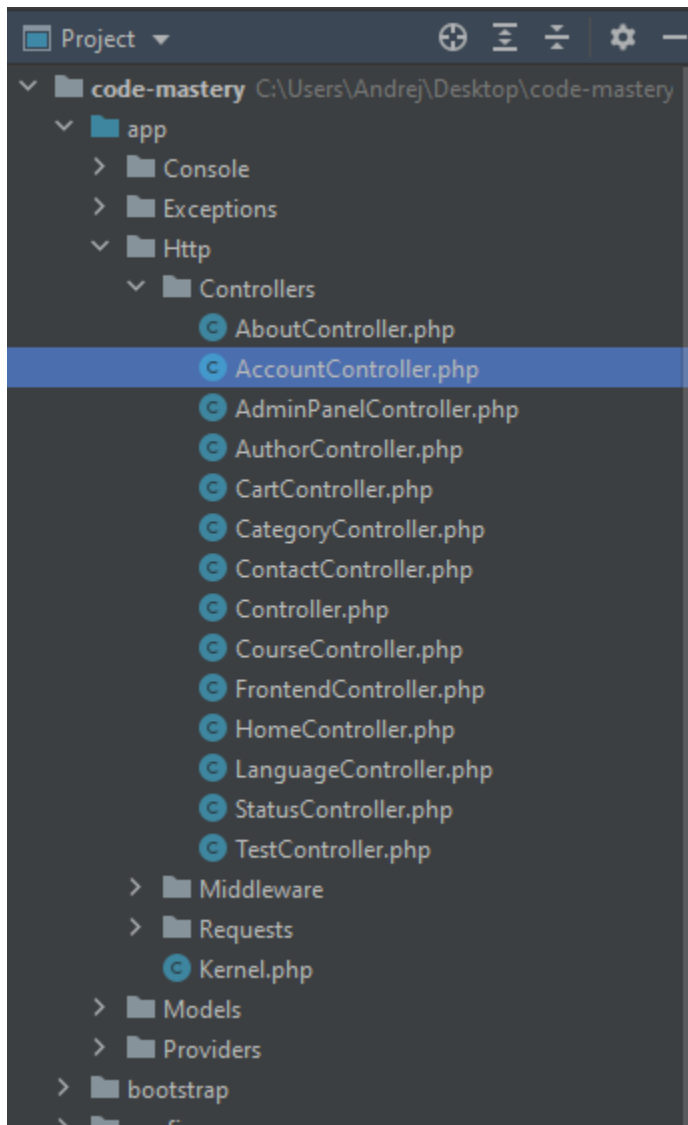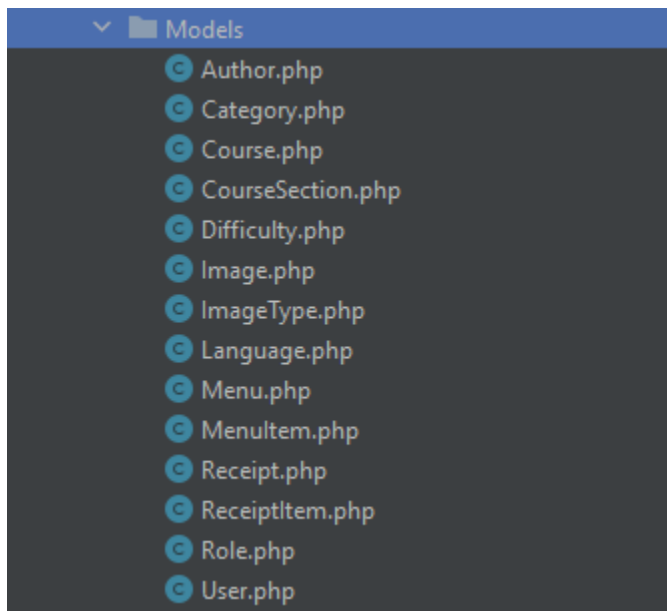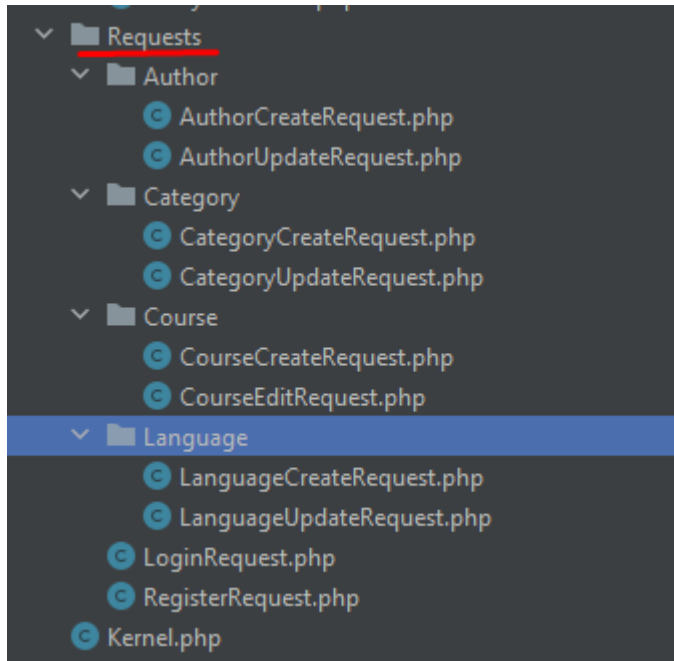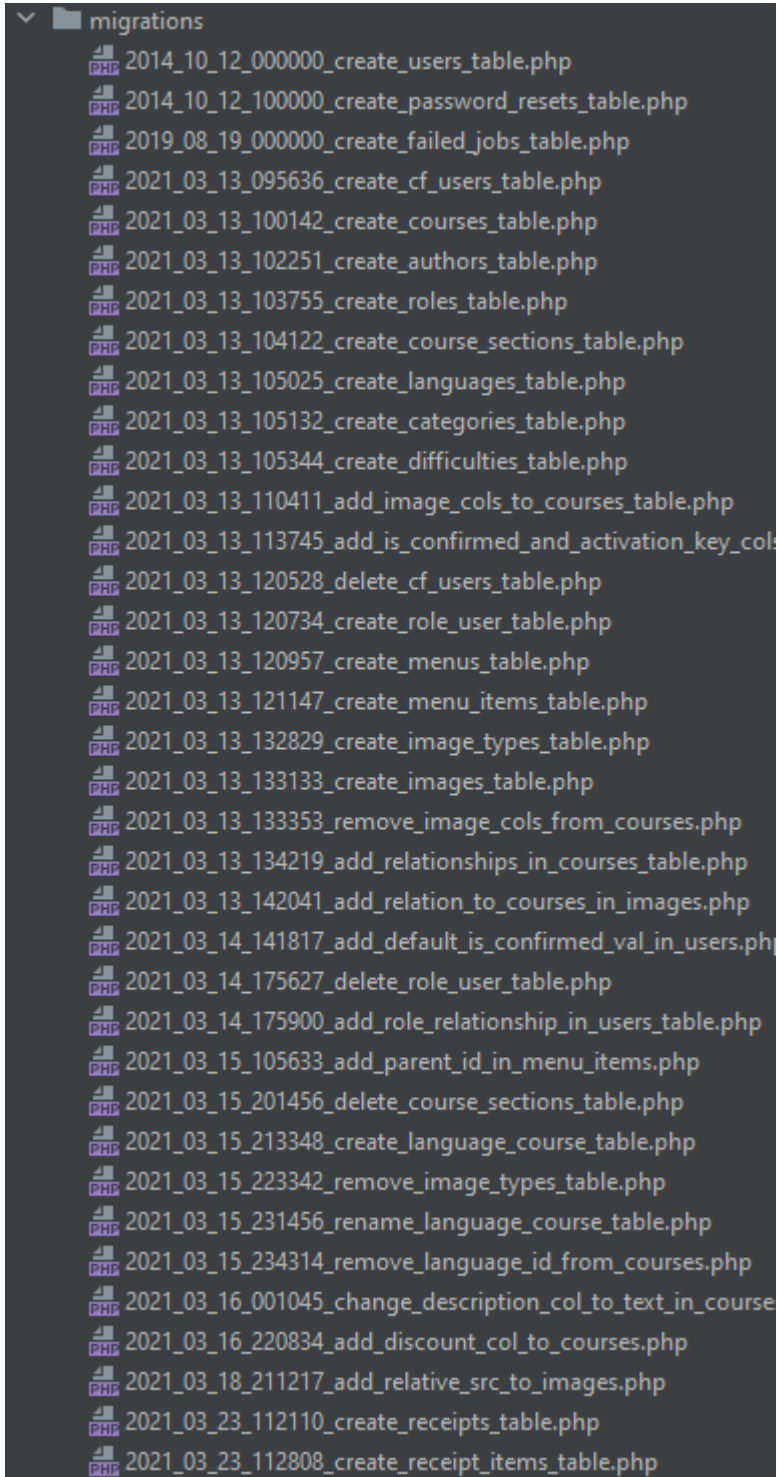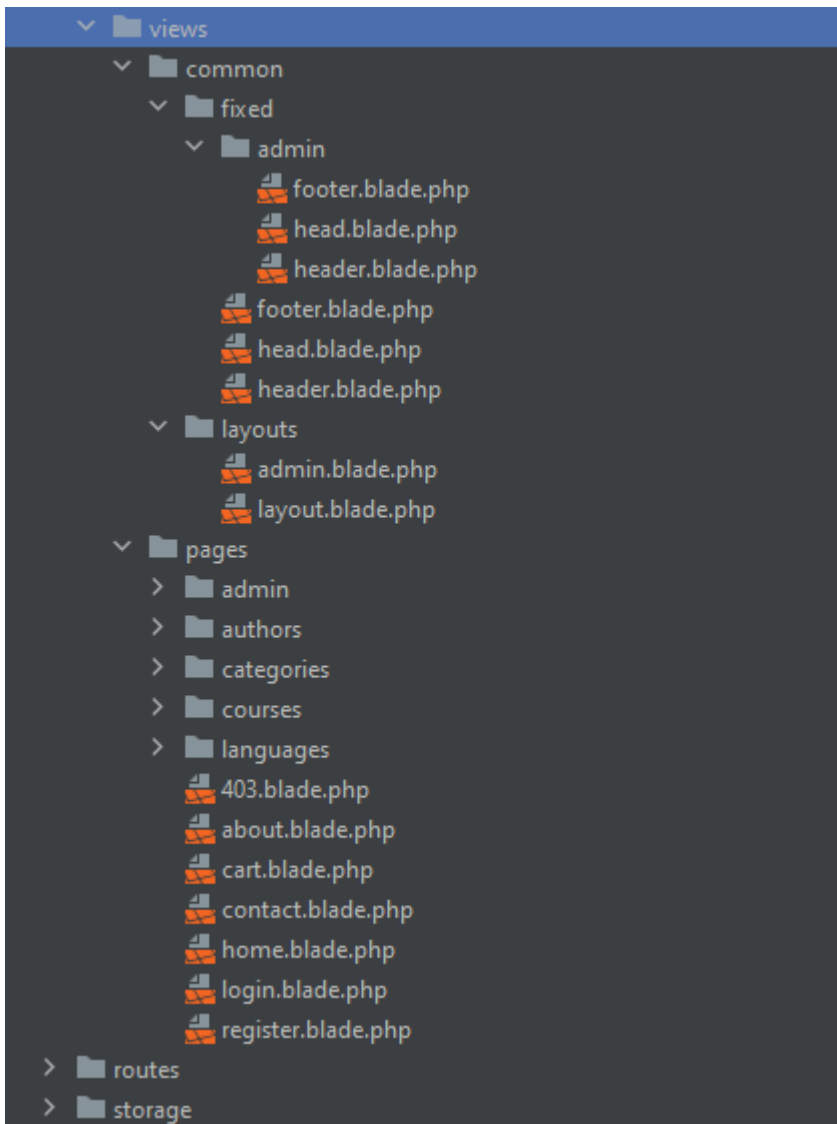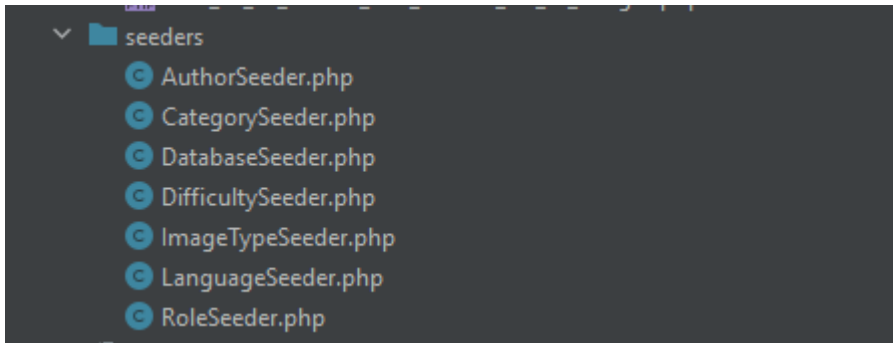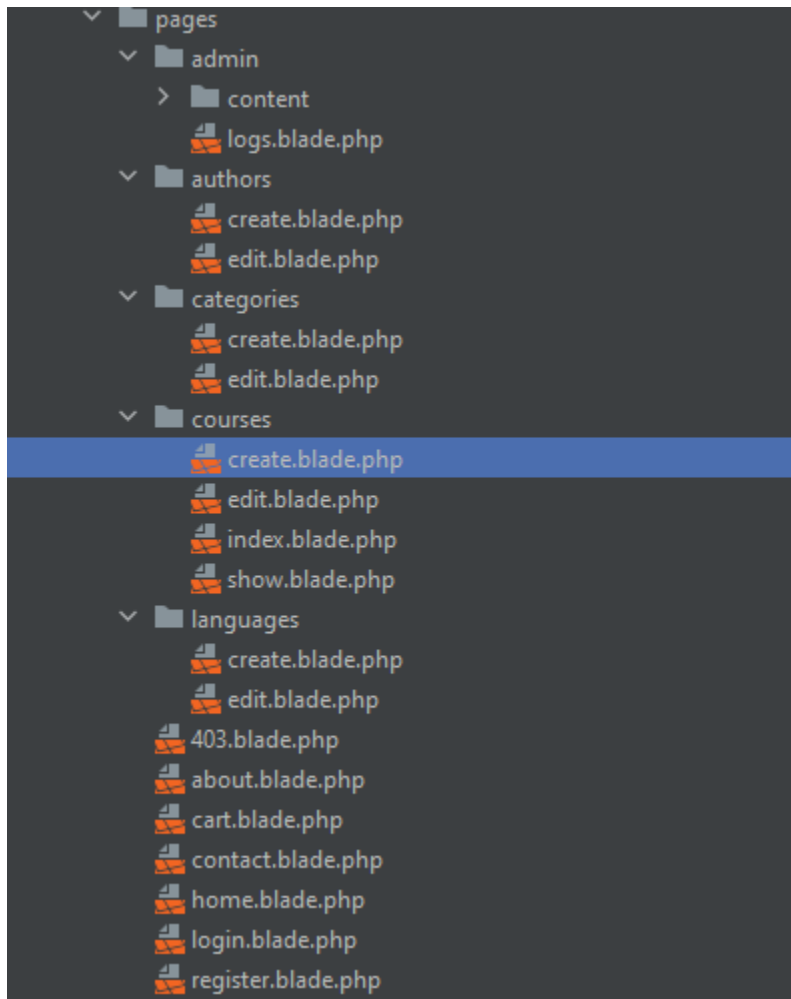
Fajl organizacija











Controllers

AboutController

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;

class AboutController extends FrontendController
{
    public function index() {
        return view("pages.about", $this->data);
    }
}
```

AccountController

```
<?php

namespace App\Http\Controllers;

use App\Http\Requests\RegisterRequest;
use App\Http\Requests\LoginRequest;
use Illuminate\Http\Request;
use App\Models\User;
use App\Models\Role;

class AccountController extends FrontendController
{
    public function loginPage() {
        return view("pages.login", $this->data);
    }
    public function login(LoginRequest $request) {
        $user = User::with("role")->where("email", "=", $request->email)->first();

        if(!password_verify($request->password, $user->password)) {
            return redirect()->route("loginPage")->with("loginErrorMsg", "Password
incorrect.")->withInput();
        }
        else {
            session()->put("user", $user);
            return redirect()->route("home");
        }
    }
    public function registerPage() {
        return view("pages.register", $this->data);
    }
    public function register(RegisterRequest $request) {
        $user = new User($request->except("password"));
        $user->password = password_hash($request->password, PASSWORD_DEFAULT);
        $user->activation_key = $this->generateActivationKey(64);
    }
}
```



```

        $userRoleId = Role::all()->where("name","=", "user")->first()->id;
        $user->role_id = $userRoleId;

        $user->save();

        return redirect()->route("loginPage")->with("registrationSuccessfullMsg",
"Registration successfull.");
    }

    public function logout() {
        session()->remove("user");
        return redirect()->route("home");
    }

    private function generateActivationKey($length) {
        $chars = '0123456789abcdefghijklmnopqrstuvwxyzABCDEFGHIJKLMNOPQRSTUVWXYZ';

        $key = "";

        for($i = 0; $i < $length; $i++){
            $key.= $chars[rand(0, strlen($chars) - 1)];
        }

        return $key;
    }
}

```

AdminController

```
<?php

namespace App\Http\Controllers;

use App\Models\Author;
use App\Models\Category;
use App\Models\Course;
use App\Models\Language;
use App\Models\Menu;
use App\Models\MenuItem;
use Illuminate\Http\Request;

class AdminPanelController extends Controller
{
    private $data = [];

    public function __construct()
    {
        $menu = Menu::with("items")->where("name","=", "admin_panel")->first();
        $menuGrouped = $this->groupMenuItemsByParent($menu->items);

        $this->data["menu_grouped"] = $menuGrouped;
    }

    public function coursesPage() {
        $courses = Course::with("author")->simplePaginate(8);
        $this->data["courses"] = $courses;

        return view("pages.admin.content.courses", $this->data);
    }

    public function authorsPage() {
        $authors = Author::all();
        $this->data["authors"] = $authors;

        return view("pages.admin.content.authors", $this->data);
    }

    public function languagesPage() {
        $languages = Language::all();
        $this->data["languages"] = $languages;

        return view("pages.admin.content.languages", $this->data);
    }

    public function categoriesPage() {
        $categories = Category::all();
        $this->data["categories"] = $categories;

        return view("pages.admin.content.categories", $this->data);
    }

    public function logsPage() {
        return view("pages.admin.logs");
    }

    private function groupMenuItemsByParent($menu items) {
```

```
$menu_grouped = [];  
foreach($menu_items as $item){  
    if($item->parent_id == null){  
        $menu_grouped[$item->name] = [];  
        array_unshift($menu_grouped[$item->name], $item);  
        continue;  
    }  
    $parent_name = array_filter($menu_items->toArray(), function($val)  
use($item){  
        return $val["id"] == $item["parent_id"];  
    })[0]["name"];  
  
    array_push($menu_grouped[$parent_name], $item);  
}  
return $menu_grouped;  
}
```

AuthorController

```
<?php

namespace App\Http\Controllers;

use App\Models\Author;
use Illuminate\Database\QueryException;
use Illuminate\Http\Request;

class AuthorController extends FrontendController
{
    /**
     * Display a listing of the resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function index()
    {
        //
    }

    /**
     * Show the form for creating a new resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function create()
    {
        return view("pages.authors.create", $this->data);
    }

    /**
     * Store a newly created resource in storage.
     *
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\Response
     */
    public function store(Request $request)
    {
        Author::create($request->except("_token"));

        return redirect()->route("admin.authorsPage")->with("authorCreateMsg", "Author
created successfully");
    }

    /**
     * Display the specified resource.
     *
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function show($id)
    {
        //
    }
}
```

```

/**
 * Show the form for editing the specified resource.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function edit($id)
{
    $author = Author::find($id);
    $this->data["author"] = $author;
    return view("pages.authors.edit", $this->data);
}

/**
 * Update the specified resource in storage.
 *
 * @param \Illuminate\Http\Request $request
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function update(Request $request, $id)
{
    $author = Author::find($id);
    $author->fill($request->except("_token"));

    $author->save();

    return redirect()->route("admin.authorsPage")->with(["entityCreateMsg" =>
"Author updated successfully"]);
}

/**
 * Remove the specified resource from storage.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function destroy($id)
{
    try{
        Author::destroy($id);
        return redirect()->back();
    }
    catch (QueryException $e){
        return redirect()->back()->with(["entityErrorMsg" => "Error deleting
author. Please delete all correlated courses first."]);
    }
}
}

```

CategoryController

```
<?php

namespace App\Http\Controllers;

use App\Http\Requests\Category\CategoryCreateRequest;
use App\Http\Requests\Category\CategoryUpdateRequest;
use App\Models\Category;
use Illuminate\Database\QueryException;
use Illuminate\Http\Request;

class CategoryController extends FrontendController
{
    /**
     * Display a listing of the resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function index()
    {
        //
    }

    /**
     * Show the form for creating a new resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function create()
    {
        return view("pages.categories.create", $this->data);
    }

    /**
     * Store a newly created resource in storage.
     *
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\Response
     */
    public function store(CategoryCreateRequest $request)
    {
        Category::create($request->except("_token"));

        return redirect()->route("admin.categoriesPage")->with("entityCreateMsg",
"Category created successfully.");
    }

    /**
     * Display the specified resource.
     *
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function show($id)
```

```

{
    //
}

/**
 * Show the form for editing the specified resource.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function edit($id)
{
    $category = Category::find($id);

    $this->data["category"] = $category;

    return view("pages.categories.edit", $this->data);
}

/**
 * Update the specified resource in storage.
 *
 * @param \Illuminate\Http\Request $request
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function update(CategoryUpdateRequest $request, $id)
{
    $category = Category::find($id);

    $category->fill($request->except("_token"));

    $category->save();

    return redirect()->route("admin.categoriesPage")->with("entityCreateMsg",
"Category updated successfully.");
}

/**
 * Remove the specified resource from storage.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function destroy($id)
{
    try{
        Category::destroy($id);

        return redirect()->back();
    }
    catch (QueryException $exception){
        return redirect()->back()->with(["entityErrorMsg" => "Error category
language. Please delete courses which have this category first."]);
    }
}
}

```

ContactController

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;

class ContactController extends FrontendController
{
    public function index() {
        return view("pages.contact", $this->data);
    }
}
```


CourseController

```
<?php

namespace App\Http\Controllers;

use App\Http\Requests\Course\CourseCreateRequest;
use App\Models\Author;
use App\Models\Category;
use App\Models\Course;
use App\Models\Difficulty;
use App\Models\Image;
use App\Models\Language;
use http\Env\Response;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Storage;
use SebastianBergmann\Diff\Diff;

class CourseController extends FrontendController
{
    /**
     * Display a listing of the resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function index()
    {
        $languages = Language::all();
        $categories = Category::all();
        $difficulties = Difficulty::all();
        $recommended_courses = Course::recommendedCourses();

        $this->data["languages"] = $languages;
        $this->data["categories"] = $categories;
        $this->data["difficulties"] = $difficulties;
        $this->data["recommended_courses"] = $recommended_courses;

        return view("pages.courses.index", $this->data);
    }

    /**
     * Show the form for creating a new resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function create()
    {
        $this->data["authors"] = Author::all();
        $this->data["categories"] = Category::all();
        $this->data["difficulties"] = Difficulty::all();
        $this->data["languages"] = Language::all();

        return view("pages.courses.create", $this->data);
    }

    /**
```

```

    * Store a newly created resource in storage.
    *
    * @param \Illuminate\Http\Request $request
    * @return \Illuminate\Http\Response
    */
    public function store(CourseCreateRequest $request)
    {
        $course = new Course($request->except(["_token", "image", "language_id"]));
        $course->save();

        $course->languages()->sync($request->input("language_id"));

        //Save image
        // $new_image_name = md5($request->file("image")->getFilename()) . time() . "."
        // . $request->file("image")->extension();

        $base_url = "https://code-freakz.s3.eu-central-1.amazonaws.com/";
        $relative_src = Storage::disk("s3")->put("public/images", $request-
>file("image"), "public");
        $src = Storage::disk("s3")->url($relative_src);

        Image::create(["src" => $src, "relative_src" => $relative_src, "course_id" =>
$course->id]);

        return redirect()->route("admin.coursesPage")->with("entityInsertMsg", "Course
added successfully.");
    }

    /**
     * Display the specified resource.
     *
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function show($id)
    {
        $course = Course::find($id);

        $this->data["course"] = $course;
        return view("pages.courses.show", $this->data);
    }

    /**
     * Show the form for editing the specified resource.
     *
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function edit($id)
    {
        $course = Course::with("images")->where("id", "=", $id)->first();
        $this->data["authors"] = Author::all();
        $this->data["categories"] = Category::all();
        $this->data["difficulties"] = Difficulty::all();
        $this->data["languages"] = Language::all();

        $this->data["course"] = $course;
    }

```

```

        return view("pages.courses.edit", $this->data);
    }

    /**
     * Update the specified resource in storage.
     *
     * @param \Illuminate\Http\Request $request
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function update(Request $request, $id)
    {
        $course = Course::find($id);
        $course->fill($request->except(['_token', 'language_id', 'image']));

        $course->save();

        $course->languages()->sync($request->input('language_id'));

        if($request->has('image')){
            Storage::disk("s3")->delete($course->images[0]->relative_src);
            Image::where("course_id","=", $course->id)->delete();

            $relative_src = Storage::disk("s3")->put("public/images", $request-
>file("image"),"public");
            $src = Storage::disk("s3")->url($relative_src);
            Image::create(["src" => $src, "relative_src" => $relative_src,"course_id"
=> $course->id]);
        }

        return redirect()->route("admin.coursesPage")->with("entityInsertMsg", "Course
updated successfully.");
    }

    /**
     * Remove the specified resource from storage.
     *
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function destroy($id)
    {
        $course = Course::find($id);

        $course->languages()->sync([]);

        Storage::disk("s3")->delete($course->images[0]->relative_src);
        Image::where("course_id","=", $course->id)->delete();

        $course->delete();

        return response()->json(["msg" => "Course deleted successfully"]);
    }

    public function paginate(Request $request){
        $per_page = 8;
    }

```

```

$offset = 0;

$courses = Course::with("images")->with("author");

$data = [];

//FILTERS
if($request->has("search")){
    $courses = $courses->where("courses.name", "LIKE", "%".$request->input("search")."%");
}
if($request->has("languages")){
    $courses = $courses->whereHas("languages", function($l) use ($request){
        $l->whereIn("languages.id", $request->input("languages"));
    });
}
if($request->has("category")){
    $courses = $courses->where("category_id", "=", $request->input("category"));
}
if($request->has("difficulty")){
    $courses = $courses->where("difficulty_id", "=", $request->input("difficulty"));
}
$filtered_count = $courses->count();

// LIMIT AND OFFSET
if($request->has("per_page"))
    $per_page = $request->input("per_page");

if($request->has("offset"))
    $offset = $request->input("offset");

$courses = $courses->skip($offset)->take($per_page)->get();

//Courses count is used in admin panel - courses page
$courses_count = Course::all()->count();
$data["courses_count"] = $courses_count;
$data["filtered_count"] = $filtered_count;

$data["courses"] = $courses;

return response()->json($data);
}
}

```

FrontendController

```
<?php

namespace App\Http\Controllers;

use App\Models\Category;
use App\Models\Course;
use App\Models\Menu;
use Illuminate\Http\Request;

class FrontendController extends Controller
{
    protected $data = [];

    public function __construct()
    {
        $menu = Menu::with("items")->where("name","=", "header_menu")->first();
        $this->data["header_menu"] = $menu->items;
        $this->data["footer_categories"] = Category::topEightCategories();
        $this->data["footer_courses"] = Course::recommendedCourses()->take(4);
    }
}
```

HomeController

```
<?php

namespace App\Http\Controllers;

use App\Models\Category;
use App\Models\Course;
use App\Models\Language;
use Illuminate\Http\Request;

class HomeController extends FrontendController
{
    public function index() {
        $recommended_courses = Course::recommendedCourses();
        $discounted_courses = Course::topFiveDiscounted();
        $free_courses = Course::topFiveFree();
        $recent_courses = Course::recentlyReleased();
        $categories = Category::topEightCategories();
        $rand_lang = Language::randLangWithCourses();

        $this->data["recommended_courses"] = $recommended_courses;
        $this->data["discounted_courses"] = $discounted_courses;
        $this->data["free_courses"] = $free_courses;
        $this->data["recent_courses"] = $recent_courses;
        $this->data["categories"] = $categories;
        $this->data["rand_lang"] = $rand_lang;

        return view("pages.home", $this->data);
    }
}
```

LanguageController

```
<?php

namespace App\Http\Controllers;

use App\Http\Requests\Language\LanguageCreateRequest;
use App\Http\Requests\Language\LanguageUpdateRequest;
use App\Models\Language;
use Illuminate\Database\QueryException;
use Illuminate\Http\Request;

class LanguageController extends FrontendController
{
    /**
     * Display a listing of the resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function index()
    {
    }

    /**
     * Show the form for creating a new resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function create()
    {
        return view("pages.languages.create", $this->data);
    }

    /**
     * Store a newly created resource in storage.
     *
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\Response
     */
    public function store(LanguageCreateRequest $request)
    {
        Language::create($request->except("_token"));

        return redirect()->route("admin.languagesPage")->with("entityCreateMsg",
"Language created successfully.");
    }

    /**
     * Display the specified resource.
     *
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function show($id)
    {
        //
    }
}
```

```

}

/**
 * Show the form for editing the specified resource.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function edit($id)
{
    $language = Language::find($id);

    $this->data["language"] = $language;

    return view("pages.languages.edit", $this->data);
}

/**
 * Update the specified resource in storage.
 *
 * @param \Illuminate\Http\Request $request
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function update(LanguageUpdateRequest $request, $id)
{
    $language = Language::find($id);

    $language->fill($request->except("_token"));

    $language->save();

    return redirect()->route("admin.languagesPage")->with("entityCreateMsg",
"Language updated successfully.");
}

/**
 * Remove the specified resource from storage.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function destroy($id)
{
    try{
        Language::destroy($id);

        return redirect()->back();
    }
    catch (QueryException $exception){
        return redirect()->back()->with(["entityErrorMsg" => "Error deleting
language. Please delete courses which have this language first."]);
    }
}
}

```


StatusController

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;

class StatusController extends FrontendController
{
    public function forbidden() {
        return view("pages.403", $this->data);
    }
}
```

CartController

```
<?php

namespace App\Http\Controllers;

use App\Models\Course;
use App\Models\Receipt;
use App\Models\ReceiptItem;
use Illuminate\Http\Request;

class CartController extends FrontendController
{
    public function index() {
        return view("pages.cart", $this->data);
    }

    public function items(Request $request) {
        $courses = Course::with("images")->whereIn("id", $request->cartItems)->get();

        return response()->json($courses);
    }

    public function save(Request $request) {
        $user = $request->session()->get("user");
        if($user == null) {
            return redirect()->route("home");
        }

        $receipt = Receipt::create(["user_id" => $user->id]);
        foreach($request->cartItems as $course) {
            ReceiptItem::create(["receipt_id" => $receipt->id, "course_id" =>
$course]);
        }

        return response()->json(["msg" => "Order confirmed."]);
    }
}
```

Requests

AuthorCreateRequest

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class AuthorCreateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "first_name" => "bail|required|min:3|alpha",
            "last_name" => "bail|required|min:3|alpha",
            "birth_date" => "bail|required|date"
        ];
    }

    public function messages()
    {
        return [
            "first_name" => "First name must be minimum 3 chars, and only alphabet.",
            "last_name" => "Last name must be minimum 3 chars, and only alphabet.",
            "birth_date" => "Incorrect date format."
        ];
    }
}
```

AuthorUpdateRequest

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class AuthorCreateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "first_name" => "bail|required|min:3|alpha",
            "last_name" => "bail|required|min:3|alpha",
            "birth_date" => "bail|required|date"
        ];
    }

    public function messages()
    {
        return [
            "first_name" => "First name must be minimum 3 chars, and only alphabet.",
            "last_name" => "Last name must be minimum 3 chars, and only alphabet.",
            "birth_date" => "Incorrect date format."
        ];
    }
}
```

CategoryCreateRequest

```
<?php

namespace App\Http\Requests\Category;

use Illuminate\Foundation\Http\FormRequest;

class CategoryCreateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "name" => "bail|required"
        ];
    }
}
```

CategoryUpdateRequest

```
<?php

namespace App\Http\Requests\Category;

use Illuminate\Foundation\Http\FormRequest;

class CategoryUpdateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "name" => "bail|required"
        ];
    }

    public function messages()
    {
        return [
            "name" => "Name is required."
        ];
    }
}
```

CourseCreateRequest

```
<?php

namespace App\Http\Requests\Course;

use Illuminate\Foundation\Http\FormRequest;

class CourseCreateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "name" => "bail|required|unique:courses,name",
            "author_id" => "bail|required|exists:authors,id",
            "description" => "bail|required",
            "price" => "bail|required|numeric",
            "discount" => "bail|numeric",
            "category_id" => "bail|required|exists:categories,id",
            "release_date" => "bail|required|date",
            "difficulty_id" => "bail|required|exists:difficulties,id",
            "language_id" => "bail|required|array",
            "language_id.*" => "bail|required|exists:languages,id",
            "image" => "bail|required|mimes:jpg,png,jpeg|max:10000"
        ];
    }

    public function messages()
    {
        return [
            "name.required" => "Course name is required",
            "author_id.required" => "Author name is required",
            "description.required" => "Description is required",
            "price.required" => "Price is required",
            "discount" => "Discount must be a whole number",
            "category_id.required" => "Category is required",
            "difficulty_id.required" => "Difficulty is required",
            "language_id.required" => "Languages is required",
            "image.required" => "Image is required",
            "release_date" => "bail|required|date",

            "name.unique" => "Course name must be unique",
        ];
    }
}
```

```
    "author_id.exists" => "Author does not exists",
    "price.numeric" => "Price must be a number",
    "category_id.exists" => "Category does not exist",
    "difficulty_id.exists" => "Difficulty does not exists",
    "image" => "Uploaded wrong file. Image is required. JPG or PNG.",
    "release_date" => "Incorrect date format"
  ];
}
```


CourseEditRequest

```
<?php

namespace App\Http\Requests\Course;

use Illuminate\Foundation\Http\FormRequest;

class CourseEditRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "id" => "bail|required|exists:courses,id",
            "name" => "bail|required|unique:courses,name",
            "author_id" => "bail|required|exists:authors,id",
            "description" => "bail|required",
            "price" => "bail|required|numeric",
            "discount" => "bail|numeric",
            "category_id" => "bail|required|exists:categories,id",
            "difficulty_id" => "bail|required|exists:difficulties,id",
            "language_id" => "bail|required|array",
            "language_id.*" => "bail|required|exists:languages,id",
            "image" => "bail|mimes:jpg,png,jpeg|max:10000"
        ];
    }

    public function messages()
    {
        return [
            "name.required" => "Course name is required",
            "author_id.required" => "Author name is required",
            "description.required" => "Description is required",
            "price.required" => "Price is required",
            "discount" => "Discount must be a whole number.",
            "category_id.required" => "Category is required",
            "difficulty_id.required" => "Difficulty is required",
            "language_id.required" => "Languages is required",
            "image.required" => "Image is required",
            "release_date" => "bail|required|date",

            "name.unique" => "Course name must be unique",
        ];
    }
}
```

```
        "author_id.exists" => "Author does not exists",
        "price.numeric" => "Price must be a number",
        "category_id.exists" => "Category does not exist",
        "difficulty_id.exists" => "Difficulty does not exists",
        "image" => "Uploaded wrong file. JPG or PNG.",
        "release_date" => "Incorrect date format"
    ];
}
```

LanguageCreateRequest

```
<?php

namespace App\Http\Requests\Language;

use Illuminate\Foundation\Http\FormRequest;

class LanguageCreateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "name" => "bail|required"
        ];
    }

    public function messages()
    {
        return [
            "name" => "Name is required."
        ];
    }
}
```

LanguageUpdateRequest

```
<?php

namespace App\Http\Requests\Language;

use Illuminate\Foundation\Http\FormRequest;

class LanguageUpdateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "name" => "bail|required|unique:languages,name"
        ];
    }

    public function messages()
    {
        return [
            "name" => "Name is required and must be unique."
        ];
    }
}
```

LoginRequest

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class LoginRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "email" => "bail|required|email|exists:users,email",
            "password" => "bail|required|regex:/^(?=[A-Z])(?=[a-z])(?=[\d])[A-Za-z\d]{8,}$/"
        ];
    }

    public function messages()
    {
        return [
            "email.required" => "Email empty.",
            "email.exists" => "You have not registered yet.",

            "password.required" => "Password empty.",
            "password.regex" => "Password must be at least 8 characters, and must contain 1 lowercase letter, 1 uppercase letter, and a number."
        ];
    }
}
```

RegisterRequest

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class RegisterRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "name" => "bail|required|alpha_num|unique:users,name|min:5|max:20",
            "email" => "bail|required|email|unique:users,email",
            "password" => "bail|required|confirmed|regex:/^(?=[A-Z])(?=[a-z])(?=[0-9])[A-Za-z\d]{8,}$/",
        ];
    }

    public function messages()
    {
        return [
            "name.required" => "Username empty.",
            "name.alphanumeric" => "Username can contain only letters and numbers.",
            "name.unique" => "Username already exists.",
            "name.min" => "Username must be larger than 5 characters.",
            "name.max" => "Username must be smaller than 20 characters.",

            "email.required" => "Email empty.",
            "email.unique" => "Email already registerd.",
            "email.email" => "Email is not in correct format.",

            "password.required" => "Password empty.",
            "password.regex" => "Password must be at least 8 characters, and must contain 1 lowercase letter, 1 uppercase letter, and a number.",
            "password.confirmed" => "Password do not match"
        ];
    }
}
```

Models

Author

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Author extends Model
{
    use HasFactory;

    protected $table = "authors";
    public $timestamps = false;

    protected $fillable = ["first_name", "last_name", "birth_date"];

    public function topFourCourses() {
        return $this->hasMany(Course::class)->take(4)->get();
    }
}
```

Category

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Category extends Model
{
    use HasFactory;

    protected $table = "categories";
    protected $fillable = ["name"];

    public $timestamps = false;

    public static function topEightCategories() {
        return Category::all()->take(8);
    }
}
```


Course

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Course extends Model
{
    use HasFactory;

    protected $table = "courses";

    protected $guarded = [];

    public function languages() {
        return $this->belongsToMany(Language::class);
    }
    public function images() {
        return $this->hasMany(Image::class);
    }
    public function author() {
        return $this->belongsTo(Author::class);
    }
    public function category() {
        return $this->belongsTo(Category::class);
    }
    public function difficulty() {
        return $this->belongsTo(Difficulty::class);
    }

    public static function recommendedCourses() {
        return Course::with("images")->inRandomOrder()->take(5)->get();
    }

    public static function topFiveDiscounted() {
        return Course::with("images")->with("author")->where("discount", ">", "0")
            ->orderByDesc("discount")->take(5)->get();
    }

    public static function topFiveFree() {
        return Course::with("images")->where("price", "=", "0")
            ->take(5)->get();
    }

    public static function recentlyReleased() {
        return Course::with("images")->orderByDesc("release_date")
            ->take(4)->get();
    }
}
```

CourseSection

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class CourseSection extends Model
{
    use HasFactory;

    protected $table = "course_sections"
}
```

Difficulty

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Difficulty extends Model
{
    use HasFactory;

    protected $table = "difficulties";
}
```

Image

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Image extends Model
{
    use HasFactory;

    protected $table = "images";

    protected $fillable = ["src", "course_id", "relative_src"];

    public $timestamps = false;
}
```

ImageType

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class ImageType extends Model
{
    use HasFactory;

    protected $table = "image_types";
}
```

Language

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Support\Facades\DB;
use Illuminate\Support\Facades\Lang;

class Language extends Model
{
    use HasFactory;

    protected $table = "languages";

    protected $fillable = ["name"];
    public $timestamps = false;

    public function courses() {
        return $this->belongsToMany(Course::class);
    }

    public static function randLangWithCourses() {
        $languages = Language::all();

        $rand_lang_bucket = [];

        foreach($languages as $l) {
            if($l->courses()->count() >= 3)
                $rand_lang_bucket[] = $l;
        }

        $rand_ind = rand(0, count($rand_lang_bucket) - 1);
        $rand_lang = $rand_lang_bucket[$rand_ind];

        $rand_lang->courses()->get();

        return $rand_lang;
    }
}
```

Menu

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Menu extends Model
{
    use HasFactory;

    protected $table = "menus";

    public function items(){
        return $this->hasMany(MenuItem::class);
    }
}
```

MenuItem

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class MenuItem extends Model
{
    use HasFactory;

    protected $table = "menu_items";
}
```


Receipt

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Receipt extends Model
{
    use HasFactory;

    protected $table = "receipts";

    protected $guarded = [];
}
```

ReceiptItem

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class ReceiptItem extends Model
{
    use HasFactory;

    protected $table = "receipt_items";
    public $timestamps = false;

    protected $guarded = [];
}
```

Role

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Role extends Model
{
    use HasFactory;

    protected $table = "roles";
}
```

User

```
<?php

namespace App\Models;

use Illuminate\Contracts\Auth\MustVerifyEmail;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Foundation\Auth\User as Authenticatable;
use Illuminate\Notifications\Notifiable;

class User extends Authenticatable
{
    use HasFactory, Notifiable;

    /**
     * The attributes that are mass assignable.
     *
     * @var array
     */
    protected $fillable = [
        'name',
        'email',
        'password',
    ];

    /**
     * The attributes that should be hidden for arrays.
     *
     * @var array
     */
    protected $hidden = [
        'password',
        'remember_token',
    ];

    /**
     * The attributes that should be cast to native types.
     *
     * @var array
     */
    protected $casts = [
        'email_verified_at' => 'datetime',
    ];

    public function role(){
        return $this->belongsTo(Role::class);
    }
}
```

Migrations

<https://drive.google.com/file/d/1RiGaaXJy1uckCTBQsIQkNiOZFsyMo4R0/view?usp=sharing>

Seeders

AuthorSeeder

```
<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;
use Faker\Factory;

class AuthorSeeder extends Seeder
{
    /**
     * Run the database seeds.
     *
     * @return void
     */
    public function run()
    {
        $authors = [];

        $faker = Factory::create();

        for ($i = 0; $i < 50; $i++){
            array_push($authors,
                [
                    "first_name" => $faker->firstName(),
                    "last_name" => $faker->lastName(),
                    "birth_date" => $faker->dateTimeBetween("-50 years", "-20 years")
                ]
            );
        }

        \DB::table("authors")->insert($authors);
    }
}
```

CategorySeeder

```
<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;

class CategorySeeder extends Seeder
{
    /**
     * Run the database seeds.
     *
     * @return void
     */
    public function run()
    {
        \DB::table("categories")->insert([
            ["name" => "Web Development"],
            ["name" => "Mobile Development"],
            ["name" => "Game Development"],
            ["name" => "Desktop Development"],
            ["name" => "Database"],
            ["name" => "Software Tools"],
            ["name" => "Programming Languages"]
        ]);
    }
}
```

DifficultySeeder

```
<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;

class DifficultySeeder extends Seeder
{
    /**
     * Run the database seeds.
     *
     * @return void
     */
    public function run()
    {
        \DB::table("difficulties")->insert([
            ["name" => "Beginner"],
            ["name" => "Intermediate"],
            ["name" => "Advanced"]
        ]);
    }
}
```


ImageTypeSeeder

```
<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;

class ImageTypeSeeder extends Seeder
{
    /**
     * Run the database seeds.
     *
     * @return void
     */
    public function run()
    {
        \DB::table("image_types")->insert([
            ["name" => "thumbnail"],
            ["name" => "wallpaper"]
        ]);
    }
}
```

LanguageSeeder

```
<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;
use function Symfony\Component\Translation\t;

class LanguageSeeder extends Seeder
{
    private $languages;

    public function __construct()
    {
        $this->languages = [
            "JavaScript (React.js and Node.js)",
            "Python",
            "HTML",
            "CSS",
            "C++",
            "TypeScript",
            "Rust",
            "Scheme",
            "Java ",
            "Kotlin",
            "C#",
            "Perl",
            "PHP",
            "Scala ",
            "Swift",
            "MATLAB",
            "SQL",
            "R Programming Language",
            "Golang (Go)",
            "Ruby"
        ];
    }

    /**
     * Run the database seeds.
     *
     * @return void
     */
    public function run()
    {
        $array_to_insert = [];

        foreach($this->languages as $language){
            array_push($array_to_insert, ["name" => "$language"]);
        }

        \DB::table("languages")->insert($array_to_insert);
    }
}
```

RoleSeeder

```
<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;

class RoleSeeder extends Seeder
{
    /**
     * Run the database seeds.
     *
     * @return void
     */
    public function run()
    {
        \DB::table("roles")->insert([
            ["name" => "user"],
            ["name" => "admin"]
        ]);
    }
}
```

Views

Common

Fixed

Admin

Footer.blade.php

```
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.12.4/jquery.min.js"></script>
<script src="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0-
alpha.6/js/bootstrap.min.js"
    integrity="sha384-
vBWWz1ZJ8ea9aCX4pEW3rVHjgjt7zpkNpZk+02D9phzyeVKE+jo0ieGizqPLForn"
    crossorigin="anonymous"></script>

<script src="{{ asset('assets/js/admin/admin.js') }}"></script>
@yield("scripts")
</body>
</html>
```

Head.blade.php

```
<!DOCTYPE html>

<html lang="en" class="no-js">
<head>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
    <meta name="csrf-token" content="{{ csrf_token() }}" />
    <title>@yield("title")</title>

    <link href="{{ asset('assets/css/media_query.css') }}" rel="stylesheet"
type="text/css"/>
    <link href="{{ asset('assets/css/bootstrap.css') }}" rel="stylesheet"
type="text/css"/>

    {{--Line icons--}}
    <link href="https://cdn.lineicons.com/2.0/LineIcons.css" rel="stylesheet">

    {{--Poppins font--}}
    <link href="https://fonts.googleapis.com/css?family=Poppins" rel="stylesheet">

    {{--Line Icons--}}
    <link href="https://cdn.lineicons.com/2.0/LineIcons.css" rel="stylesheet">
    <link href="https://maxcdn.bootstrapcdn.com/font-awesome/4.7.0/css/font-
awesome.min.css" rel="stylesheet"
        integrity="sha384-
wvfXpqpZZVQGK6TAh5PVlGOfQNHSoD2xbE+QkPxCAFlNEevoEH3Sl0sibVcOQVnN"
crossorigin="anonymous">

    <link href="{{ asset('assets/css/style_1.css') }}" rel="stylesheet"
type="text/css"/>

    {{--Main CSS--}}
    <link href="{{ asset('assets/css/main.css') }}" type="text/css" rel="stylesheet"/>

    {{--Admin CSS--}}
    <link href="{{ asset('assets/css/admin.css') }}" type="text/css"
rel="stylesheet"/>

    @yield("stylesheets")
</head>
```

Header.blade.php

```
<body>
    <div class="row position-fixed fixed-top admin-top-nav p-2">
        <div class="col-12 d-flex justify-content-between align-items-center pl-4">
            <i id="left-nav-expand-btn" class="lni lni-menu"></i>
            <a href="{{ route('home') }}"></a>
            <div class="d-flex align-items-center">
                <a href="{{ route('logout') }}" class="cf-button cf-button-small mr-
2">Logout</a>
                <div class="d-flex align-items-center">
                    <span class="mx-2 text-on-dark admin-name"> Andrej
Zarkovski</span>
                    
                </div>
            </div>
        </div>
    </div>
    <div class="admin-left-nav position-fixed">
        <h2 class="my-3 mb-4 text-center">Control panel</h2>
        <ul class="my-3 px-0 admin-control-panel">
            @foreach($menu_grouped as $group)
                <li><a class="@if(Route::is($group[0]->route)) admin-control-panel-
selected @endif" href="@if($group[0]->route != '') {{ route($group[0]->route) }}
@endif"><i class="lni lni-library"></i>{{ $group[0]->name }}</a></li>
                <ul class="pl-0">
                    @foreach($group as $sub_item)
                        @if($loop->first) @continue @endif
                        <li class="pl-5"><a class="@if(Route::is($sub_item->route)) admin-
control-panel-selected @endif" href="{{ route($sub_item->route) }}">{{ $sub_item->name
}}</a></li>
                    @endforeach
                </ul>
            @endforeach
        </ul>
    </div>
```

Head.blade.php

```
<!DOCTYPE html>

<html lang="en" class="no-js">
  <head>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-
fit=no">
    <title>@yield("title")</title>

    <link href="{{ asset('assets/css/media_query.css') }}" rel="stylesheet"
type="text/css"/>
    <link href="{{ asset('assets/css/bootstrap.css') }}" rel="stylesheet"
type="text/css"/>

    {{--Line Icons--}}
    <link href="https://cdn.lineicons.com/2.0/LineIcons.css" rel="stylesheet">

    <link href="https://maxcdn.bootstrapcdn.com/font-awesome/4.7.0/css/font-
awesome.min.css" rel="stylesheet"
        integrity="sha384-
wvfXpqpZZVQGK6TAh5PVlGOfQNHSoD2xbE+QkPxCAF1NEEvoEH3S10sibVcoQVnN"
crossorigin="anonymous">
    <link href="{{ asset('assets/css/animate.css') }}" rel="stylesheet"
type="text/css"/>
    <link href="https://fonts.googleapis.com/css?family=Poppins" rel="stylesheet">
    <link href="{{ asset('assets/css/owl.carousel.css') }}" rel="stylesheet"
type="text/css"/>
    <link href="{{ asset('assets/css/owl.theme.default.css') }}" rel="stylesheet"
type="text/css"/>
    <!-- Bootstrap CSS -->
    <link href="{{ asset('assets/css/style_1.css') }}" rel="stylesheet"
type="text/css"/>
    <!-- Modernizr JS -->
    <script src="{{ asset('assets/js/modernizr-3.5.0.min.js') }}"></script>

    {{--Materialize Icons--}}
    <link href="https://fonts.googleapis.com/icon?family=Material+Icons"
rel="stylesheet">

    {{--Main CSS--}}
    <link href="{{ asset('assets/css/main.css') }}" type="text/css"
rel="stylesheet"/>

    @yield("stylesheets")
  </head>
```

Footer.blade.php

```
<div class="container-fluid fh5co_footer_bg pb-3">
    <div class="container animate-box">
        <div class="row">
            <div class="col-12 spdpright py-5 logo-footer-container"></div>
            <div class="clearfix"></div>
            <div class="col-12 col-md-4 col-lg-3">
                <div class="footer_main_title py-3"> About</div>
                <div class="footer_sub_about pb-3"> Welcome to CodeFreakz. Here you
can perfect your skills in various programming areas. From web development to OS
development. Video tutorials are made by top of the class programmers with in depth
coverage of the material being presented. Tutorial difficulties range from begginer to
advanced, and on top of all, we have best prices.</div>
                <div class="footer_mediya_icon">
                    <div class="text-center d-inline-block"><a
href="https://www.linkedin.com/in/andrej-zarkovski-01b8a4188/" target="_blank"
class="fh5co_display_table_footer">
                        <div class="fh5co_verticle_middle"><i class="fa fa-
linkedin"></i></div>
                            </a></div>
                        <div class="text-center d-inline-block"><a
href="https://youtube.com" target="_blank" class="fh5co_display_table_footer">
                            <div class="fh5co_verticle_middle"><i class="fa fa-
youtube"></i></div>
                                </a></div>
                            <div class="text-center d-inline-block"><a
href="https://twitter.com" target="_blank" class="fh5co_display_table_footer"
target="_blank" class="fh5co_display_table_footer">
                                <div class="fh5co_verticle_middle"><i class="fa fa-
twitter"></i></div>
                                    </a></div>
                                        <div class="text-center d-inline-block"><a
href="https://facebook.com" target="_blank" class="fh5co_display_table_footer">
                                            <div class="fh5co_verticle_middle"><i class="fa fa-
facebook"></i></div>
                                                </a>
                                                    </div>
                                                        </div>
                                                            </div>
                                                                <div class="col-12 col-md-3 col-lg-2">
                                                                    <div class="footer_main_title py-3"> Category</div>
                                                                    <ul class="footer_menu">
                                                                        @foreach($footer_categories as $category)
                                                                            <li><a href="#" class="footer_cat"><i class="fa fa-angle-
right"></i>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&{{ $category->name }}</a></li>
                                                                                @endforeach
                                                                                    </ul>
                                                                                        </div>
                                                                                            <div class="col-12 col-md-5 col-lg-3 position_footer_relative">
                                                                                                <div class="footer_main_title py-3">Recommended courses</div>
                                                                                                  @foreach($footer_courses as $course)
                                                                                                      <div class="footer_makes_sub_font"> {{ $course->release_date
}}</div>
                                                                                                          <a href="#" class="footer_post pb-4"> {{ $course->name }}</a>
                                                                                                              @endforeach
                                                                                                                  <div class="footer_position absolute"><img src="{{
```



```

asset("assets/images/footer_sub_tipik.png") }}" alt="img"
class="width_footer_sub_img"/></div>
</div>
<div class="col-12 col-md-12 col-lg-4 latest-youtube-video ">
    <div class="footer_main_title py-3"> Our latest YouTube video</div>
    <iframe class="youtube-video" style="width: 100%" height="190px"
src="https://www.youtube.com/embed/F-sFp_AvHc8" frameborder="0" allow="accelerometer;
autoplay; clipboard-write; encrypted-media; gyroscope; picture-in-picture"
allowfullscreen></iframe>
    </div>
</div>
</div>
<div class="container-fluid fh5co_footer_right_reserved">
    <div class="container">
        <div class="row ">
            <div class="col-12 col-md-6 py-4 Reserved"> © Copyright {{ date("Y") }},
Code Mastery. All rights reserved. </div>
            <div class="col-12 col-md-6 spdp_right py-4 d-flex flex-wrap justify-
content-center">
                @foreach($header_menu as $menu_item)
                    <a href="{{ route($menu_item->route) }}"
class="footer_last_part_menu"> {{ $menu_item->name }}</a>
                @endforeach
            </div>
        </div>
    </div>
</div>

{{--Scroll up arrow--}}
<div class="gototop js-top">
    <a href="#" class="js-gotop"><i class="fa fa-arrow-up"></i></a>
</div>

<script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.12.4/jquery.min.js"></script>
<script src="{{ asset("assets/js/owl.carousel.min.js") }}"></script>
<!--<script src="https://code.jquery.com/jquery-3.1.1.slim.min.js" integrity="sha384-
A7FZj7v+d/sdmMqp/nOQwliLvUsJfDHW+k9Omg/a/EheAdgtzNs3hpfag6Ed950n"
crossorigin="anonymous"></script>-->
<script src="https://cdnjs.cloudflare.com/ajax/libs/tether/1.4.0/js/tether.min.js"
integrity="sha384-
DztdAPBWPRXSA/3eYEEUWrWCy7G5KFbe8fFjk5JAIxUYHKkDx6Qin1DkWx51bBrb"
crossorigin="anonymous"></script>
<script src="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0-
alpha.6/js/bootstrap.min.js"
integrity="sha384-
vBWwZlZJ8ea9aCX4pEW3rVHjgjt7zpkNpZk+02D9phzyeVKE+jo0ieGizqPLForn"
crossorigin="anonymous"></script>
<!-- Waypoints -->
<script src="{{ asset("assets/js/jquery.waypoints.min.js") }}"></script>

<!-- Main -->
<script src="{{ asset("assets/js/main.js") }}"></script>
<script src="{{ asset("assets/js/cf-main.js") }}"></script>
@yield("scripts")

```

```
</body>  
</html>
```

Header.blade.php

```
<body class="@yield('body-classes')">
<div class="container-fluid account-bar pr-md-4 pr-lg-5">
    <div class="d-flex justify-content-end">
        @if(session("user"))
            @if(session("user")->role->name == "admin")
                <a href="{{ route('admin.coursesPage') }}" class="admin-panel-link mr-4">
                    <span>Admin panel</span>
                    <i class="lni lni-layout admin-panel-icon"></i>
                </a>
            @endif
            <a href="{{ route('logout') }}" class="cf-button cf-button-small">Logout</a>
            @else
                <a href="{{ route('registerPage') }}" class="cf-button cf-button-small">Register</a>
                <a href="{{ route('loginPage') }}" class="cf-button cf-button-small ml-2">Login</a>
            @endif
        </div>
    </div>
<div class="container-fluid fh5co_header_bg">
    <div class="container">
        <div class="row">
            <div class="col-12 fh5co_mediya_center">
                </div>
            </div>
        </div>
    </div>
<div class="container-fluid">
    <div class="container">
        <div class="row">
            <div class="col-12 col-md-3 fh5co_padding_menu">
                <a href="{{ route('home') }}"></a>
            </div>
            <div class="col-12 col-md-9 align-self-center justify-content-end align-items-center d-none d-md-flex">
                <div class="d-none d-lg-flex">
                    <div class="text-center d-inline-block">
                        <a href="https://www.linkedin.com/in/andrej-zarkovski-01b8a4188/" target="_blank" class="fh5co_display_table">
                            <div class="fh5co_verticle_middle"><i class="fa fa-linkedin"></i></div>
                        </a>
                    </div>
                    <div class="text-center d-inline-block">
                        <a href="https://youtube.com" class="fh5co_display_table" target="_blank">
                            <div class="fh5co_verticle_middle"><i class="fa fa-youtube"></i></div>
                        </a>
                    </div>
                    <div class="text-center d-inline-block">
                        <a href="https://twitter.com" target="_blank">
```

```

class="fh5co_display_table" target="_blank">
    <div class="fh5co_verticle_middle"><i class="fa fa-
twitter"></i></div>
    </a>
</div>
<div class="text-center d-inline-block">
    <a href="https://facebook.com" target="_blank"
class="fh5co_display_table" target="_blank">
    <div class="fh5co_verticle_middle"><i class="fa fa-
facebook"></i></div>
    </a>
</div>
</div>
<!--<div class="d-inline-block text-center"></div>-->
    <div class="clearfix"></div>
</div>
</div>
</div>
<div class="container-fluid bg-faded fh5co_padd_mediya padding_786">
    <div class="container padding_786">
        <nav class="navbar navbar-toggleable-md navbar-light" id="navigation-bar">
            <div class="d-lg-none d-flex justify-content-between align-items-center
mb-3">
                <button class="navbar-toggler d-inline-block mt-1" type="button" data-
toggle="collapse"
                    data-target="#navbarSupportedContent" aria-
controls="navbarSupportedContent"
                    aria-expanded="false"
                    aria-label="Toggle navigation"><span class="fa fa-
bars"></span></button>
            </div>
            <div class="collapse navbar-collapse" id="navbarSupportedContent">
                <ul class="navbar-nav mr-auto">
                    @foreach($header_menu as $menu_item)
                        <li class="nav-item @if( Route::is($menu_item->route) ) active
@endif">
                            <a class="nav-link" href="{{ route($menu_item->route)
}}">{{ $menu_item->name }} <span class="sr-only">(current)</span></a>
                        </li>
                    @endforeach
                </ul>
            </div>
        </nav>
    </div>
</div>

```

Layouts

Admin.blade.php

```
@include("common.fixed.admin.head")

@include("common.fixed.admin.header")

<div class="admin-page-content">
    @yield("content")
</div>
@include("common.fixed.admin.footer")
```

Layout.blade.php

```
@include("common.fixed.head")  
  
@include("common.fixed.header")  
  
@yield("content")  
  
@include("common.fixed.footer")
```

Pages

403.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | About @endsection

@section("content")
<div class="row my-5">
    <div class="row col-sm-10 offset-sm-1 mx-0 mx-sm-auto">
        <div class="col-12 ">
            <h1 class="text-uppercase text-center mb-4">403 - Forbidden</h1>
        </div>
    </div>
</div>
<script async src="https://platform.twitter.com/widgets.js" charset="utf-8"></script>
@endsection
```

About.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | About @endsection

@section("content")


## About me</h2> Profile picture My name is Andrej Zarkovski. I'm studying web programming at "Visoka ICT Škola" in Belgrade. In my early childhood I was very interested in how computers work and I continued to learn more about them. Now I am pursuing career in computer programming. I love computer related stuff and I love playing video games.</p> Portfolio: <a href="http://zarke998.github.io/web-portfolio" target="_blank" class="mb-3 ml-2 cf-link">zarke998.github.io/web-portfolio</a></div> GitHub: <a href="https://github.com/zarke998" class="mb-3 ml-2 cf-link" target="_blank">github.com/zarke998</a></div> LinkedIn: <a href="https://www.linkedin.com/in/andrej-zarkovski-01b8a4188/" class="mb-3 ml-2 cf-link" target="_blank">linkedin.com/in/andrej-zarkovski-01b8a4188</a></div> Follow us on socials</h4> - <a href="http://facebook.com" target="_blank"><i class="lni lni-facebook-oval facebook-icon social-icon"></i></a></li> - <a href="http://twitter.com" target="_blank"><i class="lni lni-twitter-filled twitter-icon social-icon"></i></a></li> - <a href="http://instagram.com" target="_blank"><i class="lni lni-instagram-filled instagram-icon social-icon"></i></a></li> - <a href="http://youtube.com" target="_blank"><i class="lni lni-youtube youtube-icon social-icon"></i></a></li>


```


Contact.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Contact @endsection

    @section("content")
<div class="container-fluid contact_us_bg_img" style="background: url(&apos;{{ asset('assets/images/contact wallpaper - compressed.jpg') }}&apos;); background-size: cover;">
    <div class="container">
        <div class="row">
            <a href="#" class="fh5co_con_123"><i class="fa fa-home"></i></a>
            <a href="#" class="fh5co_con_pt-2">Contact Us </a>
        </div>
    </div>
</div>
<div class="container-fluid fh5co_fh5co_bg_contcat">
    <div class="container">
        <div class="row py-4">
            <div class="col-md-4 py-3">
                <div class="row fh5co_contact_us_no_icon_difh5co_hover">
                    <div class="col-3 fh5co_contact_us_no_icon_difh5co_hover_1 px-0
px-lg-1">
                        <div class="fh5co_contact_us_no_icon_div"> <span><i class="fa
fa-phone"></i></span> </div>
                        <div class="col-9 align-self-center
fh5co_contact_us_no_icon_difh5co_hover_2">
                            <span class="c_g d-block">Call Us</span>
                            <span class="d-block c_g fh5co_contact_us_no_text">+381 111
222 333</span>
                        </div>
                        <div class="clearfix"></div>
                    </div>
                <div class="col-md-4 py-3">
                    <div class="row fh5co_contact_us_no_icon_difh5co_hover">
                        <div class="col-3 fh5co_contact_us_no_icon_difh5co_hover_1 px-0
px-lg-1">
                            <div class="fh5co_contact_us_no_icon_div"> <span><i class="fa
fa-envelope"></i></span> </div>
                            <div class="col-9 align-self-center
fh5co_contact_us_no_icon_difh5co_hover_2">
                                <span class="c_g d-block">Have any questions?</span>
                                <span class="d-block c_g
fh5co_contact_us_no_text">andrej.zarkovski.22.18@ict.edu.rs</span>
                            </div>
                            <div class="clearfix"></div>
                        </div>
                    </div>
                <div class="col-md-4 py-3">
                    <div class="row fh5co_contact_us_no_icon_difh5co_hover">
                        <div class="col-3 fh5co_contact_us_no_icon_difh5co_hover_1 px-0
```

```

px-lg-1">
        <div class="fh5co_contact_us_no_icon_div"> <span><i class="fa
fa-map-marker"></i></span> </div>
        </div>
        <div class="col-9 align-self-center
fh5co_contact_us_no_icon_difh5co_hover_2">
        <span class="c_g d-block">Address</span>
        <span class="d-block c_g fh5co_contact_us_no_text"> Zdravka
Čelara 16, Beograd</span>
        </div>
        <div class="clearfix"></div>
    </div>
</div>
<div class="clearfix"></div>
</div>
</div>
<div class="container-fluid mb-4">
    <div class="container">
        <div class="col-12 text-center contact margin svnit ">
            <div class="text-center fh5co_heading py-2">Contact Us</div>
        </div>
        <div class="row">
            <div class="col-12 col-md-6">
                <form class="row" id="fh5co_contact_form">
                    <div class="col-12 py-3">
                        <input type="text" class="form-control fh5co_contact_text_box"
placeholder="Enter Your Name" />
                    </div>
                    <div class="col-6 py-3">
                        <input type="text" class="form-control fh5co_contact_text_box"
placeholder="E-mail" />
                    </div>
                    <div class="col-6 py-3">
                        <input type="text" class="form-control fh5co_contact_text_box"
placeholder="Subject" />
                    </div>
                    <div class="col-12 py-3">
                        <textarea class="form-control fh5co_contacts_message"
placeholder="Message"></textarea>
                    </div>
                    <div class="col-12 py-3 text-center"> <a href="#" class="btn
contact_btn">Send Message</a> </div>
                </form>
            </div>
            <div class="col-12 col-md-6 align-self-center">
                <iframe
src="https://www.google.com/maps/embed?pb=!1m14!1m12!1m3!1d3168.639290621062!2d-
122.08624618469247!3d37.421999879825215!2m3!1f0!2f0!3f0!3m2!1i1024!2i768!4f13.1!5e0!3m
2!1sfr!2sbe!4v1514861541665" class="map_sss" allowfullscreen></iframe>
                </div>
            </div>
        </div>
    </div>
</div>
@endsection

```

Cart.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Cart @endsection

@section("scripts")
    <script src="{{ asset('assets/js/cart.js') }}"></script>
@endsection

@section("content")
    <div class="row mb-5 mx-0">
        <div class="col-12">
            <h1 class="text-center py-4">Cart</h1>
        </div>
        <div class="col-10 offset-1" style="overflow: auto">
            <table class="cart-table w-100">
                <thead style="border-bottom: 1px solid gray">
                    <td>Image</td>
                    <td>Title</td>
                    <td>Price</td>
                    <td>Actions</td>
                </thead>
                <tbody class="cart-container">

                </tbody>
            </table>
            <div class="d-flex justify-content-end mr-2 cart-total" style="font-size:24px">
                <p>Total: <span></span></p>
            </div>
            <div class="d-flex justify-content-end">
                <a href="#" class="cf-button confirm-order-btn">Confirm order</a>
            </div>
        </div>
    </div>
@endsection
```

Home.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Home @endsection

@section("stylesheets")
    <link href="{{ asset('assets/css/home.css') }}" rel="stylesheet" type="text/css"/>
@endsection

@section("content")
<div class="container-fluid paddding mb-5">
    <div class="row mx-0 intro-slider">
        <div class="col-md-6 col-12 paddding animate-box" data-animate-
effect="fadeIn">
            <div class="fh5co_suceefh5co_height">
                
                <div class="fh5co_suceefh5co_height_position_absolute"></div>
                <div class="fh5co_suceefh5co_height_position_absolute_font">
                    <div class="">
                        {{ $recommended_courses[0]->release_date }}
                    </div>
                    <div class="">
                        <a href="{{ route('courses.show', [ "id" =>
$recommended_courses[0]->id]) }}" class="fh5co_good_font">
                            {{ $recommended_courses[0]->name }}
                        </a>
                    </div>
                </div>
            </div>
            <div class="col-md-6">
                <div class="row">
                    @for($i = 1; $i < $recommended_courses->count(); $i++)
                        <div class="col-md-6 col-6 paddding animate-box" data-animate-
effect="fadeIn">
                            <div class="fh5co_suceefh5co_height_2">
                                
                                <div
class="fh5co_suceefh5co_height_position_absolute"></div>
                                <div
class="fh5co_suceefh5co_height_position_absolute_font_2">
                                    <div class="">
                                        {{ $recommended_courses[0]->release_date }}
                                    </div>
                                    <div class=""><a href="{{ route('courses.show', [ "id"
=> $recommended_courses[$i]->id]) }}" class="fh5co_good_font_2">
                                        {{ $recommended_courses[$i]->name }}
                                    </a>
                                </div>
                            </div>
                        </div>
                    @endfor
                </div>
            </div>
        </div>
    </div>
</div>
```

```

        <div class="intro-slider-title">
            Recommended
        </div>
    </div>
</div>
<div class="container-fluid pb-4 pt-5">
    <div class="container animate-box">
        <div>
            <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-4">On
Discount</div>
            <div>
                <div class="owl-carousel owl-theme" id="slider2">
                    @foreach($discounted_courses as $course)
                        <div class="item px-2">
                            <div class="fh5co_hover_news_img">
                                <div class="fh5co_news_img">
                                    </div>
                                <div>
                                    <a href="{{ route('courses.show', [ 'id' => $course->id])
}}" class="d-block fh5co_small_post_heading"><span class="">{{ $course->name
}}</span></a>
                                    <div class="c_g"><i class="fa fa-clock-o"></i> {{ $course-
>release_date }}</div>
                                </div>
                            </div>
                        </div>
                    @endforeach
                </div>
            </div>
        </div>
</div>
<div class="container-fluid fh5co_video_news_bg pb-4">
    <div class="container animate-box" data-animate-effect="fadeIn">
        <div>
            <div class="fh5co_heading fh5co_heading_border_bottom pt-5 pb-2 mb-4">FREE
Courses</div>
            <div>
                <div class="owl-carousel owl-theme" id="slider3">
                    @foreach($free_courses as $course)
                        <div class="item px-2">
                            <div class="fh5co_hover_news_img">
                                <div class="fh5co_news_img">
                                    </div>
                                <div>
                                    <a href="{{ route('courses.show', [ 'id' => $course-
>id]) }}" class="d-block fh5co_small_post_heading"><span class="">{{ $course->name
}}</span></a>
                                    <div class="c_g"><i class="fa fa-clock-o"></i> {{
$course->release_date }}</div>
                                </div>
                            </div>
                        </div>
                    @endforeach
                </div>
            </div>
        </div>
    </div>

```

```

    </div>
</div>
<div class="container-fluid pb-4 pt-4 paddding">
    <div class="container paddding">
        <div class="row mx-0">
            <div class="col-md-8 animate-box" data-animate-effect="fadeInLeft">
                <div>
                    <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-4">Recently uploaded</div>
                </div>
                @foreach($recent_courses as $course)
                    <div class="row pb-4">
                        <div class="col-md-5">
                            <div class="fh5co_hover_news_img">
                                <div class="fh5co_news_img"></div>
                                <div></div>
                            </div>
                        </div>
                        <div class="col-md-7 animate-box">
                            <a style="display: block" href="{{ route('courses.show', [ "id" => $course->id]) }}" class="fh5co_magna py-2">
                                {{ $course->name }}
                            </a> <a href="{{ route('courses.show', [ "id" => $course->id]) }}" class="fh5co_mini_time pb-3">
                                {{ $course->author->first_name . " " . $course->author->last_name }} <span class="pl-1"> {{ $course->release_date }}</span>
                            </a>
                            <div class="fh5co_consectetur">
                                {{ substr($course->description,0, 50) }}
                            </div>
                        </div>
                    </div>
                @endforeach
            </div>
            <div class="col-md-3 animate-box" data-animate-effect="fadeInRight">
                <div>
                    <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-4">Popular categories</div>
                </div>
                <div class="clearfix"></div>
                <div class="fh5co_tags_all popular-categories">
                    @foreach($categories as $category)
                        <a href="#" class="fh5co_tagg">{{ $category->name }}</a>
                    @endforeach
                </div>
                <div>
                    <div class="fh5co_heading fh5co_heading_border_bottom pt-3 py-2 mb-4">{{ $rand_lang->name }}</div>
                </div>
                @foreach($rand_lang->courses->take(4) as $course)
                    <div class="row py-3">
                        <div class="col-lg-5 align-self-center">
                            
                        </div>
                        <div class="col-lg-7 mt-1 px-lg-0">

```



```

<div class="most_fh5co_treding_font">{{ $course->name
}}</div>
<div class="most_fh5co_treding_font_123">{{ $course-
>release_date }}</div>
</div>
</div>
@endforeach
</div>
</div>
<div class="row mx-0 animate-box" data-animate-effect="fadeInUp">
</div>
</div>
</div>
@endsection

```

Login.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Login @endsection

@section("content")
    <div class="row mb-5">
        <div class="col-12">
            <h1 class="text-center py-4">Login</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-10 offset-1 col-sm-8 offset-sm-2">
                    <form action="{{ route('login') }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" name="email" class="form-control cf-
input" placeholder="Email" aria-label="Email" aria-describedby="basic-addon1"
value="{{ old('email') }}">
                        </div>
                        <div class="input-group mb-2">
                            <input type="password" name="password" class="form-control
cf-input" placeholder="Password" aria-label="Password" aria-describedby="basic-
addon1">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-
3">Login</button>
                        </div>
                        @if(session("registrationSuccessfullMsg"))
                        <div class="success-msg my-2">
                            Registration successfull.
                        </div>
                        @endif
                        @if($errors->any())
                            <ul class="my-2 error-msg-list">
                                @foreach($errors->all() as $error)
                                    <li>
                                        {{ $error }}
                                    </li>
                                @endforeach
                            </ul>
                        @endif
                        @if(session("loginErrorMsg"))
                            <div class="error-msg my-2">
                                {{ session("loginErrorMsg") }}
                            </div>
                        @endif
                    </form>
                </div>
            </div>
        </div>
    </div>
@endsection
```

Register.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Register @endsection

@section("content")
    <div class="row mb-5">
        <div class="col-12">
            <h1 class="text-center py-4">Register</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-10 offset-1 col-sm-8 offset-sm-2">
                    <form action="{{ route('register') }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" name="name" class="form-control cf-
input" placeholder="Username" aria-label="Username" aria-describedby="basic-addon1"
value="{{ old('name') }}">
                        </div>
                        <div class="input-group mb-3">
                            <input type="text" name="email" class="form-control cf-
input" placeholder="Email" aria-label="Email" aria-describedby="basic-addon1"
value="{{ old('email') }}">
                        </div>
                        <div class="input-group mb-3">
                            <input type="password" name="password" class="form-control
cf-input" placeholder="Password" aria-label="Username" aria-describedby="basic-
addon1">
                        </div>
                        <div class="input-group mb-3">
                            <input type="password" name="password_confirmation"
class="form-control cf-input" placeholder="Confirm password" aria-label="Username"
aria-describedby="basic-addon1">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-
3">Register</button>
                        </div>
                        @if($errors->any())
                            <ul class="my-2 error-msg-list">
                                @foreach($errors->all() as $error)
                                    <li>
                                        {{ $error }}
                                    </li>
                                @endforeach
                            </ul>
                        @endif
                    </form>
                </div>
            </div>
        </div>
    </div>
@endsection
```

Admin

Logs.blade.php

```
@extends("common.layouts.admin")

@section("title") CodeFreakz | Admin - Logs @endsection

@section("content")
    <div class="content-container my-3">
        <div class="content-section mx-3 mb-5">
            <h2 class="text-center my-4">Logs</h2>
            <div class="row log-filters align-items-center mb-2">
                <div class="col-md-6 col-lg-4 log-type-filter d-flex align-items-
center">
                    <span>Log type:</span>
                    <select class="form-control cf-input cf-select" name="author"
placeholder="Author" aria-label="Author" aria-describedby="basic-addon1">
                        <option value="1">All logs</option>
                    </select>
                </div>
                <div class="col-lg-6 offset-lg-2 mt-3 d-flex justify-content-lg-end
justify-content-between flex-wrap date-filter">
                    <div class="mb-2"><span>Start date</span><input class="cf-input
ml-2" type="date" name="log-start"/></div>
                    <div class="ml-md-3"><span>End date</span><input class="cf-input
ml-3" type="date" name="log-end"/></div>
                </div>
            </div>
            <div id="log"></div>
        </div>
    </div>
@endsection
```

Content

Authors.blade.php

```
@extends("common.layouts.admin")

@section("title") CodeFreakz | Admin - Courses @endsection

@section("content")
    <div class="row content-container justify-content-center">
        <div class="content-section col-12 px-4 px-sm-5 mb-2">
            <h2 class="text-center my-4 mr-3">Authors</h2>
            <div style="">
                <table class="table">
                    <thead>
                        <tr>
                            <th scope="col">Id</th>
                            <th scope="col">First Name</th>
                            <th scope="col">Last Name</th>
                            <th scope="col">Birth Date</th>
                            <th scope="col" class="d-flex justify-content-
center">Actions</th>
                        </tr>
                    </thead>
                    <tbody>
                        @foreach($authors as $author)
                            <tr>
                                <th scope="row">{{ $author->id }}</th>
                                <td>{{ $author->first_name }}</td>
                                <td>{{ $author->last_name }}</td>
                                <td>{{ $author->birth_date }}</td>
                                <td class="table-actions d-flex justify-content-center">
                                    <a href="{{ route("authors.edit", ["id" => $author-
>id]) }}" class="cf-link"><i class="lni lni-pencil"></i></a>
                                    <form action="{{ route("authors.delete", ["id" =>
$author->id]) }}" method="POST">
                                        @method("DELETE")
                                        @csrf
                                        <button type="submit" class="cf-link ml-3 cf-
table-button"><i class="lni lni-trash"></i></button>
                                    </form>
                                </td>
                            </tr>
                        @endforeach
                    </tbody>
                </table>
            </div>
            <div class="d-flex justify-content-center align-items-center flex-wrap">
                <div class="d-flex align-items-center mb-3 mx-4">
                    {{--
                    <span class="mr-3 d-block">Add
course</span>--}}
                    <a href="{{ route("authors.create") }}" class="w-100 cf-button px-
5">Add Author</a>
                </div>
            </div>
            @if(session("entityCreateMsg"))
                <div class="success-msg">

```

```
        {{ session("entityCreateMsg") }}
    </div>
@endif
@if(session("entityErrorMsg"))
    <div class="error-msg">
        {{ session("entityErrorMsg") }}
    </div>
@endif
</div>
@endsection
```

Categories.blade.php

```
@extends("common.layouts.admin")

@section("title") CodeFreakz | Admin - Courses @endsection

@section("content")
    <div class="row content-container justify-content-center">
        <div class="content-section col-12 px-4 px-sm-5 mb-2">
            <h2 class="text-center my-4 mr-3">Categories</h2>
            <div style="">
                <table class="table">
                    <thead>
                        <tr>
                            <th scope="col">Id</th>
                            <th scope="col">Name</th>
                            <th scope="col" class="d-flex justify-content-
center">Actions</th>
                        </tr>
                    </thead>
                    <tbody>
                        @foreach($categories as $category)
                            <tr>
                                <th scope="row">{{ $category->id }}</th>
                                <td>{{ $category->name }}</td>
                                <td class="table-actions d-flex justify-content-center">
                                    <a href="{{ route('categories.edit', ["id" =>
$category->id]) }}" class="cf-link"><i class="lni lni-pencil"></i></a>
                                    <form action="{{ route('categories.delete', ["id" =>
$category->id]) }}" method="POST">
                                        @method("DELETE")
                                        @csrf
                                        <button type="submit" class="cf-link ml-3 cf-
table-button"><i class="lni lni-trash"></i></button>
                                    </form>
                                </td>
                            </tr>
                        @endforeach
                    </tbody>
                </table>
            </div>
            <div class="d-flex justify-content-center align-items-center flex-wrap">
                <div class="d-flex align-items-center mb-3 mx-4">
                    {{--
                        <span class="mr-3 d-block">Add
course</span>--}}
                    <a href="{{ route('categories.create') }}" class="w-100 cf-button
px-5">Add Category</a>
                </div>
            </div>
            @if(session("entityCreateMsg"))
                <div class="success-msg">
                    {{ session("entityCreateMsg") }}
                </div>
            @endif
            @if(session("entityErrorMsg"))
                <div class="error-msg">
                    {{ session("entityErrorMsg") }}
                </div>
            @endif
        </div>
    </div>
endsection
```

```
        @endif  
    </div>  
  
</div>  
@endsection
```


Courses.blade.php

```
@extends("common.layouts.admin")

@section("title") CodeFreakz | Admin - Courses @endsection

@section("scripts")
    <script src="{{ asset('assets/js/admin/course-page.js') }}"></script>
@endsection

@section("content")
    <div class="row content-container justify-content-center">
        <div class="content-section col-12 px-5 mb-2">
            <h2 class="text-center my-4 mr-3">Courses</h2>
            <table class="table">
                <thead>
                    <tr>
                        <th scope="col">Id</th>
                        <th scope="col">Course</th>
                        <th scope="col">From Author</th>
                        <th scope="col" class="d-flex justify-content-center">Actions</th>
                    </tr>
                </thead>
                <tbody id="courses-container">

                    </tbody>
            </table>
            <div class="row">
                <div class="col-12 text-center pb-4 pt-4 pl-sm-4 pr-sm-4 pl-0 pr-0 d-
flex flex-wrap justify-content-between">
                    <a href="#" class="course-page-btn btn_mange_pagging mb-2" data-
inc="-1"><i class="fa fa-long-arrow-left"></i><span class="d-lg-inline-block d-none">
Previous </span></a>
                    <a href="#" class="course-page-btn btn_mange_pagging mb-2" data-
inc="1" >
                        <span class="d-lg-inline-block d-none">Next</span>
                        <i class="fa fa-long-arrow-right"></i>&nbsp;
                    </a>
                </div>
            </div>
            <div class="d-flex justify-content-center align-items-center flex-wrap">
                <div class="d-flex align-items-center mb-3 mx-4">
                    {{--
                    <span class="mr-3 d-block">Add
course</span>--}}
                    <a href="{{ route('course.create') }}" class="w-100 cf-button px-
5">Add Course</a>
                </div>
            </div>
            @if(session("entityInsertMsg"))
                <div class="success-msg">
                    {{ session("entityInsertMsg") }}
                </div>
            @endif
        </div>
    </div>
@endsection
```

Languages.blade.php

```
@extends("common.layouts.admin")

@section("title") CodeFreakz | Admin - Courses @endsection

@section("content")
    <div class="row content-container justify-content-center">
        <div class="content-section col-12 px-4 px-sm-5 mb-2">
            <h2 class="text-center my-4 mr-3">Languages</h2>
            <div style="">
                <table class="table">
                    <thead>
                        <tr>
                            <th scope="col">Id</th>
                            <th scope="col">Name</th>
                            <th scope="col" class="d-flex justify-content-
center">Actions</th>
                        </tr>
                    </thead>
                    <tbody>
                        @foreach($languages as $language)
                            <tr>
                                <th scope="row">{{ $language->id }}</th>
                                <td>{{ $language->name }}</td>
                                <td class="table-actions d-flex justify-content-center">
                                    <a href="{{ route('languages.edit', ['id' =>
$language->id]) }}" class="cf-link"><i class="lni lni-pencil"></i></a>
                                    <form action="{{ route('languages.delete', ['id' =>
$language->id]) }}" method="POST">
                                        @method("DELETE")
                                        @csrf
                                        <button type="submit" class="cf-link ml-3 cf-
table-button"><i class="lni lni-trash"></i></button>
                                    </form>
                                </td>
                            </tr>
                        @endforeach
                    </tbody>
                </table>
            </div>
            <div class="d-flex justify-content-center align-items-center flex-wrap">
                <div class="d-flex align-items-center mb-3 mx-4">
                    {{--
                    <span class="mr-3 d-block">Add
course</span>--}}
                    <a href="{{ route('languages.create') }}" class="w-100 cf-button
px-5">Add Language</a>
                </div>
            </div>
            @if(session("entityCreateMsg"))
                <div class="success-msg">
                    {{ session("entityCreateMsg") }}
                </div>
            @endif
            @if(session("entityErrorMsg"))
                <div class="error-msg">
                    {{ session("entityErrorMsg") }}
                </div>
            @endif
        </div>
    </div>

```

```
        @endif
    </div>

</div>
@endsection
```

Authors

Create.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course Create @endsection

@section("content")
    <div class="row my-5">
        <div class="col-12">
            <h1 class="text-center py-4">Create Author</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('authors.store') }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="first_name" placeholder="First Name"
                                aria-label="Email" aria-describedby="basic-addon1">
                        </div>
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="last_name" placeholder="Last Name"
                                aria-label="Email" aria-describedby="basic-addon1">
                        </div>
                        <div class="mb-3">
                            <span>Birth Date</span>
                            <input type="date" class="form-control cf-input"
name="birth_date" placeholder="Last Name"
                                aria-label="Email" aria-describedby="basic-addon1">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-3">Add
Author</button>
                        </div>
                    </form>
                </div>
            </div>
        </div>
    </div>
@endsection
```

Edit.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course Update @endsection

@section("content")
    <div class="row my-5">
        <div class="col-12">
            <h1 class="text-center py-4">Update Author</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('authors.update', ['id' => $author->id])
}}}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="first_name" placeholder="First Name"
                            aria-label="Email" aria-describedby="basic-addon1"
value="{{ old('first_name') ? old('first_name') : $author->first_name }}">
                        </div>
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="last_name" placeholder="Last Name"
                            aria-label="Email" aria-describedby="basic-addon1"
value="{{ old('last_name') ? old('last_name') : $author->last_name }}">
                        </div>
                        <div class="mb-3">
                            <span>Birth Date</span>
                            <input type="date" class="form-control cf-input"
name="birth_date" placeholder="Last Name"
                            aria-label="Email" aria-describedby="basic-addon1"
value="{{ old('birth_date') ? old('birth_date') : $author->birth_date }}">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-3">Update
Author</button>
                        </div>
                    </form>
                </div>
            </div>
        </div>
    </div>
</div>
@endsection
```

Categories

Create.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Category Create @endsection

@section("content")
    <div class="row my-5">
        <div class="col-12">
            <h1 class="text-center py-4">Create Category</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('categories.store') }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="name" placeholder="Name"
                                aria-label="Email" aria-describedby="basic-addon1">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-3">Add
Category</button>
                        </div>
                    </form>
                </div>
            </div>
        </div>
    </div>
@endsection
```

Edit.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Category Edit @endsection

@section("content")
    <div class="row my-5">
        <div class="col-12">
            <h1 class="text-center py-4">Edit Category</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('categories.update', ["id" => $category->id]) }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="name" placeholder="Name"
                                aria-label="Email" aria-describedby="basic-addon1"
value="{{ old("name") ? old("name") : $category->name }}">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-3">Update
Category</button>
                        </div>
                    </form>
                    @foreach($errors->all() as $error)
                        <div class="error-msg">
                            {{ $error }}
                        </div>
                    @endforeach
                </div>
            </div>
        </div>
    </div>
@endsection
```

Courses

Create.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course Create @endsection

@section("scripts")
    <script src="{{ asset('assets/js/course_create.js') }}"></script>
@endsection

@section("content")
    <div class="row mx-0 mb-5">
        <div class="col-12">
            <h1 class="text-center py-4">Create</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('course.store') }}" method="POST"
enctype="multipart/form-data">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="name" placeholder="Course name"
                                aria-label="Email" aria-describedby="basic-addon1"
value="{{ old('name') }}">
                        </div>
                        <div class="mb-3">
                            <span>Author</span>
                            <select class="form-control cf-input cf-select"
name="author_id" placeholder="Author"
                                aria-label="Author" aria-describedby="basic-
addon1">
                                @foreach($authors as $author)
                                    <option
                                        value="{{ $author->id }}">{{ $author-
>first_name . " " . $author->last_name }}</option>
                                @endforeach
                            </select>
                        </div>
                        <div class="mb-3">
                            <span>Description</span>
                            <textarea name="description" placeholder="Description..."
                                class="w-100 cf-text-area">{{ old('description')
}}</textarea>
                        </div>
                        <div class="mb-3">
                            <span>Release date</span>
                            <input type="date" class="form-control cf-input"
name="release_date" placeholder="Release Date"
                                aria-label="Email" aria-describedby="basic-addon1"
value="{{ old('release_date') }}">
                        </div>
                        <div class="mb-3">
                            <span>Price ($)</span>

```



```

        <input type="text" class="form-control cf-input"
name="price" placeholder="Price ($)"
        aria-label="Email" aria-describedby="basic-addon1"
value="{{ old("price") }}">
    </div>
    <div class="mb-3">
        <span>Discount (%)</span>
        <input type="text" class="form-control cf-input"
name="discount" placeholder="Discount in %"
        aria-label="Email" aria-describedby="basic-addon1"
value="{{ old("discount") }}">
    </div>
    <div class="mb-4">
        <p class="cf-text-medium text-center mb-2">Category</p>
        <select class="form-control cf-input cf-select"
name="category_id" placeholder="Category"
        aria-label="Author" aria-describedby="basic-
addon1">
            @foreach($categories as $category)
                <option value="{{ $category->id }}">{{ $category-
>name }}</option>
            @endforeach
        </select>
    </div>
    <div class="mb-4">
        <p class="cf-text-medium text-center mb-2">Difficulty</p>
        <select class="form-control cf-input cf-select"
name="difficulty_id" placeholder="Category"
        aria-label="Author" aria-describedby="basic-
addon1">
            @foreach($difficulties as $difficulty)
                <option value="{{ $difficulty->id }}">{{
$difficulty->name }}</option>
            @endforeach
        </select>
    </div>
    <div class="mb-3">
        <p class="text-center w-100 cf-text-medium mb-
2">Languages</p>
        <div class="d-flex justify-content-center flex-wrap">
            @foreach($languages as $language)
                <div class="d-flex align-items-center cf-checkbox
mr-3 mb-1">
                    <div>
                        <input type="checkbox" id="language{{
$loop->index }}" name="language_id[]"
                            value="{{ $language->id }}" />
                        <i class="material-icons cf-
checked">check_box</i>
                        <i class="material-icons cf-
unchecked">check_box_outline_blank</i>
                    </div>
                    <label class="mb-0 ml-2"
                        for="language{{ $loop->index }}">{{
$language->name }}</label>
                </div>
            @endforeach

```

```

        </div>
    </div>
    <div class="mb-3 mt-2">
        <p class="cf-text-medium text-center">Course cover</p>
        <input id="course_image_input" type="file" class="form-
control cf-input" name="image"
placeholder="Course cover" aria-label="Email" aria-
describedby="basic-addon1">
        
    </div>
    <div>
        <button type="submit" class="w-100 cf-button mt-3">Add
course</button>
    </div>
    @if($errors->any())
        @foreach($errors->all() as $error)
            <div class="error-msg my-2">
                {{ $error }}
            </div>
        @endforeach
    @endif
</form>
</div>
</div>
</div>
</div>
@endsection

```

Edit.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course Edit @endsection

@section("scripts")
    <script src="{{ asset('assets/js/course_create.js') }}"></script>
@endsection

@section("content")
    <div class="row mx-0 mb-5">
        <div class="col-12">
            <h1 class="text-center py-4">Edit</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('course.update', [ 'id' => $course->id ]) }}" method="POST" enctype="multipart/form-data">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
                                name="name" placeholder="Course name"
                                aria-label="Email" aria-describedby="basic-addon1"
                                value="{{ old('name') ? old('name') : $course->name }}" />
                        </div>
                        <div class="mb-3">
                            <span>Author</span>
                            <select class="form-control cf-input cf-select"
                                name="author_id" placeholder="Author"
                                aria-label="Author" aria-describedby="basic-addon1">
                                @foreach($authors as $author)
                                    <option
                                        value="{{ $author->id }}" @if($author->id == $course->author_id) selected @endif>{{ $author->first_name . " " . $author->last_name }}</option>
                                @endforeach
                            </select>
                        </div>
                        <div class="mb-3">
                            <span>Description</span>
                            <textarea name="description" placeholder="Description..."
                                class="w-100 cf-text-area">{{ old('description') ? old('description') : $course->description }}</textarea>
                        </div>
                        <div class="mb-3">
                            <span>Release date</span>
                            <input type="date" class="form-control cf-input"
                                name="release_date" placeholder="Release Date"
                                aria-label="Email" aria-describedby="basic-addon1"
                                value="{{ old('release_date') ? old('release_date') : $course->release_date }}" />
                        </div>
                        <div class="mb-3">
                            <span>Price ($)</span>
                            <input type="text" class="form-control cf-input"
                                name="price" placeholder="Price ($)" />
                    </form>
                </div>
            </div>
        </div>
    </div>
```

```

        aria-label="Email" aria-describedby="basic-addon1"
value="{{ old("price") ? old("price") : $course->price }}"
    </div>
    <div class="mb-3">
        <span>Discount (%)</span>
        <input type="text" class="form-control cf-input"
name="discount" placeholder="Discount in %)"
        aria-label="Email" aria-describedby="basic-addon1"
value="{{ old("discount") ? old("discount") : $course->discount }}"
    </div>
    <div class="mb-4">
        <p class="cf-text-medium text-center mb-2">Category</p>
        <select class="form-control cf-input cf-select"
name="category_id" placeholder="Category"
        aria-label="Author" aria-describedby="basic-
addon1">
            @foreach($categories as $category)
                <option value="{{ $category->id }}" @if($category-
>id == $course->category_id) selected @endif>{{ $category->name }}</option>
            @endforeach
        </select>
    </div>
    <div class="mb-4">
        <p class="cf-text-medium text-center mb-2">Difficulty</p>
        <select class="form-control cf-input cf-select"
name="difficulty_id" placeholder="Category"
        aria-label="Author" aria-describedby="basic-
addon1">
            @foreach($difficulties as $difficulty)
                <option value="{{ $difficulty->id }}"
@if($difficulty->id == $course->difficulty_id) selected @endif>{{ $difficulty->name
}}</option>
            @endforeach
        </select>
    </div>
    <div class="mb-3">
        <p class="text-center w-100 cf-text-medium mb-
2">Languages</p>
        <div class="d-flex justify-content-center flex-wrap">
            @foreach($languages as $language)
                <div class="d-flex align-items-center cf-checkbox
mr-3 mb-1">
                    <div>
                        <input type="checkbox" id="language{{
$loop->index }}" name="language_id[]"
                        value="{{ $language->id }}"
                        @if($course->languages-
>contains("id", $language->id))
                            checked
                        @endif
                    </div>
                    <i class="material-icons cf-
checked">check_box</i>
                    <i class="material-icons cf-
unchecked">check_box_outline_blank</i>
                </div>
                <label class="mb-0 ml-2"

```

```

for="language{{ $loop->index }}">{{
$language->name }}</label>
        </div>
    @endforeach
</div>
</div>
<div class="mb-3 mt-2">
    <p class="cf-text-medium text-center">Course cover</p>
    <input id="course_image_input" type="file" class="form-
control cf-input" name="image"
placeholder="Course cover" aria-label="Email" aria-
describedby="basic-addon1">
    
    </div>
    <div>
        <button type="submit" class="w-100 cf-button mt-3">Update
course</button>
    </div>
    @if($errors->any())
        @foreach($errors->all() as $error)
            <div class="error-msg my-2">
                {{ $error }}
            </div>
        @endforeach
    @endif
</form>
</div>
</div>
</div>
</div>
@endsection

```

Index.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Courses @endsection

@section("stylesheets")
    <link href="{{ asset('assets/css/courses.css') }}" rel="stylesheet"
type="text/css" />
@endsection
@section("scripts")
    <script src="{{ asset('assets/js/courses.js') }}"></script>
@endsection

@section("content")
<div class="container-fluid pb-4 pt-4 paddding">
    <div class="container paddding">
        <div class="row mx-0">
            <div class="col-md-8 animate-box" data-animate-effect="fadeInLeft">
                <div>
                    <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-
4">Courses</div>
                </div>
                <div class="course-container">

                </div>
                <div class="row">
                    <div id="pagination-container" class="col-12 text-center pb-4 pt-4
pl-sm-4 pr-sm-4 pl-0 pr-0 d-flex flex-wrap justify-content-center">
                        <a href="#" class="btn_mange_pagging mb-2 pagination-btn prev-
next-btn" data-inc="-1">
                            <i class="fa fa-long-arrow-left"></i><span class="d-lg-
inline-block d-none"> Previous </span>
                        </a>
                        <a href="#" class="btn_pagging mb-2 pagination-btn page-btn"
data-page="1">1</a>
                        <a href="#" class="btn_mange_pagging mb-2 pagination-btn prev-
next-btn" data-inc="1">
                            <span class="d-lg-inline-block d-none">Next</span> <i
class="fa fa-long-arrow-right"></i>&nbsp;&nbsp;&nbsp;
                        </a>
                    </div>
                </div>
                <div class="col-md-3 animate-box" data-animate-effect="fadeInRight">
                    <div>
                        <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-
4">Filters</div>
                        <div class="search">
                            <input id="course-search" type="text" name="search"
placeholder="Search courses..." class="py-1 px-3">
                        </div>
                        <div class="sub-filter">
                            <h4>Language</h4>
                            <ul>
                                @foreach($languages as $language)
                                    <li class="mb-2">
                                        <div class="d-flex align-items-center cf-
```

```

checkbox">
                                <div>
                                    <input class="language-filter"
name="language[]" type="checkbox" id="language{{ $language->id }}" value="{{
$language->id }}" />
                                    <i class="material-icons cf-
checked">check_box</i>
                                    <i class="material-icons cf-
unchecked">check_box_outline_blank</i>
                                </div>
                                <label class="mb-0 ml-2" for="language{{
$language->id }}">{{ $language->name }}</label>
                                </div>
                            </li>
                        @endforeach
                    </ul>
                </div>
                <div class="sub-filter mb-4">
                    <h4>Difficulty</h4>
                    <select id="difficulty-filter" name="difficulty" class="cf-
input cf-select p-2 w-100">
                        <option value="-1">(None)</option>
                        @foreach($difficulties as $difficulty)
                            <option value="{{ $difficulty->id }}">{{ $difficulty-
>name }}</option>
                        @endforeach
                    </select>
                </div>
                <div class="sub-filter">
                    <h4>Category</h4>
                    <select id="category-filter" name="category" class="cf-input
cf-select p-2 w-100">
                        <option value="-1">(None)</option>
                        @foreach($categories as $category)
                            <option value="{{ $category->id }}">{{ $category->name
}}</option>
                        @endforeach
                    </select>
                </div>
                <button id="apply-filters-btn" type="button" class="cf-input cf-
button w-100 my-4">Apply</button>
            </div>
            <div class="clearfix"></div>
        </div>
    </div>
</div>
<div class="container-fluid pb-4 pt-5">
    <div class="container animate-box">
        <div>
            <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-
4">Recommended courses</div>
            </div>
            <div class="owl-carousel owl-theme" id="slider2">
                @foreach($recommended_courses as $course)
                    <div class="item px-2">
                        <div class="fh5co_hover_news_img">

```

```

        <div class="fh5co_news_img"></div>
        <div>
            <a href="#" class="d-block fh5co_small_post_heading"><span
class="">{{ $course->name }}</span></a>
            <div class="c_g"><i class="fa fa-clock-o"></i> {{ $course-
>release_date }}</div>
        </div>
    </div>
</div>
    @endforeach
</div>
</div>
@endsection

```


Show.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course @endsection

@section("scripts")
    {{--Parallax--}}
    <script src="{{ asset('assets/js/jquery.stellar.min.js') }}"></script>
    <script>if (!navigator.userAgent.match(/Android|BlackBerry|iPhone|iPad|iPod|Opera
Mini|IEMobile/i)) {$(window).stellar();}</script>
@endsection

@section("body-classes") single @endsection

@section("content")
<div id="fh5co-title-box" >
    <div class="overlay" style="background-image: url('{{ asset('assets/images/course wallpaper - compressed.jpg') }}'); background-size:
cover; background-repeat: no-repeat;"></div>
    <div class="page-title">
        <span>{{ $course->release_date }}</span>
        <h2>{{ $course->name }}</h2>
    </div>
</div>
<div id="fh5co-single-content" class="container-fluid pb-4 pt-4 padding">
    <div class="container padding">
        <div class="row mx-0">
            <div class="col-md-8 animate-box my-5" data-animate-effect="fadeInLeft">
                <div>
                    
                </div>
                <div>
                    <h2 class="my-5">Description</h2>
                    <p>{{ $course->description }}</p>
                </div>

                <div class="d-flex align-items-center">
                    <h2 class="py-5">Price: </h2>
                    <p class="my-1 ml-3 pb-1" style="font-size:24px">{{ $course->price
}}$</p>
                </div>

                <div class="d-flex justify-content-center mt-2">
                    <button class="cf-input cf-button w-50">Add to cart</button>
                </div>
            </div>

            <div class="col-md-3 animate-box" data-animate-effect="fadeInRight">
                <div>
                    <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-
4">Tags</div>
                </div>
                <div class="clearfix"></div>
                <div class="fh5co_tags_all">
                    <a href="#" class="fh5co_tagg link-disabled">{{ $course->category-
>name }}</a>
                </div>
            </div>
        </div>
    </div>
</div>
```


Languages

Create.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course Create @endsection

@section("content")
    <div class="row my-5">
        <div class="col-12">
            <h1 class="text-center py-4">Create Language</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('languages.store') }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="name" placeholder="Name"
                                aria-label="Email" aria-describedby="basic-addon1">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-3">Add
Language</button>
                        </div>
                    </form>
                </div>
            </div>
        </div>
    </div>
@endsection
```

Edit.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course Create @endsection

@section("content")
    <div class="row my-5">
        <div class="col-12">
            <h1 class="text-center py-4">Create Language</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('languages.store') }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="name" placeholder="Name"
                                aria-label="Email" aria-describedby="basic-addon1">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-3">Add
Language</button>
                        </div>
                    </form>
                </div>
            </div>
        </div>
    </div>
</div>
@endsection
```

Routes

Web.php

```
<?php

use Illuminate\Support\Facades\Route;

Route::get('/', [\App\Http\Controllers\HomeController::class, "index"])->name("home");

//region Courses
Route::get('/courses', [\App\Http\Controllers\CourseController::class, "index"])->name("courses");
Route::get('/courses/{id}', [\App\Http\Controllers\CourseController::class, "show"])->name("courses.show")
    ->whereNumber("id");
Route::get('/courses/create', [\App\Http\Controllers\CourseController::class, "create"])->name("course.create");
Route::post('/courses/store', [\App\Http\Controllers\CourseController::class, "store"])->name("course.store");
Route::get('/courses/edit/{id}', [\App\Http\Controllers\CourseController::class, "edit"])->name("course.edit")
    ->whereNumber("id");
Route::post('/courses/update/{id}', [\App\Http\Controllers\CourseController::class, "update"])->name("course.update");
Route::delete('/courses/delete/{id}', [\App\Http\Controllers\CourseController::class, "destroy"])->name("course.delete")
    ->whereNumber("id");

Route::get('/courses/pagination', [\App\Http\Controllers\CourseController::class, "paginate"])->name("course.paginate");
//endregion

//region Authors
Route::get("/authors/create", [\App\Http\Controllers\AuthorController::class, "create"])->name("authors.create");
Route::post("/authors/store", [\App\Http\Controllers\AuthorController::class, "store"])->name("authors.store");
Route::get("/authors/edit/{id}", [\App\Http\Controllers\AuthorController::class, "edit"])->name("authors.edit")
    ->whereNumber("id");
Route::post("/authors/update/{id}", [\App\Http\Controllers\AuthorController::class, "update"])->name("authors.update")
    ->whereNumber("id");
Route::delete("/authors/delete/{id}", [\App\Http\Controllers\AuthorController::class, "destroy"])->name("authors.delete")
    ->whereNumber("id");
//endregion

//region Languages
Route::get("/languages/create", [\App\Http\Controllers\LanguageController::class, "create"])->name("languages.create");
Route::post("/languages/store", [\App\Http\Controllers\LanguageController::class, "store"])->name("languages.store");
Route::get("/languages/edit/{id}", [\App\Http\Controllers\LanguageController::class, "edit"])->name("languages.edit")
```

```

        ->whereNumber("id");
Route::post("/languages/update/{id}",
[\App\Http\Controllers\LanguageController::class, "update"])->name("languages.update")
        ->whereNumber("id");
Route::delete("/languages/delete/{id}",
[\App\Http\Controllers\LanguageController::class, "destroy"])-
>name("languages.delete")
        ->whereNumber("id");
//endregion

//region Categories
Route::get("/categories/create", [\App\Http\Controllers\CategoryController::class,
"create"])->name("categories.create");
Route::post("/categories/store", [\App\Http\Controllers\CategoryController::class,
"store"])->name("categories.store");
Route::get("/categories/edit/{id}", [\App\Http\Controllers\CategoryController::class,
"edit"])->name("categories.edit")
        ->whereNumber("id");
Route::post("/categories/update/{id}",
[\App\Http\Controllers\CategoryController::class, "update"])-
>name("categories.update")
        ->whereNumber("id");
Route::delete("/categories/delete/{id}",
[\App\Http\Controllers\CategoryController::class, "destroy"])-
>name("categories.delete")
        ->whereNumber("id");
//endregion

Route::get('/contact', [\App\Http\Controllers>ContactController::class, "index"])-
>name("contact");
Route::get('/about', [\App\Http\Controllers>AboutController::class, "index"])-
>name("about");
Route::get('/cart', [\App\Http\Controllers\CartController::class, "index"])-
>name("cart");

Route::get('/cart/getItems', [\App\Http\Controllers\CartController::class, "items"])-
>name("cart.items");
Route::post('/cart/save', [\App\Http\Controllers\CartController::class, "save"])-
>name("cart.save");

//region Account routes
Route::get("/login", [\App\Http\Controllers\AccountController::class, "loginPage"])-
>name("loginPage");
Route::post("/login", [\App\Http\Controllers\AccountController::class, "login"])-
>name("login");
Route::get("/register", [\App\Http\Controllers\AccountController::class,
"registerPage"])->name("registerPage");
Route::post("/register", [\App\Http\Controllers\AccountController::class,
"register"])->name("register");
Route::get("/logout", [\App\Http\Controllers\AccountController::class, "logout"])-
>name("logout");
//endregion

//region Admin
Route::middleware("admin")->group(function() {
    Route::get("/admin/content/courses",
[\App\Http\Controllers\AdminPanelController::class, "coursesPage"])-

```

```

>name("admin.coursesPage");
    Route::get("/admin/content/authors",
[\App\Http\Controllers\AdminPanelController::class, "authorsPage"])-
>name("admin.authorsPage");
    Route::get("/admin/content/languages",
[\App\Http\Controllers\AdminPanelController::class, "languagesPage"])-
>name("admin.languagesPage");
    Route::get("/admin/content/categories",
[\App\Http\Controllers\AdminPanelController::class, "categoriesPage"])-
>name("admin.categoriesPage");
    Route::get("/admin/content/difficulties",
[\App\Http\Controllers\AdminPanelController::class, "difficultiesPage"])-
>name("admin.difficultiesPage");
    Route::get("/admin/content/menus",
[\App\Http\Controllers\AdminPanelController::class, "menusPage"])-
>name("admin.menusPage");

    Route::get("/admin/logs", [\App\Http\Controllers\AdminPanelController::class,
"logsPage"])->name("admin.logsPage");
});
//endregion

Route::get("/403", [\App\Http\Controllers>StatusController::class, "forbidden"])-
>name("403");
Route::get("/documentation", function() {
    $headers = [
        'Content-Type' => 'application/pdf',
    ];
    $file = File::get(asset("assets/documentation.pdf"));
    return response()->download($file, 'documentation.pdf', $headers);
})->name("documentation");

Route::get("/test", [\App\Http\Controllers\TestController::class, "test"]);

```