

Visoka skola strukovnih studija za  
informacione i komunikacione  
tehnologije

# CodeFreakz

<https://code-freakz.herokuapp.com/>

Smer: Internet tehnologije

Modul: Web programiranje

Predmet: Web programiranje PHP 2

Andrej Zarkovski 22/18

# Sadržaj

1. Uvod.....	5
<b>Korišćeni programski jezici.....</b>	<b>5</b>
<b>Opis funkcionalnosti .....</b>	<b>5</b>
2. Organizacija.....	7
<b>Organizaciona šema.....</b>	<b>7</b>
<b>Mapa sajta.....</b>	<b>9</b>
<b>Opis stranica sajta .....</b>	<b>11</b>
Home.....	11
index.php (autorizovani korisnici) .....	11
movies.php .....	14
tvshows.php .....	16
contact.php .....	17
about.php .....	18
bookmarks.php .....	19
manage_content_library.php .....	20
login.php.....	23
register.php .....	24
403.php.....	25
3. Kodovi.....	26
Fajl organizacija .....	26
Controllers.....	31
AboutController .....	31
AccountController .....	31
AdminController .....	33
AuthorController.....	35
CategoryController .....	37
ContactController.....	39
CourseController.....	40
FrontendController.....	44
HomeController .....	45
LanguageController .....	46
StatusController .....	48
<b>Requests .....</b>	<b>49</b>

AuthorCreateRequest .....	49
AuthorUpdateRequest .....	50
CategoryCreateRequest .....	51
CategoryUpdateRequest .....	52
CourseCreateRequest .....	53
CourseEditRequest .....	55
LanguageCreateRequest .....	57
LanguageUpdateRequest .....	58
LoginRequest .....	59
RegisterRequest .....	60
Models .....	61
Author .....	61
Category .....	62
Course .....	63
CourseSection .....	64
Difficulty .....	65
Image .....	66
ImageType .....	67
Language .....	68
Menu .....	69
MenuItem .....	70
Role .....	71
User .....	72
Migrations .....	73
Seeders .....	74
AuthorSeeder .....	74
CategorySeeder .....	75
DifficultySeeder .....	76
ImageTypeSeeder .....	77
LanguageSeeder .....	78
RoleSeeder .....	79
<b>Views</b> .....	80
Common .....	80
Fixed .....	80
Admin .....	80
Footer.blade.php .....	80
Head.blade.php .....	81

Header.blade.php .....	82
Head.blade.php .....	83
Footer.blade.php .....	84
Header.blade.php .....	87
Layouts .....	89
Admin.blade.php .....	89
Layout.blade.php .....	90
Pages .....	91
403.blade.php .....	91
About.blade.php .....	92
Contact.blade.php .....	94
Home.blade.php .....	96
Login.blade.php .....	100
Register.blade.php .....	101
Admin .....	102
Logs.blade.php .....	102
Content .....	103
Authors.blade.php .....	103
Categories.blade.php .....	105
Courses.blade.php .....	107
Languages.blade.php .....	108
Authors .....	110
Create.blade.php .....	110
Edit.blade.php .....	111
Categories .....	112
Create.blade.php .....	112
Edit.blade.php .....	113
Courses .....	114
Create.blade.php .....	114
Edit.blade.php .....	117
Index.blade.php .....	120
Show.blade.php .....	123
Languages .....	125
Create.blade.php .....	125
Edit.blade.php .....	126
Routes .....	127
Web.php .....	127

# 1. Uvod

## Korišćeni programski jezici

Za izradu sajta korišćene su sledeće tehnologije:

- PHP (Xampp)
- Laravel
- Amazon S3
- Heroku
- ClearDB Heroku Add-On
- HTML 5
- CSS 3/ SASS
- Bootstrap
- JavaScript
- jQuery
- phpStorm
- Photoshop


## Opis funkcionalnosti


Sajt poseduje sledeće funkcionalnosti:

- Dinamicko učitavanje sadržaja iz baze i prikazivanje na stranicama
- Filtriranje proizvoda na stranici za kurseve
- Admin panel – dodavanje/izmena/brisanje sadržaja
- Logovanje/Registracija

## 2. Organizacija

### Organizaciona šema

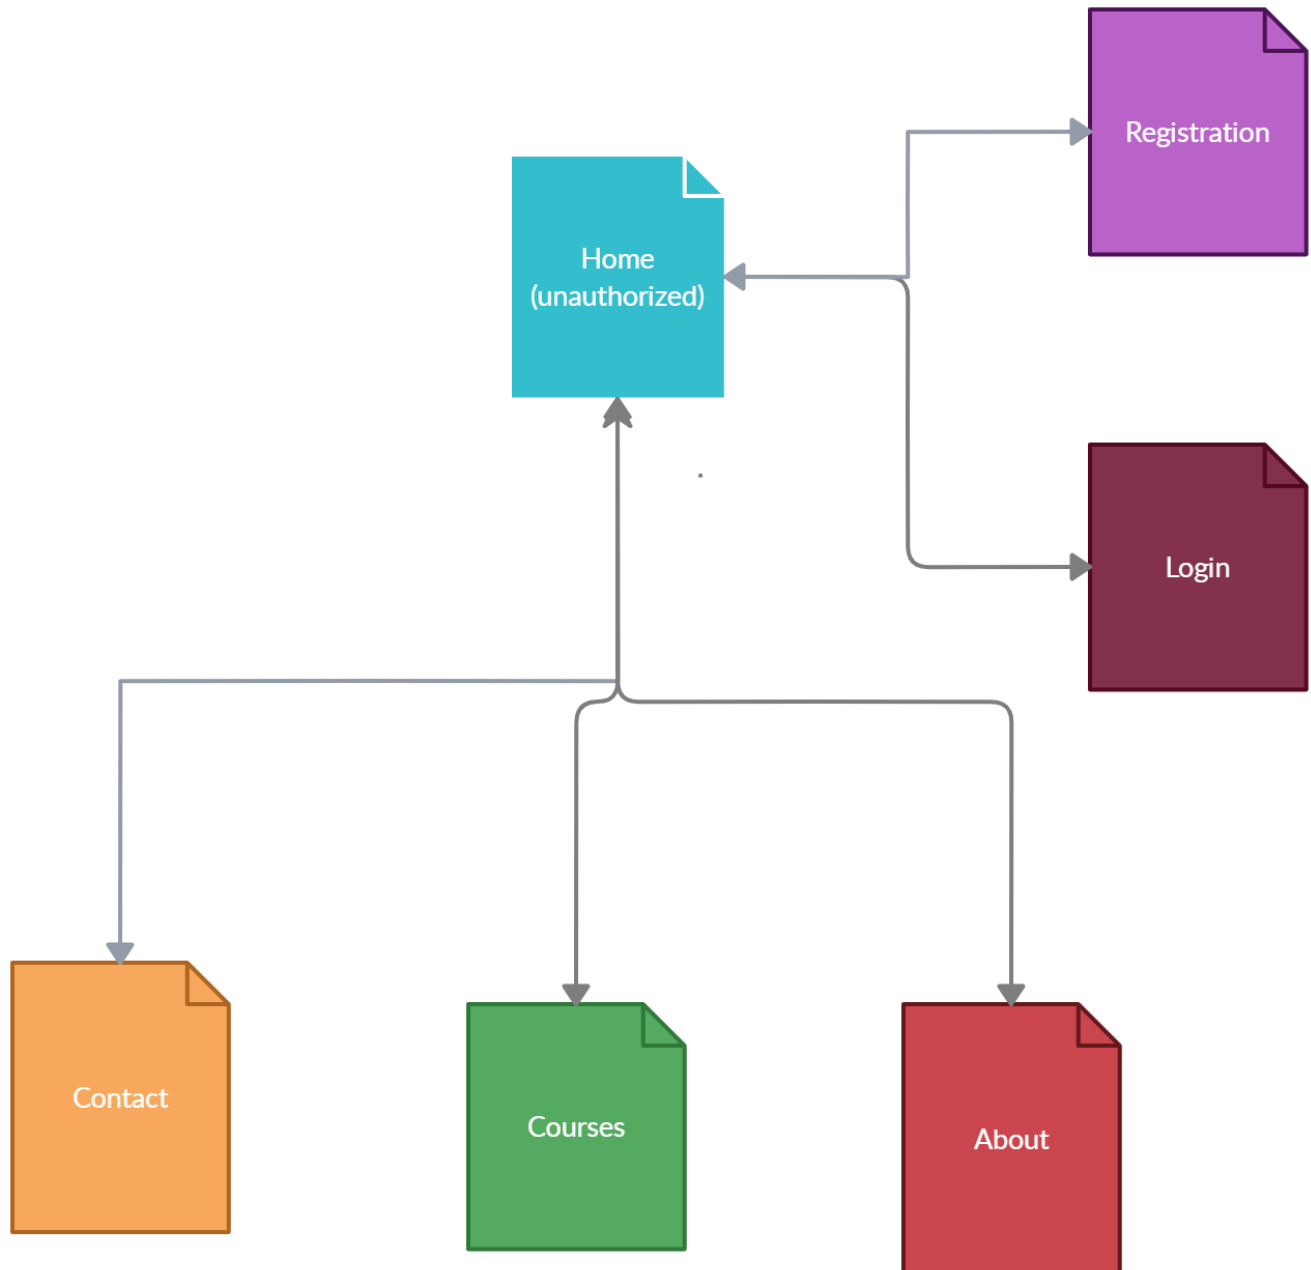

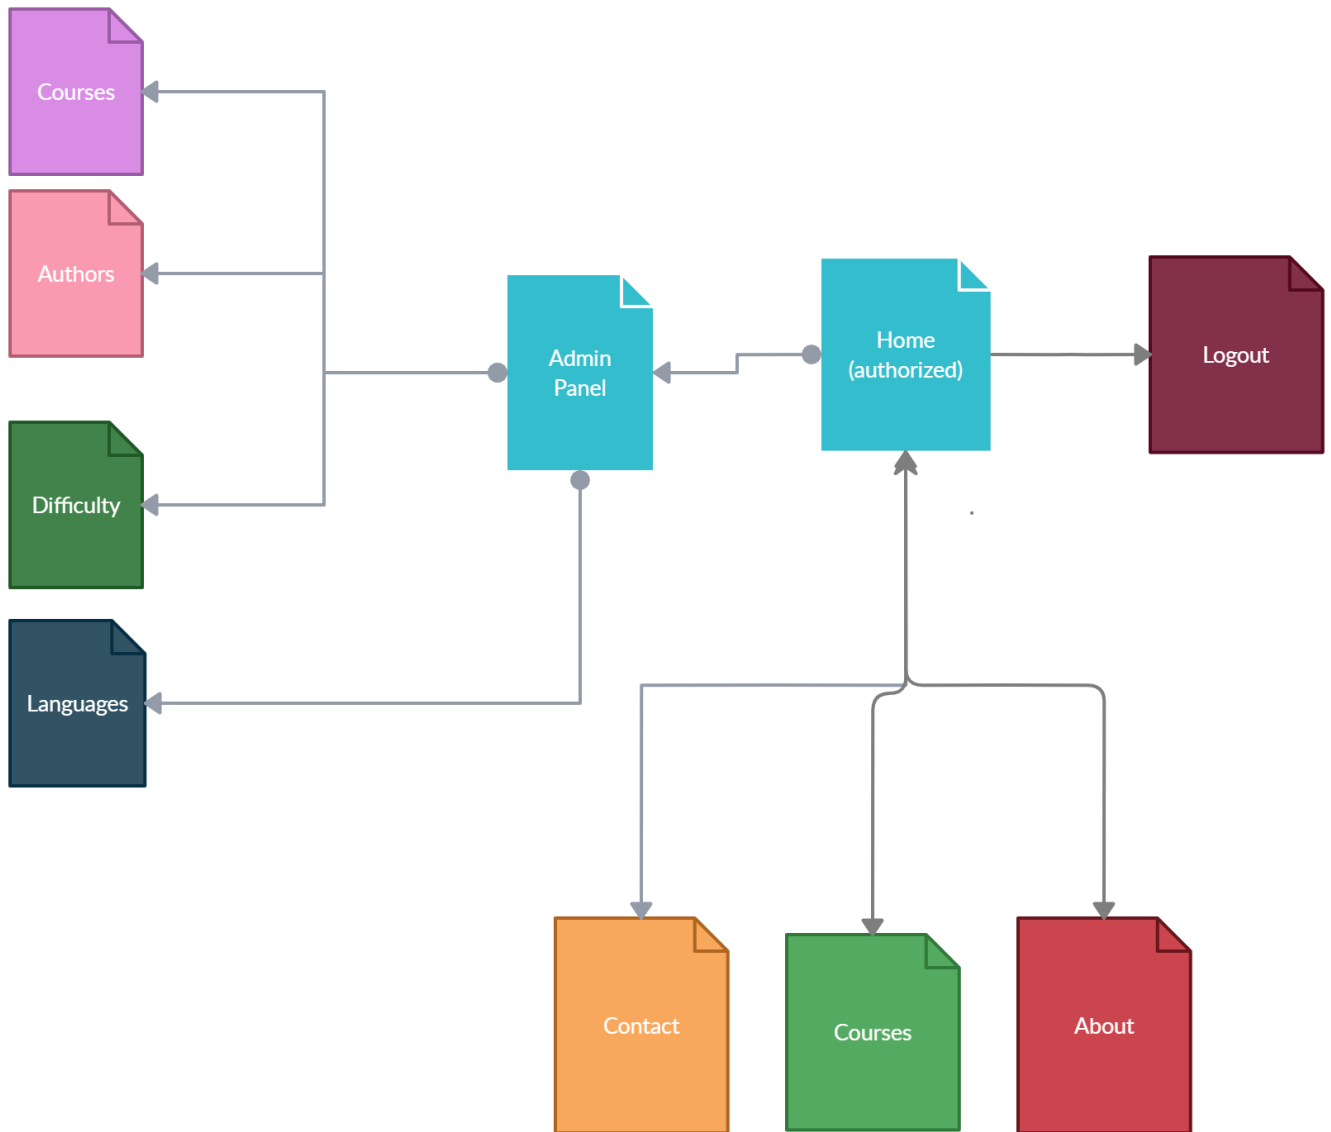



# Mapa sajta

```
<?xml version="1.0" encoding="UTF-8"?>
<urlset
  xmlns="http://www.sitemaps.org/schemas/sitemap/0.9"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://www.sitemaps.org/schemas/sitemap/0.9
    http://www.sitemaps.org/schemas/sitemap/0.9/sitemap.xsd">


  <url>
    <loc>https://code-freakz.herokuapp.com/</loc>
    <lastmod>2020-03-18</lastmod>
    <priority>1.00</priority>
    <changefreq>daily</changefreq>
  </url>
  <url>
    <loc>https://code-freakz.herokuapp.com/courses</loc>
    <lastmod>2020-03-18</lastmod>
    <priority>0.90</priority>
    <changefreq>daily</changefreq>
  </url>
  <url>
    <loc>https://code-freakz.herokuapp.com/contact</loc>
    <lastmod>2020-03-18</lastmod>
    <priority>0.90</priority>
    <changefreq>monthly</changefreq>
  </url>
  <url>
    <loc>https://code-freakz.herokuapp.com/about</loc>
    <lastmod>2019-02-18</lastmod>
    <priority>0.70</priority>
    <changefreq>yearly</changefreq>
  </url>
  <url>
    <loc>https://code-freakz.herokuapp.com/login</loc>
    <lastmod>2019-03-18</lastmod>
    <priority>0.50</priority>
    <changefreq>yearly</changefreq>
  </url>
  <url>
    <loc>https://code-freakz.herokuapp.com/register</loc>
    <lastmod>2019-03-18</lastmod>
    <priority>0.50</priority>
    <changefreq>yearly</changefreq>
```

```
</url>  
</urlset>
```

## Opis stranica sajta


[Home](#)

[index.php \(autorizovani korisnici\)](#)

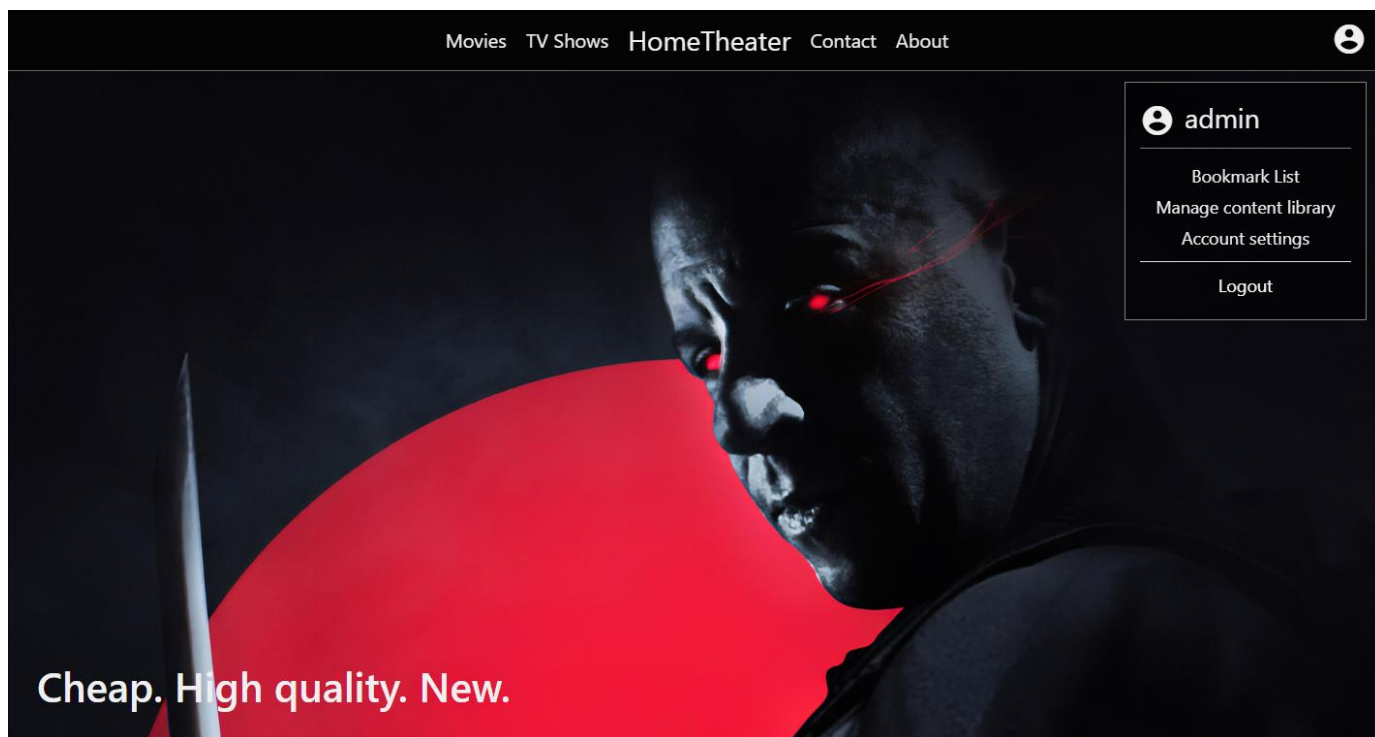


Dijalog za nalog kod autorizovanih korisnika ima linkove koji su prikazani na slici iznad, s tim sto samo admin nalozi imaju link »Manage content library«, dok ostali autorizovani korisnici nemaju.

P.S. Link »Account settings« je samo dekoracija/za popunu prostora menija.

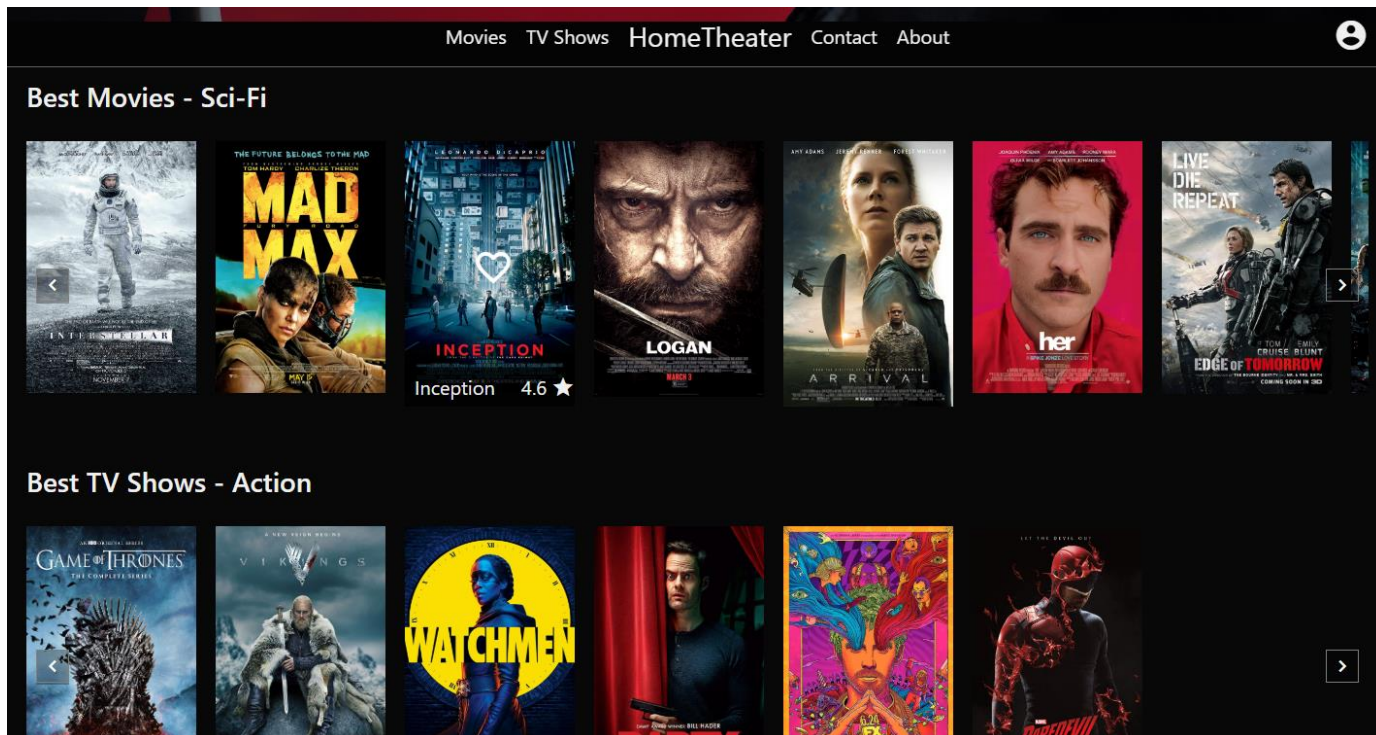

Na početnom delu stranice nalaze se dve sekcije sa filmovima i serijama sa nasumicno odabranim kategorijama.


Prelaskom misa preko bilo kojeg filma/serije pojavljuje se srce, cijim se klikom taj film/serija dodaje u boemark listu za ulogovanog korisnika.

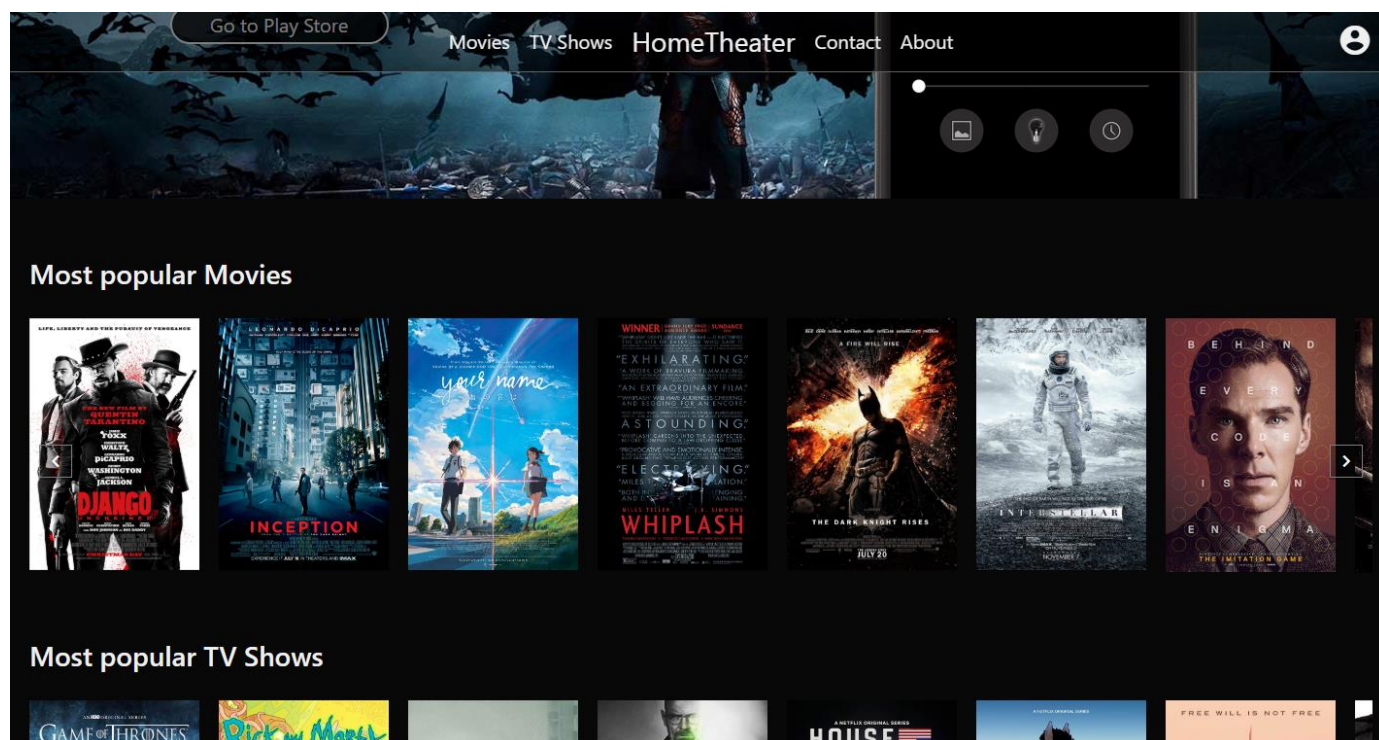

Sekcije »Most popular Movies« i »Most popular TV Shows« su ostale nepromenjene, i pomerene su na dno stranice, gde su pre bile pri vrhu kod neautorizovanih korisnika.


Sekcije »New releases«, »4K Movies«, sekcija za mobilnu aplikaciju, kao i futer ostali su nepromenjeni.

Sekcija za promo kod je sakrivena kod autorizovanih korisnika.

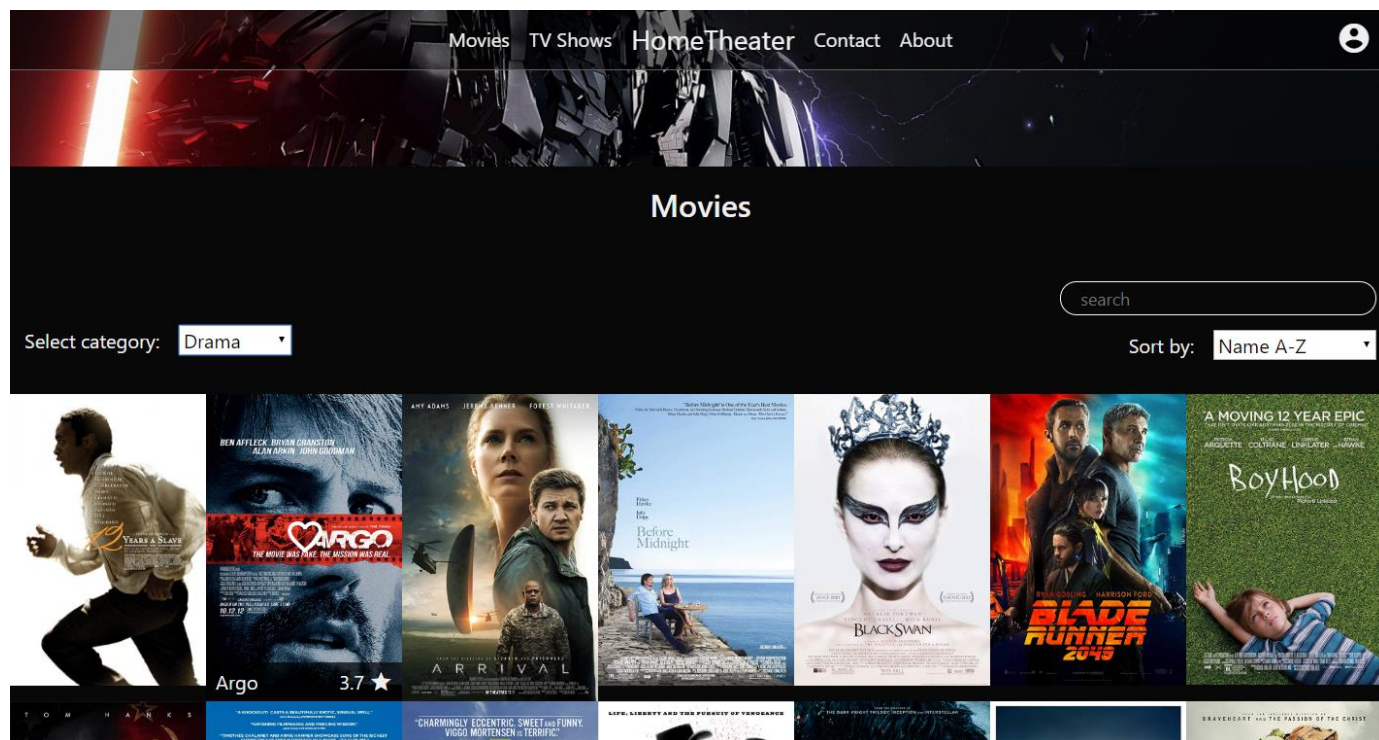


Stranica za prikaz svih filmova. Sadrzi filter za kategoriju filma, dropdown za sortiranje prikazanih filmova, kao i tekstualno polje sa pretrazivanje filmova po naslovu.



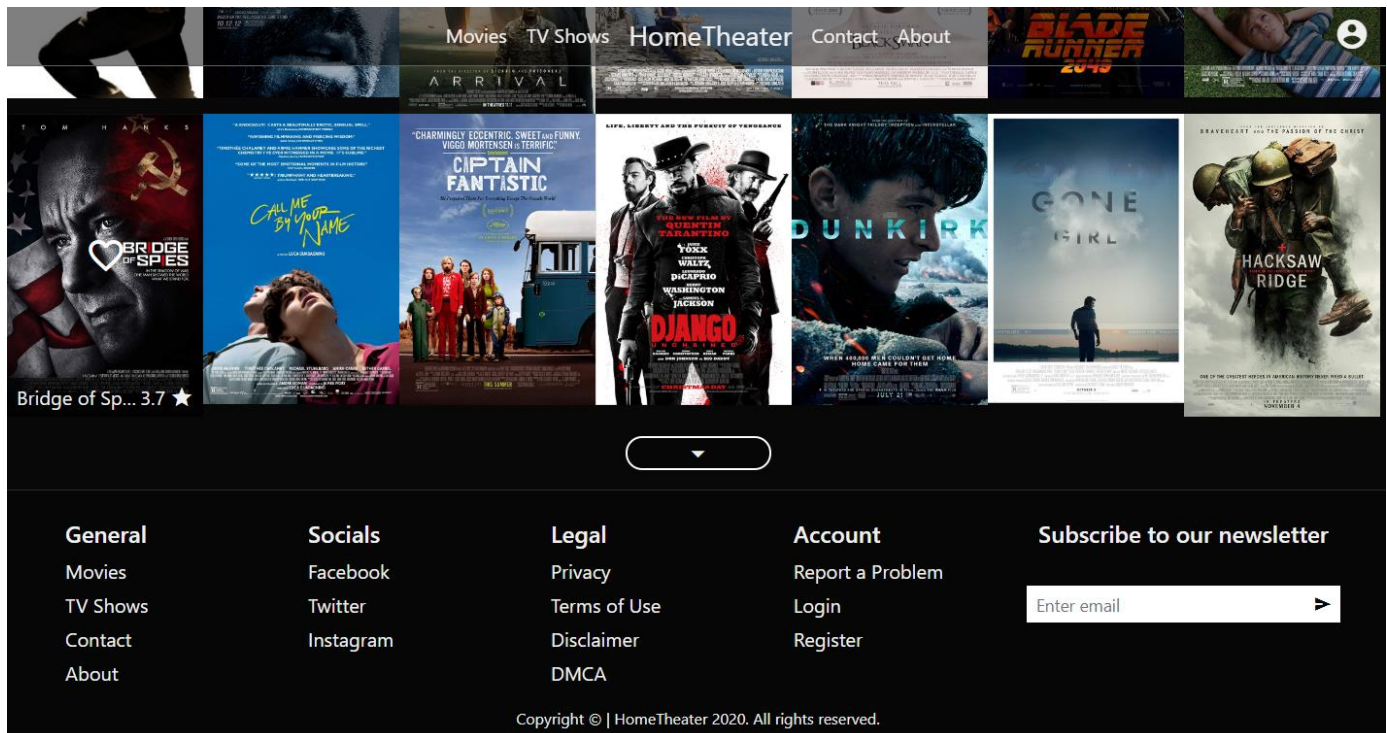


Pri dnu liste nalazi se dugme za učitavanje još filmova po izabranom filteru. Ukoliko nema dodatnih filmova za učitavanje, dugme se sakriva.

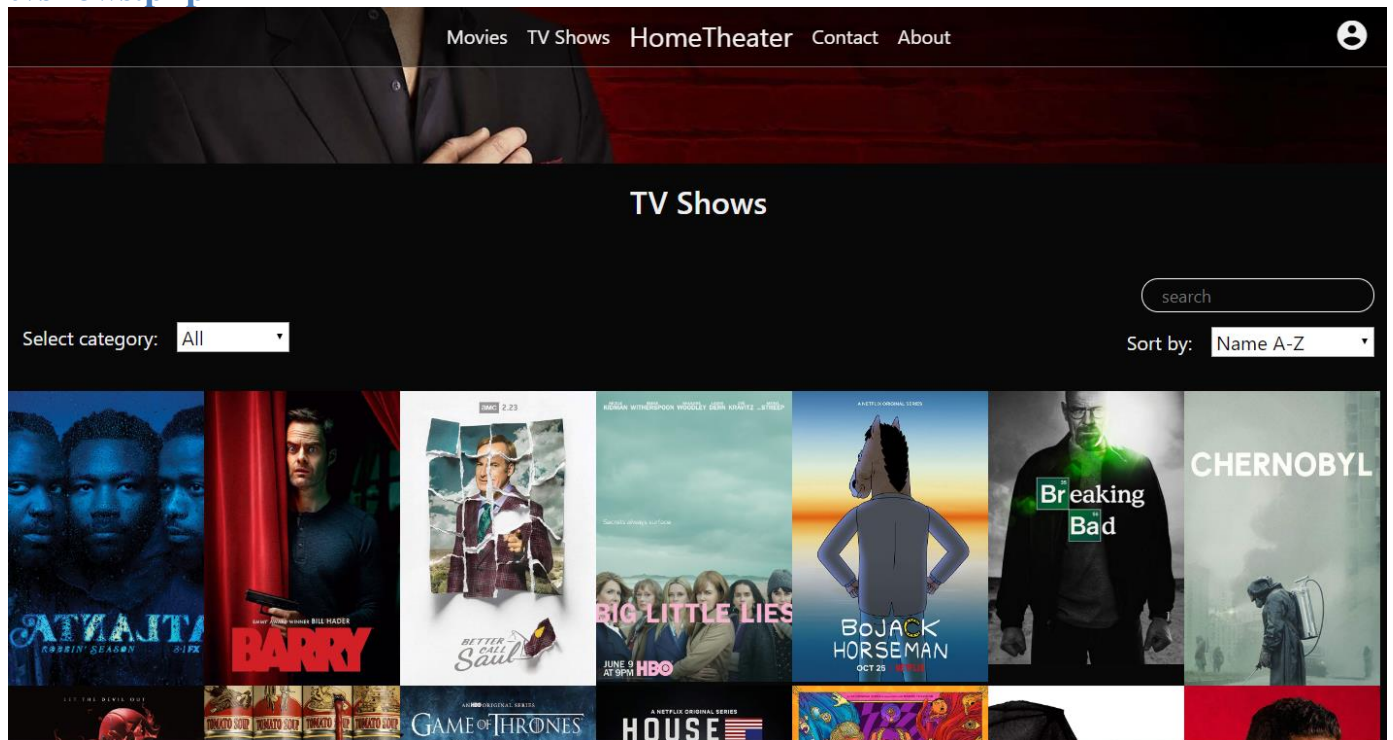

Stranica za prikaz svih serija je po funkcionalnosti identicna kao i stranica za prikaz filmova.



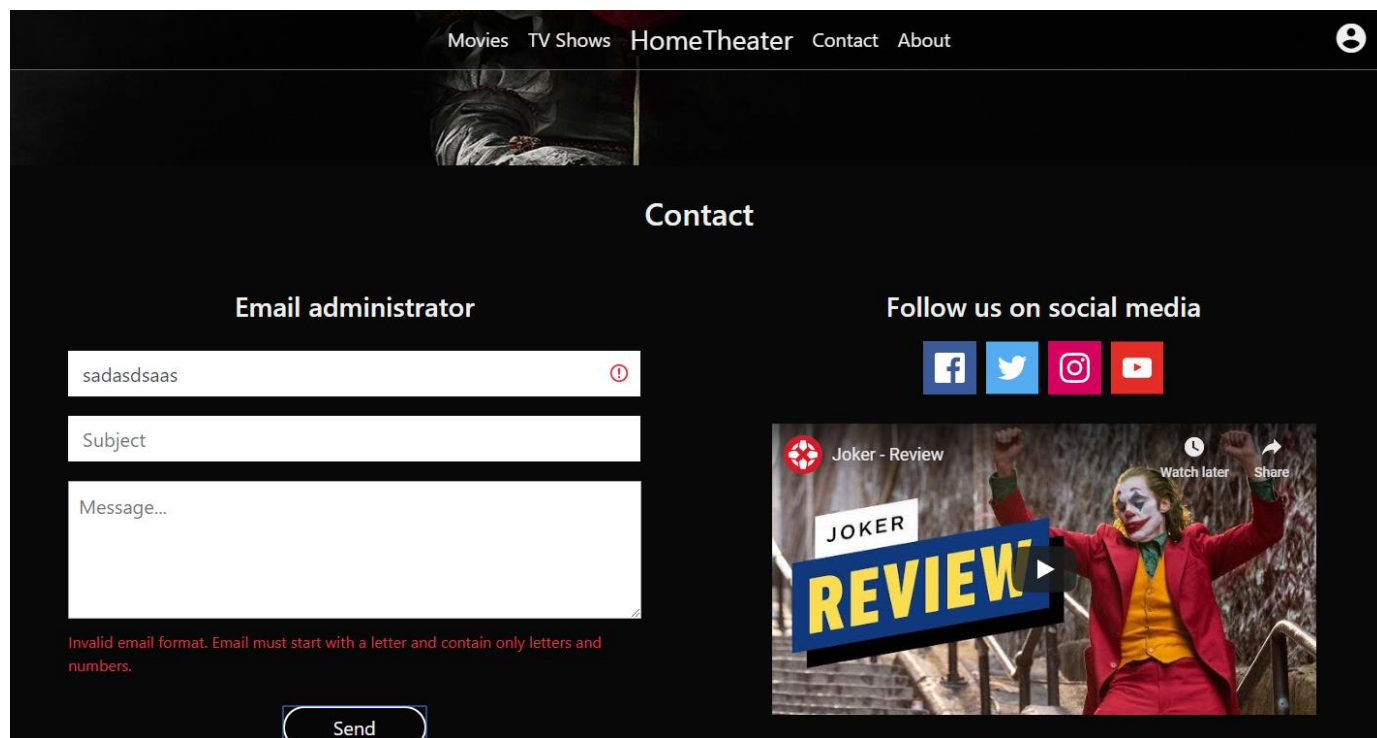

Movies TV Shows HomeTheater Contact About

## Contact

### Email administrator

sadasdsaas ⓘ

Subject

Message...

Invalid email format. Email must start with a letter and contain only letters and numbers.

Send

### Follow us on social media

Facebook Twitter Instagram YouTube

Joker - Review


Watch later Share

JOKER

REVIEW


Na stranici za kontakt sa leve strane nalazi se forma za slanje mail-a administratoru. Unosom ispravnih podataka prikazuje se poruka da je mejl uspesno poslat. A pri neispravnom unosu, ispisuje se poruka crvenim slovima, kao na slici iznad, o tipu greske.

Sa desne strane nalaze se linkovi ka socijalnim mrezama, kao i video klip o najnovijoj recenziji na youtube kanalu.

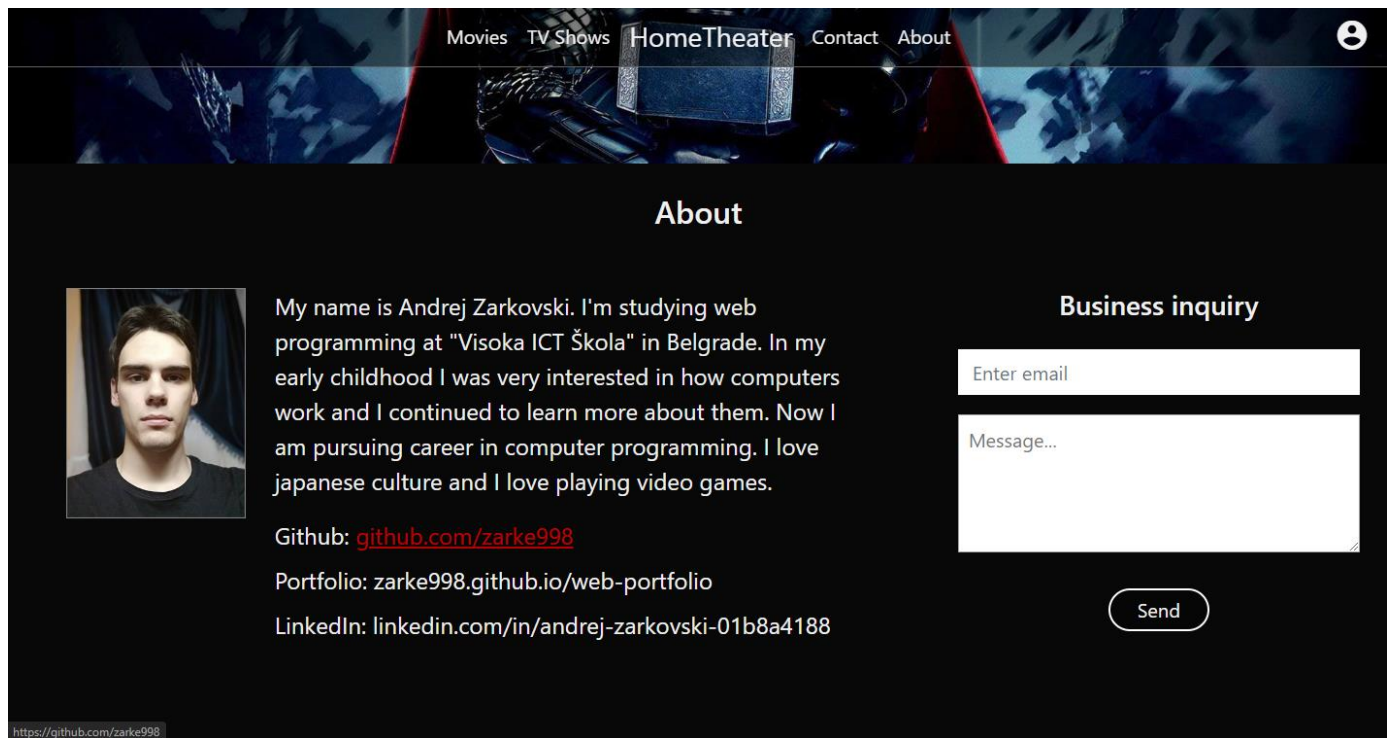

Na stranici o autoru sa leve strane nalazi slika, kratka izjava autora i linkovi ka bitnim stranicama koje se ticu autora.

A sa desne strane nalazi se forma za slanje biznis mejla autoru. Ponasanje forme je identicno kao na stranici za kontakt.

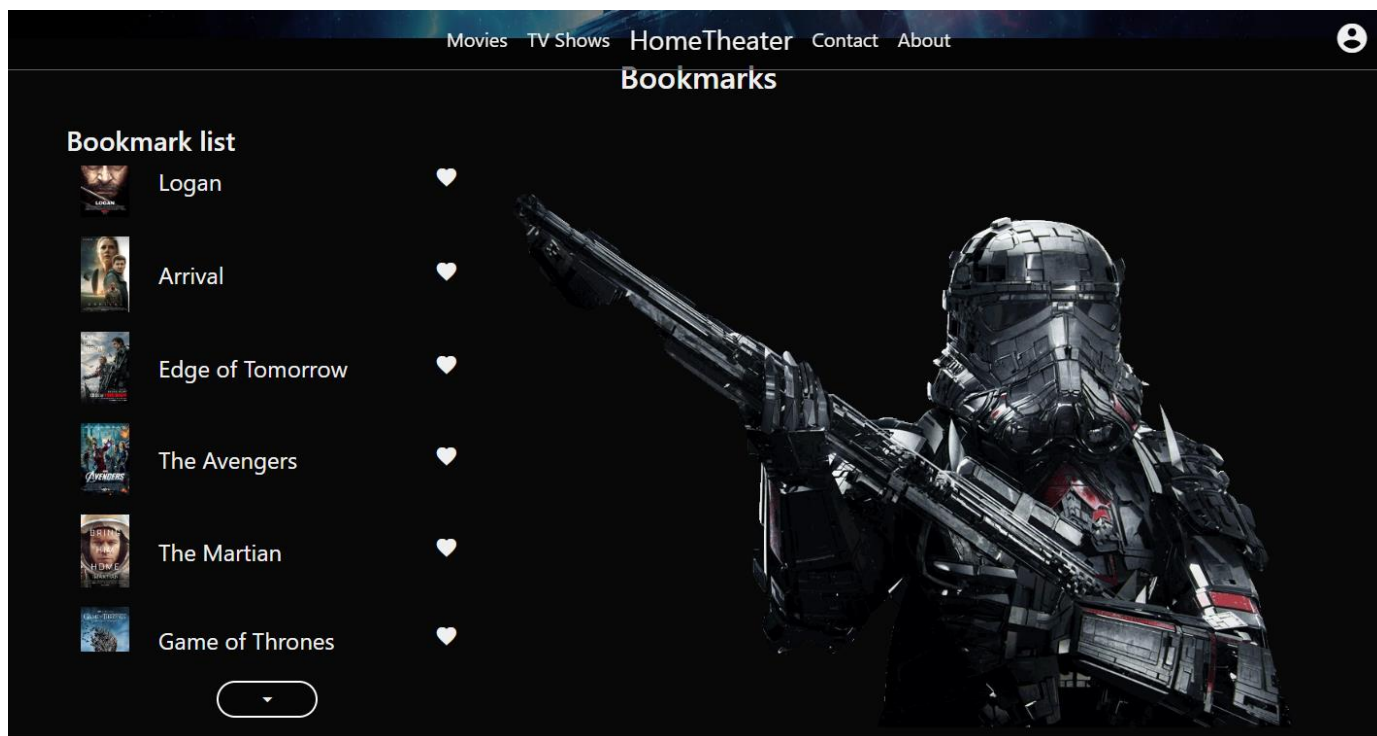

Stranica »Bookmarks« namenjena je samo autorizovanim korisnicima. Na stranici se nalazi lista zapamcenih filmova/serija od strane korisnika. Pored svakog filma/serije nalazi se srce, cijim se klikom film/serija brise iz bookmark liste.


Pri dnu liste se nalazi dugme za učitavanje jos zapamcenih filmova/serija. Ukoliko nema dodatnih filmova/serija dugme se sakriva.

Na sredini stranice nalazi se lista sa sadržajem sa osnovnim informacijama o sadržaju (naslov, godina izdavanja itd.).

Na vrhu liste nalazi se filter sa tip sadržaja, kao i tekstualno polje za pretragu sadržaja po naslovu.


Na dnu liste nalazi se dugme za učitavanje dodatnog sadržaja.

Klikom na dugme u donjem desnom uglu otvara se dijalog za dodavanje novog sadržaja u biblioteku kao na slici ispod.

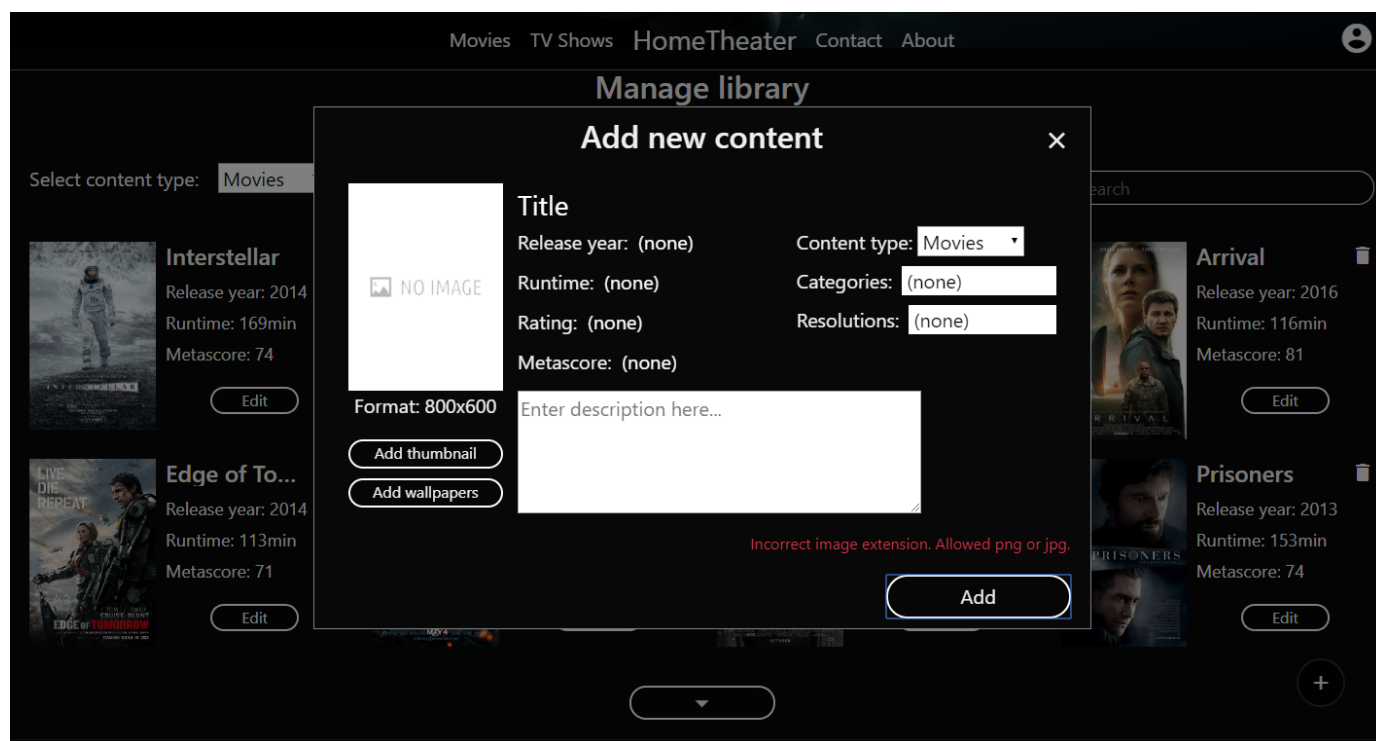

Na dijalogu se nalaze polja za ubacivanje slika, polja za unos osnovnih informacija o sadržaju, kao i drop down liste za odabir različitih kategorija sadržaja (tip sadržaja, podkategorija, rezolucija).


Klikom na dugme »Add« sadržaj se ubacuje u bazu podataka. U slučaju neispravnog formata nekih od polja za unos, ispisuje se greka iznad dugmeta kao na slici iznad.

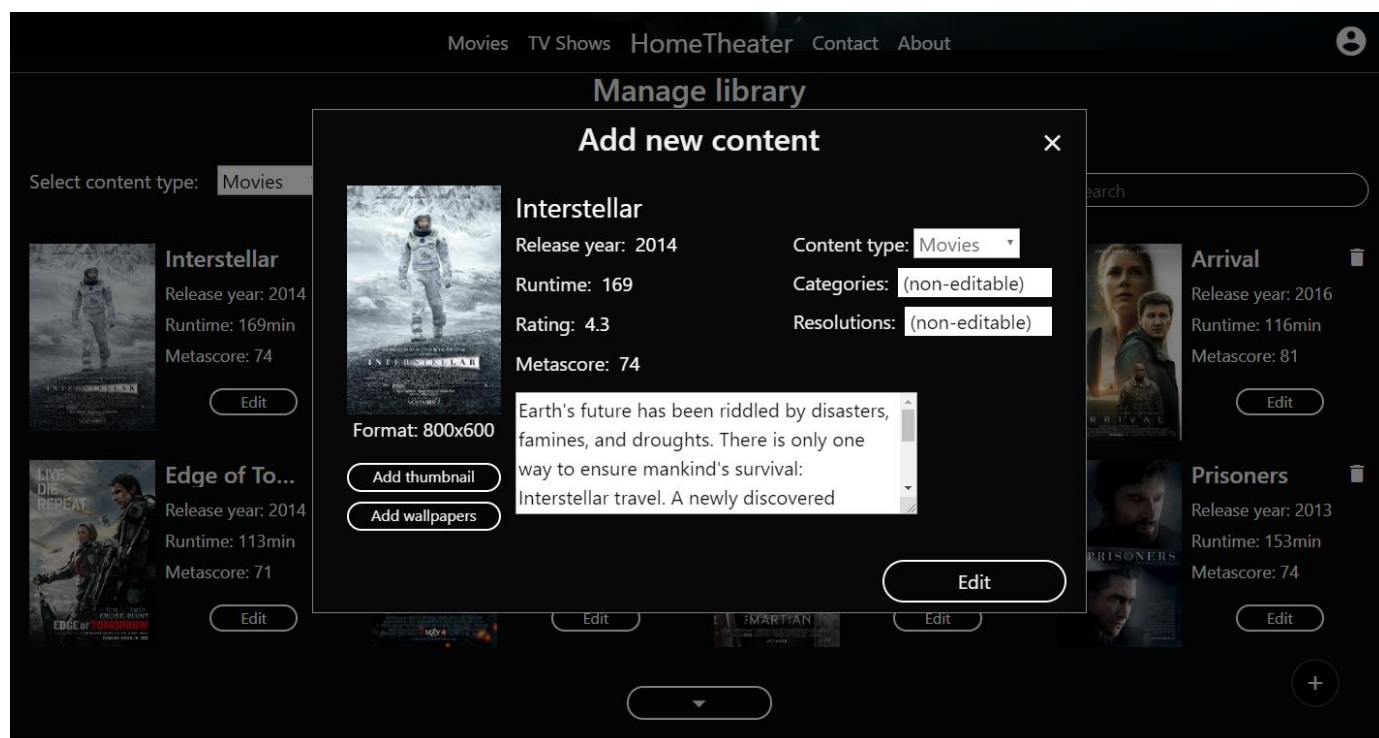

Klikom da dugme »Edit« kod stavke liste otvara se dijalog za izmenu sadržaja pri čemu je omogućeno menjati samo osnovnih informacija o sadržaju: titl, godina izdavanja itd. (red u sredini).

Klikom ikonicu kante pored stavke u listi sadržaj se briše iz baze podataka.



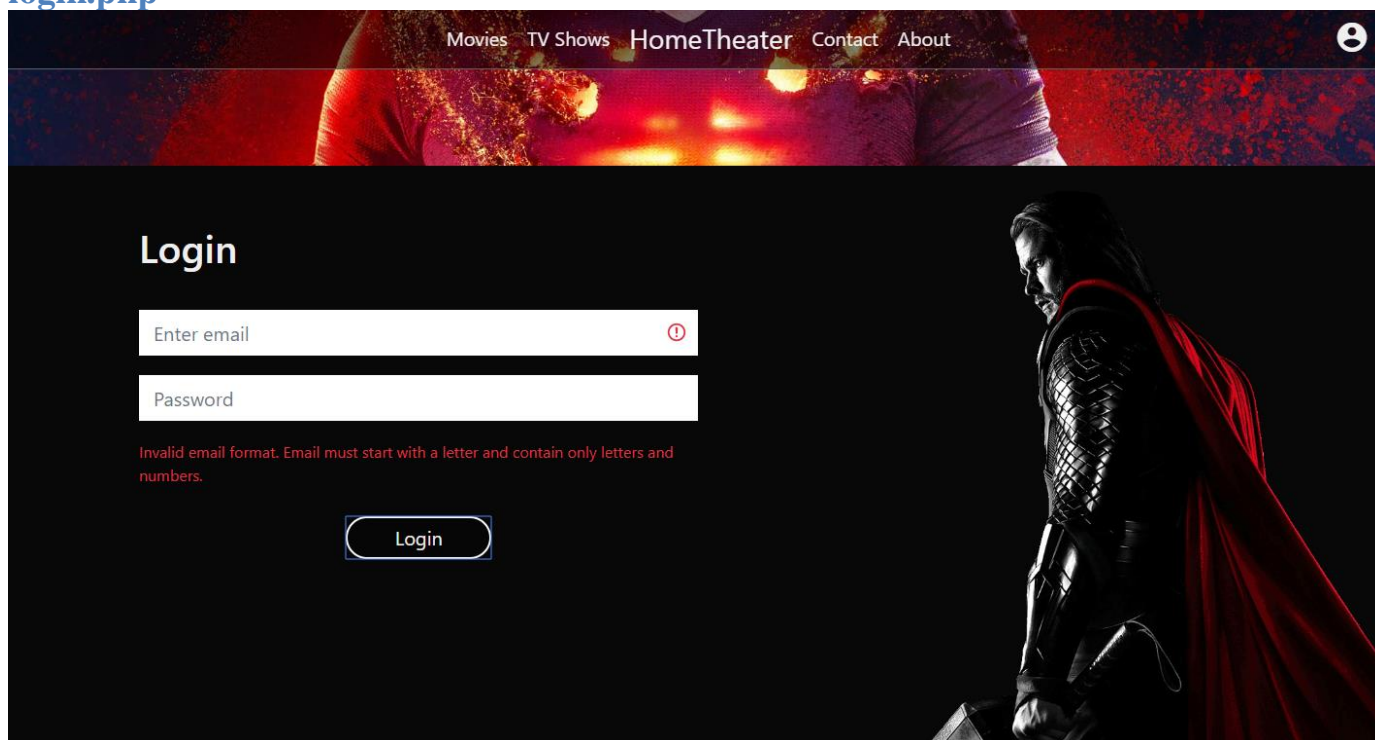


The screenshot shows a web page titled 'login.php'. At the top, there is a navigation bar with links: 'Movies', 'TV Shows', 'HomeTheater', 'Contact', and 'About'. A user profile icon is visible in the top right corner. The background of the page features a dramatic image of a superhero in a red cape. The main content area is dark and contains a 'Login' form. The form has two input fields: 'Enter email' and 'Password'. Below the 'Enter email' field, there is a red error message: 'Invalid email format. Email must start with a letter and contain only letters and numbers.' Below the password field, there is a 'Login' button.

Movies TV Shows HomeTheater Contact About

## Login

Enter email 


Password

Invalid email format. Email must start with a letter and contain only letters and numbers.

Login

Stranica za logovanje autorizovanih korisnika.

Pri neuspelom logovanju ispisuje se poruka iznad dugmeta »Login« o tipu greske.

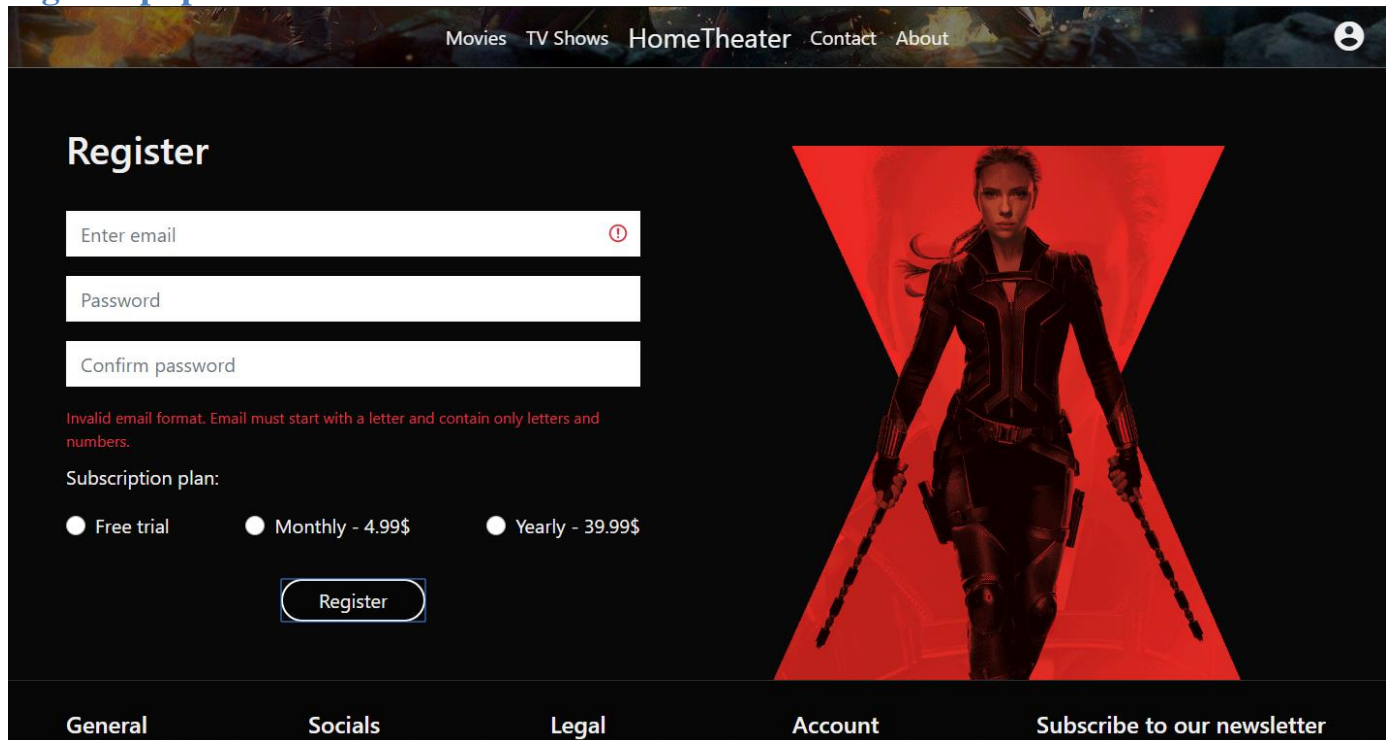

Movies TV Shows HomeTheater Contact About

## Register

Enter email !

Password

Confirm password

Invalid email format. Email must start with a letter and contain only letters and numbers.

Subscription plan:

☐ Free trial ☐ Monthly - 4.99\$ ☐ Yearly - 39.99\$

Register

General Socials Legal Account Subscribe to our newsletter

Stranica za registraciju korisnika.

Pri neuspeloj registraciji ispisuje se poruka ispod tekstualnih polja o tipu greske.



## 403 - Forbidden Access


Ups... It seems that you don't have the rights to be on this page.




Stranica koja se prikazuje pri neautorizovanom pristupu stranicama *bookmarks.php* i *manage\_content\_library.php*.

### 3. Kodovi


#### Fajl organizacija

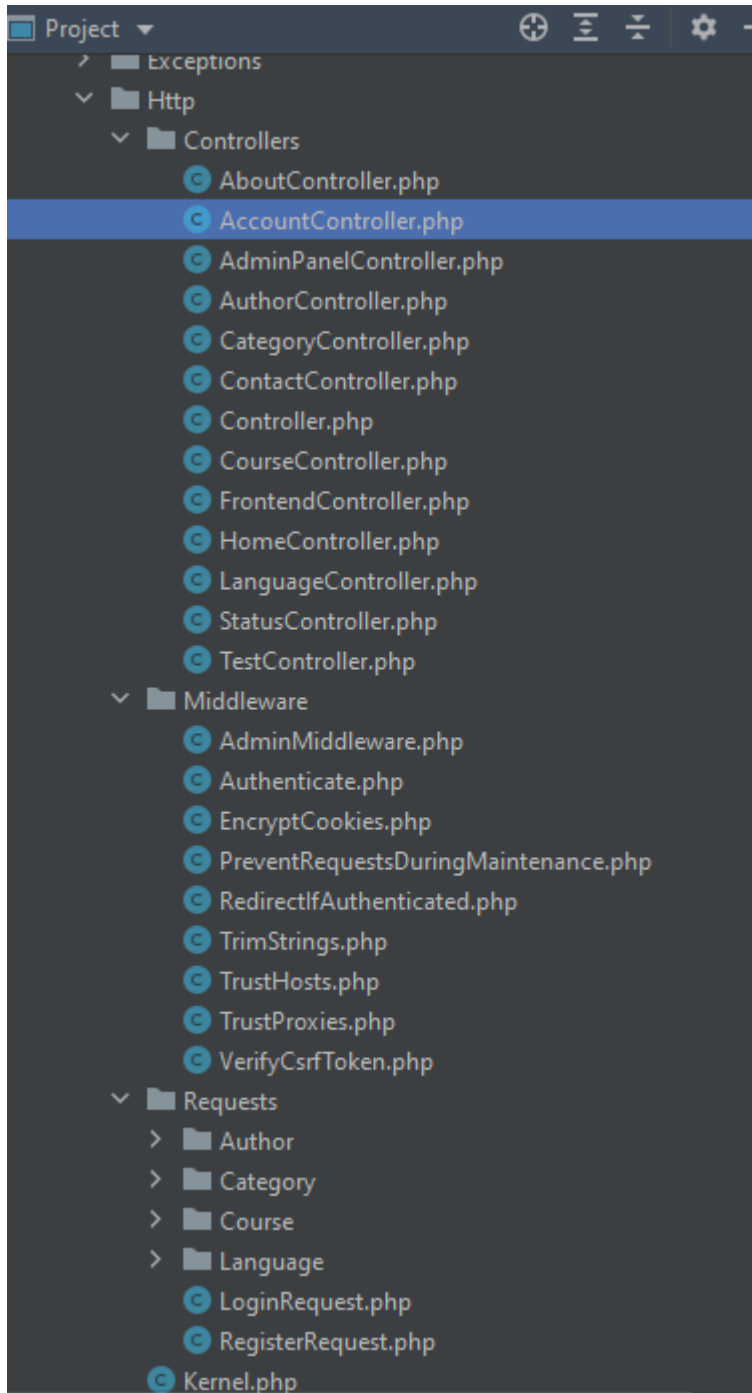


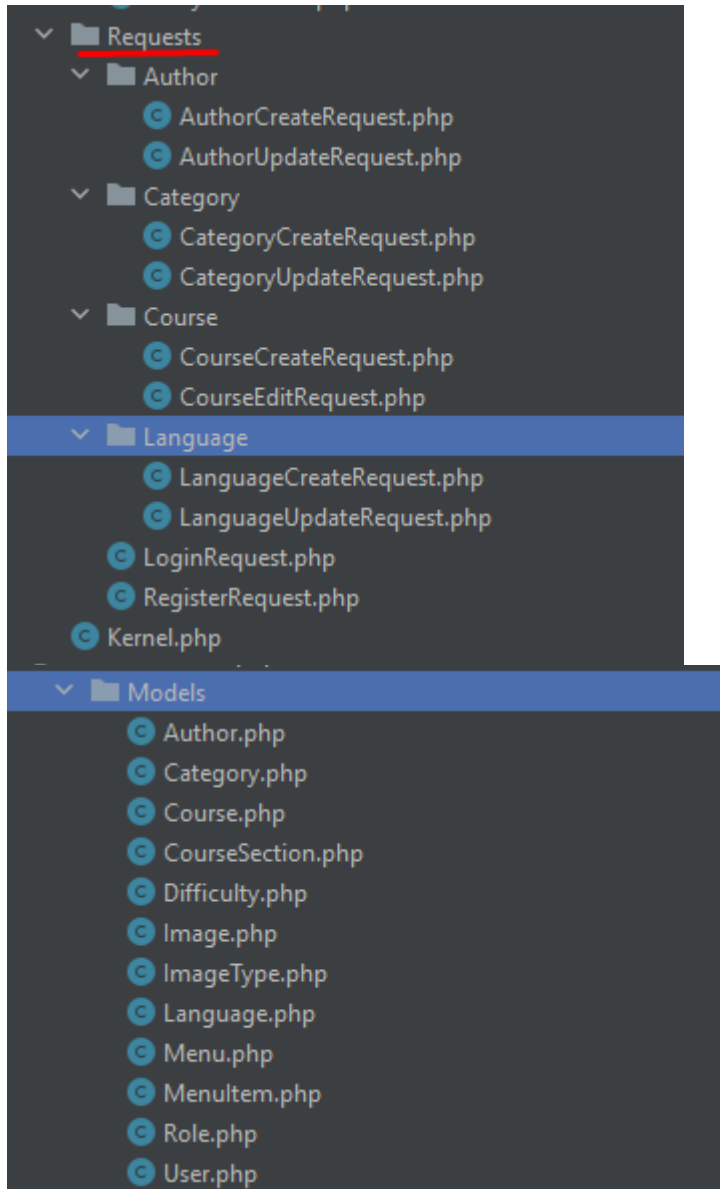

▼ migrations

- 141012000000\_create\_users\_table.php
- 141012100000\_create\_password\_resets\_table.php
- 190819000000\_create\_failed\_jobs\_table.php
- 210313095636\_create\_cf\_users\_table.php
- 210313100142\_create\_courses\_table.php
- 210313102251\_create\_authors\_table.php
- 210313103755\_create\_roles\_table.php
- 210313104122\_create\_course\_sections\_table.php
- 210313105025\_create\_languages\_table.php
- 210313105132\_create\_categories\_table.php
- 210313105344\_create\_difficulties\_table.php
- 210313110411\_add\_image\_cols\_to\_courses\_table.php
- 210313113745\_add\_is\_confirmed\_and\_activation\_key\_cols\_to\_users\_t
- 210313120528\_delete\_cf\_users\_table.php
- 210313120734\_create\_role\_user\_table.php
- 210313120957\_create\_menus\_table.php
- 210313121147\_create\_menu\_items\_table.php
- 210313132829\_create\_image\_types\_table.php
- 210313133133\_create\_images\_table.php
- 210313133353\_remove\_image\_cols\_from\_courses.php
- 210313134219\_add\_relationships\_in\_courses\_table.php
- 210313142041\_add\_relation\_to\_courses\_in\_images.php
- 210314141817\_add\_default\_is\_confirmed\_val\_in\_users.php
- 210314175627\_delete\_role\_user\_table.php
- 210314175900\_add\_role\_relationship\_in\_users\_table.php
- 210315105633\_add\_parent\_id\_in\_menu\_items.php
- 210315201456\_delete\_course\_sections\_table.php
- 210315213348\_create\_language\_course\_table.php
- 210315223342\_remove\_image\_types\_table.php
- 210315231456\_rename\_language\_course\_table.php
- 210315234314\_remove\_language\_id\_from\_courses.php
- 210316001045\_change\_description\_col\_to\_text\_in\_courses.php
- 210316220834\_add\_discount\_col\_to\_courses.php
- 210318211217\_add\_relative\_src\_to\_images.php

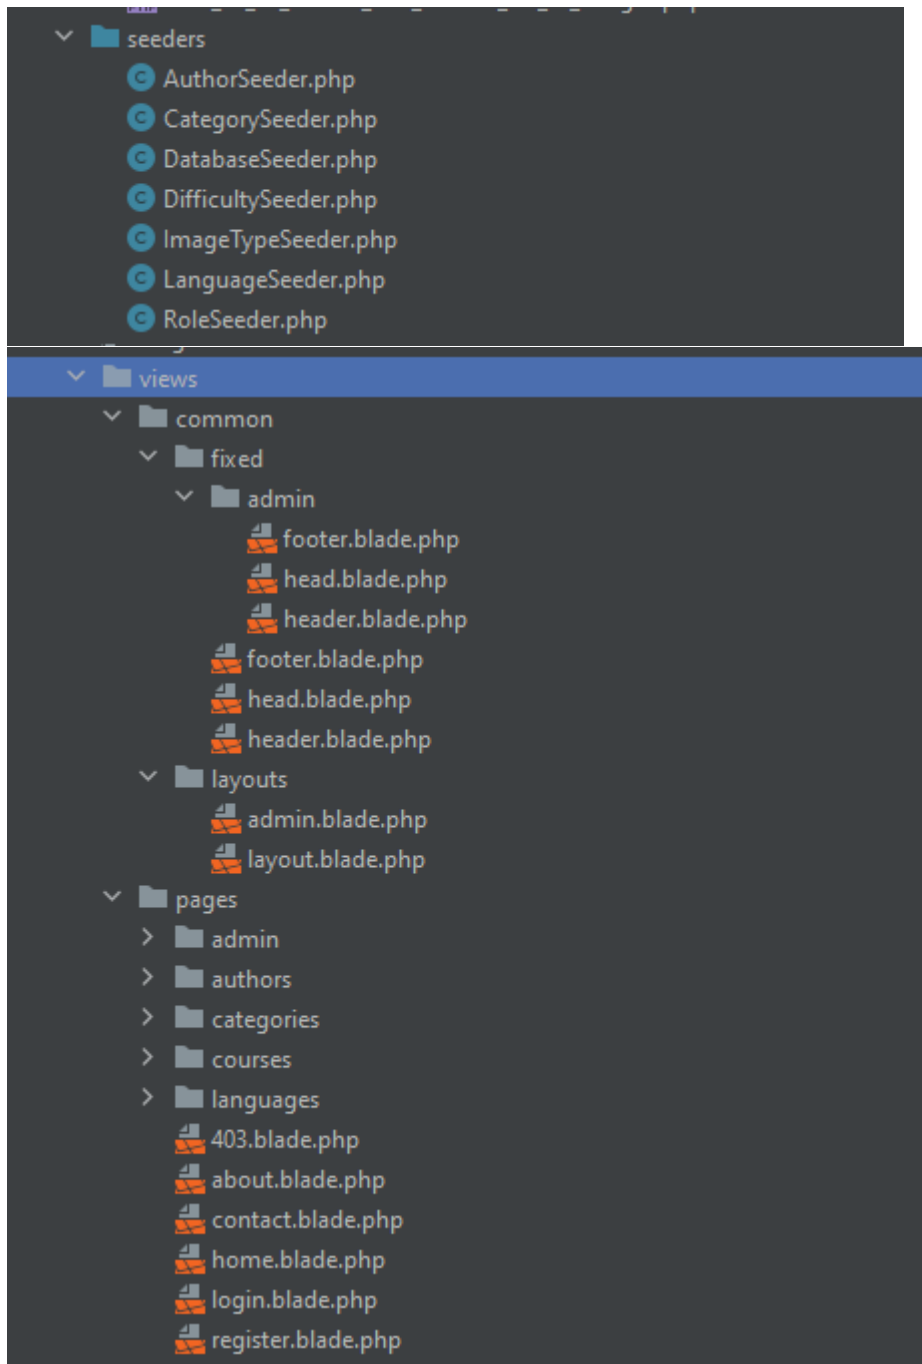

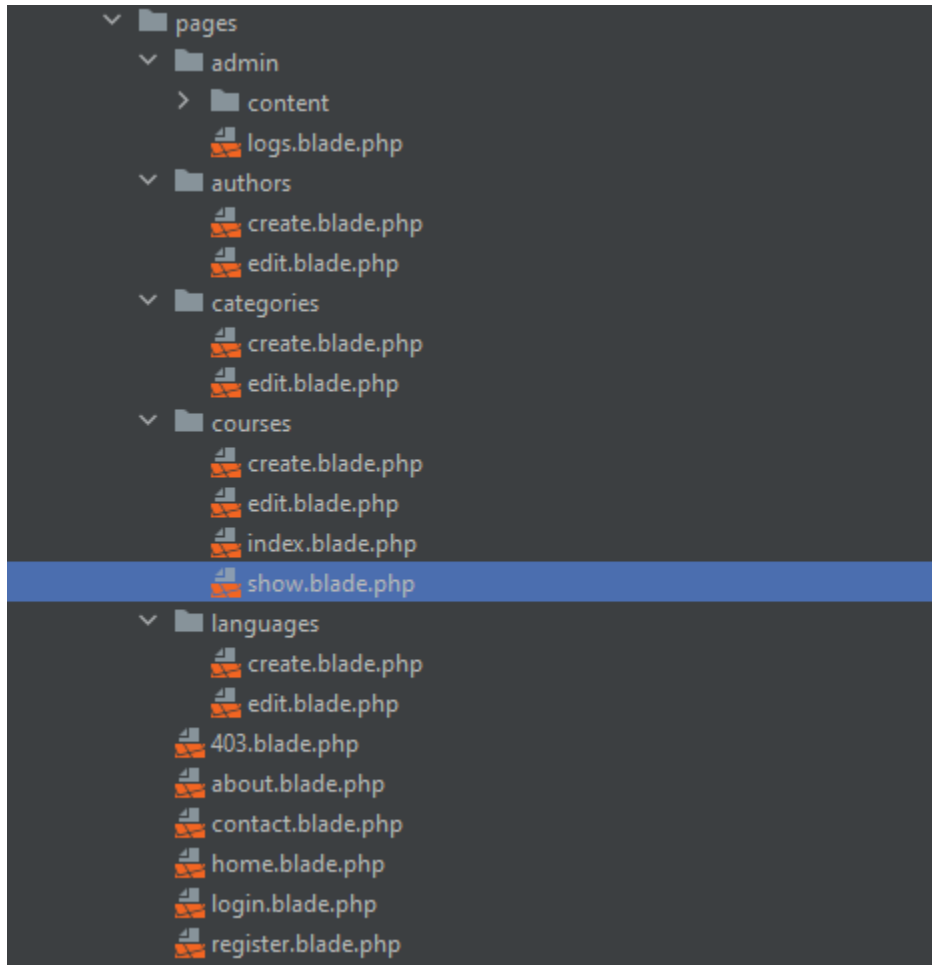

# Controllers

## AboutController

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;

class AboutController extends FrontendController
{
    public function index() {
        return view("pages.about", $this->data);
    }
}
```

## AccountController

```
<?php

namespace App\Http\Controllers;

use App\Http\Requests\RegisterRequest;
use App\Http\Requests\LoginRequest;
use Illuminate\Http\Request;
use App\Models\User;
use App\Models\Role;

class AccountController extends FrontendController
{
    public function loginPage() {
        return view("pages.login", $this->data);
    }
    public function login(LoginRequest $request) {
        $user = User::with("role")->where("email", "=", $request->email)->first();

        if(!password_verify($request->password, $user->password)) {
            return redirect()->route("loginPage")->with("loginErrorMsg", "Password incorrect.")->withInput();
        }
        else {
            session()->put("user", $user);
            return redirect()->route("home");
        }
    }
    public function registerPage() {
        return view("pages.register", $this->data);
    }
    public function register(RegisterRequest $request) {
        $user = new User($request->except("password"));
        $user->password = password_hash($request->password, PASSWORD_DEFAULT);
        $user->activation_key = $this->generateActivationKey(64);
    }
}
```

```

        $userRoleId = Role::all()->where("name","=", "user")->first()->id;
        $user->role_id = $userRoleId;

        $user->save();

        return redirect()->route("loginPage")->with("registrationSuccessfullMsg",
"Registration successfull.");
    }

    public function logout() {
        session()->remove("user");
        return redirect()->route("home");
    }

    private function generateActivationKey($length) {
        $chars = '0123456789abcdefghijklmnopqrstuvwxyzABCDEFGHIJKLMNOPQRSTUVWXYZ';

        $key = "";

        for($i = 0; $i < $length; $i++){
            $key.= $chars[rand(0, strlen($chars) - 1)];
        }

        return $key;
    }
}

```



## AdminController

```
<?php

namespace App\Http\Controllers;

use App\Models\Author;
use App\Models\Category;
use App\Models\Course;
use App\Models\Language;
use App\Models\Menu;
use App\Models\MenuItem;
use Illuminate\Http\Request;

class AdminPanelController extends Controller
{
    private $data = [];

    public function __construct()
    {
        $menu = Menu::with("items")->where("name","=", "admin_panel")->first();
        $menuGrouped = $this->groupMenuItemsByParent($menu->items);

        $this->data["menu_grouped"] = $menuGrouped;
    }

    public function coursesPage() {
        $courses = Course::with("author")->simplePaginate(8);
        $this->data["courses"] = $courses;

        return view("pages.admin.content.courses", $this->data);
    }

    public function authorsPage() {
        $authors = Author::all();
        $this->data["authors"] = $authors;

        return view("pages.admin.content.authors", $this->data);
    }

    public function languagesPage() {
        $languages = Language::all();
        $this->data["languages"] = $languages;

        return view("pages.admin.content.languages", $this->data);
    }

    public function categoriesPage() {
        $categories = Category::all();
        $this->data["categories"] = $categories;

        return view("pages.admin.content.categories", $this->data);
    }

    public function logsPage() {
        return view("pages.admin.logs");
    }

    private function groupMenuItemsByParent($menu items) {
```

```
$menu_grouped = [];  
foreach($menu_items as $item){  
    if($item->parent_id == null){  
        $menu_grouped[$item->name] = [];  
        array_unshift($menu_grouped[$item->name], $item);  
        continue;  
    }  
    $parent_name = array_filter($menu_items->toArray(), function($val)  
use($item){  
        return $val["id"] == $item["parent_id"];  
    })[0]["name"];  
  
    array_push($menu_grouped[$parent_name], $item);  
}  
return $menu_grouped;  
}
```

## AuthorController

```
<?php

namespace App\Http\Controllers;

use App\Models\Author;
use Illuminate\Database\QueryException;
use Illuminate\Http\Request;

class AuthorController extends FrontendController
{
    /**
     * Display a listing of the resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function index()
    {
        //
    }

    /**
     * Show the form for creating a new resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function create()
    {
        return view("pages.authors.create", $this->data);
    }

    /**
     * Store a newly created resource in storage.
     *
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\Response
     */
    public function store(Request $request)
    {
        Author::create($request->except("_token"));

        return redirect()->route("admin.authorsPage")->with("authorCreateMsg", "Author
created successfully");
    }

    /**
     * Display the specified resource.
     *
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function show($id)
    {
        //
    }
}
```

```

/**
 * Show the form for editing the specified resource.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function edit($id)
{
    $author = Author::find($id);
    $this->data["author"] = $author;
    return view("pages.authors.edit", $this->data);
}

/**
 * Update the specified resource in storage.
 *
 * @param \Illuminate\Http\Request $request
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function update(Request $request, $id)
{
    $author = Author::find($id);
    $author->fill($request->except("_token"));

    $author->save();

    return redirect()->route("admin.authorsPage")->with(["entityCreateMsg" =>
"Author updated successfully"]);
}

/**
 * Remove the specified resource from storage.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function destroy($id)
{
    try{
        Author::destroy($id);
        return redirect()->back();
    }
    catch (QueryException $e){
        return redirect()->back()->with(["entityErrorMsg" => "Error deleting
author. Please delete all correlated courses first."]);
    }
}
}

```

## CategoryController

```
<?php

namespace App\Http\Controllers;

use App\Http\Requests\Category\CategoryCreateRequest;
use App\Http\Requests\Category\CategoryUpdateRequest;
use App\Models\Category;
use Illuminate\Database\QueryException;
use Illuminate\Http\Request;

class CategoryController extends FrontendController
{
    /**
     * Display a listing of the resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function index()
    {
        //
    }

    /**
     * Show the form for creating a new resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function create()
    {
        return view("pages.categories.create", $this->data);
    }

    /**
     * Store a newly created resource in storage.
     *
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\Response
     */
    public function store(CategoryCreateRequest $request)
    {
        Category::create($request->except("_token"));

        return redirect()->route("admin.categoriesPage")->with("entityCreateMsg",
"Category created successfully.");
    }

    /**
     * Display the specified resource.
     *
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function show($id)
```

```

{
    //
}

/**
 * Show the form for editing the specified resource.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function edit($id)
{
    $category = Category::find($id);

    $this->data["category"] = $category;

    return view("pages.categories.edit", $this->data);
}

/**
 * Update the specified resource in storage.
 *
 * @param \Illuminate\Http\Request $request
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function update(CategoryUpdateRequest $request, $id)
{
    $category = Category::find($id);

    $category->fill($request->except("_token"));

    $category->save();

    return redirect()->route("admin.categoriesPage")->with("entityCreateMsg",
"Category updated successfully.");
}

/**
 * Remove the specified resource from storage.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function destroy($id)
{
    try{
        Category::destroy($id);

        return redirect()->back();
    }
    catch (QueryException $exception){
        return redirect()->back()->with(["entityErrorMsg" => "Error category
language. Please delete courses which have this category first."]);
    }
}
}

```

## ContactController

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;

class ContactController extends FrontendController
{
    public function index() {
        return view("pages.contact", $this->data);
    }
}
```

## CourseController

```
<?php

namespace App\Http\Controllers;

use App\Http\Requests\Course\CourseCreateRequest;
use App\Models\Author;
use App\Models\Category;
use App\Models\Course;
use App\Models\Difficulty;
use App\Models\Image;
use App\Models\Language;
use http\Env\Response;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Storage;
use SebastianBergmann\Diff\Diff;

class CourseController extends FrontendController
{
    /**
     * Display a listing of the resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function index()
    {
        $languages = Language::all();
        $categories = Category::all();
        $difficulties = Difficulty::all();
        $recommended_courses = Course::recommendedCourses();

        $this->data["languages"] = $languages;
        $this->data["categories"] = $categories;
        $this->data["difficulties"] = $difficulties;
        $this->data["recommended_courses"] = $recommended_courses;

        return view("pages.courses.index", $this->data);
    }

    /**
     * Show the form for creating a new resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function create()
    {
        $this->data["authors"] = Author::all();
        $this->data["categories"] = Category::all();
        $this->data["difficulties"] = Difficulty::all();
        $this->data["languages"] = Language::all();

        return view("pages.courses.create", $this->data);
    }

    /**
```



```

    * Store a newly created resource in storage.
    *
    * @param \Illuminate\Http\Request $request
    * @return \Illuminate\Http\Response
    */
    public function store(CourseCreateRequest $request)
    {
        $course = new Course($request->except(["_token", "image", "language_id"]));
        $course->save();

        $course->languages()->sync($request->input("language_id"));

        //Save image
        // $new_image_name = md5($request->file("image")->getFilename()) . time() . "."
        // . $request->file("image")->extension();

        $base_url = "https://code-freakz.s3.eu-central-1.amazonaws.com/";
        $relative_src = Storage::disk("s3")->put("public/images", $request-
>file("image"), "public");
        $src = Storage::disk("s3")->url($relative_src);

        Image::create(["src" => $src, "relative_src" => $relative_src, "course_id" =>
$course->id]);

        return redirect()->route("admin.coursesPage")->with("entityInsertMsg", "Course
added successfully.");
    }

    /**
     * Display the specified resource.
     *
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function show($id)
    {
        $course = Course::find($id);

        $this->data["course"] = $course;
        return view("pages.courses.show", $this->data);
    }

    /**
     * Show the form for editing the specified resource.
     *
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function edit($id)
    {
        $course = Course::with("images")->where("id", "=", $id)->first();
        $this->data["authors"] = Author::all();
        $this->data["categories"] = Category::all();
        $this->data["difficulties"] = Difficulty::all();
        $this->data["languages"] = Language::all();

        $this->data["course"] = $course;
    }

```

```

        return view("pages.courses.edit", $this->data);
    }

    /**
     * Update the specified resource in storage.
     *
     * @param \Illuminate\Http\Request $request
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function update(Request $request, $id)
    {
        $course = Course::find($id);
        $course->fill($request->except(['_token', 'language_id', 'image']));

        $course->save();

        $course->languages()->sync($request->input('language_id'));

        if($request->has('image')){
            Storage::disk("s3")->delete($course->images[0]->relative_src);
            Image::where("course_id","=", $course->id)->delete();

            $relative_src = Storage::disk("s3")->put("public/images", $request-
>file("image"),"public");
            $src = Storage::disk("s3")->url($relative_src);
            Image::create(["src" => $src, "relative_src" => $relative_src,"course_id"
=> $course->id]);
        }

        return redirect()->route("admin.coursesPage")->with("entityInsertMsg", "Course
updated successfully.");
    }

    /**
     * Remove the specified resource from storage.
     *
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function destroy($id)
    {
        $course = Course::find($id);

        $course->languages()->sync([]);

        Storage::disk("s3")->delete($course->images[0]->relative_src);
        Image::where("course_id","=", $course->id)->delete();

        $course->delete();

        return response()->json(["msg" => "Course deleted successfully"]);
    }

    public function paginate(Request $request){
        $per_page = 8;
    }

```

```

        $offset = 0;

        $courses = Course::with("images")->with("author");

        $data = [];

        //FILTERS
        if($request->has("search")){
            $courses = $courses->where("courses.name", "LIKE", "%".$request->input("search")."%");
        }
        if($request->has("languages")){
            $courses = $courses->whereHas("languages", function($l) use ($request){
                $l->whereIn("languages.id", $request->input("languages"));
            });
        }
        if($request->has("category")){
            $courses = $courses->where("category_id", "=", $request->input("category"));
        }
        if($request->has("difficulty")){
            $courses = $courses->where("difficulty_id", "=", $request->input("difficulty"));
        }
        $filtered_count = $courses->count();

        // LIMIT AND OFFSET
        if($request->has("per_page"))
            $per_page = $request->input("per_page");

        if($request->has("offset"))
            $offset = $request->input("offset");

        $courses = $courses->skip($offset)->take($per_page)->get();

        //Courses count is used in admin panel - courses page
        $courses_count = Course::all()->count();
        $data["courses_count"] = $courses_count;
        $data["filtered_count"] = $filtered_count;

        $data["courses"] = $courses;

        return response()->json($data);
    }
}

```

## FrontendController

```
<?php

namespace App\Http\Controllers;

use App\Models\Category;
use App\Models\Course;
use App\Models\Menu;
use Illuminate\Http\Request;

class FrontendController extends Controller
{
    protected $data = [];

    public function __construct()
    {
        $menu = Menu::with("items")->where("name","=", "header_menu")->first();
        $this->data["header_menu"] = $menu->items;
        $this->data["footer_categories"] = Category::topEightCategories();
        $this->data["footer_courses"] = Course::recommendedCourses()->take(4);
    }
}
```

## HomeController

```
<?php

namespace App\Http\Controllers;

use App\Models\Category;
use App\Models\Course;
use App\Models\Language;
use Illuminate\Http\Request;

class HomeController extends FrontendController
{
    public function index() {
        $recommended_courses = Course::recommendedCourses();
        $discounted_courses = Course::topFiveDiscounted();
        $free_courses = Course::topFiveFree();
        $recent_courses = Course::recentlyReleased();
        $categories = Category::topEightCategories();
        $rand_lang = Language::randLangWithCourses();

        $this->data["recommended_courses"] = $recommended_courses;
        $this->data["discounted_courses"] = $discounted_courses;
        $this->data["free_courses"] = $free_courses;
        $this->data["recent_courses"] = $recent_courses;
        $this->data["categories"] = $categories;
        $this->data["rand_lang"] = $rand_lang;

        return view("pages.home", $this->data);
    }
}
```

## LanguageController

```
<?php

namespace App\Http\Controllers;

use App\Http\Requests\Language\LanguageCreateRequest;
use App\Http\Requests\Language\LanguageUpdateRequest;
use App\Models\Language;
use Illuminate\Database\QueryException;
use Illuminate\Http\Request;

class LanguageController extends FrontendController
{
    /**
     * Display a listing of the resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function index()
    {
    }

    /**
     * Show the form for creating a new resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function create()
    {
        return view("pages.languages.create", $this->data);
    }

    /**
     * Store a newly created resource in storage.
     *
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\Response
     */
    public function store(LanguageCreateRequest $request)
    {
        Language::create($request->except("_token"));

        return redirect()->route("admin.languagesPage")->with("entityCreateMsg",
"Language created successfully.");
    }

    /**
     * Display the specified resource.
     *
     * @param int $id
     * @return \Illuminate\Http\Response
     */
    public function show($id)
    {
        //
    }
}
```

```

}

/**
 * Show the form for editing the specified resource.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function edit($id)
{
    $language = Language::find($id);

    $this->data["language"] = $language;

    return view("pages.languages.edit", $this->data);
}

/**
 * Update the specified resource in storage.
 *
 * @param \Illuminate\Http\Request $request
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function update(LanguageUpdateRequest $request, $id)
{
    $language = Language::find($id);

    $language->fill($request->except("_token"));

    $language->save();

    return redirect()->route("admin.languagesPage")->with("entityCreateMsg",
"Language updated successfully.");
}

/**
 * Remove the specified resource from storage.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function destroy($id)
{
    try{
        Language::destroy($id);

        return redirect()->back();
    }
    catch (QueryException $exception){
        return redirect()->back()->with(["entityErrorMsg" => "Error deleting
language. Please delete courses which have this language first."]);
    }
}
}

```

## StatusController

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;

class StatusController extends FrontendController
{
    public function forbidden() {
        return view("pages.403", $this->data);
    }
}
```



# Requests

## AuthorCreateRequest

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class AuthorCreateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "first_name" => "bail|required|min:3|alpha",
            "last_name" => "bail|required|min:3|alpha",
            "birth_date" => "bail|required|date"
        ];
    }

    public function messages()
    {
        return [
            "first_name" => "First name must be minimum 3 chars, and only alphabet.",
            "last_name" => "Last name must be minimum 3 chars, and only alphabet.",
            "birth_date" => "Incorrect date format."
        ];
    }
}
```

## AuthorUpdateRequest

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class AuthorCreateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "first_name" => "bail|required|min:3|alpha",
            "last_name" => "bail|required|min:3|alpha",
            "birth_date" => "bail|required|date"
        ];
    }

    public function messages()
    {
        return [
            "first_name" => "First name must be minimum 3 chars, and only alphabet.",
            "last_name" => "Last name must be minimum 3 chars, and only alphabet.",
            "birth_date" => "Incorrect date format."
        ];
    }
}
```

## CategoryCreateRequest

```
<?php

namespace App\Http\Requests\Category;

use Illuminate\Foundation\Http\FormRequest;

class CategoryCreateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "name" => "bail|required"
        ];
    }
}
```

## CategoryUpdateRequest

```
<?php

namespace App\Http\Requests\Category;

use Illuminate\Foundation\Http\FormRequest;

class CategoryUpdateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "name" => "bail|required"
        ];
    }

    public function messages()
    {
        return [
            "name" => "Name is required."
        ];
    }
}
```

## CourseCreateRequest

```
<?php

namespace App\Http\Requests\Course;

use Illuminate\Foundation\Http\FormRequest;

class CourseCreateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "name" => "bail|required|unique:courses,name",
            "author_id" => "bail|required|exists:authors,id",
            "description" => "bail|required",
            "price" => "bail|required|numeric",
            "discount" => "bail|numeric",
            "category_id" => "bail|required|exists:categories,id",
            "release_date" => "bail|required|date",
            "difficulty_id" => "bail|required|exists:difficulties,id",
            "language_id" => "bail|required|array",
            "language_id.*" => "bail|required|exists:languages,id",
            "image" => "bail|required|mimes:jpg,png,jpeg|max:10000"
        ];
    }

    public function messages()
    {
        return [
            "name.required" => "Course name is required",
            "author_id.required" => "Author name is required",
            "description.required" => "Description is required",
            "price.required" => "Price is required",
            "discount" => "Discount must be a whole number",
            "category_id.required" => "Category is required",
            "difficulty_id.required" => "Difficulty is required",
            "language_id.required" => "Languages is required",
            "image.required" => "Image is required",
            "release_date" => "bail|required|date",

            "name.unique" => "Course name must be unique",
        ];
    }
}
```

```
        "author_id.exists" => "Author does not exists",
        "price.numeric" => "Price must be a number",
        "category_id.exists" => "Category does not exist",
        "difficulty_id.exists" => "Difficulty does not exists",
        "image" => "Uploaded wrong file. Image is required. JPG or PNG.",
        "release_date" => "Incorrect date format"
    ];
}
```

## CourseEditRequest

```
<?php

namespace App\Http\Requests\Course;

use Illuminate\Foundation\Http\FormRequest;

class CourseEditRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "id" => "bail|required|exists:courses,id",
            "name" => "bail|required|unique:courses,name",
            "author_id" => "bail|required|exists:authors,id",
            "description" => "bail|required",
            "price" => "bail|required|numeric",
            "discount" => "bail|numeric",
            "category_id" => "bail|required|exists:categories,id",
            "difficulty_id" => "bail|required|exists:difficulties,id",
            "language_id" => "bail|required|array",
            "language_id.*" => "bail|required|exists:languages,id",
            "image" => "bail|mimes:jpg,png,jpeg|max:10000"
        ];
    }

    public function messages()
    {
        return [
            "name.required" => "Course name is required",
            "author_id.required" => "Author name is required",
            "description.required" => "Description is required",
            "price.required" => "Price is required",
            "discount" => "Discount must be a whole number.",
            "category_id.required" => "Category is required",
            "difficulty_id.required" => "Difficulty is required",
            "language_id.required" => "Languages is required",
            "image.required" => "Image is required",
            "release_date" => "bail|required|date",

            "name.unique" => "Course name must be unique",
        ];
    }
}
```

```
    "author_id.exists" => "Author does not exists",  
    "price.numeric" => "Price must be a number",  
    "category_id.exists" => "Category does not exist",  
    "difficulty_id.exists" => "Difficulty does not exists",  
    "image" => "Uploaded wrong file. JPG or PNG.",  
    "release_date" => "Incorrect date format"  
  ];  
}  
}
```



## LanguageCreateRequest

```
<?php

namespace App\Http\Requests\Language;

use Illuminate\Foundation\Http\FormRequest;

class LanguageCreateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "name" => "bail|required"
        ];
    }

    public function messages()
    {
        return [
            "name" => "Name is required."
        ];
    }
}
```

## LanguageUpdateRequest

```
<?php

namespace App\Http\Requests\Language;

use Illuminate\Foundation\Http\FormRequest;

class LanguageUpdateRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "name" => "bail|required|unique:languages,name"
        ];
    }

    public function messages()
    {
        return [
            "name" => "Name is required and must be unique."
        ];
    }
}
```

## LoginRequest

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class LoginRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "email" => "bail|required|email|exists:users,email",
            "password" => "bail|required|regex:/^(?=[A-Z])(?=[a-z])(?=[\d])[A-Za-z\d]{8,}$/"
        ];
    }

    public function messages()
    {
        return [
            "email.required" => "Email empty.",
            "email.exists" => "You have not registered yet.",

            "password.required" => "Password empty.",
            "password.regex" => "Password must be at least 8 characters, and must contain 1 lowercase letter, 1 uppercase letter, and a number."
        ];
    }
}
```

## RegisterRequest

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class RegisterRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            "name" => "bail|required|alpha_num|unique:users,name|min:5|max:20",
            "email" => "bail|required|email|unique:users,email",
            "password" => "bail|required|confirmed|regex:/^(?=[A-Z])(?=[a-z])(?=[0-9])[A-Za-z\d]{8,}$/",
        ];
    }

    public function messages()
    {
        return [
            "name.required" => "Username empty.",
            "name.alphanumeric" => "Username can contain only letters and numbers.",
            "name.unique" => "Username already exists.",
            "name.min" => "Username must be larger than 5 characters.",
            "name.max" => "Username must be smaller than 20 characters.",

            "email.required" => "Email empty.",
            "email.unique" => "Email already registerd.",
            "email.email" => "Email is not in correct format.",

            "password.required" => "Password empty.",
            "password.regex" => "Password must be at least 8 characters, and must contain 1 lowercase letter, 1 uppercase letter, and a number.",
            "password.confirmed" => "Password do not match"
        ];
    }
}
```

## Models

### Author

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Author extends Model
{
    use HasFactory;

    protected $table = "authors";
    public $timestamps = false;

    protected $fillable = ["first_name", "last_name", "birth_date"];

    public function topFourCourses() {
        return $this->hasMany(Course::class)->take(4)->get();
    }
}
```

## Category

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Category extends Model
{
    use HasFactory;

    protected $table = "categories";
    protected $fillable = ["name"];

    public $timestamps = false;

    public static function topEightCategories() {
        return Category::all()->take(8);
    }
}
```

## Course

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Course extends Model
{
    use HasFactory;

    protected $table = "courses";

    protected $guarded = [];

    public function languages() {
        return $this->belongsToMany(Language::class);
    }
    public function images() {
        return $this->hasMany(Image::class);
    }
    public function author() {
        return $this->belongsTo(Author::class);
    }
    public function category() {
        return $this->belongsTo(Category::class);
    }
    public function difficulty() {
        return $this->belongsTo(Difficulty::class);
    }

    public static function recommendedCourses() {
        return Course::with("images")->inRandomOrder()->take(5)->get();
    }

    public static function topFiveDiscounted() {
        return Course::with("images")->with("author")->where("discount", ">", "0")
            ->orderByDesc("discount")->take(5)->get();
    }

    public static function topFiveFree() {
        return Course::with("images")->where("price", "=", "0")
            ->take(5)->get();
    }

    public static function recentlyReleased() {
        return Course::with("images")->orderByDesc("release_date")
            ->take(4)->get();
    }
}
```

## CourseSection

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class CourseSection extends Model
{
    use HasFactory;

    protected $table = "course_sections"
}
```



## Difficulty

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Difficulty extends Model
{
    use HasFactory;

    protected $table = "difficulties";
}
```

## Image

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Image extends Model
{
    use HasFactory;

    protected $table = "images";

    protected $fillable = ["src", "course_id", "relative_src"];

    public $timestamps = false;
}
```

## ImageType

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class ImageType extends Model
{
    use HasFactory;

    protected $table = "image_types";
}
```

## Language

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Support\Facades\DB;
use Illuminate\Support\Facades\Lang;

class Language extends Model
{
    use HasFactory;

    protected $table = "languages";

    protected $fillable = ["name"];
    public $timestamps = false;

    public function courses() {
        return $this->belongsToMany(Course::class);
    }

    public static function randLangWithCourses() {
        $languages = Language::all();

        $rand_lang_bucket = [];

        foreach($languages as $l) {
            if($l->courses()->count() >= 3)
                $rand_lang_bucket[] = $l;
        }

        $rand_ind = rand(0, count($rand_lang_bucket) - 1);
        $rand_lang = $rand_lang_bucket[$rand_ind];

        $rand_lang->courses()->get();

        return $rand_lang;
    }
}
```

## Menu

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Menu extends Model
{
    use HasFactory;

    protected $table = "menus";

    public function items(){
        return $this->hasMany(MenuItem::class);
    }
}
```

## MenuItem

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class MenuItem extends Model
{
    use HasFactory;

    protected $table = "menu_items";
}
```

## Role

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Role extends Model
{
    use HasFactory;

    protected $table = "roles";
}
```

## User

```
<?php

namespace App\Models;

use Illuminate\Contracts\Auth\MustVerifyEmail;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Foundation\Auth\User as Authenticatable;
use Illuminate\Notifications\Notifiable;

class User extends Authenticatable
{
    use HasFactory, Notifiable;

    /**
     * The attributes that are mass assignable.
     *
     * @var array
     */
    protected $fillable = [
        'name',
        'email',
        'password',
    ];

    /**
     * The attributes that should be hidden for arrays.
     *
     * @var array
     */
    protected $hidden = [
        'password',
        'remember_token',
    ];

    /**
     * The attributes that should be cast to native types.
     *
     * @var array
     */
    protected $casts = [
        'email_verified_at' => 'datetime',
    ];

    public function role(){
        return $this->belongsTo(Role::class);
    }
}
```



# Migrations

<https://drive.google.com/file/d/1R1a9UEhPDGS2OyXg9cMhiA-PLmCWWXWo/view?usp=sharing>

## Seeders

### AuthorSeeder

```
<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;
use Faker\Factory;

class AuthorSeeder extends Seeder
{
    /**
     * Run the database seeds.
     *
     * @return void
     */
    public function run()
    {
        $authors = [];

        $faker = Factory::create();

        for ($i = 0; $i < 50; $i++){
            array_push($authors,
                [
                    "first_name" => $faker->firstName(),
                    "last_name" => $faker->lastName(),
                    "birth_date" => $faker->dateTimeBetween("-50 years", "-20 years")
                ]
            );
        }

        \DB::table("authors")->insert($authors);
    }
}
```

## CategorySeeder

```
<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;

class CategorySeeder extends Seeder
{
    /**
     * Run the database seeds.
     *
     * @return void
     */
    public function run()
    {
        \DB::table("categories")->insert([
            ["name" => "Web Development"],
            ["name" => "Mobile Development"],
            ["name" => "Game Development"],
            ["name" => "Desktop Development"],
            ["name" => "Database"],
            ["name" => "Software Tools"],
            ["name" => "Programming Languages"]
        ]);
    }
}
```

## DifficultySeeder

```
<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;

class DifficultySeeder extends Seeder
{
    /**
     * Run the database seeds.
     *
     * @return void
     */
    public function run()
    {
        \DB::table("difficulties")->insert([
            ["name" => "Beginner"],
            ["name" => "Intermediate"],
            ["name" => "Advanced"]
        ]);
    }
}
```

## ImageTypeSeeder

```
<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;

class ImageTypeSeeder extends Seeder
{
    /**
     * Run the database seeds.
     *
     * @return void
     */
    public function run()
    {
        \DB::table("image_types")->insert([
            ["name" => "thumbnail"],
            ["name" => "wallpaper"]
        ]);
    }
}
```

## LanguageSeeder

```
<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;
use function Symfony\Component\Translation\t;

class LanguageSeeder extends Seeder
{
    private $languages;

    public function __construct()
    {
        $this->languages = [
            "JavaScript (React.js and Node.js)",
            "Python",
            "HTML",
            "CSS",
            "C++",
            "TypeScript",
            "Rust",
            "Scheme",
            "Java ",
            "Kotlin",
            "C#",
            "Perl",
            "PHP",
            "Scala ",
            "Swift",
            "MATLAB",
            "SQL",
            "R Programming Language",
            "Golang (Go)",
            "Ruby"
        ];
    }

    /**
     * Run the database seeds.
     *
     * @return void
     */
    public function run()
    {
        $array_to_insert = [];

        foreach($this->languages as $language){
            array_push($array_to_insert, ["name" => "$language"]);
        }

        \DB::table("languages")->insert($array_to_insert);
    }
}
```

## RoleSeeder

```
<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;

class RoleSeeder extends Seeder
{
    /**
     * Run the database seeds.
     *
     * @return void
     */
    public function run()
    {
        \DB::table("roles")->insert([
            ["name" => "user"],
            ["name" => "admin"]
        ]);
    }
}
```

# Views

## Common

## Fixed

### Admin

#### Footer.blade.php

```
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.12.4/jquery.min.js"></script>
<script src="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0-
alpha.6/js/bootstrap.min.js"
    integrity="sha384-
vBWWz1ZJ8ea9aCX4pEW3rVHjgjt7zpkNpZk+02D9phzyeVKE+jo0ieGizqPLForn"
    crossorigin="anonymous"></script>

<script src="{{ asset('assets/js/admin/admin.js') }}"></script>
@yield("scripts")
</body>
</html>
```



## Head.blade.php

```
<!DOCTYPE html>

<html lang="en" class="no-js">
<head>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
    <meta name="csrf-token" content="{{ csrf_token() }}" />
    <title>@yield("title")</title>

    <link href="{{ asset('assets/css/media_query.css') }}" rel="stylesheet"
type="text/css"/>
    <link href="{{ asset('assets/css/bootstrap.css') }}" rel="stylesheet"
type="text/css"/>

    {{--Line icons--}}
    <link href="https://cdn.lineicons.com/2.0/LineIcons.css" rel="stylesheet">

    {{--Poppins font--}}
    <link href="https://fonts.googleapis.com/css?family=Poppins" rel="stylesheet">

    {{--Line Icons--}}
    <link href="https://cdn.lineicons.com/2.0/LineIcons.css" rel="stylesheet">
    <link href="https://maxcdn.bootstrapcdn.com/font-awesome/4.7.0/css/font-
awesome.min.css" rel="stylesheet"
        integrity="sha384-
wvfXpqpZZVQGK6TAh5PVlGOfQNHSoD2xbE+QkPxCAFlNEevoEH3Sl0sibVcOQVnN"
crossorigin="anonymous">

    <link href="{{ asset('assets/css/style_1.css') }}" rel="stylesheet"
type="text/css"/>

    {{--Main CSS--}}
    <link href="{{ asset('assets/css/main.css') }}" type="text/css" rel="stylesheet"/>

    {{--Admin CSS--}}
    <link href="{{ asset('assets/css/admin.css') }}" type="text/css"
rel="stylesheet"/>

    @yield("stylesheets")
</head>
```

## Header.blade.php

```
<body>
    <div class="row position-fixed fixed-top admin-top-nav p-2">
        <div class="col-12 d-flex justify-content-between align-items-center pl-4">
            <i id="left-nav-expand-btn" class="lni lni-menu"></i>
            <a href="{{ route('home') }}"></a>
            <div class="d-flex align-items-center">
                <a href="{{ route('logout') }}" class="cf-button cf-button-small mr-
2">Logout</a>
                <div class="d-flex align-items-center">
                    <span class="mx-2 text-on-dark admin-name"> Andrej
Zarkovski</span>
                    
                </div>
            </div>
        </div>
    </div>
    <div class="admin-left-nav position-fixed">
        <h2 class="my-3 mb-4 text-center">Control panel</h2>
        <ul class="my-3 px-0 admin-control-panel">
            @foreach($menu_grouped as $group)
                <li><a class="@if(Route::is($group[0]->route)) admin-control-panel-
selected @endif" href="@if($group[0]->route != "") {{ route($group[0]->route) }}
@endif"><i class="lni lni-library"></i>{{ $group[0]->name }}</a></li>
                <ul class="pl-0">
                    @foreach($group as $sub_item)
                        @if($loop->first) @continue @endif
                        <li class="pl-5"><a class="@if(Route::is($sub_item->route)) admin-
control-panel-selected @endif" href="{{ route($sub_item->route) }}">{{ $sub_item->name
}}</a></li>
                    @endforeach
                </ul>
            @endforeach
        </ul>
    </div>
```

## Head.blade.php

```
<!DOCTYPE html>

<html lang="en" class="no-js">
  <head>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-
fit=no">
    <title>@yield("title")</title>

    <link href="{{ asset('assets/css/media_query.css') }}" rel="stylesheet"
type="text/css"/>
    <link href="{{ asset('assets/css/bootstrap.css') }}" rel="stylesheet"
type="text/css"/>

    {{--Line Icons--}}
    <link href="https://cdn.lineicons.com/2.0/LineIcons.css" rel="stylesheet">

    <link href="https://maxcdn.bootstrapcdn.com/font-awesome/4.7.0/css/font-
awesome.min.css" rel="stylesheet"
        integrity="sha384-
wvfXpqpZZVQGK6TAh5PVlGOfQNHSoD2xbE+QkPxCAF1NEEvoEH3S10sibVcoQVnN"
crossorigin="anonymous">
    <link href="{{ asset('assets/css/animate.css') }}" rel="stylesheet"
type="text/css"/>
    <link href="https://fonts.googleapis.com/css?family=Poppins" rel="stylesheet">
    <link href="{{ asset('assets/css/owl.carousel.css') }}" rel="stylesheet"
type="text/css"/>
    <link href="{{ asset('assets/css/owl.theme.default.css') }}" rel="stylesheet"
type="text/css"/>
    <!-- Bootstrap CSS -->
    <link href="{{ asset('assets/css/style_1.css') }}" rel="stylesheet"
type="text/css"/>
    <!-- Modernizr JS -->
    <script src="{{ asset('assets/js/modernizr-3.5.0.min.js') }}"></script>

    {{--Materialize Icons--}}
    <link href="https://fonts.googleapis.com/icon?family=Material+Icons"
rel="stylesheet">

    {{--Main CSS--}}
    <link href="{{ asset('assets/css/main.css') }}" type="text/css"
rel="stylesheet"/>

    @yield("stylesheets")
  </head>
```

## Footer.blade.php

```
<div class="container-fluid fh5co_footer_bg pb-3">
    <div class="container animate-box">
        <div class="row">
            <div class="col-12 spdpright py-5 logo-footer-container"></div>
            <div class="clearfix"></div>
            <div class="col-12 col-md-4 col-lg-3">
                <div class="footer_main_title py-3"> About</div>
                <div class="footer_sub_about pb-3"> Welcome to CodeFreakz. Here you
can perfect your skills in various programming areas. From web development to OS
development. Video tutorials are made by top of the class programmers with in depth
coverage of the material being presented. Tutorial difficulties range from begginer to
advanced, and on top of all, we have best prices.</div>
                <div class="footer_mediya_icon">
                    <div class="text-center d-inline-block"><a
href="https://www.linkedin.com/in/andrej-zarkovski-01b8a4188/" target="_blank"
class="fh5co_display_table_footer">
                        <div class="fh5co_verticle_middle"><i class="fa fa-
linkedin"></i></div>
                            </a></div>
                        <div class="text-center d-inline-block"><a
href="https://youtube.com" target="_blank" class="fh5co_display_table_footer">
                            <div class="fh5co_verticle_middle"><i class="fa fa-
youtube"></i></div>
                                </a></div>
                            <div class="text-center d-inline-block"><a
href="https://twitter.com" target="_blank" class="fh5co_display_table_footer"
target="_blank" class="fh5co_display_table_footer">
                                <div class="fh5co_verticle_middle"><i class="fa fa-
twitter"></i></div>
                                    </a></div>
                                        <div class="text-center d-inline-block"><a
href="https://facebook.com" target="_blank" class="fh5co_display_table_footer">
                                            <div class="fh5co_verticle_middle"><i class="fa fa-
facebook"></i></div>
                                                </a>
                                                    </div>
                                                        </div>
                                                            </div>
                                                                <div class="col-12 col-md-3 col-lg-2">
                                                                    <div class="footer_main_title py-3"> Category</div>
                                                                    <ul class="footer_menu">
                                                                        @foreach($footer_categories as $category)
                                                                            <li><a href="#" class="footer_cat"><i class="fa fa-angle-
right"></i>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&{{ $category->name }}</a></li>
                                                                                @endforeach
                                                                                    </ul>
                                                                                        </div>
                                                                                            <div class="col-12 col-md-5 col-lg-3 position_footer_relative">
                                                                                                <div class="footer_main_title py-3">Recommended courses</div>
                                                                                                  @foreach($footer_courses as $course)
                                                                                                      <div class="footer_makes_sub_font"> {{ $course->release_date
}}</div>
                                                                                                          <a href="#" class="footer_post pb-4"> {{ $course->name }}</a>
                                                                                                              @endforeach
                                                                                                                  <div class="footer position absolute"></div>
</div>
<div class="col-12 col-md-12 col-lg-4 latest-youtube-video ">
    <div class="footer_main_title py-3"> Our latest YouTube video</div>
    <iframe class="youtube-video" style="width: 100%" height="190px"
src="https://www.youtube.com/embed/F-sFp_AvHc8" frameborder="0" allow="accelerometer;
autoplay; clipboard-write; encrypted-media; gyroscope; picture-in-picture"
allowfullscreen></iframe>
    </div>
</div>
</div>
<div class="container-fluid fh5co_footer_right_reserved">
    <div class="container">
        <div class="row ">
            <div class="col-12 col-md-6 py-4 Reserved"> © Copyright {{ date("Y") }},
Code Mastery. All rights reserved. </div>
            <div class="col-12 col-md-6 spdp_right py-4 d-flex flex-wrap justify-
content-center">
                @foreach($header_menu as $menu_item)
                    <a href="{{ route($menu_item->route) }}"
class="footer_last_part_menu"> {{ $menu_item->name }}</a>
                @endforeach
            </div>
        </div>
    </div>
</div>

{{--Scroll up arrow--}}
<div class="gototop js-top">
    <a href="#" class="js-gotop"><i class="fa fa-arrow-up"></i></a>
</div>

<script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.12.4/jquery.min.js"></script>
<script src="{{ asset("assets/js/owl.carousel.min.js") }}"></script>
<!--<script src="https://code.jquery.com/jquery-3.1.1.slim.min.js" integrity="sha384-
A7FZj7v+d/sdmMqp/nOQwliLvUsJfDHW+k9Omg/a/EheAdgtzNs3hpfag6Ed950n"
crossorigin="anonymous"></script>-->
<script src="https://cdnjs.cloudflare.com/ajax/libs/tether/1.4.0/js/tether.min.js"
integrity="sha384-
DztdAPBWPRXSA/3eYEEUWrWCy7G5KFbe8fFjk5JAIxUYHKkDx6Qin1DkWx5lbBrb"
crossorigin="anonymous"></script>
<script src="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0-
alpha.6/js/bootstrap.min.js"
integrity="sha384-
vBWwZlZJ8ea9aCX4pEW3rVHjgjt7zpkNpZk+02D9phzyeVKE+jo0ieGizqPLForn"
crossorigin="anonymous"></script>
<!-- Waypoints -->
<script src="{{ asset("assets/js/jquery.waypoints.min.js") }}"></script>

<!-- Main -->
<script src="{{ asset("assets/js/main.js") }}"></script>
<script src="{{ asset("assets/js/cf-main.js") }}"></script>
@yield("scripts")

```

```
</body>  
</html>
```

## Header.blade.php

```
<body class="@yield('body-classes')">
<div class="container-fluid account-bar pr-md-4 pr-lg-5">
    <div class="d-flex justify-content-end">
        @if(session("user"))
            @if(session("user")->role->name == "admin")
                <a href="{{ route('admin.coursesPage') }}" class="admin-panel-link mr-4">
                    <span>Admin panel</span>
                    <i class="lni lni-layout admin-panel-icon"></i>
                </a>
            @endif
            <a href="{{ route('logout') }}" class="cf-button cf-button-small">Logout</a>
            @else
                <a href="{{ route('registerPage') }}" class="cf-button cf-button-small">Register</a>
                <a href="{{ route('loginPage') }}" class="cf-button cf-button-small ml-2">Login</a>
            @endif
        </div>
    </div>
<div class="container-fluid fh5co_header_bg">
    <div class="container">
        <div class="row">
            <div class="col-12 fh5co_mediya_center">
                </div>
            </div>
        </div>
    </div>
<div class="container-fluid">
    <div class="container">
        <div class="row">
            <div class="col-12 col-md-3 fh5co_padding_menu">
                <a href="{{ route('home') }}"></a>
            </div>
            <div class="col-12 col-md-9 align-self-center justify-content-end align-items-center d-none d-md-flex">
                <div class="d-none d-lg-flex">
                    <div class="text-center d-inline-block">
                        <a href="https://www.linkedin.com/in/andrej-zarkovski-01b8a4188/" target="_blank" class="fh5co_display_table">
                            <div class="fh5co_verticle_middle"><i class="fa fa-linkedin"></i></div>
                        </a>
                    </div>
                    <div class="text-center d-inline-block">
                        <a href="https://youtube.com" class="fh5co_display_table" target="_blank">
                            <div class="fh5co_verticle_middle"><i class="fa fa-youtube"></i></div>
                        </a>
                    </div>
                    <div class="text-center d-inline-block">
                        <a href="https://twitter.com" target="_blank">
```

```

class="fh5co_display_table" target="_blank">
    <div class="fh5co_verticle_middle"><i class="fa fa-
twitter"></i></div>
    </a>
</div>
<div class="text-center d-inline-block">
    <a href="https://facebook.com" target="_blank"
class="fh5co_display_table" target="_blank">
    <div class="fh5co_verticle_middle"><i class="fa fa-
facebook"></i></div>
    </a>
</div>
</div>
<!--<div class="d-inline-block text-center"></div>-->
    <div class="clearfix"></div>
</div>
</div>
</div>
<div class="container-fluid bg-faded fh5co_padd_mediya padding_786">
    <div class="container padding_786">
        <nav class="navbar navbar-toggleable-md navbar-light" id="navigation-bar">
            <div class="d-lg-none d-flex justify-content-between align-items-center
mb-3">
                <button class="navbar-toggler d-inline-block mt-1" type="button" data-
toggle="collapse"
                    data-target="#navbarSupportedContent" aria-
controls="navbarSupportedContent"
                    aria-expanded="false"
                    aria-label="Toggle navigation"><span class="fa fa-
bars"></span></button>
            </div>
            <div class="collapse navbar-collapse" id="navbarSupportedContent">
                <ul class="navbar-nav mr-auto">
                    @foreach($header_menu as $menu_item)
                        <li class="nav-item @if( Route::is($menu_item->route) ) active
@endif">
                            <a class="nav-link" href="{{ route($menu_item->route)
}}">{{ $menu_item->name }} <span class="sr-only">(current)</span></a>
                        </li>
                    @endforeach
                </ul>
            </div>
        </nav>
    </div>
</div>

```



## Layouts

Admin.blade.php

```
@include("common.fixed.admin.head")

@include("common.fixed.admin.header")

<div class="admin-page-content">
    @yield("content")
</div>
@include("common.fixed.admin.footer")
```

## Layout.blade.php

```
@include("common.fixed.head")  
  
@include("common.fixed.header")  
  
@yield("content")  
  
@include("common.fixed.footer")
```

## Pages

### 403.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | About @endsection

@section("content")
<div class="row my-5">
    <div class="row col-sm-10 offset-sm-1 mx-0 mx-sm-auto">
        <div class="col-12 ">
            <h1 class="text-uppercase text-center mb-4">403 - Forbidden</h1>
        </div>
    </div>
</div>
<script async src="https://platform.twitter.com/widgets.js" charset="utf-8"></script>
@endsection
```

## About.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | About @endsection

@section("content")
<div class="row my-5">
    <div class="row col-sm-10 offset-sm-1 mx-0 mx-sm-auto">
        <div class="col-12 col-md-8 mb-5 mb-md-0">
            <h2 class="text-uppercase text-center mb-4">About me</h2>
            <div id="aboutText">
                <div class="row">
                    <div id="profilePicWrapper" class="col-6 offset-3 col-sm-5 offset-sm-0 mx-sm-auto col-md-6 offset-md-3 col-lg-3 offset-lg-0 mb-4">
                        
                    </div>
                    <div class="col-lg-9">
                        <p class="mb-4">My name is Andrej Zarkovski. I'm studying web programming at "Visoka ICT Škola" in Belgrade. In my early childhood I was very interested in how computers work and I continued to learn more about them. Now I am pursuing career in computer programming. I love computer related stuff and I love playing video games.</p>
                        <span class="d-block">Portfolio: <a href="http://zarke998.github.io/web-portfolio" target="_blank" class="mb-3 ml-2 cf-link">zarke998.github.io/web-portfolio</a></span>
                        <span class="d-block">GitHub: <a href="https://github.com/zarke998" class="mb-3 ml-2 cf-link" target="_blank">github.com/zarke998</a></span>
                        <span class="d-block">LinkedIn: <a href="https://www.linkedin.com/in/andrej-zarkovski-01b8a4188/" class="mb-3 ml-2 cf-link" target="_blank">linkedin.com/in/andrej-zarkovski-01b8a4188</a></span>
                    </div>
                </div>
            </div>
        </div>
        <div class="col-12 col-md-4">
            <div class="row">
                <div id="socials" class="col-12">
                    <h4 class="text-uppercase text-center">Follow us on socials</h4>
                    <ul id="socialLinks" class="d-flex justify-content-center px-0">
                        <li><a href="http://facebook.com" target="_blank"><i class="lni lni-facebook-oval facebook-icon social-icon"></i></a>
                        </li>
                        <li><a href="http://twitter.com" target="_blank"><i class="lni lni-twitter-filled twitter-icon social-icon"></i></a>
                        </li>
                        <li><a href="http://instagram.com" target="_blank"><i class="lni lni-instagram-filled instagram-icon social-icon"></i></a></li>
                        <li><a href="http://youtube.com" target="_blank"><i class="lni lni-youtube youtube-icon social-icon"></i></a></li>
                    </ul>
                </div>
            </div>
        </div>
    </div>
</div>
```



## Contact.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Contact @endsection

@section("content")


<i class="fa fa-home"></i></a>


Contact Us </a>



<span><i class="fa
fa-phone"></i></span> </div>


Call Us</span>


<span><i class="fa
fa-envelope"></i></span> </div>


Have any questions?</span>


9


```

```

px-lg-1">
        <div class="fh5co_contact_us_no_icon_div"> <span><i class="fa
fa-map-marker"></i></span> </div>
        </div>
        <div class="col-9 align-self-center
fh5co_contact_us_no_icon_difh5co_hover_2">
        <span class="c_g d-block">Address</span>
        <span class="d-block c_g fh5co_contact_us_no_text"> Zdravka
Čelara 16, Beograd</span>
        </div>
        <div class="clearfix"></div>
    </div>
</div>
<div class="clearfix"></div>
</div>
</div>
<div class="container-fluid mb-4">
    <div class="container">
        <div class="col-12 text-center contact margin svnit ">
            <div class="text-center fh5co_heading py-2">Contact Us</div>
        </div>
        <div class="row">
            <div class="col-12 col-md-6">
                <form class="row" id="fh5co_contact_form">
                    <div class="col-12 py-3">
                        <input type="text" class="form-control fh5co_contact_text_box"
placeholder="Enter Your Name" />
                    </div>
                    <div class="col-6 py-3">
                        <input type="text" class="form-control fh5co_contact_text_box"
placeholder="E-mail" />
                    </div>
                    <div class="col-6 py-3">
                        <input type="text" class="form-control fh5co_contact_text_box"
placeholder="Subject" />
                    </div>
                    <div class="col-12 py-3">
                        <textarea class="form-control fh5co_contacts_message"
placeholder="Message"></textarea>
                    </div>
                    <div class="col-12 py-3 text-center"> <a href="#" class="btn
contact_btn">Send Message</a> </div>
                </form>
            </div>
            <div class="col-12 col-md-6 align-self-center">
                <iframe
src="https://www.google.com/maps/embed?pb=!1m14!1m12!1m3!1d3168.639290621062!2d-
122.08624618469247!3d37.421999879825215!2m3!1f0!2f0!3f0!3m2!1i1024!2i768!4f13.1!5e0!3m
2!1sfr!2sbe!4v1514861541665" class="map_sss" allowfullscreen></iframe>
                </div>
            </div>
        </div>
    </div>
</div>
@endsection

```

## Home.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Home @endsection

@section("stylesheets")
    <link href="{{ asset('assets/css/home.css') }}" rel="stylesheet" type="text/css"/>
@endsection

@section("content")
<div class="container-fluid padddding mb-5">
    <div class="row mx-0 intro-slider">
        <div class="col-md-6 col-12 padddding animate-box" data-animate-
effect="fadeIn">
            <div class="fh5co_suceefh5co_height">
                
                <div class="fh5co_suceefh5co_height_position_absolute"></div>
                <div class="fh5co_suceefh5co_height_position_absolute_font">
                    <div class="">
                        {{ $recommended_courses[0]->release_date }}
                    </div>
                    <div class="">
                        <a href="{{ route('courses.show', [ "id" =>
$recommended_courses[0]->id]) }}" class="fh5co_good_font">
                            {{ $recommended_courses[0]->name }}
                        </a>
                    </div>
                </div>
            </div>
            <div class="col-md-6">
                <div class="row">
                    @for($i = 1; $i < $recommended_courses->count(); $i++)
                        <div class="col-md-6 col-6 padddding animate-box" data-animate-
effect="fadeIn">
                            <div class="fh5co_suceefh5co_height_2">
                                
                                <div
class="fh5co_suceefh5co_height_position_absolute"></div>
                                <div
class="fh5co_suceefh5co_height_position_absolute_font_2">
                                    <div class="">
                                        {{ $recommended_courses[0]->release_date }}
                                    </div>
                                    <div class=""><a href="{{ route('courses.show', [ "id"
=> $recommended_courses[$i]->id]) }}" class="fh5co_good_font_2">
                                        {{ $recommended_courses[$i]->name }}
                                    </a>
                                </div>
                            </div>
                        </div>
                    @endfor
                </div>
            </div>
        </div>
    </div>
</div>
```



```

        <div class="intro-slider-title">
            Recommended
        </div>
    </div>
</div>
<div class="container-fluid pb-4 pt-5">
    <div class="container animate-box">
        <div>
            <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-4">On
Discount</div>
            <div>
                <div class="owl-carousel owl-theme" id="slider2">
                    @foreach($discounted_courses as $course)
                        <div class="item px-2">
                            <div class="fh5co_hover_news_img">
                                <div class="fh5co_news_img">
                                    </div>
                                <div>
                                    <a href="{{ route('courses.show', [ 'id' => $course->id])
}}" class="d-block fh5co_small_post_heading"><span class="">{{ $course->name
}}</span></a>
                                    <div class="c_g"><i class="fa fa-clock-o"></i> {{ $course-
>release_date }}</div>
                                </div>
                            </div>
                        </div>
                    @endforeach
                </div>
            </div>
        </div>
</div>
<div class="container-fluid fh5co_video_news_bg pb-4">
    <div class="container animate-box" data-animate-effect="fadeIn">
        <div>
            <div class="fh5co_heading fh5co_heading_border_bottom pt-5 pb-2 mb-4">FREE
Courses</div>
            <div>
                <div class="owl-carousel owl-theme" id="slider3">
                    @foreach($free_courses as $course)
                        <div class="item px-2">
                            <div class="fh5co_hover_news_img">
                                <div class="fh5co_news_img">
                                    </div>
                                <div>
                                    <a href="{{ route('courses.show', [ 'id' => $course-
>id]) }}" class="d-block fh5co_small_post_heading"><span class="">{{ $course->name
}}</span></a>
                                    <div class="c_g"><i class="fa fa-clock-o"></i> {{
$course->release_date }}</div>
                                </div>
                            </div>
                        </div>
                    @endforeach
                </div>
            </div>
        </div>
    </div>

```

```

        </div>
</div>
<div class="container-fluid pb-4 pt-4 paddding">
    <div class="container paddding">
        <div class="row mx-0">
            <div class="col-md-8 animate-box" data-animate-effect="fadeInLeft">
                <div>
                    <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-4">Recently uploaded</div>
                </div>
                @foreach($recent_courses as $course)
                    <div class="row pb-4">
                        <div class="col-md-5">
                            <div class="fh5co_hover_news_img">
                                <div class="fh5co_news_img"></div>
                                <div></div>
                            </div>
                        </div>
                        <div class="col-md-7 animate-box">
                            <a style="display: block" href="{{ route('courses.show', [ "id" => $course->id]) }}" class="fh5co_magna py-2">
                                {{ $course->name }}
                            </a> <a href="{{ route('courses.show', [ "id" => $course->id]) }}" class="fh5co_mini_time pb-3">
                                {{ $course->author->first_name . " " . $course->author->last_name }} <span class="pl-1"> {{ $course->release_date }}</span>
                            </a>
                            <div class="fh5co_consectetur">
                                {{ substr($course->description,0, 50) }}
                            </div>
                        </div>
                    </div>
                @endforeach
            </div>
            <div class="col-md-3 animate-box" data-animate-effect="fadeInRight">
                <div>
                    <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-4">Popular categories</div>
                </div>
                <div class="clearfix"></div>
                <div class="fh5co_tags_all popular-categories">
                    @foreach($categories as $category)
                        <a href="#" class="fh5co_tagg">{{ $category->name }}</a>
                    @endforeach
                </div>
                <div>
                    <div class="fh5co_heading fh5co_heading_border_bottom pt-3 py-2 mb-4">{{ $rand_lang->name }}</div>
                </div>
                @foreach($rand_lang->courses->take(4) as $course)
                    <div class="row py-3">
                        <div class="col-lg-5 align-self-center">
                            
                        </div>
                        <div class="col-lg-7 mt-1 px-lg-0">

```

```

<div class="most_fh5co_treding_font">{{ $course->name
}}</div>
<div class="most_fh5co_treding_font_123">{{ $course-
>release_date }}</div>
</div>
</div>
@endforeach
</div>
</div>
<div class="row mx-0 animate-box" data-animate-effect="fadeInUp">
</div>
</div>
</div>
@endsection

```

## Login.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Login @endsection

@section("content")
    <div class="row mb-5">
        <div class="col-12">
            <h1 class="text-center py-4">Login</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-10 offset-1 col-sm-8 offset-sm-2">
                    <form action="{{ route('login') }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" name="email" class="form-control cf-
input" placeholder="Email" aria-label="Email" aria-describedby="basic-addon1"
value="{{old('email')}}">
                        </div>
                        <div class="input-group mb-2">
                            <input type="password" name="password" class="form-control
cf-input" placeholder="Password" aria-label="Password" aria-describedby="basic-
addon1">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-
3">Login</button>
                        </div>
                        @if(session("registrationSuccessfullMsg"))
                            <div class="success-msg my-2">
                                Registration successfull.
                            </div>
                        @endif
                        @if($errors->any())
                            <ul class="my-2 error-msg-list">
                                @foreach($errors->all() as $error)
                                    <li>
                                        {{ $error }}
                                    </li>
                                @endforeach
                            </ul>
                        @endif
                        @if(session("loginErrorMsg"))
                            <div class="error-msg my-2">
                                {{ session("loginErrorMsg") }}
                            </div>
                        @endif
                    </form>
                </div>
            </div>
        </div>
    </div>
@endsection
```

## Register.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Register @endsection

@section("content")
    <div class="row mb-5">
        <div class="col-12">
            <h1 class="text-center py-4">Register</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-10 offset-1 col-sm-8 offset-sm-2">
                    <form action="{{ route('register') }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" name="name" class="form-control cf-
input" placeholder="Username" aria-label="Username" aria-describedby="basic-addon1"
value="{{ old('name') }}">
                        </div>
                        <div class="input-group mb-3">
                            <input type="text" name="email" class="form-control cf-
input" placeholder="Email" aria-label="Email" aria-describedby="basic-addon1"
value="{{ old('email') }}">
                        </div>
                        <div class="input-group mb-3">
                            <input type="password" name="password" class="form-control
cf-input" placeholder="Password" aria-label="Username" aria-describedby="basic-
addon1">
                        </div>
                        <div class="input-group mb-3">
                            <input type="password" name="password_confirmation"
class="form-control cf-input" placeholder="Confirm password" aria-label="Username"
aria-describedby="basic-addon1">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-
3">Register</button>
                        </div>
                        @if($errors->any())
                            <ul class="my-2 error-msg-list">
                                @foreach($errors->all() as $error)
                                    <li>
                                        {{ $error }}
                                    </li>
                                @endforeach
                            </ul>
                        @endif
                    </form>
                </div>
            </div>
        </div>
    </div>
@endsection
```

## Admin

### Logs.blade.php

```
@extends("common.layouts.admin")

@section("title") CodeFreakz | Admin - Logs @endsection

@section("content")
    <div class="content-container my-3">
        <div class="content-section mx-3 mb-5">
            <h2 class="text-center my-4">Logs</h2>
            <div class="row log-filters align-items-center mb-2">
                <div class="col-md-6 col-lg-4 log-type-filter d-flex align-items-
center">
                    <span>Log type:</span>
                    <select class="form-control cf-input cf-select" name="author"
placeholder="Author" aria-label="Author" aria-describedby="basic-addon1">
                        <option value="1">All logs</option>
                    </select>
                </div>
                <div class="col-lg-6 offset-lg-2 mt-3 d-flex justify-content-lg-end
justify-content-between flex-wrap date-filter">
                    <div class="mb-2"><span>Start date</span><input class="cf-input
ml-2" type="date" name="log-start"/></div>
                    <div class="ml-md-3"><span>End date</span><input class="cf-input
ml-3" type="date" name="log-end"/></div>
                </div>
            </div>
            <div id="log"></div>
        </div>
    </div>
@endsection
```

# Content

## Authors.blade.php

```
@extends("common.layouts.admin")

@section("title") CodeFreakz | Admin - Courses @endsection

@section("content")
    <div class="row content-container justify-content-center">
        <div class="content-section col-12 px-4 px-sm-5 mb-2">
            <h2 class="text-center my-4 mr-3">Authors</h2>
            <div style="">
                <table class="table">
                    <thead>
                        <tr>
                            <th scope="col">Id</th>
                            <th scope="col">First Name</th>
                            <th scope="col">Last Name</th>
                            <th scope="col">Birth Date</th>
                            <th scope="col" class="d-flex justify-content-
center">Actions</th>
                        </tr>
                    </thead>
                    <tbody>
                        @foreach($authors as $author)
                            <tr>
                                <th scope="row">{{ $author->id }}</th>
                                <td>{{ $author->first_name }}</td>
                                <td>{{ $author->last_name }}</td>
                                <td>{{ $author->birth_date }}</td>
                                <td class="table-actions d-flex justify-content-center">
                                    <a href="{{ route("authors.edit", ["id" => $author-
>id]) }}" class="cf-link"><i class="lni lni-pencil"></i></a>
                                    <form action="{{ route("authors.delete", ["id" =>
$author->id]) }}" method="POST">
                                        @method("DELETE")
                                        @csrf
                                        <button type="submit" class="cf-link ml-3 cf-
table-button"><i class="lni lni-trash"></i></button>
                                    </form>
                                </td>
                            </tr>
                        @endforeach
                    </tbody>
                </table>
            </div>
            <div class="d-flex justify-content-center align-items-center flex-wrap">
                <div class="d-flex align-items-center mb-3 mx-4">
                    {{--
                    <span class="mr-3 d-block">Add
course</span>--}}
                    <a href="{{ route("authors.create") }}" class="w-100 cf-button px-
5">Add Author</a>
                </div>
            </div>
            @if(session("entityCreateMsg"))
                <div class="success-msg">

```

```
        {{ session("entityCreateMsg") }}
    </div>
@endif
@if(session("entityErrorMsg"))
    <div class="error-msg">
        {{ session("entityErrorMsg") }}
    </div>
@endif
</div>
@endsection
```



## Categories.blade.php

```
@extends("common.layouts.admin")

@section("title") CodeFreakz | Admin - Courses @endsection

@section("content")
    <div class="row content-container justify-content-center">
        <div class="content-section col-12 px-4 px-sm-5 mb-2">
            <h2 class="text-center my-4 mr-3">Categories</h2>
            <div style="">
                <table class="table">
                    <thead>
                        <tr>
                            <th scope="col">Id</th>
                            <th scope="col">Name</th>
                            <th scope="col" class="d-flex justify-content-
center">Actions</th>
                        </tr>
                    </thead>
                    <tbody>
                        @foreach($categories as $category)
                            <tr>
                                <th scope="row">{{ $category->id }}</th>
                                <td>{{ $category->name }}</td>
                                <td class="table-actions d-flex justify-content-center">
                                    <a href="{{ route("categories.edit", ["id" =>
$category->id]) }}" class="cf-link"><i class="lni lni-pencil"></i></a>
                                    <form action="{{ route("categories.delete", ["id" =>
$category->id]) }}" method="POST">
                                        @method("DELETE")
                                        @csrf
                                        <button type="submit" class="cf-link ml-3 cf-
table-button"><i class="lni lni-trash"></i></button>
                                    </form>
                                </td>
                            </tr>
                        @endforeach
                    </tbody>
                </table>
            </div>
            <div class="d-flex justify-content-center align-items-center flex-wrap">
                <div class="d-flex align-items-center mb-3 mx-4">
                    {{--
                    <span class="mr-3 d-block">Add
course</span>--}}
                    <a href="{{ route("categories.create") }}" class="w-100 cf-button
px-5">Add Category</a>
                </div>
            </div>
            @if(session("entityCreateMsg"))
                <div class="success-msg">
                    {{ session("entityCreateMsg") }}
                </div>
            @endif
            @if(session("entityErrorMsg"))
                <div class="error-msg">
                    {{ session("entityErrorMsg") }}
                </div>
            @endif
        </div>
    </div>

```

```
@endif  
</div>  
  
</div>  
@endsection
```

## Courses.blade.php

```
@extends("common.layouts.admin")

@section("title") CodeFreakz | Admin - Courses @endsection

@section("scripts")
    <script src="{{ asset('assets/js/admin/course-page.js') }}"></script>
@endsection

@section("content")
    <div class="row content-container justify-content-center">
        <div class="content-section col-12 px-5 mb-2">
            <h2 class="text-center my-4 mr-3">Courses</h2>
            <table class="table">
                <thead>
                    <tr>
                        <th scope="col">Id</th>
                        <th scope="col">Course</th>
                        <th scope="col">From Author</th>
                        <th scope="col" class="d-flex justify-content-center">Actions</th>
                    </tr>
                </thead>
                <tbody id="courses-container">

                </tbody>
            </table>
            <div class="row">
                <div class="col-12 text-center pb-4 pt-4 pl-sm-4 pr-sm-4 pl-0 pr-0 d-
flex flex-wrap justify-content-between">
                    <a href="#" class="course-page-btn btn_mange_pagging mb-2" data-
inc="-1"><i class="fa fa-long-arrow-left"></i><span class="d-lg-inline-block d-none">
Previous </span></a>
                    <a href="#" class="course-page-btn btn_mange_pagging mb-2" data-
inc="1" >
                        <span class="d-lg-inline-block d-none">Next</span>
                        <i class="fa fa-long-arrow-right"></i>&nbsp;
                    </a>
                </div>
            </div>
            <div class="d-flex justify-content-center align-items-center flex-wrap">
                <div class="d-flex align-items-center mb-3 mx-4">
                    {{--
                    <span class="mr-3 d-block">Add
course</span>--}}
                    <a href="{{ route('course.create') }}" class="w-100 cf-button px-
5">Add Course</a>
                </div>
            </div>
            @if(session("entityInsertMsg"))
                <div class="success-msg">
                    {{ session("entityInsertMsg") }}
                </div>
            @endif
        </div>
    </div>
@endsection
```

## Languages.blade.php

```
@extends("common.layouts.admin")

@section("title") CodeFreakz | Admin - Courses @endsection

@section("content")
    <div class="row content-container justify-content-center">
        <div class="content-section col-12 px-4 px-sm-5 mb-2">
            <h2 class="text-center my-4 mr-3">Languages</h2>
            <div style="">
                <table class="table">
                    <thead>
                        <tr>
                            <th scope="col">Id</th>
                            <th scope="col">Name</th>
                            <th scope="col" class="d-flex justify-content-
center">Actions</th>
                        </tr>
                    </thead>
                    <tbody>
                        @foreach($languages as $language)
                            <tr>
                                <th scope="row">{{ $language->id }}</th>
                                <td>{{ $language->name }}</td>
                                <td class="table-actions d-flex justify-content-center">
                                    <a href="{{ route('languages.edit', ['id' =>
$language->id]) }}" class="cf-link"><i class="lni lni-pencil"></i></a>
                                    <form action="{{ route('languages.delete', ['id' =>
$language->id]) }}" method="POST">
                                        @method("DELETE")
                                        @csrf
                                        <button type="submit" class="cf-link ml-3 cf-
table-button"><i class="lni lni-trash"></i></button>
                                    </form>
                                </td>
                            </tr>
                        @endforeach
                    </tbody>
                </table>
            </div>
            <div class="d-flex justify-content-center align-items-center flex-wrap">
                <div class="d-flex align-items-center mb-3 mx-4">
                    {{--
                    <span class="mr-3 d-block">Add
course</span>--}}
                    <a href="{{ route('languages.create') }}" class="w-100 cf-button
px-5">Add Language</a>
                </div>
            </div>
            @if(session("entityCreateMsg"))
                <div class="success-msg">
                    {{ session("entityCreateMsg") }}
                </div>
            @endif
            @if(session("entityErrorMsg"))
                <div class="error-msg">
                    {{ session("entityErrorMsg") }}
                </div>
            @endif
        </div>
    </div>

```

```
        @endif
    </div>

</div>
@endsection
```

## Authors

### Create.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course Create @endsection

@section("content")
    <div class="row my-5">
        <div class="col-12">
            <h1 class="text-center py-4">Create Author</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('authors.store') }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="first_name" placeholder="First Name"
                                aria-label="Email" aria-describedby="basic-addon1">
                        </div>
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="last_name" placeholder="Last Name"
                                aria-label="Email" aria-describedby="basic-addon1">
                        </div>
                        <div class="mb-3">
                            <span>Birth Date</span>
                            <input type="date" class="form-control cf-input"
name="birth_date" placeholder="Last Name"
                                aria-label="Email" aria-describedby="basic-addon1">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-3">Add
Author</button>
                        </div>
                    </form>
                </div>
            </div>
        </div>
    </div>
@endsection
```

## Edit.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course Update @endsection

@section("content")
    <div class="row my-5">
        <div class="col-12">
            <h1 class="text-center py-4">Update Author</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('authors.update', ['id' => $author->id])
                    }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="first_name" placeholder="First Name"
                            aria-label="Email" aria-describedby="basic-addon1"
value="{{ old('first_name') ? old('first_name') : $author->first_name }}">
                        </div>
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="last_name" placeholder="Last Name"
                            aria-label="Email" aria-describedby="basic-addon1"
value="{{ old('last_name') ? old('last_name') : $author->last_name }}">
                        </div>
                        <div class="mb-3">
                            <span>Birth Date</span>
                            <input type="date" class="form-control cf-input"
name="birth_date" placeholder="Last Name"
                            aria-label="Email" aria-describedby="basic-addon1"
value="{{ old('birth_date') ? old('birth_date') : $author->birth_date }}">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-3">Update
Author</button>
                        </div>
                    </form>
                </div>
            </div>
        </div>
    </div>
</div>
@endsection
```

## Categories

Create.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Category Create @endsection

@section("content")
    <div class="row my-5">
        <div class="col-12">
            <h1 class="text-center py-4">Create Category</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('categories.store') }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="name" placeholder="Name"
                                aria-label="Email" aria-describedby="basic-addon1">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-3">Add
Category</button>
                        </div>
                    </form>
                </div>
            </div>
        </div>
    </div>
</div>
@endsection
```



## Edit.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Category Edit @endsection

@section("content")
    <div class="row my-5">
        <div class="col-12">
            <h1 class="text-center py-4">Edit Category</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('categories.update', ["id" => $category->id]) }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="name" placeholder="Name"
                                aria-label="Email" aria-describedby="basic-addon1"
value="{{ old("name") ? old("name") : $category->name }}">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-3">Update
Category</button>
                        </div>
                    </form>
                    @foreach($errors->all() as $error)
                        <div class="error-msg">
                            {{ $error }}
                        </div>
                    @endforeach
                </div>
            </div>
        </div>
    </div>
@endsection
```

## Courses

### Create.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course Create @endsection

@section("scripts")
    <script src="{{ asset('assets/js/course_create.js') }}"></script>
@endsection

@section("content")
    <div class="row mx-0 mb-5">
        <div class="col-12">
            <h1 class="text-center py-4">Create</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('course.store') }}" method="POST"
enctype="multipart/form-data">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="name" placeholder="Course name"
                                aria-label="Email" aria-describedby="basic-addon1"
value="{{ old('name') }}">
                        </div>
                        <div class="mb-3">
                            <span>Author</span>
                            <select class="form-control cf-input cf-select"
name="author_id" placeholder="Author"
                                aria-label="Author" aria-describedby="basic-
addon1">
                                @foreach($authors as $author)
                                    <option
                                        value="{{ $author->id }}">{{ $author-
>first_name . " " . $author->last_name }}</option>
                                @endforeach
                            </select>
                        </div>
                        <div class="mb-3">
                            <span>Description</span>
                            <textarea name="description" placeholder="Description..."
                                class="w-100 cf-text-area">{{ old('description')
}}</textarea>
                        </div>
                        <div class="mb-3">
                            <span>Release date</span>
                            <input type="date" class="form-control cf-input"
name="release_date" placeholder="Release Date"
                                aria-label="Email" aria-describedby="basic-addon1"
value="{{ old('release_date') }}">
                        </div>
                        <div class="mb-3">
                            <span>Price ($)</span>

```

```

        <input type="text" class="form-control cf-input"
name="price" placeholder="Price ($)"
        aria-label="Email" aria-describedby="basic-addon1"
value="{{ old("price") }}">
    </div>
    <div class="mb-3">
        <span>Discount (%)</span>
        <input type="text" class="form-control cf-input"
name="discount" placeholder="Discount in %"
        aria-label="Email" aria-describedby="basic-addon1"
value="{{ old("discount") }}">
    </div>
    <div class="mb-4">
        <p class="cf-text-medium text-center mb-2">Category</p>
        <select class="form-control cf-input cf-select"
name="category_id" placeholder="Category"
        aria-label="Author" aria-describedby="basic-
addon1">
            @foreach($categories as $category)
                <option value="{{ $category->id }}">{{ $category-
>name }}</option>
            @endforeach
        </select>
    </div>
    <div class="mb-4">
        <p class="cf-text-medium text-center mb-2">Difficulty</p>
        <select class="form-control cf-input cf-select"
name="difficulty_id" placeholder="Category"
        aria-label="Author" aria-describedby="basic-
addon1">
            @foreach($difficulties as $difficulty)
                <option value="{{ $difficulty->id }}">{{
$difficulty->name }}</option>
            @endforeach
        </select>
    </div>
    <div class="mb-3">
        <p class="text-center w-100 cf-text-medium mb-
2">Languages</p>
        <div class="d-flex justify-content-center flex-wrap">
            @foreach($languages as $language)
                <div class="d-flex align-items-center cf-checkbox
mr-3 mb-1">
                    <div>
                        <input type="checkbox" id="language{{
$loop->index }}" name="language_id[]"
                            value="{{ $language->id }}" />
                        <i class="material-icons cf-
checked">check_box</i>
                        <i class="material-icons cf-
unchecked">check_box_outline_blank</i>
                    </div>
                    <label class="mb-0 ml-2"
                        for="language{{ $loop->index }}">{{
$language->name }}</label>
                </div>
            @endforeach

```

```

        </div>
    </div>
    <div class="mb-3 mt-2">
        <p class="cf-text-medium text-center">Course cover</p>
        <input id="course_image_input" type="file" class="form-
control cf-input" name="image"
placeholder="Course cover" aria-label="Email" aria-
describedby="basic-addon1">
        
    </div>
    <div>
        <button type="submit" class="w-100 cf-button mt-3">Add
course</button>
    </div>
    @if($errors->any())
        @foreach($errors->all() as $error)
            <div class="error-msg my-2">
                {{ $error }}
            </div>
        @endforeach
    @endif
</form>
</div>
</div>
</div>
</div>
@endsection

```

## Edit.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course Edit @endsection

@section("scripts")
    <script src="{{ asset('assets/js/course_create.js') }}"></script>
@endsection

@section("content")
    <div class="row mx-0 mb-5">
        <div class="col-12">
            <h1 class="text-center py-4">Edit</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('course.update', [ 'id' => $course->id ]) }}" method="POST" enctype="multipart/form-data">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
                                name="name" placeholder="Course name"
                                aria-label="Email" aria-describedby="basic-addon1"
                                value="{{ old('name') ? old('name') : $course->name }}" />
                        </div>
                        <div class="mb-3">
                            <span>Author</span>
                            <select class="form-control cf-input cf-select"
                                name="author_id" placeholder="Author"
                                aria-label="Author" aria-describedby="basic-addon1">
                                @foreach($authors as $author)
                                    <option
                                        value="{{ $author->id }}" @if($author->id ==
$course->author_id) selected @endif>{{ $author->first_name . " " . $author->last_name
}}</option>
                                @endforeach
                            </select>
                        </div>
                        <div class="mb-3">
                            <span>Description</span>
                            <textarea name="description" placeholder="Description..."
                                class="w-100 cf-text-area">{{ old('description')
? old('description') : $course->description }}</textarea>
                        </div>
                        <div class="mb-3">
                            <span>Release date</span>
                            <input type="date" class="form-control cf-input"
                                name="release_date" placeholder="Release Date"
                                aria-label="Email" aria-describedby="basic-addon1"
                                value="{{ old('release_date') ? old('release_date') : $course->release_date }}" />
                        </div>
                        <div class="mb-3">
                            <span>Price ($)</span>
                            <input type="text" class="form-control cf-input"
                                name="price" placeholder="Price ($)" />
                    </form>
                </div>
            </div>
        </div>
    </div>
```

```

        aria-label="Email" aria-describedby="basic-addon1"
value="{{ old("price") ? old("price") : $course->price }}"
    </div>
    <div class="mb-3">
        <span>Discount (%)</span>
        <input type="text" class="form-control cf-input"
name="discount" placeholder="Discount in %)"
        aria-label="Email" aria-describedby="basic-addon1"
value="{{ old("discount") ? old("discount") : $course->discount }}"
    </div>
    <div class="mb-4">
        <p class="cf-text-medium text-center mb-2">Category</p>
        <select class="form-control cf-input cf-select"
name="category_id" placeholder="Category"
        aria-label="Author" aria-describedby="basic-
addon1">
            @foreach($categories as $category)
                <option value="{{ $category->id }}" @if($category-
>id == $course->category_id) selected @endif>{{ $category->name }}</option>
            @endforeach
        </select>
    </div>
    <div class="mb-4">
        <p class="cf-text-medium text-center mb-2">Difficulty</p>
        <select class="form-control cf-input cf-select"
name="difficulty_id" placeholder="Category"
        aria-label="Author" aria-describedby="basic-
addon1">
            @foreach($difficulties as $difficulty)
                <option value="{{ $difficulty->id }}"
@if($difficulty->id == $course->difficulty_id) selected @endif>{{ $difficulty->name
}}</option>
            @endforeach
        </select>
    </div>
    <div class="mb-3">
        <p class="text-center w-100 cf-text-medium mb-
2">Languages</p>
        <div class="d-flex justify-content-center flex-wrap">
            @foreach($languages as $language)
                <div class="d-flex align-items-center cf-checkbox
mr-3 mb-1">
                    <div>
                        <input type="checkbox" id="language{{
$loop->index }}" name="language_id[]"
                        value="{{ $language->id }}"
                        @if($course->languages-
>contains("id", $language->id))
                            checked
                        @endif
                    </div>
                    <i class="material-icons cf-
checked">check_box</i>
                    <i class="material-icons cf-
unchecked">check_box_outline_blank</i>
                </div>
                <label class="mb-0 ml-2"

```

```

for="language{{ $loop->index }}">{{
$language->name }}</label>
        </div>
    @endforeach
</div>
</div>
<div class="mb-3 mt-2">
    <p class="cf-text-medium text-center">Course cover</p>
    <input id="course_image_input" type="file" class="form-
control cf-input" name="image"
placeholder="Course cover" aria-label="Email" aria-
describedby="basic-addon1">
    
    </div>
    <div>
        <button type="submit" class="w-100 cf-button mt-3">Update
course</button>
    </div>
    @if($errors->any())
        @foreach($errors->all() as $error)
            <div class="error-msg my-2">
                {{ $error }}
            </div>
        @endforeach
    @endif
</form>
</div>
</div>
</div>
</div>
@endsection

```

## Index.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Courses @endsection

@section("stylesheets")
    <link href="{{ asset("assets/css/courses.css") }}" rel="stylesheet"
type="text/css" />
@endsection
@section("scripts")
    <script src="{{ asset("assets/js/courses.js") }}"></script>
@endsection

@section("content")
<div class="container-fluid pb-4 pt-4 paddding">
    <div class="container paddding">
        <div class="row mx-0">
            <div class="col-md-8 animate-box" data-animate-effect="fadeInLeft">
                <div>
                    <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-
4">Courses</div>
                </div>
                <div class="course-container">

                </div>
                <div class="row">
                    <div id="pagination-container" class="col-12 text-center pb-4 pt-4
pl-sm-4 pr-sm-4 pl-0 pr-0 d-flex flex-wrap justify-content-center">
                        <a href="#" class="btn_mange_pagging mb-2 pagination-btn prev-
next-btn" data-inc="-1">
                            <i class="fa fa-long-arrow-left"></i><span class="d-lg-
inline-block d-none"> Previous </span>
                        </a>
                        <a href="#" class="btn_pagging mb-2 pagination-btn page-btn"
data-page="1">1</a>
                        <a href="#" class="btn_mange_pagging mb-2 pagination-btn prev-
next-btn" data-inc="1">
                            <span class="d-lg-inline-block d-none">Next</span> <i
class="fa fa-long-arrow-right"></i>&nbsp;&nbsp;&nbsp;
                        </a>
                    </div>
                </div>
                <div class="col-md-3 animate-box" data-animate-effect="fadeInRight">
                    <div>
                        <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-
4">Filters</div>
                        <div class="search">
                            <input id="course-search" type="text" name="search"
placeholder="Search courses..." class="py-1 px-3">
                        </div>
                        <div class="sub-filter">
                            <h4>Language</h4>
                            <ul>
                                @foreach($languages as $language)
                                    <li class="mb-2">
                                        <div class="d-flex align-items-center cf-
```



```

checkbox">
                                <div>
                                    <input class="language-filter"
name="language[]" type="checkbox" id="language{{ $language->id }}" value="{{
$language->id }}" />
                                    <i class="material-icons cf-
checked">check_box</i>
                                    <i class="material-icons cf-
unchecked">check_box_outline_blank</i>
                                </div>
                                <label class="mb-0 ml-2" for="language{{
$language->id }}">{{ $language->name }}</label>
                                </div>
                            </li>
                        @endforeach
                    </ul>
                </div>
                <div class="sub-filter mb-4">
                    <h4>Difficulty</h4>
                    <select id="difficulty-filter" name="difficulty" class="cf-
input cf-select p-2 w-100">
                        <option value="-1">(None)</option>
                        @foreach($difficulties as $difficulty)
                            <option value="{{ $difficulty->id }}">{{ $difficulty-
>name }}</option>
                        @endforeach
                    </select>
                </div>
                <div class="sub-filter">
                    <h4>Category</h4>
                    <select id="category-filter" name="category" class="cf-input
cf-select p-2 w-100">
                        <option value="-1">(None)</option>
                        @foreach($categories as $category)
                            <option value="{{ $category->id }}">{{ $category->name
}}</option>
                        @endforeach
                    </select>
                </div>
                <button id="apply-filters-btn" type="button" class="cf-input cf-
button w-100 my-4">Apply</button>
            </div>
            <div class="clearfix"></div>
        </div>
    </div>
</div>
<div class="container-fluid pb-4 pt-5">
    <div class="container animate-box">
        <div>
            <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-
4">Recommended courses</div>
            </div>
            <div class="owl-carousel owl-theme" id="slider2">
                @foreach($recommended_courses as $course)
                    <div class="item px-2">
                        <div class="fh5co_hover_news_img">

```

```

        <div class="fh5co_news_img"></div>
        <div>
            <a href="#" class="d-block fh5co_small_post_heading"><span
class="">{{ $course->name }}</span></a>
            <div class="c_g"><i class="fa fa-clock-o"></i> {{ $course-
>release_date }}</div>
        </div>
    </div>
</div>
    @endforeach
</div>
</div>
@endsection

```

Show.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course @endsection

@section("scripts")
    {{--Parallax--}}
    <script src="{{ asset('assets/js/jquery.stellar.min.js') }}"></script>
    <script>if (!navigator.userAgent.match(/Android|BlackBerry|iPhone|iPad|iPod|Opera
Mini|IEMobile/i)) {$(window).stellar();}</script>
@endsection

@section("body-classes") single @endsection

@section("content")
<div id="fh5co-title-box" >
    <div class="overlay" style="background-image: url(&apos;{{
asset('assets/images/course wallpaper - compressed.jpg') }}&apos;); background-size:
cover; background-repeat: no-repeat";></div>
    <div class="page-title">
        <span>{{ $course->release_date }}</span>
        <h2>{{ $course->name }}</h2>
    </div>
</div>
<div id="fh5co-single-content" class="container-fluid pb-4 pt-4 paddding">
    <div class="container paddding">
        <div class="row mx-0">
            <div class="col-md-8 animate-box my-5" data-animate-effect="fadeInLeft">
                <div>
                    
                </div>
                <div>
                    <h2 class="my-5">Description</h2>
                    <p>{{ $course->description }}</p>
                </div>

                <div class="d-flex align-items-center">
                    <h2 class="py-5">Price: </h2>
                    <p class="my-1 ml-3 pb-1" style="font-size:24px">{{ $course->price
}}$</p>
                </div>

                <div class="d-flex justify-content-center mt-2">
                    <button class="cf-input cf-button w-50">Add to cart</button>
                </div>
            </div>
            <div class="col-md-3 animate-box" data-animate-effect="fadeInRight">
                <div>
                    <div class="fh5co_heading fh5co_heading_border_bottom py-2 mb-
4">Tags</div>
                </div>
                <div class="clearfix"></div>
                <div class="fh5co_tags_all">
                    <a href="#" class="fh5co_tagg link-disabled">{{ $course->category-
>name }}</a>
                </div>
            </div>
        </div>
    </div>
</div>
```



## Languages

Create.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course Create @endsection

@section("content")
    <div class="row my-5">
        <div class="col-12">
            <h1 class="text-center py-4">Create Language</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('languages.store') }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="name" placeholder="Name"
                                aria-label="Email" aria-describedby="basic-addon1">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-3">Add
Language</button>
                        </div>
                    </form>
                </div>
            </div>
        </div>
    </div>
@endsection
```

## Edit.blade.php

```
@extends("common.layouts.layout")

@section("title") CodeFreakz | Course Create @endsection

@section("content")
    <div class="row my-5">
        <div class="col-12">
            <h1 class="text-center py-4">Create Language</h1>
        </div>
        <div class="col-md-10 offset-md-1 col-lg-8 offset-lg-2 col-xl-6 offset-xl-3">
            <div class="row">
                <div class="col-12 col-sm-8 offset-sm-2 px-4 px-sm-auto">
                    <form action="{{ route('languages.store') }}" method="POST">
                        @csrf
                        <div class="input-group mb-3">
                            <input type="text" class="form-control cf-input"
name="name" placeholder="Name"
                                aria-label="Email" aria-describedby="basic-addon1">
                        </div>
                        <div>
                            <button type="submit" class="w-100 cf-button mt-3">Add
Language</button>
                        </div>
                    </form>
                </div>
            </div>
        </div>
    </div>
@endsection
```

## Routes

### Web.php

```
<?php

use Illuminate\Support\Facades\Route;

Route::get('/', [\App\Http\Controllers\HomeController::class, "index"])->name("home");

//region Courses
Route::get('/courses', [\App\Http\Controllers\CourseController::class, "index"])->name("courses");
Route::get('/courses/{id}', [\App\Http\Controllers\CourseController::class, "show"])->name("courses.show")
    ->whereNumber("id");
Route::get('/courses/create', [\App\Http\Controllers\CourseController::class, "create"])->name("course.create");
Route::post('/courses/store', [\App\Http\Controllers\CourseController::class, "store"])->name("course.store");
Route::get('/courses/edit/{id}', [\App\Http\Controllers\CourseController::class, "edit"])->name("course.edit")
    ->whereNumber("id");
Route::post('/courses/update/{id}', [\App\Http\Controllers\CourseController::class, "update"])->name("course.update");
Route::delete('/courses/delete/{id}', [\App\Http\Controllers\CourseController::class, "destroy"])->name("course.delete")
    ->whereNumber("id");

Route::get('/courses/pagination', [\App\Http\Controllers\CourseController::class, "paginate"])->name("course.paginate");
//endregion

//region Authors
Route::get("/authors/create", [\App\Http\Controllers\AuthorController::class, "create"])->name("authors.create");
Route::post("/authors/store", [\App\Http\Controllers\AuthorController::class, "store"])->name("authors.store");
Route::get("/authors/edit/{id}", [\App\Http\Controllers\AuthorController::class, "edit"])->name("authors.edit")
    ->whereNumber("id");
Route::post("/authors/update/{id}", [\App\Http\Controllers\AuthorController::class, "update"])->name("authors.update")
    ->whereNumber("id");
Route::delete("/authors/delete/{id}", [\App\Http\Controllers\AuthorController::class, "destroy"])->name("authors.delete")
    ->whereNumber("id");
//endregion

//region Languages
Route::get("/languages/create", [\App\Http\Controllers\LanguageController::class, "create"])->name("languages.create");
Route::post("/languages/store", [\App\Http\Controllers\LanguageController::class, "store"])->name("languages.store");
Route::get("/languages/edit/{id}", [\App\Http\Controllers\LanguageController::class, "edit"])->name("languages.edit")
```

```

        ->whereNumber("id");
Route::post("/languages/update/{id}",
[\App\Http\Controllers\LanguageController::class, "update"])->name("languages.update")
        ->whereNumber("id");
Route::delete("/languages/delete/{id}",
[\App\Http\Controllers\LanguageController::class, "destroy"])-
>name("languages.delete")
        ->whereNumber("id");
//endregion

//region Categories
Route::get("/categories/create", [\App\Http\Controllers\CategoryController::class,
"create"])->name("categories.create");
Route::post("/categories/store", [\App\Http\Controllers\CategoryController::class,
"store"])->name("categories.store");
Route::get("/categories/edit/{id}", [\App\Http\Controllers\CategoryController::class,
"edit"])->name("categories.edit")
        ->whereNumber("id");
Route::post("/categories/update/{id}",
[\App\Http\Controllers\CategoryController::class, "update"])-
>name("categories.update")
        ->whereNumber("id");
Route::delete("/categories/delete/{id}",
[\App\Http\Controllers\CategoryController::class, "destroy"])-
>name("categories.delete")
        ->whereNumber("id");
//endregion

Route::get('/contact', [\App\Http\Controllers>ContactController::class, "index"])-
>name("contact");
Route::get('/about', [\App\Http\Controllers>AboutController::class, "index"])-
>name("about");

//region Account routes
Route::get("/login", [\App\Http\Controllers\AccountController::class, "loginPage"])-
>name("loginPage");
Route::post("/login", [\App\Http\Controllers\AccountController::class, "login"])-
>name("login");
Route::get("/register", [\App\Http\Controllers\AccountController::class,
"registerPage"])->name("registerPage");
Route::post("/register", [\App\Http\Controllers\AccountController::class,
"register"])->name("register");
Route::get("/logout", [\App\Http\Controllers\AccountController::class, "logout"])-
>name("logout");
//endregion

//region Admin
Route::middleware("admin")->group(function() {
    Route::get("/admin/content/courses",
[\App\Http\Controllers\AdminPanelController::class, "coursesPage"])-
>name("admin.coursesPage");
    Route::get("/admin/content/authors",
[\App\Http\Controllers\AdminPanelController::class, "authorsPage"])-
>name("admin.authorsPage");
    Route::get("/admin/content/languages",
[\App\Http\Controllers\AdminPanelController::class, "languagesPage"])-
>name("admin.languagesPage");

```



```

Route::get("/admin/content/categories",
[\App\Http\Controllers\AdminPanelController::class, "categoriesPage"])-
>name("admin.categoriesPage");
Route::get("/admin/content/difficulties",
[\App\Http\Controllers\AdminPanelController::class, "difficultiesPage"])-
>name("admin.difficultiesPage");
Route::get("/admin/content/menus",
[\App\Http\Controllers\AdminPanelController::class, "menusPage"])-
>name("admin.menusPage");

Route::get("/admin/logs", [\App\Http\Controllers\AdminPanelController::class,
"logsPage"])->name("admin.logsPage");
});
//endregion

Route::get("/403", [\App\Http\Controllers>StatusController::class, "forbidden"])-
>name("403");

Route::get("/test", [\App\Http\Controllers\TestController::class, "test"]);

```