

Python Programming

Roadmap: [Python Roadmap](#)

Chapter 1: Introduction to Python

- 1.1 History of Python
 - 1.2 What is Python?
 - 1.3 Why Learn Python?
 - 1.4 Main Features of Python
 - 1.5 Python Version
 - 1.6 How Python Code Runs
 - 1.7 Compiler vs Interpreter Basics
-

Chapter 2: Environment Setup

- 2.1 Installing Python
 - 2.2 Checking Python Version
 - 2.3 Installing VS Code
 - 2.4 Terminal and Command Line Basics
 - 2.5 Python Interpreter
 - 2.6 Python REPL
 - 2.7 Creating and Running .py Files
 - 2.8 Virtual Environments Using venv
 - 2.9 Installing Packages Using pip
 - 2.10 requirements.txt
-

Chapter 3: Python Syntax Basics

- 3.1 First Python Code
- 3.2 Python File Structure
- 3.3 Comments
- 3.4 Indentation Rules
- 3.5 Variables
- 3.6 Naming Conventions
- 3.7 Keywords
- 3.8 Print Statements
- 3.9 Input from Users
- 3.10 Basic Program Structure
- 3.11 Common Syntax Errors
- 3.12 Quick Revision Table

Chapter 4: Data Types

4.1 Numbers

4.1.1 `int`

4.1.2 `float`

4.1.3 `complex`

4.2 Strings

4.2.1 String Creation

4.2.2 String Indexing

4.2.3 String Slicing

4.2.4 String Immutability

4.3 Boolean Data Type

4.3.1 `True`

4.3.2 `False`

4.4 `None` Type

4.5 Type Checking with `type()`

4.6 Type Conversion

4.7 Mutable vs Immutable Data Types

4.8 Simple Memory Understanding

4.9 Quick Revision

Chapter 5: Operators

5.1 Arithmetic Operators

5.2 Comparison Operators

5.3 Logical Operators

5.4 Assignment Operators

5.5 Membership Operators

5.6 Identity Operators

5.7 Bitwise Operators

5.8 Operator Precedence

Chapter 6: String Operations

6.1 String Creation

6.2 String Indexing

6.3 String Slicing

6.4 String Methods

6.5 String Formatting

6.5.1 f-strings

6.5.2 `format()` Method

6.5.3 Old `%` Formatting

6.6 String Concatenation

6.7 Escape Characters

6.8 Raw Strings

6.9 String Multiplication

Chapter 7: Control Flow

- 7.1 if Statement
 - 7.2 if-else Statement
 - 7.3 elif Statement
 - 7.4 Nested Conditions
 - 7.5 Ternary Operator
 - 7.6 match-case
 - 7.7 Truthy and Falsy Values
-

Chapter 8: Loops and Iteration

- 8.1 for Loop
- 8.2 while Loop
- 8.3 break
- 8.4 continue
- 8.5 pass
- 8.6 else with Loops
- 8.7 Nested Loops
- 8.8 range()
- 8.9 enumerate()
- 8.10 zip()
- 8.11 Iterator Protocol Basics
- 8.12 StopIteration

Chapter 9: Data Structures

9.1 Lists

- 9.1.1 Creating Lists
- 9.1.2 Accessing List Values
- 9.1.3 Updating List Values
- 9.1.4 List Methods
- 9.1.5 List Slicing
- 9.1.6 List Comprehensions
- 9.1.7 Nested Lists
- 9.1.8 Sorting and Reversing Lists
- 9.1.9 Copying Lists
- 9.1.10 Shallow Copy vs Deep Copy

9.2 Tuples

- 9.2.1 Creating Tuples
- 9.2.2 Tuple Immutability
- 9.2.3 Tuple Packing
- 9.2.4 Tuple Unpacking

- 9.2.5 Named Tuples
- 9.2.6 Tuple vs List
- 9.2.7 Tuple methods
- 9.2.8 Tuple operations
- 9.2.9 Tuple packing
- 9.2.10 Tuple unpacking
- 9.2.11 Extended Tuple Unpacking
- 9.2.12 Named Tuples
- 9.2.13 Tuple vs List

9.3 Dictionaries

- 9.3.1 Creating Dictionaries
- 9.3.2 Accessing Dictionary Values
- 9.3.3 Updating Dictionary Values
- 9.3.4 Dictionary Methods
- 9.3.5 `get()` Method
- 9.3.6 Nested Dictionaries
- 9.3.7 Dictionary Comprehensions
- 9.3.8 Merging Dictionaries
- 9.3.9 Real-World Dictionary Use Cases
- 9.3.10 Nested Dictionaries
- 9.3.11 Dictionary Comprehensions
- 9.3.12 Merging Dictionaries
- 9.3.13 Copying Dictionaries
- 9.3.14 Dictionary vs List
- 9.3.15 Important Dictionary Operations

9.4 Sets

- 9.4.1 Creating Sets
- 9.4.2 Unique Values
- 9.4.3 Set Elements Must Be Immutable
- 9.4.4 Accessing Set Values
- 9.4.5 Checking Membership
- 9.4.6 Adding Set Items
- 9.4.7 Removing Set Items
- 9.4.8 Set Operations
- 9.4.9 Union
- 9.4.10 Intersection
- 9.4.11 Difference
- 9.4.12 Symmetric Difference
- 9.4.13 Subset, Superset, & Disjoint Sets
- 9.4.14 Set Methods
- 9.4.15 Set Operators
- 9.4.16 Updating Sets with Operations
- 9.4.17 Copying Sets
- 9.4.18 Frozen Sets
- 9.4.19 Set Comprehensions

- 9.4.20 Set Conversion
- 9.4.21 Set vs List vs Tuple

9.5 Collections Module

- 9.5.1 Counter
 - 9.5.2 defaultdict
 - 9.5.3 OrderedDict
 - 9.5.4 deque
 - 9.5.5 ChainMap
-

Chapter 10: Functions

- 10.1 What is a Function?
 - 10.2 Defining Functions
 - 10.3 Calling Functions
 - 10.4 Parameters
 - 10.5 Arguments
 - 10.6 Positional Arguments
 - 10.7 Return Values
 - 10.8 Returning Multiple Values
 - 10.9 Default Parameters
 - 10.10 Keyword Arguments
 - 10.11 *args
 - 10.12 **kwargs
 - 10.13 *args vs **kwargs
 - 10.14 Function Parameter Order
 - 10.15 Docstrings
 - 10.16 Function Naming Rules
-

Chapter 11: Advanced Functions

- 11.1 Functions as First-Class Objects
 - 11.2 Lambda Functions
 - 11.3 map()
 - 11.4 filter()
 - 11.5 reduce()
 - 11.6 Recursion
 - 11.7 Nested Functions
 - 11.8 Closures
 - 11.9 Function Annotations
 - 11.10 Higher-Order Functions
-

Chapter 12: Scope and Namespaces

- 12.1 Local Scope
- 12.2 Global Scope
- 12.3 Local vs Global Scope
- 12.4 Variable Shadowing
- 12.5 global Keyword
- 12.6 Enclosing Scope
- 12.7 nonlocal Keyword
- 12.8 Built-in Scope
- 12.9 LEGB Rule
- 12.10 Namespace Concept
- 12.11 locals() and globals()
- 12.12 NameError & UnboundLocalError
- 12.13 Important Scope Summary Table

Chapter 13: Modules and Packages

- 13.1 Importing Modules
- 13.2 Different Ways to Import
- 13.3 Standard Library Modules
- 13.4 Creating Your Own Modules
- 13.5 Importing Specific Code from Your Own Module
- 13.6 Module Search Path
- 13.7 Exploring a Module with dir()
- 13.8 `__name__ == "__main__"`
- 13.9 Package Structure
- 13.10 `__init__.py`
- 13.11 Absolute Imports
- 13.12 Relative Imports
- 13.13 Package Management Basics
- 13.14 pip Basics
- 13.15 Virtual Environment Basics
- 13.16 requirements.txt
- 13.17 Third-Party Packages
- 13.18 Circular Import Warning

Chapter 14: Object-Oriented Programming

14.1 OOP Fundamentals

- 14.1.1 Classes
- 14.1.2 Objects
- 14.1.3 Attributes
- 14.1.4 Methods
- 14.1.5 `self`
- 14.1.6 `__init__` Constructor
- 14.1.7 Instance Variables

- 14.1.8 Class Variables
- 14.1.9 Methods vs Functions

14.2 OOP Principles

- 14.2.1 Encapsulation
- 14.2.2 Inheritance
- 14.2.3 Method Overriding
- 14.2.4 Polymorphism
- 14.2.5 Duck Typing
- 14.2.6 Abstraction
- 14.2.7 Composition

14.3 Special Methods

- 14.3.1 `__str__`
- 14.3.2 `__repr__`
- 14.3.3 `__len__`
- 14.3.4 `__getitem__`
- 14.3.5 `__add__`
- 14.3.6 `__sub__`
- 14.3.7 `__call__`
- 14.3.8 `__enter__` & `__exit__`
- 14.3.9 Context Manager Real Use
- 14.3.10 Operator Overloading
- 14.3.11 Magic Methods / Dunder Methods
- 14.3.12 Reverse and In-place Operator Methods
- 14.3.13 `__bool__`
- 14.3.14 `__iter__` and `__next__`
- 14.3.15 `__contains__`

Chapter 15: Advanced OOP in Python

- 15.1 `@classmethod`
- 15.2 Class Method as Alternate Constructor
- 15.3 `@staticmethod`
- 15.4 Instance Method vs Class Method vs Static Method
- 15.5 `@property`
- 15.6 `@property` Setter
- 15.7 Read-only Property
- 15.8 Abstract Base Classes
- 15.9 Why Abstract Base Classes Are Used
- 15.10 Mixins
- 15.11 Mixin vs Normal Parent Class
- 15.12 Metaclasses
- 15.13 Data Classes
- 15.14 Normal Class vs Data Class
- 15.15 Default Values in Data Classes
- 15.16 Mutable Defaults in Data Classes
- 15.17 Frozen Data Classes

Chapter 16: File Handling and Error Management

16.1 File Operations

- 16.1.1 File Handling
- 16.1.2 Opening Files
- 16.1.3 Closing Files
- 16.1.4 Reading Files
- 16.1.5 Reading Line by Line
- 16.1.6 Writing Files
- 16.1.7 Appending Files
- 16.1.8 File Modes
- 16.1.9 `with` Statement
- 16.1.10 File Object Methods
- 16.1.11 Binary Files
- 16.1.12 File Paths
- 16.1.13 Basic `os` Module
- 16.1.14 Basic `pathlib` Module
- 16.1.15 Encoding

16.2 Exception Handling

- 16.2.1 try-except
- 16.2.2 Catching Exception Object
- 16.2.3 Multiple except Blocks
- 16.2.4 Handling Multiple Exceptions Together
- 16.2.5 else in Exception Handling
- 16.2.6 finally
- 16.2.7 try-except-else-finally Flow
- 16.2.8 Raising Exceptions
- 16.2.9 Re-raising Exceptions
- 16.2.10 Custom Exceptions
- 16.2.11 Exception Hierarchy
- 16.2.12 Bare except Warning
- 16.2.13 File Handling with Exception Handling

15.3 File Formats

- 16.3.1 Text Files
- 16.3.2 CSV Files
- 16.3.3 `csv.reader` vs `csv.DictReader`
- 16.3.4 JSON Files
- 16.3.5 `json.load()` vs `json.loads()`
- 16.3.6 XML Files

Chapter 17: Advanced Python Concepts

17.1 Decorators

- 17.1.1 Decorators
- 17.1.2 Function Decorators
- 17.1.3 Decorators with Function Arguments
- 17.1.4 `functools.wraps`
- 17.1.5 Decorators with Arguments
- 17.1.6 Multiple Decorators
- 17.1.7 Class Decorators
- 17.1.8 Built-in and Standard Decorators

17.2 Generators and Iterators

- 17.2.1 Generators and Iterators
- 17.2.2 Iterable vs Iterator
- 17.2.3 Iterator Protocol
- 17.2.4 `__iter__`
- 17.2.5 `__next__`
- 17.2.6 Generator Functions
- 17.2.7 `yield`
- 17.2.8 Generator Expressions
- 17.2.9 `yield from`
- 17.2.10 One-time Consumption of Iterators
- 17.2.11 `itertools`
- 17.2.12 Memory Efficiency

16.3 Context Managers

- 16.3.1 `__enter__`
- 16.3.2 `__exit__`
- 16.3.3 Custom Context Manager Using Class
- 16.3.4 `contextlib`
- 16.3.5 `@contextmanager`
- 16.3.6 Resource Management

16.4 Regular Expressions

- 16.4.1 `re` Module
- 16.4.2 Pattern Matching
- 16.4.3 Regex Metacharacters
- 16.4.4 Common Regex Character Classes
- 16.4.5 Groups and Capturing
- 16.4.6 Non-capturing Groups
- 16.4.7 `search()`
- 16.4.8 `match()`
- 16.4.9 `fullmatch()`
- 16.4.10 `findall()`
- 16.4.11 `finditer()`
- 16.4.12 `sub()`
- 16.4.13 `split()`
- 16.4.14 `re.compile()`

Chapter 17: Concurrent and Asynchronous Programming

17.1 Multithreading

- 17.1.1 `threading` Module
- 17.1.2 Creating Threads
- 17.1.3 Managing Threads
- 17.1.4 Race Conditions
- 17.1.5 Locks
- 17.1.6 Synchronization

17.2 Multiprocessing

- 17.1.1 Managing Processes
- 17.1.2 Process Pools
- 17.1.3 Memory Sharing Basics
- 17.1.4 Concurrent Futures

17.3 Concurrent Futures

- 17.3.1 `ThreadPoolExecutor`
- 17.3.2 `ProcessPoolExecutor`
- 17.3.3 Futures
- 17.3.4 Async Programming

17.4 Async Programming

- 17.4.1 `asyncio`
 - 17.4.2 `async` and Coroutines
 - 17.4.3 `await`
 - 17.4.4 Event Loop
 - 17.4.5 Tasks
 - 17.4.6 `asyncio.gather()`
 - 17.4.7 Async Futures
 - 17.4.8 Async Context Managers
 - 17.4.9 Async vs Threading vs Multiprocessing
-

Chapter 1: Python Overview

1.1 History of Python

Python was created by **Guido van Rossum**.

He started working on Python in the late 1980s, and Python was first released in **1991**.

The language was designed to be simple, readable, and easy to use. Guido wanted Python code to look clean and understandable, so programmers could focus more on solving problems instead of writing complicated syntax.

Python's name does not come from the snake. It was inspired by a British comedy show called **"Monty Python's Flying Circus."**

Over time, Python became popular because it was easy for beginners and powerful for professionals.

Today, Python is used in many fields like:

- Web development
- Automation
- Data science
- Artificial intelligence
- Machine learning
- Testing
- Scripting
- Backend development

1.2 What is Python?

Python is a high-level, general-purpose programming language.

It is used to write programs for automation, web development, data handling, artificial intelligence, machine learning, scripting, testing, and many other tasks. Python is popular because its syntax is simple and easy to read.

Example:

```
PYTHON CODE  
print("Hello, World!")
```

Output: Hello, World!

Python files are saved with the **.py** extension. Example: main.py, app.py, hello.py

1.3 Why Learn Python?

Python is easy to start with and powerful enough for real-world projects.

Python is useful because:

- It is beginner-friendly.
- It is used in many industries.
- It has simple syntax.
- It has many libraries.
- It is good for automation.
- It is widely used in AI, data science, and backend development.

1.4 Main Features of Python

Feature	Meaning
Easy syntax	Python code is simple and readable
High-level	We do not need to deal directly with machine-level details
Interpreted	Python code runs using the Python interpreter
Dynamically typed	No need to declare variable type manually
Object-oriented	Supports classes and objects
Cross-platform	Runs on Windows, macOS, and Linux
Large library support	Many built-in and external libraries are available
Open-source	Free to use

1.5 Python Version

For modern learning, use **Python 3**. Python 2 is old and should not be used for new learning.

To check Python version, use:

`python --version` or: `python3 --version`

Example output: Python 3.12.5

1.6 How Python Code Runs

Basic flow:

Python Code → Python Interpreter → Output

More accurate flow:

Source Code → Bytecode → Python Virtual Machine → Output

For now, remember:

- Python code is written in `.py` files.
- Python interpreter reads and runs the code.
- Python runs code from top to bottom.
- Output is shown on the screen.

1.7 Compiler vs Interpreter Basics

Before code runs, it must be translated into a form the computer can understand.

There are two common translators:

- Compiler
- Interpreter

Compiler

A compiler translates the whole program before running it.

Flow: **Source Code → Compiler → Executable File → Run Program**

Examples of compiled languages:

- C
- C++
- Go
- Rust

Interpreter

An interpreter runs code more directly.

Flow: **Source Code → Interpreter → Output**

Python is commonly called an interpreted language.

Compiler vs Interpreter

Point	Compiler	Interpreter
Translation	Translates full code before running	Runs code more directly
Speed	Usually faster after compilation	Usually slower
Error checking	Many errors found before running	Errors can appear while running
Examples	C, C++, Go, Rust	Python, JavaScript, Ruby

Chapter 2: Environment Setup

Environment setup means preparing your computer so you can write, run, and manage Python programs properly.

For Python development, we mainly need:

1. Python installed on the system
2. A code editor like VS Code
3. Terminal/Command Prompt basics
4. Package manager `pip`
5. Virtual environment setup using `venv`

Basic setup flow:



2.1 Installing Python

The safest way is to download Python from the official Python website. The official Python downloads page provides the latest stable Python release and installers for different operating systems.

For Windows

1. Go to the official Python website.
2. Download the latest stable Python 3 installer.
3. Open the installer.
4. Select **Add python.exe to PATH**.
5. Click **Install Now**.
6. Wait for installation to complete.
7. Open Command Prompt and check the version.

Important: Always tick: Add python.exe to PATH

This option allows you to run Python from the terminal.

For macOS

Steps:

1. Download the macOS installer from the official Python website.
2. Open the `.pkg` file.
3. Follow the installation steps.
4. Open Terminal.
5. Check Python version.

Command: `python3 --version`

For Linux

Many Linux systems already come with Python installed.

Check version: `python3 --version`

For Ubuntu/Debian-based systems, Python can usually be installed with:

```
sudo apt update
```

```
sudo apt install python3 python3-pip python3-venv
```

2.2 Checking Python Version

Windows

```
python --version or: py --version
```

macOS/Linux

```
python3 --version
```

2.3 Installing VS Code

VS Code is a code editor used to write and run Python code. Python itself runs the code, but VS Code helps us write code easily.

Steps to Install VS Code

1. Download VS Code from the official website.
2. Install it.
3. Open VS Code.
4. Go to Extensions.
5. Search for **Python**.
6. Install the official Python extension by Microsoft.
7. Open a Python file.
8. Select Python interpreter if VS Code asks.

Creating First Python File in VS Code

Create a file: hello.py

Write: print("Hello CodeWithNishchal")

Run the file.

Output: Hello CodeWithNishchal

Ways to Run Python in VS Code

You can run Python code by:

1. Clicking the **Run** button.
2. Right-clicking and selecting **Run Python File in Terminal**.
3. Opening terminal and running:

python hello.py or: python3 hello.py

VS Code's Python extension provides multiple ways to run Python files, including the "Run Python File in Terminal" option.

Bad file names: random.py, math.py, sys.py

Better file names: number_game.py, student_report.py, calculator.py

2.4 Terminal and Command Line Basics

The terminal / command prompt is a place where we type commands to interact with the computer.

Task	Windows Command	macOS/Linux Command	Meaning
Check current folder	<code>pwd</code>	<code>pwd</code>	Shows the current folder/location in terminal
List files and folders	<code>dir</code>	<code>ls</code>	Shows files and folders inside the current folder
Change folder	<code>cd folder_name</code>	<code>cd folder_name</code>	Moves into a folder
Go back one folder	<code>cd ..</code>	<code>cd ..</code>	Moves one level back
Create folder	<code>mkdir python-notes</code>	<code>mkdir python-notes</code>	Creates a new folder named <code>python-notes</code>
Clear terminal	<code>cls</code>	<code>clear</code>	Clears the terminal screen

Running a Python File from Terminal

Suppose your file name is:

app.py

Run it using: `python app.py` or: `python3 app.py`

Example file:

PYTHON CODE

```
print("Terminal is running Python")
```

Output: Terminal is running Python

2.5 Python Interpreter

The Python interpreter is the program that reads and runs Python code.

When we write: `print("Hello")`

the computer does not understand this directly.

The Python interpreter reads this code and executes it.

Basic flow: **Python Code** → **Python Interpreter** → **Output**

2.6 Python REPL

REPL stands for:

- **Read**
- **Evaluate**
- **Print**
- **Loop**

Python REPL allows us to run Python code line by line. It is useful for quick testing.

Opening Python REPL

Windows: `python` or: `py`

macOS/Linux: `python3`

You may see something like: `>>>`

This means Python REPL is ready.

REPL Example

```
>>> 10 + 20
30
>>> print("Hello")
Hello
>>> name = "Aman"
>>> name
'Aman'
```

Exiting Python REPL

Use: `exit()`

or press:

Ctrl + Z then Enter on Windows

Ctrl + D on macOS/Linux

REPL vs Python File

REPL	Python File
Used for quick testing	Used for complete programs
Code is not saved automatically	Code is saved in <code>.py</code> file
Runs line by line	Runs full file
Good for experiments	Good for projects

When to Use REPL

Use REPL for:

- Testing small calculations
- Checking syntax
- Trying functions
- Quick experiments

2.7 Creating and Running `.py` Files

A Python file is a file that contains Python code. Python files use the `.py` extension.

Examples:

`main.py`, `hello.py`, `calculator.py`, `student_app.py`

Creating a Python File

Steps:

1. Create a project folder.
2. Open it in VS Code.
3. Create a new file.
4. Save it with the `.py` extension.
5. Write Python code.
6. Run the file.

Example File

File name: `hello.py`

Code:

PYTHON CODE

```
print("Hello, Python")  
print("This is my first Python file")
```

Run:

`python hello.py` OR `python3 hello.py`

Output:

Hello, Python
This is my first Python file

Python Runs File Top to Bottom

PYTHON CODE

```
print("Start")  
name = "Nishchal"  
print("Name:", name)  
print("End")
```

Output:

Start
Name: Nishchal
End

Common Mistakes

- Saving file as `hello.py.txt`.
- Forgetting `.py` extension.
- Running the wrong file.
- Writing Python code in the terminal instead of a file.
- Not saving file before running.
- Giving file names with spaces.

Bad: my first python file.py

Good: first_python_file.py

Best Practices

- Use lowercase file names.
- Use underscores for multiple words.
- Keep one project in one folder.
- Save before running.
- Keep file names meaningful.

2.8 Virtual Environments Using `venv`

A virtual environment is an isolated environment for a Python project. It keeps project packages separate from other projects.

Python's official documentation says `venv` is the standard tool for creating virtual environments, and each virtual environment has its own independent set of installed Python packages.

Why Virtual Environment is Needed

Suppose you have two projects:

Project A needs package version 1.0

Project B needs package version 2.0

If both projects use the same global Python environment, package conflicts can happen.

Virtual environments solve this problem.

Computer Python

↓

Project A → `venv` → packages for Project A

Project B → `venv` → packages for Project B

Project C → `venv` → packages for Project C

2.9 Installing Packages Using `pip`

`pip` is Python's package installer. It is used to install external libraries.

Python's official installing guide describes PyPI as a public repository of open-source packages, and `pip` is used to install packages from it.

What is a Package?

A package is reusable code created by someone else. Instead of writing everything from scratch, we can install packages.

Example packages:

Package	Use
requests	Working with APIs
pandas	Data analysis
numpy	Numerical computing
flask	Web development
django	Web development
pytest	Testing

Check `pip` Version

`pip --version` or: `python -m pip --version`

On macOS/Linux: `python3 -m pip --version`

Install a Package

Example: `pip install requests`

Better command: `python -m pip install requests`

On macOS/Linux: `python3 -m pip install requests`

Why `python -m pip` is Better

This makes sure `pip` installs the package for the same Python interpreter you are using. This is helpful when multiple Python versions are installed.

List Installed Packages

`pip list` or: `python -m pip list`

2.10 requirements.txt

`requirements.txt` is a file that stores the list of packages used in a Python project.

It helps other people install the same packages easily.

Example:

```
requests==2.32.3
```

```
pandas==2.2.2
```

```
numpy==2.0.1
```

Why `requirements.txt` is Important

Suppose you create a project and install many packages. Later, you share the project with another person. Instead of telling them every package manually, you give them `requirements.txt`. They can install everything using one command.

Create `requirements.txt`

After installing packages, run:

```
pip freeze > requirements.txt
```

or:

```
python -m pip freeze > requirements.txt
```

This creates a file like:

```
requests==2.32.3
```

```
urllib3==2.2.2
```

```
certifi==2024.7.4
```

Install Packages from `requirements.txt`

Use: `pip install -r requirements.txt`

or:

```
python -m pip install -r requirements.txt
```

Example Project Structure

```
weather_app/
```

```
|
```

```
├── app.py
```

```
├── requirements.txt
```

```
└── venv/
```

Chapter 3. Python Syntax Basics

Python syntax means the set of rules used to write Python programs.

Just like English has grammar, Python also has grammar. If we do not follow Python syntax rules, the program gives an error Python is beginner-friendly because its syntax is simple, readable, and close to normal English.

Example:

```
print("Hello, World!")
```

Output: Hello, World!

3.1 First Python Code


The first Python program usually starts with printing a message on the screen.

```
print("Hello, World!")
```

Output: Hello, World!

Part	Meaning
<code>print</code>	Built-in Python function used to display output
<code>()</code>	Parentheses used to pass data to the function
<code>"Hello, World!"</code>	Text value, also called a string

Diagram:

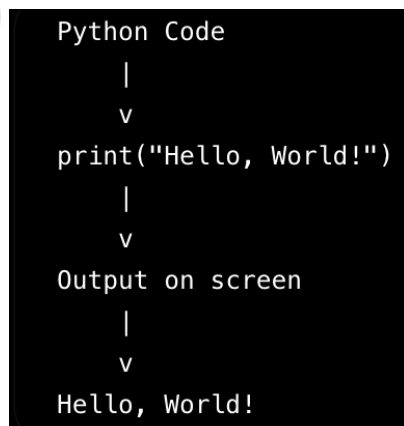

Another example:

```
print("Welcome to Python")  
print("Python is easy to learn")
```

Output:

Welcome to Python
Python is easy to learn

Each `print()` statement displays output on a new line by default.

3.2 Python File Structure

Python programs are usually saved with the `.py` extension.

Example: `hello.py`

Inside `hello.py`:


```
print("This is my first Python file")
```

A Python file can be very simple. It may contain only one line of code. But in larger programs, we usually follow a clean structure.

Basic file structure:

```
# 1. Comments or program description  
  
# 2. Import statements  
import math  
  
# 3. Variables  
radius = 5  
  
# 4. Logic  
area = math.pi * radius * radius  
  
# 5. Output  
print("Area of circle:", area)
```


Diagram:



Important point:

Python does not force a fixed file structure for small programs. But writing code in a clean order makes it easier to read and maintain.

3.3 Comments

Comments are notes written inside a program. Python ignores comments while running the code. Comments are useful for explaining what the code does.

Single-Line Comment

```
# This program prints a message  
print("Hello Python")
```

Output: Hello Python

The line starting with `#` is ignored by Python.

Inline Comment

```
age = 20 # storing user's age  
print(age)
```

Output: 20

Multi-Line Comments

Python does not have a special multi-line comment symbol. The recommended way is to use `#` on each line.

```
# This program calculates
# the sum of two numbers
# and prints the result

a = 10
b = 20
print(a + b)
```

Output: 30

Triple quotes can also be used for multi-line text, but technically they create a string.

```
"""
This is a multi-line string.
It is sometimes used like a comment,
but it is not an actual comment.
"""

print("Program started")
```

Output: Program started

Best practice for beginners: use `#` for comments.

3.4 Indentation Rules

Indentation means spaces at the beginning of a line. Python uses indentation to define code blocks. In many languages, curly braces `{ }` are used to define blocks. Python uses indentation instead.

Example:

```
if 10 > 5:
    print("10 is greater than 5")
```

Output: 10 is greater than 5

Here, the `print()` line is indented because it belongs to the `if` block.

```
if condition:
    statement inside block
    statement inside block

statement outside block
```

```
age = 18

if age >= 18:
    print("You are eligible to vote")
    print("Please carry your ID")

print("Program finished")
```

Output:

You are eligible to vote
Please carry your ID
Program finished

Explanation:

if age >= 18: This checks the condition.
 print("You are eligible to vote")
 print("Please carry your ID")

These two lines are indented, so they are inside the **if** block.

print("Program finished") : **This line is not indented**, so it is outside the **if** block.

Wrong Indentation

```
if 10 > 5:
print("Correct condition")
```

Error: IndentationError: expected an indented block

Correct code:

```
if 10 > 5:
    print("Correct condition")
```

Important Indentation Rules

Use 4 spaces for indentation.

```
if True:
    print("Use 4 spaces")
```

Avoid mixing tabs and spaces.

Wrong style:

```
if True:
    print("This uses a tab")
```

Python may give an error if tabs and spaces are mixed.

3.5 Variables

A variable is a name used to store data.

Example:

```
name = "Rahul"  
age = 21  
height = 5.8  
  
print(name)  
print(age)  
print(height)
```

Output:

Rahul
21
5.8

Variable Name	Value
name	-----> "Rahul"
age	-----> 21
height	-----> 5.8

Basic syntax: variable_name = value

Example:

```
city = "Delhi"  
marks = 85  
is_passed = True
```

Variable	Value	Type
city	"Delhi"	String
marks	85	Integer

is_passed	True	Boolean
-----------	------	---------

Python Variables Do Not Need Type Declaration

In Python, we do not need to write the data type before the variable name.

```
x = 10
print(x)

x = "Python"
print(x)
```

Output: 10

Python

In the first line, `x` stores an integer. Later, `x` stores a string. This is allowed because Python is dynamically typed.

Multiple Variable Assignment

```
a, b, c = 10, 20, 30

print(a)
print(b)
print(c)
```

Output:

10

20

30

Same Value to Multiple Variables

```
x = y = z = 100

print(x)
print(y)
print(z)
```

Output:

100

100

100

3.6 Naming Conventions

Variable names should be meaningful and easy to understand.

Good variable names:

```
student_name = "Aman"
total_marks = 450
is_logged_in = True
```

Bad variable names:

```
x = "Aman"
tm = 450
flag = True
```

These names are not always wrong, but they are less clear.

Rules for Naming Variables

Rule	Valid Example	Invalid Example
Can contain letters	name	—
Can contain numbers	student1	1student
Can contain underscore _	student_name	student-name
Cannot contain spaces	first_name	first name
Cannot use keywords	course_name	class
Case-sensitive	name, Name	—

Valid variable names:

```
name = "Riya"
student_name = "Amit"
marks1 = 90
_total = 500
is_active = True
```

Invalid variable names:

```
1name = "Riya"      # starts with number
student-name = "Amit" # contains hyphen
first name = "Raj"   # contains space
class = "Python"     # keyword
```

Python Naming Convention

Python commonly uses **snake_case** for variable names.

```
student_name = "Karan"
total_salary = 50000
is_available = True
```

Naming Style	Example 1	Example 2	Example 3
--------------	-----------	-----------	-----------

snake_case	student_name	total_marks	user_email
camelCase	studentName	totalMarks	userEmail
PascalCase	StudentName	TotalMarks	UserEmail

3.7 Keywords

Keywords are reserved words in Python. They already have special meaning, so we cannot use them as variable names. Some common Python keywords:

1. if
2. else
3. for
4. while
5. class
6. def
7. return
8. True
9. False
10. None
11. import
12. try
13. except
14. with
15. as
16. break
17. Continue

Wrong example:

```
class = "Python"
```

This gives an error because `class` is a keyword.

Correct example:

```
course_name = "Python"
```

Checking Python Keywords

Python provides a built-in module called `keyword`.

```
import keyword

print(keyword.kwlist)
```

This prints the list of Python keywords. To check whether a word is a keyword:

```
import keyword

print(keyword.iskeyword("class"))
print(keyword.iskeyword("student"))
```

Output: True
False

3.8 Print Statements

The `print()` function is used to display output on the screen.

Basic Print

```
print("Hello Python")
```

Output: Hello Python

Printing Numbers

```
print(100)
print(25.75)
```

Output:

100

25.75

Printing Variables

```
name = "Sneha"
age = 22

print(name)
print(age)
```

Output:

Sneha

22

Printing Text with Variables

```
name = "Arjun"
age = 20

print("Name:", name)
print("Age:", age)
```

Output: Name: Arjun

Age: 20

Printing Multiple Values

```
a = 10
b = 20

print("A =", a, "B =", b)
```

Output: A = 10 B = 20

Using f-strings

f-strings are a clean way to insert variables inside text.

```
name = "Priya"
age = 19

print(f"My name is {name} and I am {age} years old.")
```

Output: My name is Priya and I am 19 years old.

Another example

```
product = "Laptop"
price = 55000

print(f"The price of {product} is ₹{price}.")
```

Output: The price of Laptop is ₹55000.

Print with Separator

The `sep` parameter controls how multiple values are separated.

```
print("Python", "Java", "C++", sep=" | ")
```

Output: Python | Java | C++

Default separator is a space.

```
print("Python", "Java", "C++")
```

Output: Python Java C++

Print with End Parameter

By default, `print()` moves to a new line after printing.

```
print("Hello")
print("Python")
```

Output:

Hello

Python

Using end:

```
print("Hello", end=" ")  
print("Python")
```

Output: Hello Python

Another example:

```
print("A", end="-")  
print("B", end="-")  
print("C")
```

Output:

A-B-C

3.9 Input from Users

The `input()` function is used to take input from the user.

Example:

```
name = input("Enter your name: ")  
print("Hello", name)
```

Example output: Enter your name: Aman

Hello Aman

Important Point

The `input()` function always returns data as a string.

```
age = input("Enter your age: ")  
  
print(age)  
print(type(age))
```

Example output:

Enter your age: 21

21

<class 'str'>

Even though the user entered 21, Python stores it as "21".

Taking Integer Input

To convert input into an integer, use `int()`.

```
age = int(input("Enter your age: "))

print("Your age is:", age)
print(type(age))
```

Example output:

Enter your age: 21

Your age is: 21

<class 'int'>

Taking Float Input

To convert input into decimal number, use `float()`.

```
price = float(input("Enter product price: "))

print("Price is:", price)
print(type(price))
```

Example output:

Enter product price: 99.50

Price is: 99.5

<class 'float'>

Example: Add Two Numbers

```
num1 = int(input("Enter first number: "))
num2 = int(input("Enter second number: "))

result = num1 + num2

print("Sum is:", result)
```

Example output: Enter first number: 10

Enter second number: 20

Sum is: 30

What Happens Without `int()`?

```
num1 = input("Enter first number: ")
num2 = input("Enter second number: ")

print(num1 + num2)
```

Example output:

Enter first number: 10

Enter second number: 20

1020

Here, Python joins the two strings. It does not perform mathematical addition because both values are strings.

Correct version:

```
num1 = int(input("Enter first number: "))
num2 = int(input("Enter second number: "))

print(num1 + num2)
```

Output: 30

3.10 Basic Program Structure

A basic Python program usually follows this flow:

Start

|

v

Take input / define data

|

v

Process data

|

v

Display output

|

v

End

Simple structure:

```
# Input
number1 = int(input("Enter first number: "))
number2 = int(input("Enter second number: "))

# Processing
sum_result = number1 + number2

# Output
print("Sum:", sum_result)
```

Example: Student Marks Program

```
# Program to calculate total and average marks

student_name = input("Enter student name: ")

math_marks = int(input("Enter math marks: "))
science_marks = int(input("Enter science marks: "))
english_marks = int(input("Enter English marks: "))

total_marks = math_marks + science_marks + english_marks
average_marks = total_marks / 3

print("Student Name:", student_name)
print("Total Marks:", total_marks)
print("Average Marks:", average_marks)
```

Example output:

Enter student name: Ravi

Enter math marks: 80

Enter science marks: 90

Enter English marks: 85

Student Name: Ravi

Total Marks: 255

Average Marks: 85.0

3.11 Common Syntax Errors

Syntax errors happen when Python cannot understand the code because syntax rules are broken.

1. Missing Parentheses in `print()`

Wrong:

```
PYTHON CODE
print "Hello"
```

Error: `SyntaxError: Missing parentheses in call to 'print'`

Correct:

```
PYTHON CODE
print("Hello")
```

2. Missing Colon

Wrong:

```
PYTHON CODE

age = 20

if age >= 18
    print("Eligible")
```

Correct:

```
PYTHON CODE

age = 20

if age >= 18:
    print("Eligible")
```

A colon `:` is required after statements like: `if`, `else`, `elif`, `for`, `while`, `def`, `class`, `try`, `except`, `finally`

3. Wrong Indentation

Wrong:

```
PYTHON CODE  
if True:  
print("Hello")
```

Correct:

```
PYTHON CODE  
if True:  
    print("Hello")
```

4. Using Keyword as Variable Name

Wrong:

```
PYTHON CODE  
for = 10
```

Correct:

```
PYTHON CODE  
number = 10
```

5. Variable Used Before Assignment

Wrong:

```
PYTHON CODE  
print(name)  
name = "Aman"
```

Error: NameError: name 'name' is not defined

Correct:

```
PYTHON CODE  
name = "Aman"  
print(name)
```

Python reads code from top to bottom. So the variable must be created before using it.

6. Missing Quotes Around String

Wrong:

```
PYTHON CODE
name = Aman
```

Python thinks **Aman** is a variable.

Correct:

```
PYTHON CODE
name = "Aman"
```

7. Mismatched Quotes

Wrong:

```
PYTHON CODE
message = "Hello Python'
```

Correct:

```
PYTHON CODE
message = "Hello Python"
```

Also correct:

```
PYTHON CODE
message = 'Hello Python'
```

8. Invalid Variable Name

Wrong:

```
PYTHON CODE
student-name = "Nishchal"
```

Correct:

```
PYTHON CODE
student_name = "Nishchal"
```

9. Type Conversion Error

Code:

```
PYTHON CODE
age = int(input("Enter your age: "))
```

If the user enters:

twenty

Python gives: ValueError: invalid literal for int()

Correct input should be numeric: 20

10. Unclosed Parentheses

Wrong:

```
PYTHON CODE
print("Hello Python"
```

Correct:

```
PYTHON CODE
print("Hello Python")
```

11. Extra Closing Bracket

Wrong:

```
PYTHON CODE
print("Hello"))
```

Correct:

```
PYTHON CODE
print("Hello")
```

3.12 Quick Revision Table

Topic	Key Point
First Python code	Usually starts with <code>print("Hello, World!")</code>
Python file	Saved with <code>.py</code> extension
Comments	Written using <code>#</code>
Indentation	Defines code blocks in Python
Variables	Used to store data
Naming convention	Prefer meaningful <code>snake_case</code> names
Keywords	Reserved words that cannot be used as variable names
<code>print()</code>	Displays output
<code>input()</code>	Takes user input as string
<code>int()</code>	Converts value to integer
<code>float()</code>	Converts value to decimal number
Syntax errors	Occur when Python rules are broken

Chapter 4. Data Types in Python

A **data type** tells Python what kind of value a variable is storing.

Example:

```
name = "Rahul"  
age = 21  
price = 99.50  
is_active = True
```

Variable	Value	Data Type
name	"Rahul"	String
age	21	Integer
price	99.50	Float
is_active	True	Boolean

Simple meaning: Data type = Type/category of data stored in a variable

```
Value  
|  
v  
Python checks what kind of value it is  
|  
v  
Assigns a data type
```

Example:


```
x = 10  
print(type(x))
```

Output: <class 'int'>

This means **x** is storing an integer value.

4.1 Numbers

Numbers are used to store numeric values. Python mainly has three number types:

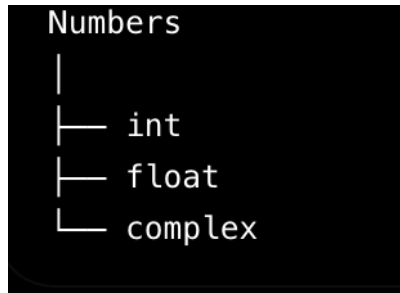

4.1.1 int

int means **integer**. Integers are whole numbers. They do not have decimal points.

Examples:

```
age = 21
marks = 95
temperature = -5
zero_value = 0

print(age)
print(marks)
print(temperature)
print(zero_value)
```

Output:

```
21
95
-5
0
```

All these values are integers.

```
age = 21

print(type(age))
```

Output: <class 'int'>

Examples of **int**

```
student_count = 50
year = 2026
quantity = 10
score = 100
```

Important point:

10 is int

10.0 is not int, it is float

```
a = 10
b = 10.0

print(type(a))
print(type(b))
```

Output:

```
<class 'int'>
<class 'float'>
```

4.1.2 **float**

float means **floating-point number**. Float values contain decimal points.

```
price = 99.50
height = 5.8
temperature = -2.5
percentage = 85.75

print(price)
print(height)
print(temperature)
print(percentage)
```

Output:

```
99.5
5.8
-2.5
```

85.75

Checking type:

```
price = 99.50  
  
print(type(price))
```

Output: <class 'float'>

Examples of float

```
salary = 45000.75  
distance = 12.5  
weight = 60.8  
rating = 4.5
```

```
float  
|  
v  
Numbers with decimal point  
|  
v  
10.5, 0.25, -7.8, 99.99
```

Important point:

Python may display 99.50 as 99.5.

Example:

```
price = 99.50  
print(price)
```

Output: 99.5

This does not mean the value is wrong. Python simply removes the unnecessary zero at the end.

4.1.3 complex

complex numbers are numbers with two parts:

Real part + Imaginary part

In mathematics, complex numbers are usually written like this:

$$3 + 4i$$

But in Python, we use **j** instead of **i**.

Python complex number:

```
number = 3 + 4j

print(number)
print(type(number))
```

Output:

(3+4j)

<class 'complex'>

Here: 3 = real part and 4j = imaginary part

```
complex number
|
v
3 + 4j
|  |
|  |  imaginary part
|  |
|  |  real part
```

More examples:

```
a = 2 + 5j
b = 10 + 0j
c = -3 + 7j

print(a)
print(b)
print(c)
```

Output:

(2+5j)

(10+0j)

(-3+7j)

You can access real and imaginary parts like this

```
number = 3 + 4j

print(number.real)
print(number.imag)
```

Output:

3.0

4.0

Important point:

Python uses j for complex numbers, not i.

Wrong:

```
number = 3 + 4i
```

Correct:

```
number = 3 + 4j
```

4.2 Strings

A **string** is a sequence of characters.

Characters can be: Letters, Numbers, Symbols, Spaces

Examples:

```
name = "Rahul"
city = "Delhi"
message = "Hello Python"
phone = "9876543210"
```

Even though the phone contains numbers, it is inside quotes, so it is a string.

```
phone = "9876543210"

print(type(phone))
```

Output: <class 'str'>

```
String
|
v
Collection of characters
|
v
"Python"
|
v
P y t h o n
```

4.2.1 String Creation

Strings can be created using quotes.

Using Double Quotes

```
name = "Aman"
print(name)
```

Output: Aman

Using Single Quotes

```
name = 'Aman'
print(name)
```

Output:

Aman

Both are correct.

```
a = "Python"
b = 'Python'

print(a)
print(b)
```

Output:

Python

Python

Using Triple Quotes

Triple quotes are used for multi-line strings.

```
message = """Python is simple.  
Python is powerful.  
Python is beginner-friendly."""  
  
print(message)
```

Output:

Python is simple.
Python is powerful.
Python is beginner-friendly.

You can also use triple single quotes:

```
message = '''Hello  
Welcome to Python'''  
  
print(message)
```

Output:

Hello
Welcome to Python

Empty String

A string can also be empty.


```
text = ""  
  
print(text)  
print(type(text))
```

Output:

<class 'str'>

There is no visible text in the first output because the string is empty.

4.2.2 String Indexing

Indexing means accessing a single character from a string. Every character in a string has a position number. This position number is called an **index**.

Python indexing starts from 0.

Example:

```
word = "Python"
```

Index diagram:

String:	P	y	t	h	o	n
Index:	0	1	2	3	4	5

Code:

```
word = "Python"  
  
print(word[0])  
print(word[1])  
print(word[2])  
print(word[3])  
print(word[4])  
print(word[5])
```

Output:

P
y
t
h
o
n

Positive Indexing

Positive indexing starts from the left side.

P	y	t	h	o	n
0	1	2	3	4	5

Example:

```
language = "Python"

print(language[0])
print(language[3])
print(language[5])
```

Output:

P
h
n

Negative Indexing

Negative indexing starts from the right side.

String:	P	y	t	h	o	n
Positive index:	0	1	2	3	4	5
Negative index:	-6	-5	-4	-3	-2	-1

Example:

```
language = "Python"

print(language[-1])
print(language[-2])
print(language[-6])
```

Output:

n
o
P

Important:

-1 means last character and -2 means second last character

Index Error

If you try to access an index that does not exist, Python gives an error.

```
word = "Python"

print(word[10])
```

Error: IndexError: string index out of range

Why?

"Python" has indexes from 0 to 5 only. Index 10 does not exist.

4.2.3 String Slicing

Slicing means taking a part of a string.

Syntax: `string[start:end]`

start index is included. end index is excluded

Example:

PYTHON CODE

```
word = "Python"

print(word[0:2])
```

Output:

Py

Explanation:

```
word[0:2]
|
v
Start from index 0
Stop before index 2
```

String:	P	y	t	h	o	n
Index:	0	1	2	3	4	5

word[0:2] gives characters from index 0 to before index 2

Result: P y

More examples:

Example:

PYTHON CODE

```
word = "Python"

print(word[0:4])

print(word[1:4])

print(word[2:6])
```

Output:

Pyth
yth
thon

Leaving Start Empty

If start is empty, Python starts from the beginning.

```
word = "Python"

print(word[:3])
```

Output:

Pyt

Meaning:

Start from beginning

Stop before index 3

Leaving End Empty

If end is empty, Python goes till the end.

```
word = "Python"

print(word[2:])
```

Output: thon

Meaning: Start from index 2 and Go till the end

Full Slice

```
word = "Python"

print(word[:])
```

Output: Python

This returns the full string.

Slicing with Negative Index

```
word = "Python"

print(word[-3:])
```

String: P y t h o n
Negative index: -6 -5 -4 -3 -2 -1

word[-3:] means start from -3 and go till end
Result: h o n

Output: hon

Slicing with Step

Syntax:

```
string[start:end:step]
```

Example:

```
word = "Python"

print(word[0:6:2])
```

String: P y t h o n
Index: 0 1 2 3 4 5
Pick: P t o

Result: Pto

Output:

Pto

Explanation:

Start at index 0, Go before index 6, Pick every 2nd character

Reverse string using slicing:

```
word = "Python"

print(word[::-1])
```

Output: nohtyP

Explanation: [::-1] means read the string from right to left

4.2.4 String Immutability

Strings in Python are **immutable**.

Immutable means: Once created, it cannot be changed directly.

name = "Ravi"

Index diagram:

```
String: R   a   v   i
Index:  0   1   2   3
```

Suppose we want to change **R** to **K**. This will not work:

```
name = "Ravi"

name[0] = "K"
```

Error: TypeError: 'str' object does not support item assignment **Why?** Because strings cannot be changed character by character.

Correct Way

You can create a new string and store it again.

PYTHON CODE

```
name = "Ravi"
name = "Kavi"
print(name)
```

Output:

Kavi

Important understanding:

Old string: "Ravi"

New string: "Kavi"

Python does not modify the old string. It creates a new string.

Diagram:

```
Before:
name  -----> "Ravi"

After:
name  -----> "Kavi"
```

So this is allowed:

```
name = "Ravi"
```

```
name = "Kavi"
```

But this is not allowed:

```
name[0] = "K"
```

Because changing one character inside the same string is not possible.

4.3 Boolean

Boolean is a data type that has only two possible values:

- True
- False

Boolean type is written as: bool

```
is_active = True
is_deleted = False

print(is_active)
print(is_deleted)
```

Output:

True

False

Checking type:

```
is_active = True

print(type(is_active))
```

Output: <class 'bool'>

Diagram:

```
Boolean
|
v
Only two values
|
├ True
└ False
```

4.3.1 True

True represents yes, correct, active, available, or enabled.

Example:

```
is_student = True
is_logged_in = True
has_access = True

print(is_student)
print(is_logged_in)
print(has_access)
```

Output:

True

True

True

Important: True must start with capital T.

Correct: is_active = True

Wrong: is_active = true

Python will not understand `true` because Python uses `True`.

4.3.2 False

`False` represents no, incorrect, inactive, unavailable, or disabled.

```
is_admin = False
is_expired = False
is_completed = False

print(is_admin)
print(is_expired)
print(is_completed)
```

Output:

False

False

False

Important: False must start with capital F.

Correct: is_active = False

Wrong: is_active = false

Python uses `False`, not `false`.

4.4 None Type

`None` means **no value** or **empty value**. It is used when a variable exists, but it does not currently store any actual value.


```
result = None

print(result)
print(type(result))
```

Output:None

<class 'NoneType'>

- None is not 0. None is not an empty string.
- None is not False. **None means no value.**

Value	Meaning
0	A number
""	Empty string
False	Boolean false
None	No value

```
marks = 0
name = ""
is_passed = False
result = None

print(marks)
print(name)
print(is_passed)
print(result)
```

Output:

0

False

None

There is a blank line after 0 because `name` is an empty string.

Diagram:

```
Variable created
|
v
No actual value yet
|
v
Use None
```

Example:

```
student_name = None

print(student_name)
```

Output: None

Later, the variable can store a real value:

```
student_name = None
print(student_name)

student_name = "Aman"
print(student_name)
```

Output:

None

Aman

Important: None must start with capital N.

Correct:

```
data = None
```

Wrong:

```
data = none
```

4.5 Type Checking with `type()`

The `type()` function is used to check the data type of a value or variable.

Syntax:

```
type(value)
```

Example:

PYTHON CODE

```
age = 21
print(type(age))
```

Output: <class 'int'>

Checking Different Data Types

```

age = 21
price = 99.50
name = "Rahul"
is_active = True
data = None
number = 3 + 4j

print(type(age))
print(type(price))
print(type(name))
print(type(is_active))
print(type(data))
print(type(number))

```

Output:

```

<class 'int'>
<class 'float'>
<class 'str'>
<class 'bool'>
<class 'NoneType'>
<class 'complex'>

```

```

Variable
|
v
type(variable)
|
v
Python tells the data type

```

Example:

```

PYTHON CODE
x = "100"
print(x)
print(type(x))

```

Output:

100

<class 'str'>

Even though it looks like a number, it is inside quotes, so it is a string.

Example:

```

PYTHON CODE
x = 100
print(x)
print(type(x))

```

Output: 100

<class 'int'>

Here, 100 is not inside quotes, so it is an integer.

4.6 Type Conversion

Type conversion means changing one data type into another.

Example:

String "100" ---> Integer 100

Integer 10 ---> Float 10.0

Number 50 ---> String "50"

Python provides built-in functions for type conversion.

Function	Converts Into
<code>int()</code>	Integer
<code>float()</code>	Float
<code>str()</code>	String
<code>bool()</code>	Boolean
<code>complex()</code>	Complex number

4.6.1 Converting to `int`

`int()` converts a value into an integer.

Example:

```
x = "100"

y = int(x)

print(y)
print(type(y))
```

Output:

100

<class 'int'>

Before conversion: x = "100" type is str

After conversion: y = 100 type is int

```
"100" ----int()----> 100
str                  int
```

Invalid `int()` Conversion

This works:

PYTHON CODE

```
number = int("50")
print(number)
```

Output: 50

This does not work:

PYTHON CODE

```
number =
int("hello")
print(number)
```

Error: `ValueError: invalid literal for int()`

Why? Because `"hello"` is not a valid number.

This also does not work:

PYTHON CODE

```
number = int("10.5")
print(number)
```

Error: `ValueError: invalid literal for int()`

Why? Because `"10.5"` is a decimal number written as a string. It cannot be converted directly into `int`.

4.6.2 Converting to `float`

`float()` converts a value into a decimal number.

```
x = "25.5"

y = float(x)

print(y)
print(type(y))
```

Output: 25.5

<class 'float'>

Integer to float:

```
number = 10

converted_number = float(number)

print(converted_number)
print(type(converted_number))
```

Output: 10.0

<class 'float'>

String integer to float:

```
number = "100"

converted_number = float(number)

print(converted_number)
print(type(converted_number))
```

Output:

100.0

<class 'float'>

Invalid conversion:

```
value = float("Python")
print(value)
```

Error: ValueError: could not convert string to float

4.6.3 Converting to **str**

str() converts a value into a string.

Example:

```
age = 21

text_age = str(age)

print(text_age)
print(type(text_age))
```

Output: 21

<class 'str'>

```
21 ----str()----> "21"
int                str
```

Checking types:

PYTHON CODE

```
price = 99.5
converted_price = str(price)
print(type(price))
```

```
print(type(converted_price))
```

Output:

<class 'float'>

<class 'str'>

Important:

After converting to str, the value becomes text.

Example:

PYTHON CODE

```
x = 100
y = "100"
print(type(x))
print(type(y))
```

Output:

<class 'int'>

<class 'str'>

Both look similar when printed, but their data types are different.

4.6.4 Converting to **bool**

bool() converts a value into **True** or **False**.

Example:

PYTHON CODE

```
x = 1
y = 0
print(bool(x))
print(bool(y))
```

Output: True

False

Some simple conversions:

PYTHON CODE

```
print(bool(1))
print(bool(0))
print(bool("Python"))
print(bool(""))
```

Output:

True

False

True

False

```
0 becomes False
Empty string becomes False
Non-empty text becomes True
```

We will study this more deeply in **Truthy and Falsy Values** in the Control Flow section.

4.6.5 Converting to **complex**

`complex()` converts a value into a complex number.

Example:

```
x = 10

y = complex(x)

print(y)
print(type(y))
```

Output:

(10+0j)

<class 'complex'>

String to complex:

```
x = "5"

y = complex(x)

print(y)
print(type(y))
```

Output:

(5+0j)

<class 'complex'>

4.7 Mutable vs Immutable Data Types

This is a very important concept in Python. First understand these two words:

Mutable = Can be changed after creation

Immutable = Cannot be changed after creation

Immutable Data Types

Immutable data types cannot be changed directly after they are created. Examples of immutable data types:

- int
- float
- complex
- str
- bool
- NoneType

We have already studied these types in this chapter.

```
Immutable value created
|
v
Cannot change the same value directly
|
v
Python creates a new value if needed
```

Example with string:

```
PYTHON CODE
name = "Ravi"
name[0] = "K"
```

Error: TypeError: 'str' object does not support item assignment

Because string is immutable.

Correct idea:

```
PYTHON CODE
name = "Ravi"
name = "Kavi"
print(name)
```

Output: Kavi

Here, Python does not change "Ravi" directly. It creates a new string "Kavi" and makes `name` refer to that new string.

Immutable Number Example

Numbers are also immutable.

Example:

```
age = 20
age = 21

print(age)
```

Output: 21

Mutable Data Types

Mutable data types can be changed after creation. Some mutable data types in Python are:

- list
- dictionary
- set

These will be studied in detail later in the **Data Structures** section. For now, only remember:

1. Mutable objects can be modified.
2. Immutable objects cannot be modified directly.

Type	Mutable or Immutable
int	Immutable
float	Immutable
complex	Immutable
str	Immutable
bool	Immutable
NoneType	Immutable
list	Mutable
dict	Mutable
set	Mutable

4.8 Simple Memory Understanding

A variable is like a name tag.

It points to a value.

Example: `x = 10` Means `x` -----> 10

Now: `x = 20` Means `x` -----> 20

The name `x` now points to 20. It does not mean 10 changed into 20.

This idea is very useful for understanding mutable and immutable data later.

4.9 Quick Revision

Topic	Meaning
Data type	Type/category of value
<code>int</code>	Whole numbers
<code>float</code>	Decimal numbers
<code>complex</code>	Number with real and imaginary parts
<code>str</code>	Text / sequence of characters
Indexing	Accessing one character from a string
Slicing	Accessing a part of a string
String immutability	Strings cannot be changed directly
<code>bool</code>	Stores <code>True</code> or <code>False</code>
<code>None</code>	Represents no value
<code>type()</code>	Checks data type
Type conversion	Converts one data type into another
Mutable	Can be changed after creation
Immutable	Cannot be changed after creation

Chapter 5. Operators in Python

Operators are special symbols or words used to perform operations on values and variables.

Simple meaning:

Operator = Symbol or keyword that performs an operation

Example:

PYTHON CODE


```
a = 10
b = 5
print(a + b)
```

Output:

15

Here, **+** is an operator. It adds **a** and **b**.

Diagram:



Python operators are mainly divided into these types:

Operators

|

- |— Arithmetic operators
 - |— Comparison operators
 - |— Logical operators
 - |— Assignment operators
 - |— Membership operators
 - |— Identity operators
 - |— Bitwise operators
 - |— Operator precedence
-

5.1 Arithmetic Operators

Arithmetic operators are used to perform mathematical operations.

1. Addition
2. Subtraction
3. Multiplication
4. Division
5. Power
6. Remainder

Arithmetic operators work mostly with numbers.

List of Arithmetic Operators

Operator	Name	Example
+	Addition	10 + 5
-	Subtraction	10 - 5
*	Multiplication	10 * 5
/	Division	10 / 5
//	Floor division	10 // 3
%	Modulus	10 % 3
**	Exponent / Power	2 ** 3

Addition +

The + operator adds two numbers.

PYTHON CODE

```
a = 10
b = 5
result = a + b
print(result)
```

Output: 15

Subtraction -

The - operator subtracts one number from another.

PYTHON CODE

```
a = 10
b = 5
result = a - b
print(result)
```

Output: 5

Multiplication *

The * operator multiplies two numbers.

PYTHON CODE

```
a = 10
b = 5
result = a * b
print(result)
```

Output: 50

Division /

The / operator divides one number by another. Division using / always gives a float result.

PYTHON CODE

```
a = 10
b = 5
result = a / b
print(result)
print(type(result))
```

Output:

2.0

<class 'float'>

Even though $10 / 5$ is mathematically 2, Python gives 2.0.

That means the result is a float.

Floor Division //

The // operator divides and gives the whole-number part.

Example:

PYTHON CODE

```
a = 10
b = 3
result = a // b
print(result)
```

Output: 3

Explanation: $10 / 3 = 3.333...$

Floor division gives 3

Important point:

/ gives normal division

// gives floor division

Example:

PYTHON CODE

```
print(10 / 3)
print(10 // 3)
```

Output:

3.3333333333333335

3

Modulus %

The % operator gives the remainder after division.

Example:

PYTHON CODE

```
a = 10
b = 3
result = a % b
print(result)
```

Output:1

Explanation:

10 divided by 3 => 3 goes into 10 three times: $3 \times 3 = 9$ Remainder: $10 - 9 = 1$

Exponent / Power **

The ****** operator is used to calculate power.

```
PYTHON CODE
result = 2 ** 3
print(result)
```

Output:8

Explanation: 2 ** 3 means 2 raised to the power 3

Example :

```
PYTHON CODE
a = 20
b = 6
print(a + b)
print(a - b)
print(a * b)
print(a / b)
print(a // b)
print(a % b)
print(a ** 2)
```

Output:

26

14

120

3.3333333333333335

3

2

400

5.2 Comparison Operators

Comparison operators are used to compare two values. The result of a comparison is always a Boolean value:

- True
- False

Example:

```
print(10 > 5)
```

Output: True

Because 10 is greater than 5.

List of Comparison Operators

Operator	Meaning	Example
<code>==</code>	Equal to	<code>10 == 10</code>
<code>!=</code>	Not equal to	<code>10 != 5</code>
<code>></code>	Greater than	<code>10 > 5</code>
<code><</code>	Less than	<code>5 < 10</code>
<code>>=</code>	Greater than or equal to	<code>10 >= 10</code>
<code><=</code>	Less than or equal to	<code>5 <= 10</code>

Equal To `==`

The `==` operator checks whether two values are equal.

```
PYTHON CODE
print(10 == 10)
print(10 == 5)
```

Output:

True

False

Not Equal To `!=`

The `!=` operator checks whether two values are not equal.

```
PYTHON CODE
print(10 != 5)
print(10 != 10)
```

Output:

True

False

Explanation:

`10 != 5` True because 10 is not equal to 5

`10 != 10` False because 10 is equal to 10

Greater Than >

The > operator checks whether the left value is greater than the right value.

PYTHON CODE

```
print(10 > 5)
print(5 > 10)
```

Output:

True

False

Less Than <

The < operator checks whether the left value is less than the right value.

PYTHON CODE

```
print(5 < 10)
print(10 < 5)
```

Output:

True

False

Greater Than or Equal To >=

The >= operator checks whether the left value is greater than or equal to the right value.

PYTHON CODE

```
print(10 >= 5)
print(10 >= 10)
print(5 >= 10)
```

Output:

True

True

False

Explanation:

10 >= 5 True because 10 is greater than 5

10 >= 10 True because 10 is equal to 10

5 >= 10 False

Less Than or Equal To <=

The <= operator checks whether the left value is less than or equal to the right value.

PYTHON CODE

```
print(5 <= 10)
print(10 <= 10)
print(20 <= 10)
```

Output:

True

True

False

Explanation:

5 <= 10 True because 5 is less than 10

10 <= 10 True because 10 is equal to 10

20 <= 10 False

Comparison with Variables

PYTHON CODE

```
a = 15
b = 20
print(a == b)
print(a != b)
print(a > b)
print(a < b)
print(a >= b)
print(a <= b)
```

Output:

False

True

False

True

False

True

5.3 Logical Operators

Logical operators are used to combine Boolean values.

Python has three logical operators:

- and
- or
- not

These operators work with **True** and **False**.

List of Logical Operators

Operator	Meaning
and	True when both sides are True
or	True when at least one side is True
not	Reverses True/False

and Operator

The **and** operator gives **True** only when both values are **True**.

PYTHON CODE

```
print(True and True)
print(True and False)
print(False and True)
print(False and False)
```

Output:

True

False

False

False

Truth table:

Left Value	Right Value	Result
True	True	True
True	False	False
False	True	False
False	False	False

Simple meaning: and means both conditions must be True.

Example:

PYTHON CODE

```
age_valid = True
id_available = True
print(age_valid and id_available)
```

Output:

True

or Operator

The **or** operator gives **True** when at least one value is **True**.

PYTHON CODE

```
print(True or True)
print(True or False)
print(False or True)
print(False or False)
```

Output:

True

True

True

False

Truth table:

Left Value	Right Value	Result
True	True	True
True	False	True
False	True	True
False	False	False

or means at least one value must be True.

Example:

PYTHON CODE

```
has_email = True
has_phone = False
print(has_email or has_phone)
```

Output: True

not Operator

The **not** operator reverses a Boolean value.

PYTHON CODE

```
print(not True)
print(not False)
```

Output:

False

True

Simple meaning:

not True becomes False

not False becomes True

Example:

PYTHON CODE

```
is_logged_in = True
print(not is_logged_in)
```

Output: False

Logical Operators with Comparisons

Comparison operators return Boolean values. So they can be used with logical operators.

Example:

PYTHON CODE

```
age = 20
marks = 85
print(age > 18 and marks > 80)
```

Output:

True

Explanation: age > 18 True

marks > 80 True

True and True = True

5.4 Assignment Operators

Assignment operators are used to assign values to variables.

The most basic assignment operator is: =

Example:

```
PYTHON CODE
x = 10
print(x)
```

Output: 10

Here, 10 is assigned to x.

List of Assignment Operators

Operator	Example	Same As
=	x = 10	x = 10
+=	x += 5	x = x + 5
-=	x -= 5	x = x - 5
*=	x *= 5	x = x * 5
/=	x /= 5	x = x / 5
//=	x //= 5	x = x // 5
%=	x %= 5	x = x % 5
**=	x **= 5	x = x ** 5

Basic Assignment =

```
PYTHON CODE
x = 10
print(x)
```

Output: 10

Add and Assign +=

PYTHON CODE

```
x = 10  
x += 5  
print(x)
```

Output: 15

Explanation:

$x += 5$

Same as:

$x = x + 5$

Subtract and Assign -=

PYTHON CODE

```
x = 10  
x -= 3  
print(x)
```

Output: 7

Explanation: $x -= 3$

Same as: $x = x - 3$

Multiply and Assign *=

PYTHON CODE

```
x = 10  
x *= 2  
print(x)
```

Output: 20

Explanation: $x *= 2$

Same as: $x = x * 2$

Divide and Assign /=

PYTHON CODE

```
x = 10
x /= 2
print(x)
```

Output: 5.0

Important: /= gives float result because / gives float result.

Floor Divide and Assign //=

PYTHON CODE

```
x = 10
x //= 3
print(x)
```

Output: 3

Explanation: x //= 3

Same as: x = x // 3

Modulus and Assign %=

PYTHON CODE

```
x = 10
x %= 3
print(x)
```

Output: 1

Explanation: x %= 3

Same as: x = x % 3

Power and Assign **=

PYTHON CODE

```
x = 2
x **= 3
print(x)
```

Output: 8

Explanation: x **= 3

Same as: x = x ** 3

5.5 Membership Operators

Membership operators are used to check whether a value exists inside another value.

Python has two membership operators:

1. `in`
2. `not in`

For now, we will use membership operators with strings because strings are already covered.

`in` Operator

The `in` operator checks whether something is present.

Example:

```
PYTHON CODE
text = "Python"
print("P" in text)
print("Py" in text)
print("Java" in text)
```

Output:

True

True

False

Explanation:

"P" exists in "Python" True

"Py" exists in "Python" True

"Java" does not exist False

`not in` Operator

The `not in` operator checks whether something is not present.

Example:

```
PYTHON CODE
ext = "Python"
print("Java" not in text)
print("Py" not in text)
```

Output:

True

False

Membership Is Case-Sensitive

Python checks uppercase and lowercase carefully.

Example:

PYTHON CODE

```
text = "Python"
print("P" in text)
print("p" in text)
```

Output:

True

False

Explanation:

"P" and "p" are different in Python.

5.6 Identity Operators

Identity operators are used to check whether two variables refer to the same object in memory.

Python has two identity operators:

1. is
2. is not

Important:

== checks value

is checks identity/memory object

is Operator

The **is** operator checks whether two variables point to the same object.

Example:

PYTHON CODE

```
a = None
b = None
print(a is b)
```

Output: **True**

Explanation:

a refers to None

b refers to None

Both refer to the same None object.

is not Operator

The **is not** operator checks whether two variables do not point to the same object.

Example:

PYTHON CODE

```
a = None
b = 10
print(a is not b)
```

Output:

True

Explanation:

a refers to None

b refers to 10

They are not the same object.

Difference Between == and is

== checks whether values are equal.

is checks whether both variables refer to the same object.

PYTHON CODE

```
a = 100
b = 100
print(a == b)
print(a is b)
```

Possible output:

True

True

For some simple values, Python may reuse the same object internally.

But beginners should remember this rule: Use == for value comparison. Use is mainly with None.

Best example:

PYTHON CODE

```
result = None
print(result is None)
print(result is not None)
```

Output: True

False

5.7 Bitwise Operators

Bitwise operators work on binary numbers.

Binary means numbers written using only:

0 and 1

Computers store numbers internally in binary form.

Example:

Decimal 5 = Binary 101

Decimal 3 = Binary 011

Bitwise operators compare or shift bits.

List of Bitwise Operators

Operator	Name
&	Bitwise AND
^	Bitwise XOR
~	Bitwise NOT
<<	Left shift
>>	Right shift

Bitwise AND &

Bitwise AND compares bits.

Rule:

```
1 & 1 = 1
1 & 0 = 0
0 & 1 = 0
0 & 0 = 0
```

Example:

PYTHON CODE

```
a = 5
b = 3
print(a & b)
```

Output: 1

```
5 in binary = 101
3 in binary = 011
```

```
  101
& 011
-----
```

```
  001
```

```
001 in decimal = 1
```

So: $5 \& 3 = 1$

Bitwise OR |

Bitwise OR compares bits.

```
1 | 1 = 1
1 | 0 = 1
0 | 1 = 1
0 | 0 = 0
```

Example:

```
a = 5
b = 3

print(a | b)
```

Output: 7

Explanation:

```
5 in binary = 101
3 in binary = 011
```

```
  101
| 011
-----
```

```
  111
```

```
111 in decimal = 7
```

Bitwise XOR ^

Bitwise XOR gives 1 when bits are different.

Rule:

```
1 ^ 1 = 0
1 ^ 0 = 1
0 ^ 1 = 1
0 ^ 0 = 0
```

Example:

PYTHON CODE

```
a = 5
b = 3
print(a ^ b)
```

Output: 6

Explanation:

```
5 in binary = 101
3 in binary = 011

  101
^ 011
-----
  110

110 in decimal = 6
```

Bitwise NOT ~

Bitwise NOT flips bits. In Python, the result of $\sim x$ is:

$$\sim x = -(x + 1)$$

Example: $x = 5$

PYTHON CODE

```
print(~x)
```

Output: -6

Explanation:

$$\sim 5 = -(5 + 1)$$

$$\sim 5 = -6$$

For beginners, remember:

Bitwise NOT does not simply make 5 into -5.

It gives $-(\text{number} + 1)$.

Left Shift <<

Left shift moves bits to the left.

Simple meaning:

$x \ll n$ means x multiplied by 2 power n

Example:

PYTHON CODE

```
x = 5
print(x << 1)
```

Output:10

Explanation:

$5 \ll 1$

$5 \times 2 = 10$

Binary view:

5 in binary = 101

After left shift by 1:

1010

1010 in decimal = 10

Right Shift >>

Right shift moves bits to the right.

Simple meaning:

$x \gg n$ means x divided by 2 power n and gives whole-number result

Example:

PYTHON CODE

```
x = 10
print(x >> 1)
```

Output: 5

Explanation:

$10 \gg 1$

$10 // 2 = 5$

Binary view: 10 in binary = 1010

After right shift by 1:

101

101 in decimal = 5

5.8 Operator Precedence

Operator precedence means the order in which Python solves operators.

Example:

PYTHON CODE

```
result = 10 + 5 * 2  
print(result)
```

Output: 20

A beginner may think:

$10 + 5 = 15$

$15 * 2 = 30$

But Python does multiplication first.

Correct solving:

$10 + 5 * 2$

$10 + 10$

20

So the result is 20.

Why Operator Precedence Matters

Without precedence, Python would not know which operation to do first.

Example:

$10 + 5 * 2$

There are two possible ways:

Way 1: $(10 + 5) * 2 = 30$

Way 2: $10 + (5 * 2) = 20$

Python follows fixed precedence rules. So: $10 + 5 * 2 = 20$

and Happens Before or

PYTHON CODE

```
result = True or False and False  
print(result)
```

Output: True

Using parentheses:

$result = (True or False) and False$

$print(result)$

Output: False

Common Operator Precedence Table

Higher operators are solved first.

Priority	Operators	Meaning
1	()	Parentheses
2	**	Power
3	+x, -x, ~x	Unary plus, unary minus, bitwise NOT
4	*, /, //, %	Multiplication, division, floor division, modulus
5	+, -	Addition, subtraction
6	<<, >>	Bitwise shifts
7	&	Bitwise AND
8	^	Bitwise XOR
9	,	,
10	==, !=, >, <, >=, <=	Comparisons
11	not	Logical NOT
12	and	Logical AND
13	or	Logical OR

Parentheses () Have Highest Priority

Parentheses are used to control the order manually.

```
PYTHON CODE
result = (10 + 5) * 2
print(result)
```

Output: 30

Explanation: $(10 + 5) * 2 = 15 * 2 = 30$

Without parentheses:

```
PYTHON CODE
result = 10 + 5 * 2
print(result)
```

Output: 20

Power Has Higher Priority Than Multiplication

```
PYTHON CODE
result = 2 * 3 ** 2
print(result)
```

Output: 18

Chapter 6. String Operations

A **string** is a sequence of characters enclosed in quotes.

```
name = "Python"
```

Strings are one of the most used data types in Python because text handling is needed in almost every program.

6.1 String Creation

Strings can be created using single quotes, double quotes, or triple quotes.

PYTHON CODE

```
s1 = "Hello"
s2 = 'Hello'
s3 = """Hello Python"""
```

All three are valid.

Single quotes and double quotes are commonly used for one-line strings. Triple quotes are used for multi-line strings.

PYTHON CODE

```
message = """Python is simple.
Python is powerful.
Python is widely used."""
```

6.2 String Indexing

Indexing means accessing one character from a string. Python starts counting from **0**.

Example:

PYTHON CODE

```
word = "Python"
print(word[0])
print(word[3])
```

Output:

P

h

For negative indexing, counting starts from the end.

Example:

PYTHON CODE

```
print(word[-1])  
print(word[-2])
```

Output: n

o

Index diagram:

P	y	t	h	o	n
0	1	2	3	4	5
-6	-5	-4	-3	-2	-1

6.3 String Slicing

Slicing means taking a part of a string.

Syntax:

```
string[start:end:step]
```

Important rule: the **start index is included**, and the **end index is excluded**.

Example:

PYTHON CODE

```
word = "Python"  
print(word[0:3])  
print(word[2:])  
print(word[:4])
```

Output:

Pyt

thon

Pyth

You can also use step values:

PYTHON CODE

```
print(word[0:6:2])
```

Output: Pto

To reverse a string:

PYTHON CODE

```
print(word[::-1])
```

Output:

nohtyP

6.4 String Methods

String methods are built-in functions that work on strings.

Common string methods are used for cleaning, checking, changing case, finding text, and replacing text.

lower()

Converts string to lowercase.

PYTHON CODE

```
text = "Python"
print(text.lower())
```

Output:

python

upper()

Converts string to uppercase.

PYTHON CODE

```
text = "Python"
print(text.upper())
```

Output:

PYTHON

strip()

Removes extra spaces from the beginning and end.

PYTHON CODE

```
text = " Python "
```

```
print(text.strip())
```

Output:

Python

replace()

Replaces one part of a string with another.

PYTHON CODE

```
text = "I like Java"
print(text.replace("Java", "Python"))
```

Output:

I like Python

split()

Splits a string into a list of parts using a separator.

PYTHON CODE

```
text = "apple,banana,mango"
print(text.split(","))
```

Output:

['apple', 'banana', 'mango']

find()

Finds the position of a substring.

PYTHON CODE

```
text = "Python"
print(text.find("th"))
```

Output:

2

If the text is not found, it returns -1.

count()

Counts how many times a character or substring appears.

PYTHON CODE

```
text = "banana"
print(text.count("a"))
```

Output: 3

startswith() and endswith()

PYTHON CODE

```
text = "Python"
print(text.startswith("Py"))
print(text.endswith("on"))
```

Output:

True

True

These methods are very useful in text checking and validation.

6.5 String Formatting

String formatting means placing values inside a string in a clean way.

This is better than manually joining many values.

Python has three main ways to format strings:

- f-strings
- `format()`
- old `%` formatting

6.5.1 f-strings

f-strings are the most readable and modern way.

Write `f` before the string and place variables inside `{}`.

PYTHON CODE

```
name = "Aman"
age = 20
print(f"My name is {name} and I am {age} years old.")
```

Output:

My name is Aman and I am 20 years old.

You can also place expressions inside f-strings.

PYTHON CODE

```
a = 10
b = 5
print(f"Sum is {a + b}")
```

Output:

Sum is 15

6.5.2 `format()`

The `format()` method inserts values into placeholders.

PYTHON CODE

```
name = "Aman"
age = 20
print("My name is {} and I am {} years old.".format(name, age))
```

Output:

My name is Aman and I am 20 years old.

You can also use position numbers:

```
print("My name is {0} and I am {1} years old.".format(name, age))
```

This is useful when you want control over the order of values.

6.5.3 Old % Formatting

This is the older style of formatting.

PYTHON CODE

```
name = "Aman"
age = 20
print("My name is %s and I am %d years old." % (name, age))
```

Output: My name is Aman and I am 20 years old.

Here:

- %s is used for string
- %d is used for integer

This style is still found in older code, but f-strings are preferred in modern Python.

6.6 String Concatenation

Concatenation means joining strings together.

The + operator is used for this.

PYTHON CODE

```
first = "Python"
second = "Programming"
print(first + " " + second)
```

Output:

Python Programming

Important point: only strings can be joined directly.

6.7 Escape Characters

Escape characters start with a backslash \ and help insert special characters inside strings.

Common escape characters:

Escape Character	Meaning
\n	New line
\t	Tab space
\\	Backslash
\'	Single quote
\"	Double quote

Common Escape Characters

Escape Character	Meaning	Example	Output
<code>\n</code>	New Line	<code>print("Hello\nPython")</code>	<code><pre>Hello Python</pre></code>
<code>\t</code>	Horizontal Tab	<code>print("Name\tAge")</code>	<code><pre>Name Age</pre></code>
<code>\\</code>	Prints a Backslash	<code>print("C:\\Users\\Admin")</code>	<code>C:\Users\Admin</code>
<code>\'</code>	Prints a Single Quote	<code>print('It's Python')</code>	<code>It's Python</code>
<code>\"</code>	Prints a Double Quote	<code>print("He said \"Hello\"")</code>	<code>He said "Hello"</code>
<code>\b</code>	Backspace (removes previous character)	<code>print("ABC\bD")</code>	<code>ABD</code>
<code>\r</code>	Carriage Return (moves cursor to beginning of line)	<code>print("Hello\rHi")</code>	<code>Hillo (behavior may vary by terminal)</code>
<code>\f</code>	Form Feed	<code>print("Hello\fPython")</code>	<code>Inserts a form-feed character</code>
<code>\v</code>	Vertical Tab	<code>print("Hello\vPython")</code>	<code>Inserts a vertical tab</code>
<code>\a</code>	Alert/Bell	<code>print("\a")</code>	<code>Produces a system beep</code>

6.8 Raw Strings

Raw strings treat backslashes as normal characters.

Write `r` before the string.

PYTHON CODE

```
path = r"C:\new_folder\test"
print(path)
```

Output: `C:\new_folder\test`

6.9 String Multiplication

A string can be repeated using the `*` operator.

PYTHON CODE

```
text = "Hi"
print(text * 3)
```

Output: `HiHiHi`

Common String Methods

Method	Description	Example	Result
<code>lower()</code>	Converts all characters to lowercase	<code>"Python".lower()</code>	<code>"python"</code>
<code>upper()</code>	Converts all characters to uppercase	<code>"Python".upper()</code>	<code>"PYTHON"</code>
<code>title()</code>	Converts first letter of every word to uppercase	<code>"python programming".title()</code>	<code>"Python Programming"</code>
<code>capitalize()</code>	Capitalizes only the first letter of the string	<code>"python".capitalize()</code>	<code>"Python"</code>
<code>swapcase()</code>	Converts uppercase to lowercase and lowercase to uppercase	<code>"PyThOn".swapcase()</code>	<code>"pYtHoN"</code>
<code>strip()</code>	Removes spaces from both ends	<code>" Python ".strip()</code>	<code>"Python"</code>
<code>lstrip()</code>	Removes spaces from the left side	<code>" Python".lstrip()</code>	<code>"Python"</code>
<code>rstrip()</code>	Removes spaces from the right side	<code>"Python ".rstrip()</code>	<code>"Python"</code>
<code>replace(old, new)</code>	Replaces one substring with another	<code>"I like Java".replace("Java", "Python")</code>	<code>"I like Python"</code>
<code>find()</code>	Returns the first index of a substring	<code>"Python".find("th")</code>	<code>2</code>
<code>index()</code>	Returns the index of a substring (raises error if not found)	<code>"Python".index("th")</code>	<code>2</code>
<code>count()</code>	Counts occurrences of a substring	<code>"banana".count("a")</code>	<code>3</code>
<code>startswith()</code>	Checks whether a string starts with a substring	<code>"Python".startswith("Py")</code>	<code>True</code>
<code>endswith()</code>	Checks whether a string ends with a substring	<code>"Python".endswith("on")</code>	<code>True</code>
<code>split()</code>	Splits a string into a list	<code>"a,b,c".split(",")</code>	<code>['a', 'b', 'c']</code>
<code>join()</code>	Joins iterable elements into a string	<code>"-".join(["A", "B", "C"])</code>	<code>"A-B-C"</code>
<code>isalpha()</code>	Returns <code>True</code> if all characters are alphabets	<code>"Python".isalpha()</code>	<code>True</code>
<code>isdigit()</code>	Returns <code>True</code> if all characters are digits	<code>"12345".isdigit()</code>	<code>True</code>
<code>isalnum()</code>	Returns <code>True</code> if all characters are letters or digits	<code>"Python3".isalnum()</code>	<code>True</code>
<code>isspace()</code>	Returns <code>True</code> if all characters are whitespace	<code>" ".isspace()</code>	<code>True</code>
<code>center(width)</code>	Centers the string within the specified width	<code>"Python".center(12)</code>	<code>" Python "</code>
<code>zfill(width)</code>	Pads the string with leading zeros	<code>"25".zfill(5)</code>	<code>"00025"</code>

Chapter 7. Control Flow

7.1 if Statement

Syntax

```
if condition:  
    statement
```

The **if** statement is used when we want to run some code only when a condition is **True**. If the condition is **True**, Python executes the indented block. If the condition is **False**, Python skips the indented block.

Flow Chart

```
Start  
|  
v  
Check condition  
|  
├ True -> Execute if block  
|  
└ False -> Skip if block  
|  
v  
Continue program
```

Example

```
PYTHON CODE  
age = 20  
if age >= 18:  
    print("Eligible to vote")
```

Output: Eligible to vote

example:

```
PYTHON CODE  
marks = 35  
if marks >= 40:  
    print("Passed")  
print("Program finished")
```

Output: Program finished

7.2 if-else Statement

Syntax

```
if condition:
    statement_when_true
else:
    statement_when_false
```

Explanation


The **if-else** statement is used when we want to run **one block if the condition is True** and **another block if the condition is False**.

Only one block runs.

If the condition is **True**, the **if** block runs.

If the condition is **False**, the **else** block runs.

Flow Chart

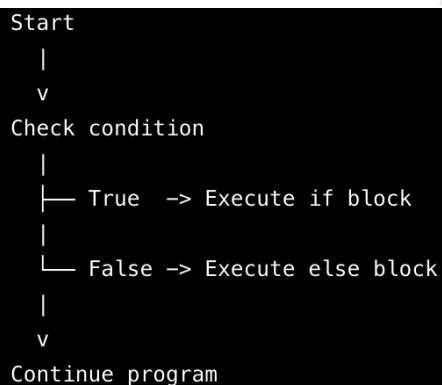

Example

PYTHON CODE


```
age = 16
if age >= 18:
    print("Eligible to vote")
else:
    print("Not eligible to vote")
```

Output: Not eligible to vote

7.3 elif Statement

Syntax

```
if condition1:
    statement1
elif condition2:
    statement2
elif condition3:
    statement3
else:
    default_statement
```

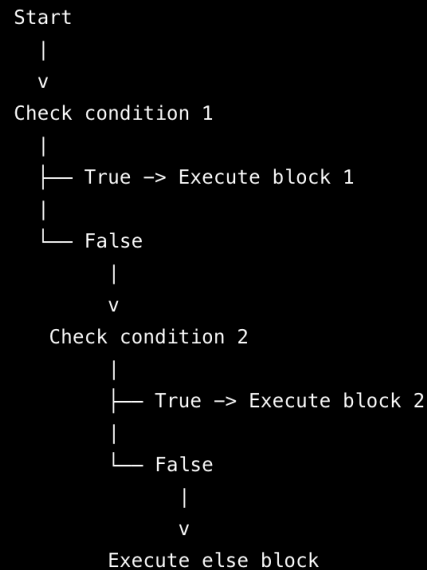

Explanation

elif means **else if**.

It is used when we need to check **multiple conditions**. Python checks conditions from top to bottom. The first condition that becomes **True** gets executed. After that, Python skips the remaining conditions.

The **else** block runs only when all previous conditions are **False**.

Example

PYTHON CODE

```
marks = 75
if marks >= 90:
    print("Grade A")
elif marks >= 75:
    print("Grade B")
elif marks >= 40:
    print("Grade C")
else:
    print("Fail")
```

Output: Grade B

7.4 Nested Conditions

Syntax


```
if condition1:
    if condition2:
        statement
```

With **else**:

```
if condition1:
    if condition2:
        statement1
    else:
        statement2
else:
    statement3
```

Nested condition means writing one condition inside another condition. The inner condition is checked only when the outer condition is **True**. This is useful when one decision depends on another decision.

Flow Chart

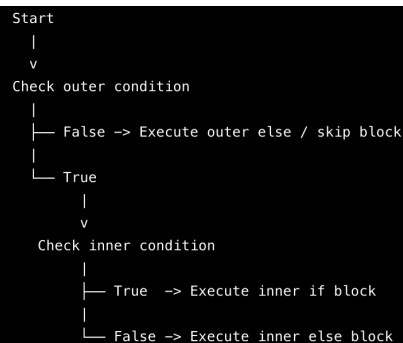

Example

```
age = 20
has_id = True

if age >= 18:
    if has_id:
        print("Entry allowed")
    else:
        print("ID required")
else:
    print("Entry not allowed")
```

Output: Entry allowed

7.5 Ternary Operator

Syntax


```
value_if_true if condition else value_if_false
```

Common usage:

```
variable = value_if_true if condition else value_if_false
```

The ternary operator is a short way to write a simple **if-else** statement in one line. It is useful when we need to choose between two values. Use it only for simple conditions. For complex logic, normal **if-else** is better.

Flow Chart

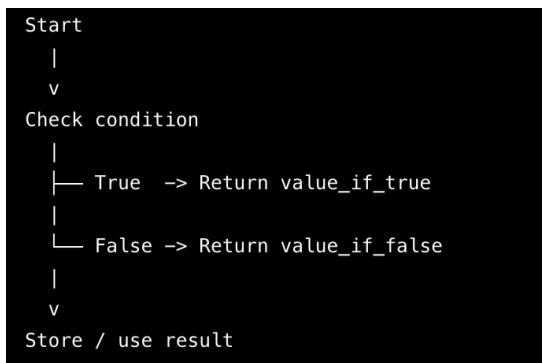

Normal **if-else**:

```
PYTHON CODE
age = 20
if age >= 18:
    status = "Adult"
else:
    status = "Minor"
print(status)
```

Output: Adult

Same code using ternary operator:

```
PYTHON CODE
age = 20
status = "Adult" if age >= 18 else "Minor"
print(status)
```

Output: Adult

7.6 match-case

Syntax

```
match value:
    case pattern1:
        statement1
    case pattern2:
        statement2
    case _:
        default_statement
```

Explanation

match-case is used to compare one value with multiple possible cases. It is similar to checking many fixed options.

The `_` case works like a default case. It runs when no other case matches. **match-case** was introduced in Python 3.10.

Flow Chart

```
graph TD
    Start --> Take_value[Take value]
    Take_value --> Match_case1[Match with case 1]
    Match_case1 -- "Match -> Execute case 1" --> End1[ ]
    Match_case1 -- "No match" --> Match_case2[Match with case 2]
    Match_case2 -- "Match -> Execute case 2" --> End2[ ]
    Match_case2 -- "No match" --> Execute_default[Execute default case _]
    style End1 fill:none,stroke:none
    style End2 fill:none,stroke:none
```


Example

```
command = "start"

match command:
    case "start":
        print("Starting program")
    case "stop":
        print("Stopping program")
    case "pause":
        print("Pausing program")
    case _:
        print("Unknown command")
```

Output: Starting program

PYTHON CODE

```
day = 3
match day:
    case 1:
        print("Monday")
    case 2:
        print("Tuesday")
    case 3:
        print("Wednesday")
    case _:
        print("Invalid day")
```

Output: Wednesday

7.7 Truthy and Falsy Values

Syntax

```
if value:
    statement
```

Explanation

In Python, conditions do not always need direct comparison like: if age >= 18:

Python can also treat values as **True** or **False**. These are called **truthy** and **falsy** values.

A **truthy value** behaves like **True**. A **falsy value** behaves like **False**.

Common falsy values:

Value	Meaning
False	Boolean false
0	Zero number
0.0	Zero float
""	Empty string
None	No value

Common truthy values:

Value	Meaning
True	Boolean true
10	Non-zero number
-5	Non-zero number
"Python"	Non-empty string
" "	String with a space

Important: " " is truthy because it contains a space. It is not empty.

Flow Chart

```
Start
|
v
Check value
|
├─ Truthy -> Execute if block
|
└─ Falsy  -> Skip if block / execute else
|
v
Continue program
```

Example 1: Non-empty string

PYTHON CODE

```
name = "Rahul"
if name:
    print("Name is available")
else:
    print("Name is missing")
```

Output:

Name is available

Example 2: Empty string

PYTHON CODE

```
name = ""
if name:
    print("Name is available")
else:
    print("Name is missing")
```

Output: Name is missing

Example 3: Number

PYTHON CODE

```
amount = 0
if amount:
    print("Amount available")
else:
    print("Amount is zero")
```

Output: Amount is zero

Chapter 8. Loops and Iteration

Loops are used when we want to run the same code multiple times.

Q: Print numbers from 1 to 5

Without a loop, we write many `print()` statements. With loop, we write the logic once and Python repeats it.

8.1 `for` Loop


Syntax

```
for variable in sequence:  
    statement
```

Explanation

1. A `for` loop is used to repeat code over a sequence.
2. A sequence can be a string, range, list, tuple, etc.
3. In each round, Python takes one value from the sequence.
4. The loop stops automatically when all values are finished.

Flow Chart

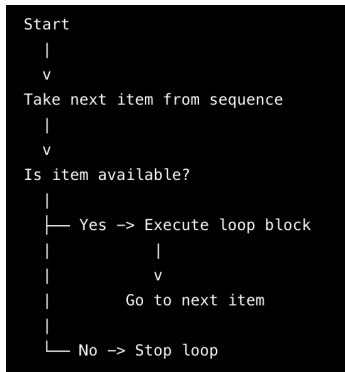

Example 1: Loop through a string

```
word = "Python"  
  
for letter in word:  
    print(letter)
```

Output:

P
y
t
h
o
n

Example 2: Loop with `range()`

```
for number in range(1, 6):  
    print(number)
```

Output:

1
2
3
4
5

8.2 while Loop


Syntax

```
while condition:  
    statement
```

Explanation

1. A `while` loop runs as long as the condition is `True`.
2. Before every round, Python checks the condition.
3. If the condition is `True`, the loop block runs.
4. If the condition becomes `False`, the loop stops.

Flow Chart

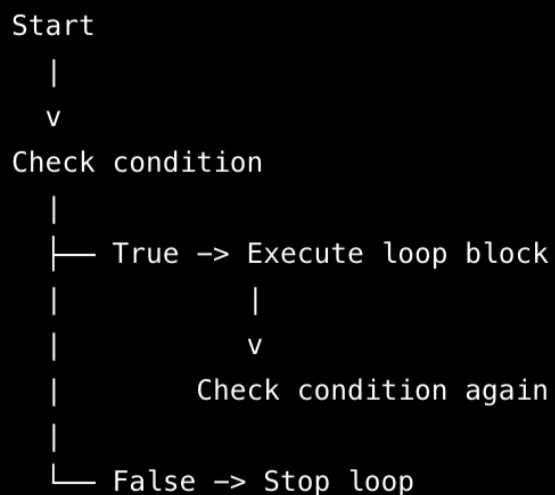

Example 1: Print numbers from 1 to 5

PYTHON CODE

```
number = 1
```

```
while number <= 5:  
    print(number)  
    number += 1
```

Output:

```
1  
2  
3  
4  
5
```

for Loop vs while Loop

Point	for Loop	while Loop
Main use	Used to loop over a sequence	Used to repeat while a condition is True
Best when	Number of iterations is known	Number of iterations is not fixed
Works with	String, range() , and other iterable values	Conditions
Stops when	Sequence ends	Condition becomes False
Risk	Usually safer	Can create infinite loop if condition never becomes False

When to Use **for** and **while**

Situation	Better Loop
Loop through characters in a string	for loop
Loop through numbers using range()	for loop
Repeat until password is correct	while loop
Repeat while balance is available	while loop
Repeat fixed number of times	for loop
Repeat based on condition	while loop

8.3 break

Syntax:

```
break
```

Explanation

1. `break` is used to stop a loop immediately.
2. When Python sees `break`, it exits the loop.
3. Code after the loop continues normally.

Flow Chart:

```
Loop starts
|
v
Condition inside loop
|
|— break found -> Exit loop
|
|— no break -> Continue loop
```

Example 1: Stop loop when number is 4

```
PYTHON CODE
for number in range(1, 8):
    if number == 4:
        break
    print(number)
```

Output:

```
1
2
3
```

Explanation:

1. The loop starts from 1.
2. When `number` becomes 4, `break` runs.
3. The loop stops before printing 4.

8.4 continue

Syntax

```
continue
```

Explanation

1. `continue` skips the current round of the loop.
2. It does not stop the full loop.
3. After `continue`, Python moves to the next round.

Flow Chart

```
Loop starts
|
v
Condition inside loop
|
|— continue found -> Skip current round
|                   Go to next round
|
|— no continue -> Execute remaining block
```

Example 1: Skip number 3

```
PYTHON CODE
for number in range(1, 6):
    if number == 3:
        continue
    print(number)
```

Output:

```
1
2
4
5
```

Explanation:

1. When number is 3, `continue` runs.
2. `print(number)` is skipped for 3.
3. The loop continues with 4 and 5.

8.5 pass

Syntax

```
pass
```

1. **pass** means “do nothing”. It is used when Python needs a statement, but we do not want to write logic yet. It does not stop or skip the loop like **break** or **continue**.

Flow Chart

```
Loop starts
|
v
pass found
|
v
Do nothing
|
v
Continue normal execution
```

Example 1: Empty loop block

PYTHON CODE

```
for number in range(1, 4):
    pass
```

Output: No output appears because **pass** does nothing.

Example 2: Placeholder inside condition

PYTHON CODE

```
for number in range(1, 4):
    if number == 2:
        pass
    print(number)
```

Output:

```
1
2
3
```

Loop Control Statements Comparison

Statement	Meaning	Effect on Loop	Common Use
break	Stop the loop	Exits the loop completely	Stop when required value is found
continue	Skip current round	Moves to next iteration	Skip unwanted values
pass	Do nothing	No effect on loop	Temporary placeholder

8.6 **else** with Loops

Syntax

```
for variable in sequence:
    statement
else:
    statement_after_loop
```

```
while condition:
    statement
else:
    statement_after_loop
```

Explanation

1. A loop can have an **else** block. The **else** block runs when the loop finishes normally.
2. If the loop stops because of **break**, the **else** block does not run.

Flow Chart

```
graph TD
    A[Loop starts] --> B[ ]
    B --> C[Loop finishes normally?]
    C -- Yes --> D[Execute else block]
    C -- No, break used --> E[Skip else block]
```

Example 1: Loop finishes normally

```
for number in range(1, 4):
    print(number)
else:
    print("Loop finished")
```

Output:

1
2
3

Loop finished

Example 2: Loop stops with **break**

```
PYTHON CODE
for number in range(1, 5):
    if number == 3:
        break
    print(number)
else:
    print("Loop finished")
```

Output:

1
2

8.7 Nested Loops

Syntax

```
for outer_variable in outer_sequence:
    for inner_variable in inner_sequence:
        statement
```

Explanation

1. Nested loop means one loop inside another loop.
2. The outer loop runs first.
3. For every one round of the outer loop, the inner loop runs completely.
4. Nested loops are useful for patterns, tables, rows and columns.

Flow Chart

```
Start outer loop
|
v
Take one outer value
|
v
Run full inner loop
|
v
Go back to outer loop
|
v
Stop when outer loop ends
```

Example 1: Row and column output

```
PYTHON CODE
for row in range(1, 3):
    for column in range(1, 4):
        print(row, column)
```

Output:

```
1 1
1 2
1 3
2 1
2 2
2 3
```

Example 2: Simple pattern

PYTHON CODE

```
for row in range(1, 4):  
    print("*" * row)
```

Output:

```
*  
  
**  
  
***
```

8.8 range()

Syntax

```
range(stop)  
range(start, stop)  
range(start, stop, step)
```

Explanation

1. `range()` creates a sequence of numbers.
2. It is commonly used with `for` loops.
3. The stop value is excluded.
4. `step` controls the gap between numbers.

Flow Chart

```
range() creates numbers  
|  
v  
for loop takes one number  
|  
v  
Loop block executes  
|  
v  
Next number is taken
```

Example 1: range(stop)

PYTHON CODE

```
for number in range(5):  
    print(number)
```

Output:

0
1
2
3
4

Explanation:

1. `range(5)` starts from 0.
2. It stops before 5.

Example 2: `range(start, stop)`

PYTHON CODE

```
for number in range(1, 6):  
    print(number)
```

Output:

1
2
3
4
5

Example 3: `range(start, stop, step)`

PYTHON CODE

```
for number in range(2, 11, 2):  
    print(number)
```

Output:

2
4
6
8
10

`range()` Forms

Syntax	Meaning	Example	Output Values
<code>range(stop)</code>	Starts from 0, stops before stop	<code>range(5)</code>	0, 1, 2, 3, 4
<code>range(start, stop)</code>	Starts from start, stops before stop	<code>range(1, 5)</code>	1, 2, 3, 4
<code>range(start, stop, step)</code>	Uses step/gap between values	<code>range(2, 10, 2)</code>	2, 4, 6, 8

Positive and Negative Step in `range()`

Example	Meaning	Output Values
<code>range(1, 6, 1)</code>	Increase by 1	1, 2, 3, 4, 5
<code>range(1, 6, 2)</code>	Increase by 2	1, 3, 5
<code>range(5, 0, -1)</code>	Decrease by 1	5, 4, 3, 2, 1
<code>range(10, 0, -2)</code>	Decrease by 2	10, 8, 6, 4, 2

8.9 `enumerate()`

Syntax

```
for index, value in enumerate(sequence):  
    statement
```

Explanation

1. `enumerate()` gives both index and value while looping.
2. It is useful when we need the position of each item.
3. The index starts from 0 by default.

Flow Chart

```
Sequence  
|  
v  
enumerate()  
|  
v  
Gives index + value  
|  
v  
Loop block executes
```

Example 1: Enumerate a string

PYTHON CODE

```
word = "Python"
for index, letter in enumerate(word):
    print(index, letter)
```

Output:

```
0 P
1 y
2 t
3 h
4 o
5 n
```

Example 2: Start index from 1

PYTHON CODE

```
word = "Python"

for index, letter in enumerate(word,
start=1):
    print(index, letter)
```

Output:

```
1 P
2 y
3 t
4 h
5 o
6 n
```

enumerate() vs Normal Loop

Normal Loop	enumerate()
Gives only value	Gives index and value
Good when index is not needed	Good when index is needed
Simple for direct looping	Better for position-based output

8.10 zip()

Syntax

```
for value1, value2 in zip(sequence1, sequence2):  
    statement
```

Explanation

1. `zip()` is used to loop over two or more sequences together.
2. It takes one item from each sequence at the same time.
3. The loop stops when the shortest sequence ends.

Flow Chart

```
Sequence 1: A B C  
Sequence 2: 1 2 3  
    |  
    v  
zip()  
    |  
    v  
(A,1), (B,2), (C,3)  
    |  
    v  
Loop runs pair by pair
```

Example 1: Zip two strings

PYTHON CODE

```
letters = "ABC"  
numbers = "123"  
for letter, number in zip(letters,  
    numbers):  
    print(letter, number)
```

Output:

A 1

B 2

C 3

Example 2: Different length sequences

PYTHON CODE

```
letters = "ABCD"
numbers = "12"
for letter, number in zip(letters,
numbers):
    print(letter, number)
```

Output:

A 1

B 2

Explanation:

1. `letters` has 4 characters.
2. `numbers` has 2 characters.
3. `zip()` stops after the shorter sequence ends.

8.11 Iterator Protocol Basics

Syntax


```
iterator = iter(sequence)
value = next(iterator)
```

Explanation

1. An iterator is an object that gives values one by one.
2. `iter()` creates an iterator from an iterable value.
3. `next()` gets the next value from the iterator.
4. Loops internally use this idea to get values one by one.

Term	Meaning
Iterable	Something that can be looped over
Iterator	Object that gives values one by one
<code>iter()</code>	Creates an iterator
<code>next()</code>	Gets the next value

Flow Chart

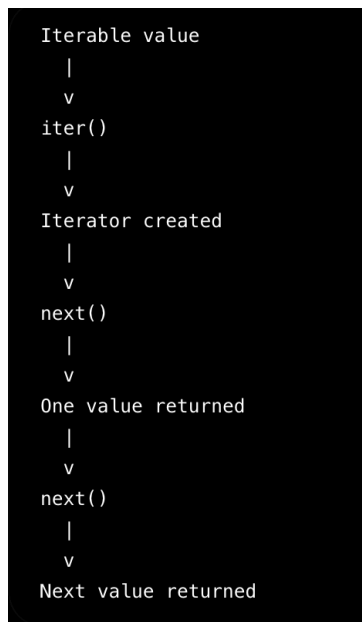

Example 1: Using `iter()` and `next()`

```
word = "ABC"

iterator = iter(word)

print(next(iterator))
print(next(iterator))
print(next(iterator))
```

Output:

A
B
C

Example 2: How for loop thinks internally

This loop:

```
PYTHON CODE

for letter in "ABC":
    print(letter)
```

Output:

A
B
C

Internally, the idea is similar to:

PYTHON CODE

```
iterator = iter("ABC")
print(next(iterator))
print(next(iterator))
print(next(iterator))
```

Output:

A
B
C

Iterable vs Iterator

Term	Meaning	Example
Iterable	Something we can loop over	String, <code>range()</code>
Iterator	Object that gives values one by one	Created using <code>iter()</code>
<code>iter()</code>	Creates an iterator	<code>iter("ABC")</code>
<code>next()</code>	Gets next value	<code>next(iterator)</code>

Example 1: Iterable

```
word = "ABC"

for letter in word:
    print(letter)
```

Output: A
B
C

Here, "ABC" is iterable because we can loop over it.

Example 2: Iterator

```
word = "ABC"

iterator = iter(word)

print(next(iterator))
print(next(iterator))
print(next(iterator))
```

Output: A
B
C

8.12 StopIteration

When an iterator has no more values, Python raises **StopIteration**.

Example 1: Iterator ends

```
word = "AB"

iterator = iter(word)

print(next(iterator))
print(next(iterator))
print(next(iterator))
```

Output:

A

B

StopIteration

Infinite Loop

An infinite loop is a loop that never stops. This usually happens when the condition in a **while** loop never becomes **False**.

Example 1: Infinite loop

```
number = 1

while number <= 5:
    print(number)
```

Problem:

number starts as 1 => **condition is number <= 5** => number is never increased=> condition always stays True . loop never stops

Correct version:

```
number = 1

while number <= 5:
    print(number)
    number += 1
```

Output:

1
2
3
4
5

Chapter 9. Data Structure in Python

9.1 Lists in Python

A **list** is a data structure used to store multiple values in one variable.

Syntax

```
list_name = [value1, value2, value3]
```

Explanation

1. Lists are written using square brackets [].
2. List items are separated by commas.
3. Lists are ordered, so every item has an index.
4. Lists are mutable, meaning we can change them after creation.
5. Lists can store duplicate values.
6. Lists can store different data types together.

Example 1

```
student = ["Rahul", 21, "Python", 85.5]  
  
print(student)
```

Output: ['Rahul', 21, 'Python', 85.5]

List Properties Table

Property	Meaning	Example
Ordered	Items have fixed positions	<code>items[0]</code>
Mutable	Items can be changed	<code>items[1] = "new"</code>
Allows duplicates	Same value can appear multiple times	<code>[10, 10, 20]</code>
Mixed data allowed	Can store different data types	<code>["Aman", 20, True]</code>
Indexed	Every item has position number	<code>0, 1, 2...</code>

Flow Chart

```
graph TD; A[Create list] --> B[Store multiple values]; B --> C[Access / update / delete values]; C --> D[Use list methods when needed];
```

9.1.1 Creating Lists

Syntax

```
list_name = [item1, item2, item3]
```

1. A list can store numbers, strings, Boolean values, or mixed values.
2. An empty list can also be created.
3. Lists are useful when many related values need to be stored together.

Example 1

Python

```
numbers = [10, 20, 30, 40]
names = ["Aman", "Riya", "Kabir"]
mixed = ["Python", 100, 99.5, True]
empty_list = []

print(numbers)
print(names)
print(mixed)
print(empty_list)
```

Output:

```
[10, 20, 30, 40]
['Aman', 'Riya', 'Kabir']
['Python', 100, 99.5, True]
[]
```

Different Ways to Create Lists

Type	Example
Empty list	<code>items = []</code>
Number list	<code>marks = [80, 90, 75]</code>
String list	<code>names = ["Aman", "Riya"]</code>
Mixed list	<code>data = ["Aman", 20, True]</code>
Nested list	<code>matrix = [[1, 2], [3, 4]]</code>
Using <code>list()</code>	<code>letters = list("ABC")</code>

9.1.2 Accessing Values

Syntax

```
list_name[index]
```

Explanation

1. List items are accessed using index numbers.
2. Python indexing starts from 0.
3. Positive indexing starts from the left.
4. Negative indexing starts from the right.

```
List:      ["Aman", "Riya", "Kabir", "Neha"]
Index:      0        1        2        3
Negative:  -4       -3       -2       -1
```

Example 1

```
students = ["Aman", "Riya", "Kabir", "Neha"]

print(students[0])
print(students[2])
print(students[-1])
```

Output:

```
Aman
Kabir
Neha
```

Indexing Table

Code	Meaning	Result
<code>students[0]</code>	First item	"Aman"
<code>students[1]</code>	Second item	"Riya"
<code>students[-1]</code>	Last item	"Neha"
<code>students[-2]</code>	Second last item	"Kabir"

9.1.3 Updating Values

Syntax

```
list_name[index] = new_value
```

1. Lists are mutable.
2. We can change an existing item using its index.
3. The index must exist in the list.

Example 1

```
<> Python  
  
marks = [70, 80, 90]  
  
marks[1] = 85  
  
print(marks)
```

Output: [70, 85, 90]

Updating Multiple Values

```
marks = [70, 80, 90, 60]  
  
marks[1:3] = [88, 95]  
  
print(marks)
```

Output: [70, 88, 95, 60]

9.1.4 List Methods

Method	Purpose	Example	Result
<code>append()</code>	Adds one item at the end	<code>items.append(40)</code>	Adds 40
<code>extend()</code>	Adds multiple items	<code>items.extend([50, 60])</code>	Adds 50, 60
<code>insert()</code>	Adds item at specific index	<code>items.insert(1, 15)</code>	Adds 15 at index 1
<code>remove()</code>	Removes first matching value	<code>items.remove(20)</code>	Removes 20
<code>pop()</code>	Removes item by index	<code>items.pop(1)</code>	Removes item at index 1
<code>clear()</code>	Removes all items	<code>items.clear()</code>	Empty list
<code>index()</code>	Returns index of value	<code>items.index(30)</code>	Gives position
<code>count()</code>	Counts occurrences	<code>items.count(10)</code>	Count of 10
<code>sort()</code>	Sorts list	<code>items.sort()</code>	Ascending order
<code>reverse()</code>	Reverses list	<code>items.reverse()</code>	Reverse order
<code>copy()</code>	Creates shallow copy	<code>new = items.copy()</code>	New list copy

Example 1

PYTHON CODE

```
numbers = [10, 20, 30]
```

```
numbers.append(40)
```

```
numbers.insert(1, 15)
```

```
numbers.remove(20)
```

```
print(numbers)
```

Output: [10, 15, 30, 40]

Useful Functions with Lists

Function	Purpose	Example
<code>len()</code>	Counts items	<code>len(numbers)</code>
<code>sum()</code>	Adds numeric items	<code>sum(numbers)</code>
<code>min()</code>	Smallest value	<code>min(numbers)</code>
<code>max()</code>	Largest value	<code>max(numbers)</code>
<code>sorted()</code>	Returns sorted copy	<code>sorted(numbers)</code>

9.1.5 Slicing

Syntax

list_name[start:end:step]

Explanation

1. Slicing is used to get a part of a list.
2. The start index is included.
3. The end index is excluded.
4. Step controls the gap between selected items.

Example 1

PYTHON CODE

```
numbers = [10, 20, 30, 40, 50, 60]
print(numbers[1:4])
print(numbers[:3])
print(numbers[3:])
print(numbers[::-2])
print(numbers[::-1])
```

Output:

[20, 30, 40]

[10, 20, 30]

[40, 50, 60]

[10, 30, 50]

[60, 50, 40, 30, 20, 10]

Slicing Table

Code	Meaning	Result
<code>numbers[1:4]</code>	Index 1 to before 4	<code>[20, 30, 40]</code>
<code>numbers[:3]</code>	Start to before index 3	<code>[10, 20, 30]</code>
<code>numbers[3:]</code>	Index 3 to end	<code>[40, 50, 60]</code>
<code>numbers[::-2]</code>	Every second item	<code>[10, 30, 50]</code>
<code>numbers[::-1]</code>	Reverse list	<code>[60, 50, 40, 30, 20, 10]</code>

9.1.6 List Comprehensions

Syntax

`new_list = [expression for item in sequence]`

With condition:

`new_list = [expression for item in sequence if condition]`

1. List comprehension is a short way to create a new list.
2. It is commonly used when each item needs to be processed.
3. It can also filter values using `if`.
4. It makes code shorter and cleaner.

Example 1

PYTHON CODE

```
numbers = [1, 2, 3, 4, 5]
squares = [number * number for
number in numbers]
print(squares)
```

Output: [1, 4, 9, 16, 25]

Example 2: With Condition

PYTHON CODE

```
numbers = [1, 2, 3, 4, 5, 6]

even_numbers = [number for number in numbers if number % 2 == 0]
print(even_numbers)
```

Output: [2, 4, 6]

9.1.7 Nested Lists

Syntax

`list_name = [[item1, item2], [item3, item4]]`

Explanation

1. A nested list means a list inside another list.
2. It is useful for matrix-like data, rows and columns, or grouped values.
3. To access nested list values, use multiple indexes.

Example 1

PYTHON CODE

```
matrix = [  
    [1, 2, 3],  
    [4, 5, 6],  
    [7, 8, 9]  
]  
print(matrix[0])  
print(matrix[1][2])
```

Output: [1, 2, 3]
6

Index Diagram

```
matrix = [  
    [1, 2, 3], -> index 0  
    [4, 5, 6], -> index 1  
    [7, 8, 9]  -> index 2  
]  
  
matrix[1][2]  
|   |  
|   v  
|   item index 2 inside row 1  
v  
row index 1  
  
Result: 6
```

Updating Nested List Value

PYTHON CODE

```
matrix = [  
    [1, 2, 3],  
    [4, 5, 6]  
]  
  
matrix[1][0] = 40  
print(matrix)
```

Output: [[1, 2, 3], [40, 5, 6]]

9.1.8 Sorting and Reversing

Sorting means arranging values in order. Reversing means changing the order from last to first.

Sorting and Reversing Table

Operation	Code	Changes Original List?	Result
Sort ascending	<code>numbers.sort()</code>	Yes	Small to large
Sort descending	<code>numbers.sort(reverse=True)</code>	Yes	Large to small
Sorted copy	<code>sorted(numbers)</code>	No	Returns new sorted list
Reverse original	<code>numbers.reverse()</code>	Yes	Reverses same list
Reverse copy	<code>numbers[::-1]</code>	No	Returns reversed copy

Example 1

PYTHON CODE

```
numbers = [40, 10, 30, 20]
numbers.sort()
print(numbers)

numbers.sort(reverse=True)
print(numbers)

numbers.reverse()
print(numbers)
```

Output:

```
[10, 20, 30, 40]
[40, 30, 20, 10]
[10, 20, 30, 40]
```

sort() vs sorted()

Point	sort()	sorted()
Type	List method	Built-in function
Original list	Changes original list	Does not change original list
Return value	Returns <code>None</code>	Returns new sorted list
Usage	<code>numbers.sort()</code>	<code>sorted(numbers)</code>

Example 2

PYTHON CODE

```
numbers = [30, 10, 20]
new_numbers =
sorted(numbers)
print(numbers)
print(new_numbers)
```

Output:

[30, 10, 20]

[10, 20, 30]

9.1.9 Copying Lists

Syntax

```
new_list = old_list.copy()
```

Other ways:

```
new_list = old_list[:]
```

```
new_list = list(old_list)
```

Explanation

1. Copying means creating another list with the same values.
2. Direct assignment does not create a real copy.
3. Direct assignment makes two variables point to the same list.
4. To create a separate list, use `copy()`, slicing, or `list()`.

Direct Assignment

PYTHON CODE

```
list1 = [10, 20, 30]
list2 = list1

list2.append(40)
print(list1)
print(list2)
```

Output:

[10, 20, 30, 40]

[10, 20, 30, 40]

Explanation:

1. `list2 = list1` does not create a new list.
2. Both variables refer to the same list.
3. So changing `list2` also affects `list1`.

```
list1 ----\
          ---> [10, 20, 30]
list2 ----/
```

Real Copy Example

Python

```
list1 = [10, 20, 30]
list2 = list1.copy()

list2.append(40)

print(list1)
print(list2)
```

Output:

[10, 20, 30]

[10, 20, 30, 40]

Copying Methods Table

Method	Code	Meaning
<code>copy()</code>	<code>new = old.copy()</code>	Creates shallow copy
Slicing	<code>new = old[:]</code>	Creates shallow copy
<code>list()</code>	<code>new = list(old)</code>	Creates shallow copy
Direct assignment	<code>new = old</code>	Not a real copy

9.1.10 Shallow Copy vs Deep Copy

Explanation

This concept matters when a list contains another list. There are two types of copy:

- Shallow copy
- Deep copy

Shallow Copy

A shallow copy creates a new outer list, but nested lists inside are still shared.

Example 1: Shallow Copy

PYTHON CODE


```
list1 = [[10, 20], [30, 40]]
list2 = list1.copy()
list2[0][0] = 99
print(list1)
print(list2)
```

Output:

```
[[99, 20], [30, 40]]
[[99, 20], [30, 40]]
```

1. `list1.copy()` creates a new outer list.
2. But the inner lists are still shared.
3. So changing an inner list affects both lists.

Shallow Copy Diagram



Deep Copy

A deep copy creates a completely separate copy of both the outer list and inner lists.

Example 2: Deep Copy

PYTHON CODE

```
import copy
list1 = [[10, 20], [30, 40]]
list2 = copy.deepcopy(list1)

list2[0][0] = 99
print(list1)
print(list2)
```

Output: `[[10, 20], [30, 40]]`
`[[99, 20], [30, 40]]`

Explanation:

1. `copy.deepcopy()` creates a fully independent copy.
2. Inner lists are also copied separately.
3. Changing `list2` does not affect `list1`.

Shallow Copy vs Deep Copy Table

Point	Shallow Copy	Deep Copy
Outer list	New copy	New copy
Inner nested lists	Shared	New copy
Affects original nested data?	Yes	No
Common method	<code>copy()</code>	<code>copy.deepcopy()</code>
Useful for	Simple lists	Nested lists

Important List Operations Table

Operation	Code	Meaning
Create list	<code>items = [10, 20, 30]</code>	Creates list
Access item	<code>items[0]</code>	Gets first item
Update item	<code>items[1] = 25</code>	Changes second item
Add item	<code>items.append(40)</code>	Adds at end
Insert item	<code>items.insert(1, 15)</code>	Adds at index
Remove item	<code>items.remove(20)</code>	Removes value
Remove by index	<code>items.pop(0)</code>	Removes by index
Slice list	<code>items[1:3]</code>	Gets part of list
Sort list	<code>items.sort()</code>	Sorts original list
Reverse list	<code>items.reverse()</code>	Reverses original list
Copy list	<code>items.copy()</code>	Creates shallow copy
Length	<code>len(items)</code>	Counts items

List Method Return Behavior

Method	Changes Original List?	Returns
<code>append()</code>	Yes	None
<code>extend()</code>	Yes	None
<code>insert()</code>	Yes	None
<code>remove()</code>	Yes	None
<code>pop()</code>	Yes	Removed item
<code>clear()</code>	Yes	None
<code>sort()</code>	Yes	None
<code>reverse()</code>	Yes	None
<code>copy()</code>	No	New list

9.2 Tuples in Python

A **tuple** is a data structure used to store multiple values in one variable.

Tuples are similar to lists, but the main difference is:

List -> mutable -> can be changed

Tuple -> immutable -> cannot be changed

Syntax

```
tuple_name = (value1, value2, value3)
```

Explanation

1. Tuples are written using parentheses ().
2. Tuple items are separated by commas.
3. Tuples are ordered, so items have index positions.
4. Tuples are immutable, so items cannot be changed after creation.
5. Tuples allow duplicate values.
6. Tuples can store different data types.

Example 1

```
student = ("Rahul", 21, "Python", 85.5)


print(student)
```

Output: ('Rahul', 21, 'Python', 85.5)

Tuple Properties Table

Property	Meaning	Example
Ordered	Items have fixed positions	<code>items[0]</code>
Immutable	Items cannot be changed	<code>items[1] = 50</code> not allowed
Allows duplicates	Same value can appear more than once	<code>(10, 10, 20)</code>
Mixed data allowed	Can store different data types	<code>("Aman", 20, True)</code>
Indexed	Every item has position number	<code>0, 1, 2...</code>

Flow Chart

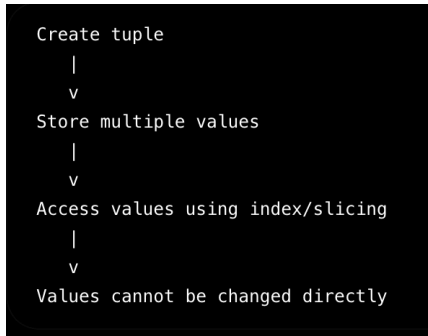

9.2.1 Creating Tuples

Syntax

`tuple_name = (item1, item2, item3)`

1. Tuples can store numbers, strings, Booleans, or mixed values. An empty tuple can also be created.
2. A tuple can be created with or without parentheses, but parentheses are recommended for clarity.
3. A single-item tuple must have a comma.

Example 1

PYTHON CODE

```
numbers = (10, 20, 30)
names = ("Aman", "Riya", "Kabir")
mixed = ("Python", 100, 99.5, True)
empty_tuple = ()
print(numbers)
print(names)
print(mixed)
print(empty_tuple)
```

Output:

```
(10, 20, 30)
('Aman', 'Riya', 'Kabir')
('Python', 100, 99.5, True)
()
```

Different Ways to Create Tuples

Type	Example
Empty tuple	<code>items = ()</code>
Number tuple	<code>marks = (80, 90, 75)</code>
String tuple	<code>names = ("Aman", "Riya")</code>
Mixed tuple	<code>data = ("Aman", 20, True)</code>
Nested tuple	<code>matrix = ((1, 2), (3, 4))</code>
Without parentheses	<code>items = 10, 20, 30</code>
Using <code>tuple()</code>	<code>letters = tuple("ABC")</code>

9.2.2 Single-Item Tuple

Syntax

`tuple_name = (value,)`

Explanation

1. A single-item tuple must contain a comma.
2. Without the comma, Python does not treat it as a tuple.
3. Parentheses alone are not enough.

Example 1

PYTHON CODE

```
a = ("Python")
b = ("Python",)
print(type(a))
print(type(b))
```

Output:

```
<class 'str'>
<class 'tuple'>
```

9.2.3 Accessing Tuple Values

Syntax

`tuple_name[index]`

1. Tuple values are accessed using index numbers.
2. Python indexing starts from 0.
3. Positive indexing starts from the left.
4. Negative indexing starts from the right.

Index Diagram

Tuple:	("Aman", "Riya", "Kabir", "Neha")			
Index:	0	1	2	3
Negative:	-4	-3	-2	-1

Example 1

PYTHON CODE

```
students = ("Aman", "Riya", "Kabir", "Neha")
print(students[0])
print(students[2])
print(students[-1])
```

Output:

Aman
Kabir
Neha

9.2.4 Tuple Slicing

Syntax

`tuple_name[start:end:step]`

Explanation

1. Slicing is used to get a part of a tuple.
2. The start index is included.
3. The end index is excluded.
4. Step controls the gap between selected values.
5. Slicing returns a new tuple.

Example 1

```
<> Python  
  
numbers = (10, 20, 30, 40, 50, 60)  
  
print(numbers[1:4])  
print(numbers[:3])  
print(numbers[3:])  
print(numbers[::2])  
print(numbers[::-1])
```

Output:

(20, 30, 40)
(10, 20, 30)
(40, 50, 60)
(10, 30, 50)
(60, 50, 40, 30, 20, 10)

Slicing Table

Code	Meaning	Result
<code>numbers[1:4]</code>	Index 1 to before 4	(20, 30, 40)
<code>numbers[:3]</code>	Start to before index 3	(10, 20, 30)
<code>numbers[3:]</code>	Index 3 to end	(40, 50, 60)
<code>numbers[::2]</code>	Every second item	(10, 30, 50)
<code>numbers[::-1]</code>	Reverse tuple	(60, 50, 40, 30, 20, 10)

9.2.5 Tuple Immutability

Syntax

`tuple_name[index] = new_value`

This syntax is **not allowed** for tuples.

Explanation

1. Tuples are immutable.
2. Once a tuple is created, its values cannot be changed directly.
3. We cannot update, add, or remove tuple items directly.
4. If changes are needed, use a list or create a new tuple.

Example 1

PYTHON CODE

```
numbers = (10, 20, 30)
numbers[1] = 25
```

Output: TypeError: 'tuple' object does not support item assignment

Correct Way

Create a new tuple:

PYTHON CODE

```
numbers = (10, 20, 30)
numbers = (10, 25, 30)
print(numbers)
```

Output: (10, 25, 30)

Memory Idea

Before: numbers ----> (10, 20, 30)

After: numbers ----> (10, 25, 30)

The old tuple is not changed. The variable starts pointing to a new tuple.

9.2.6 Tuple with Mutable Items

Syntax

tuple_name = ([item1, item2], value)

1. A tuple itself is immutable.
2. But if a tuple contains a mutable item like a list, the inner list can be changed.
3. This happens because the tuple is still pointing to the same inner list.

Example 1

PYTHON CODE

```
data = ([10, 20], "Python")
data[0][1] = 99
print(data)
```

Output: ([10, 99], 'Python')

Explanation Table

Part	Mutable or Immutable?
Outer tuple	Immutable
Inner list	Mutable
<code>data[0] = [1, 2]</code>	Not allowed
<code>data[0][1] = 99</code>	Allowed

9.2.7 Tuple Methods

Method	Purpose	Example	Result
<code>count()</code>	Counts how many times a value appears	<code>items.count(10)</code>	Count of 10
<code>index()</code>	Returns index of first matching value	<code>items.index(20)</code>	Position of 20

Useful Functions with Tuples

Function	Purpose	Example
<code>len()</code>	Counts items	<code>len(numbers)</code>
<code>sum()</code>	Adds numeric items	<code>sum(numbers)</code>
<code>min()</code>	Smallest value	<code>min(numbers)</code>
<code>max()</code>	Largest value	<code>max(numbers)</code>
<code>sorted()</code>	Returns sorted list	<code>sorted(numbers)</code>

9.2.8 Tuple Operations

Operation	Code	Meaning
Concatenation	<code>tuple1 + tuple2</code>	Joins tuples
Repetition	<code>tuple1 * 3</code>	Repeats tuple
Membership	<code>value in tuple1</code>	Checks value exists
Length	<code>len(tuple1)</code>	Counts items
Slicing	<code>tuple1[1:4]</code>	Gets part of tuple

9.2.9 Tuple Packing

Syntax

`tuple_name = value1, value2, value3`

Explanation

1. Tuple packing means storing multiple values together in a tuple.
2. Python automatically packs comma-separated values into a tuple.
3. Parentheses are optional, but recommended for readability.

Example 1

PYTHON CODE

```
student = "Aman", 21, "Python"  
print(student)  
print(type(student))
```

Output: ('Aman', 21, 'Python')
<class 'tuple'>

```
"Aman", 21, "Python"  
  |  
  v  
Packed into one tuple  
  |  
  v  
( 'Aman', 21, 'Python' )
```

9.2.10 Tuple Unpacking

Syntax

`var1, var2, var3 = tuple_name`

Explanation

1. Tuple unpacking means taking values from a tuple and storing them in separate variables.
2. The number of variables should match the number of tuple values.
3. Unpacking makes code cleaner and readable.

Example 1

```
student = ("Aman", 21, "Python")

name, age, course = student

print(name)
print(age)
print(course)
```

```
student = ("Aman", 21, "Python")
           |      |      |
           v      v      v
         name   age   course
```

Output:

Aman

21

Python

Important Point

This gives an error:

PYTHON CODE

```
student = ("Aman", 21, "Python")
name, age = student
```

Output: ValueError: too many values to unpack

Because the tuple has 3 values, but only 2 variables are given.

9.2.11 Extended Tuple Unpacking

Syntax

first, *middle, last = tuple_name

Explanation

1. Extended unpacking is used when we do not want to manually create variables for every value.
2. The starred variable collects extra values.
3. The starred variable becomes a list.

Example 1

PYTHON CODE

```
numbers = (10, 20, 30, 40, 50)
first, *middle, last = numbers
print(first)
print(middle)
print(last)
```

Output:

```
10
[20, 30, 40]
50
```

Important point: The starred variable stores values in a list, not a tuple.

9.2.12 Named Tuples

Syntax

```
from collections import namedtuple
```

```
TupleName = namedtuple("TupleName", ["field1", "field2"])
```

```
object_name = TupleName(value1, value2)
```

Explanation

1. A named tuple is a tuple with named fields.
2. Normal tuple values are accessed by index.
3. Named tuple values can be accessed by name.
4. This makes code more readable.
5. Named tuples are immutable like normal tuples.

Example 1

```
from collections import namedtuple

Student = namedtuple("Student", ["name", "age", "course"])

student1 = Student("Aman", 21, "Python")

print(student1.name)
print(student1.age)
print(student1.course)
```

Output: Aman

21

Python

Normal Tuple vs Named Tuple

Normal Tuple	Named Tuple
Access by index	Access by name
<code>student[0]</code>	<code>student.name</code>
Less readable	More readable
Immutable	Immutable

9.2.13 Tuple vs List

Point	List	Tuple
Brackets	Uses <code>[]</code>	Uses <code>()</code>
Mutability	Mutable	Immutable
Can update items	Yes	No
Can add/remove items	Yes	No
Speed	Slightly slower	Slightly faster
Best for	Data that may change	Data that should not change

Important Tuple Operations Table

Operation	Code	Meaning
Create tuple	<code>items = (10, 20, 30)</code>	Creates tuple
Single-item tuple	<code>item = (10,)</code>	Creates tuple with one item
Access item	<code>items[0]</code>	Gets first item
Slice tuple	<code>items[1:3]</code>	Gets part of tuple
Count item	<code>items.count(10)</code>	Counts value
Find index	<code>items.index(20)</code>	Finds position
Pack tuple	<code>data = "Aman", 21</code>	Packs values
Unpack tuple	<code>name, age = data</code>	Extracts values
Concatenate	<code>a + b</code>	Joins tuples
Repeat	<code>a * 2</code>	Repeats tuple
Check membership	<code>10 in items</code>	Returns <code>True</code> or <code>False</code>
Convert list to tuple	<code>tuple(my_list)</code>	Creates tuple
Convert tuple to list	<code>list(my_tuple)</code>	Creates list

9.3 Dictionaries in Python

A **dictionary** is a data structure used to store data in **key-value pairs**.

Syntax

```
dictionary_name = {  
    key1: value1,  
    key2: value2,  
    key3: value3  
}
```

1. A dictionary stores data using **keys** and **values**.
2. Each key is connected to one value.
3. Keys are used to access values.
4. Dictionaries are mutable, so values can be changed.
5. Dictionary keys must be unique.
6. Dictionaries are written using curly braces {}.

Flow Chart

```
Create dictionary  
|  
v  
Store data as key-value pairs  
|  
v  
Use key to access value  
|  
v  
Update / add / remove data when needed
```

Example 1

```
PYTHON CODE  
student = {  
    "name": "Aman",  
    "age": 21,  
    "course": "Python"  
}  
print(student)
```

Output: {'name': 'Aman', 'age': 21, 'course': 'Python'}

Dictionary Structure

```
Dictionary
|
v
{
  "name": "Aman",
  key      value

  "age": 21,
  key      value
}
```

Dictionary Properties Table

Property	Meaning	Example
Key-value based	Stores data as pairs	"name": "Aman"
Mutable	Can be changed	student["age"] = 22
Ordered	Keeps insertion order	Python 3.7+
Unique keys	Duplicate keys are not allowed	Last value replaces old value
Fast lookup	Values are accessed using keys	student["name"]
Mixed values allowed	Values can be any data type	string, int, list, tuple, dict

9.3.1 Creating Dictionaries

Syntax

```
<> Python

dictionary_name = {
    "key1": "value1",
    "key2": "value2"
}
```

Explanation

1. Dictionaries are created using `{}`.
2. Keys and values are separated using a colon `:`.
3. Each pair is separated using a comma.
4. Keys are usually strings, but numbers and tuples can also be used.
5. Values can be any data type.

PYTHON CODE

```
student = {  
    "name": "Rahul",  
    "age": 20,  
    "marks": 85.5,  
    "is_passed": True  
}  
print(student)
```

Output: {'name': 'Rahul', 'age': 20, 'marks': 85.5, 'is_passed': True}

Different Ways to Create Dictionaries

Type	Example
Empty dictionary	<code>data = {}</code>
Normal dictionary	<code>student = {"name": "Aman", "age": 21}</code>
Using <code>dict()</code>	<code>student = dict(name="Aman", age=21)</code>
Nested dictionary	<code>students = {"s1": {"name": "Aman"}}</code>
Dictionary with list value	<code>data = {"marks": [80, 90, 85]}</code>
Dictionary with tuple key	<code>points = {(10, 20): "A"}</code>

9.3.2 Dictionary Keys and Values

Syntax

```
dictionary = {  
    key: value  
}
```

Explanation

1. A **key** is used to identify a value.
2. A **value** is the data stored against the key.
3. Keys must be unique.
4. Values can be duplicate.
5. Keys should be immutable types like string, number, or tuple.


```
<> Python

student = {
    "name": "Aman",
    "age": 21,
    "course": "Python"
}

print(student["name"])
```

Output: Aman

Key Rules Table

Rule	Allowed?	Example
String key	Yes	"name": "Aman"
Number key	Yes	1: "One"
Tuple key	Yes	(10, 20): "Point"
List key	No	[1, 2]: "Value"
Duplicate keys	Not useful	Last value is kept

Duplicate Key Example

```
student = {
    "name": "Aman",
    "name": "Rahul"
}

print(student)
```

Output: {'name': 'Rahul'}

The second value replaces the first value because dictionary keys must be unique.

9.3.3 Accessing Values

Syntax

dictionary_name[key]

Explanation

1. Dictionary values are accessed using keys.
2. Unlike lists and tuples, dictionaries are not accessed mainly by index.
3. If the key exists, Python returns its value.
4. If the key does not exist, Python gives `KeyError`.

```
Dictionary
  |
  v
Give key
  |
  v
Key exists?
  |
  ├── Yes -> Return value
  |
  └── No  -> KeyError
```

Example 1

```
<> Python

student = {
    "name": "Aman",
    "age": 21,
    "course": "Python"
}

print(student["name"])
print(student["age"])
```

Output:

Aman

21

Accessing Table

Code	Meaning	Result
<code>student["name"]</code>	Access name	"Aman"
<code>student["age"]</code>	Access age	21
<code>student["course"]</code>	Access course	"Python"

KeyError Example

PYTHON CODE

```
student = {  
    "name": "Aman",  
    "age": 21  
}  
print(student["marks"])
```

Output:

KeyError: 'marks'

The key "marks" does not exist.

9.3.4 Updating Values

Syntax

`dictionary_name[key] = new_value`

1. Dictionaries are mutable.
2. Existing values can be updated using keys.
3. If the key already exists, its value is updated.
4. If the key does not exist, a new key-value pair is added.

PYTHON CODE

```
student = {  
    "name": "Aman",  
    "age": 21  
}  
student["age"] = 22  
student["course"] = "Python"  
print(student)
```

Output: {'name': 'Aman', 'age': 22, 'course': 'Python'}

9.3.5 Dictionary Methods

Dictionary methods are built-in operations used to access, update, remove, copy, and manage dictionary data.

Assume this dictionary:

PYTHON CODE

```
student = {  
    "name": "Aman",  
    "age": 21,  
    "course": "Python"  
}
```

Dictionary Methods Table

Method	Purpose	Example	Result / Effect
<code>keys()</code>	Returns all keys	<code>student.keys()</code>	<code>dict_keys(['name', 'age', 'course'])</code>
<code>values()</code>	Returns all values	<code>student.values()</code>	<code>dict_values(['Aman', 21, 'Python'])</code>
<code>items()</code>	Returns key-value pairs	<code>student.items()</code>	<code>dict_items([('name', 'Aman'), ...])</code>
<code>get()</code>	Returns value safely	<code>student.get("name")</code>	"Aman"
<code>update()</code>	Adds or updates data	<code>student.update({"age": 22})</code>	Updates age
<code>pop()</code>	Removes key and returns value	<code>student.pop("age")</code>	Returns 21
<code>popitem()</code>	Removes last inserted pair	<code>student.popitem()</code>	Removes last pair
<code>clear()</code>	Removes all items	<code>student.clear()</code>	<code>{}</code>
<code>copy()</code>	Creates shallow copy	<code>new = student.copy()</code>	New dictionary
<code>setdefault()</code>	Gets value or adds default	<code>student.setdefault("city", "Delhi")</code>	Adds city if missing
<code>fromkeys()</code>	Creates dictionary from keys	<code>dict.fromkeys(["a", "b"], 0)</code>	<code>{'a': 0, 'b': 0}</code>

Method Behavior Table

Method	Changes Original Dictionary?	Returns
<code>keys()</code>	No	View of keys
<code>values()</code>	No	View of values
<code>items()</code>	No	View of key-value pairs
<code>get()</code>	No	Value or default
<code>update()</code>	Yes	<code>None</code>
<code>pop()</code>	Yes	Removed value
<code>popitem()</code>	Yes	Removed key-value pair
<code>clear()</code>	Yes	<code>None</code>
<code>copy()</code>	No	New shallow copy
<code>setdefault()</code>	May change	Existing/default value
<code>fromkeys()</code>	Creates new dictionary	New dictionary

9.3.6 `get()` Method


Syntax

```
</> Python  
  
dictionary_name.get(key)  
dictionary_name.get(key, default_value)
```

Explanation

1. `get()` is used to access dictionary values safely.
2. If the key exists, it returns the value.
3. If the key does not exist, it returns `None` by default.
4. We can also provide our own default value.
5. `get()` avoids `KeyError`.

Flow Chart

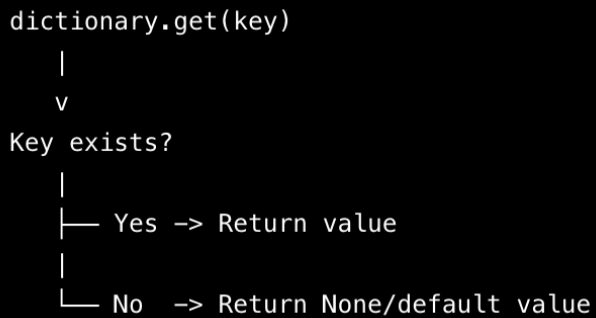

Example 1

PYTHON CODE

```
student = {
    "name": "Aman",
    "age": 21
}
print(student.get("name"))
print(student.get("marks"))
print(student.get("marks", "Not available"))
```

Output:

```
Aman
None
Not available
```

[] vs get() Table

Access Method	If Key Exists	If Key Missing
<code>student["name"]</code>	Returns value	Gives KeyError
<code>student.get("name")</code>	Returns value	Returns None
<code>student.get("marks", 0)</code>	Returns value	Returns default value

9.3.7 Removing Dictionary Items

Syntax

```
dictionary.pop(key)
dictionary.popitem()
del dictionary[key]
dictionary.clear()
```

Explanation

1. `pop(key)` removes a specific key and returns its value.
2. `popitem()` removes the last inserted key-value pair.
3. `del` removes a specific key.
4. `clear()` removes all items.

Removing Items Table

Method / Keyword	Purpose	Example
<code>pop(key)</code>	Removes specific key	<code>student.pop("age")</code>
<code>popitem()</code>	Removes last pair	<code>student.popitem()</code>
<code>del</code>	Deletes specific key	<code>del student["age"]</code>
<code>clear()</code>	Empties dictionary	<code>student.clear()</code>

Example 1

PYTHON CODE

```
student = {
    "name": "Aman",
    "age": 21,
    "course": "Python"
}
student.pop("age")
print(student)
```

Output: {'name': 'Aman', 'course': 'Python'}

9.3.8 Looping Through Dictionaries

Syntax

Python

```
for key in dictionary:  
    statement
```

Python

```
for key, value in dictionary.items():  
    statement
```

Explanation

1. A dictionary can be looped through using `for`.
2. By default, looping over a dictionary gives keys.
3. Use `values()` to loop through values.
4. Use `items()` to loop through both keys and values.

```
Dictionary  
|  
v  
Loop through keys / values / items  
|  
v  
Process one pair at a time
```

Example 1

PYTHON CODE

```
student = {  
    "name": "Aman",  
    "age": 21,  
    "course": "Python"  
}  
for key, value in student.items():  
    print(key, value)
```

Output:

```
name Aman  
age 21  
course Python
```


9.3.9 Checking Key Membership

Syntax

```
key in dictionary  
key not in dictionary
```

Explanation

1. `in` checks whether a key exists in the dictionary.
2. It checks keys, not values.
3. It returns `True` or `False`.

Example 1

```
</> Python  
  
student = {  
    "name": "Aman",  
    "age": 21  
}  
  
print("name" in student)  
print("marks" in student)
```

Output:

True

False

Membership Table

Code	Meaning
"name" in student	Checks if key exists
"marks" not in student	Checks if key does not exist
"Aman" in student	Checks key, not value

9.3.10 Nested Dictionaries

Syntax

<> Python

```
dictionary_name = {  
    key1: {  
        inner_key1: inner_value1,  
        inner_key2: inner_value2  
    },  
    key2: {  
        inner_key1: inner_value1,  
        inner_key2: inner_value2  
    }  
}
```

Explanation

1. A nested dictionary means a dictionary inside another dictionary.
2. It is useful for storing structured data.
3. To access inner values, use multiple keys.
4. Nested dictionaries are common in real-world data like users, students, products, and API responses.

Outer dictionary

|

v

Select outer key

|

v

Get inner dictionary

|

v

Select inner key

|

v

Get final value

Example 1

PYTHON CODE

```
students = {  
    "student1": {  
        "name": "Aman",  
        "age": 21  
    },  
    "student2": {  
        "name": "Riya",  
        "age": 20  
    }  
}  
print(students["student1"]["name"])  
print(students["student2"]["age"])
```

Output:

Aman

20

```
students["student1"]["name"]  
|           |           |  
|           |           v  
|           |           "Aman"  
|           |           v  
|           |           inner dictionary  
|           |  
v  
outer dictionary
```

Updating Nested Dictionary

```
Python  
  
students = {  
    "student1": {  
        "name": "Aman",  
        "age": 21  
    }  
}  
  
students["student1"]["age"] = 22  
  
print(students)
```

Output: {'student1': {'name': 'Aman', 'age': 22}}

9.3.11 Dictionary Comprehensions

Syntax

```
new_dict = {key_expression: value_expression for item in sequence}
```

With condition:

```
new_dict = {key_expression: value_expression for item in sequence if condition}
```

Explanation

1. Dictionary comprehension is a short way to create a dictionary.
2. It is similar to list comprehension.
3. It creates key-value pairs using a loop.
4. It can also include conditions.

Flow Chart

Take sequence

|

v

Loop through items

|

v

Create key-value pair

|

v

Store in new dictionary

Example 1

PYTHON CODE

```
numbers = [1, 2, 3, 4]
squares = {number: number * number for number in numbers}
print(squares)
```

Output:

```
{1: 1, 2: 4, 3: 9, 4: 16}
```

Example 2: With Condition

PYTHON CODE

```
numbers = [1, 2, 3, 4, 5, 6]
even_squares = {number: number * number for number in numbers if number % 2 == 0}
print(even_squares)
```

Output: {2: 4, 4: 16, 6: 36}

Dictionary Comprehension Parts

Part	Meaning
<code>number</code> before <code>:</code>	Key
<code>number * number</code>	Value
<code>for number in numbers</code>	Loop
<code>if number % 2 == 0</code>	Optional condition

9.3.12 Merging Dictionaries

Merging means combining two or more dictionaries.

Example 1: Using `update()`

PYTHON CODE

```
student = {
    "name": "Aman",
    "age": 21
}
extra = {
    "course": "Python",
    "city": "Delhi"
}
student.update(extra)
print(student)
```

Output: {'name': 'Aman', 'age': 21, 'course': 'Python', 'city': 'Delhi'}

Example 2: Using |

PYTHON CODE

```
student = {  
    "name": "Aman",  
    "age": 21  
}  
extra = {  
    "course": "Python",  
    "city": "Delhi"  
}  
result = student | extra  
print(result)
```

Output: {'name': 'Aman', 'age': 21, 'course': 'Python', 'city': 'Delhi'}

Same Key During Merge

If both dictionaries have the same key, the second dictionary value wins.

PYTHON CODE

```
a = {"name": "Aman", "age": 21}  
b = {"age": 22, "course": "Python"}  
result = a | b  
print(result)
```

Output: {'name': 'Aman', 'age': 22, 'course': 'Python'}

9.3.13 Copying Dictionaries

Syntax

```
new_dict = old_dict.copy()
```

Explanation

1. `copy()` creates a shallow copy of a dictionary.
2. Direct assignment does not create a new dictionary.
3. Direct assignment makes both variables point to the same dictionary.

Direct Assignment Example

PYTHON CODE

```
student1 = {"name": "Aman", "age": 21}
student2 = student1

student2["age"] = 22
print(student1)
print(student2)
```

Output:

```
{'name': 'Aman', 'age': 22}
{'name': 'Aman', 'age': 22}
```

Real Copy Example

PYTHON CODE

```
student1 = {"name": "Aman", "age": 21}
student2 = student1.copy()

student2["age"] = 22
print(student1)
print(student2)
```

Output:

```
{'name': 'Aman', 'age': 21}
{'name': 'Aman', 'age': 22}
```

Copying Table

Method	Creates New Dictionary?	Notes
<code>dict2 = dict1</code>	No	Same dictionary reference
<code>dict2 = dict1.copy()</code>	Yes	Shallow copy
<code>dict2 = dict(dict1)</code>	Yes	Shallow copy

9.3.14 Dictionary vs List

Point	List	Dictionary
Data storage	Stores values	Stores key-value pairs
Access by	Index	Key
Brackets	[]	{ }
Best for	Ordered collection of values	Labeled/structured data
Example	["Aman", 21]	{"name": "Aman", "age": 21}

9.3.15 Important Dictionary Operations

Operation	Code	Meaning
Create dictionary	<code>data = {"name": "Aman"}</code>	Creates dictionary
Access value	<code>data["name"]</code>	Gets value by key
Safe access	<code>data.get("name")</code>	Avoids <code>KeyError</code>
Update value	<code>data["name"] = "Rahul"</code>	Changes value
Add new pair	<code>data["age"] = 21</code>	Adds key-value pair
Remove key	<code>data.pop("age")</code>	Removes key
Check key	<code>"name" in data</code>	Returns <code>True</code> or <code>False</code>
Get keys	<code>data.keys()</code>	Returns all keys
Get values	<code>data.values()</code>	Returns all values
Get pairs	<code>data.items()</code>	Returns key-value pairs
Merge dictionaries	<code>`dict1</code>	<code>dict2`</code>
Copy dictionary	<code>data.copy()</code>	Creates shallow copy
Empty dictionary	<code>data.clear()</code>	Removes all items

9.4 Sets in Python

A **set** is a data structure used to store multiple **unique** values.

Syntax

```
<> Python
set_name = {value1, value2, value3}
```

Explanation

1. Sets are written using curly braces {}.
2. Set items are separated by commas.
3. Sets store only unique values.
4. Sets are unordered, so items do not have fixed positions.
5. Sets are mutable, so we can add or remove items.
6. Set elements must be immutable/hashable values.

Example 1

PYTHON CODE

```
numbers = {10, 20, 30, 40}
print(numbers)
```

{40, 10, 20, 30} : The output order may look different because sets are unordered.

Set Properties Table

Property	Meaning	Example
Unordered	Items have no fixed index	Cannot use <code>items[0]</code>
Unique values	Duplicate values are removed	<code>{10, 10, 20}</code> becomes <code>{10, 20}</code>
Mutable	Items can be added/removed	<code>items.add(50)</code>
Unindexed	No indexing/slicing	<code>items[1]</code> not allowed
Mixed data allowed	Can store different immutable types	<code>{10, "Aman", True}</code>
Fast membership check	Good for checking existence	<code>10 in numbers</code>

9.4.1 Creating Sets

Syntax

set_name = {item1, item2, item3}

1. Sets can store numbers, strings, Booleans, and tuples.
2. Sets cannot store mutable values like lists or dictionaries.
3. Empty set must be created using `set()`. `{}` creates an empty dictionary, not an empty set.

Example 1

PYTHON CODE

```
numbers = {10, 20, 30}
names = {"Aman", "Riya", "Kabir"}
mixed = {"Python", 100, 99.5, True}
empty_set = set()

print(numbers)
print(names)
print(mixed)
print(empty_set)
```

Output:

```
{10, 20, 30}
{'Aman', 'Kabir', 'Riya'}
{True, 99.5, 100, 'Python'}
set()
Order may differ in output.
```

Different Ways to Create Sets

Type	Example
Empty set	<code>items = set()</code>
Number set	<code>marks = {80, 90, 75}</code>
String set	<code>names = {"Aman", "Riya"}</code>
Mixed set	<code>data = {"Aman", 20, True}</code>
From list	<code>items = set([10, 20, 10])</code>
From string	<code>letters = set("ABC")</code>
From tuple	<code>items = set((10, 20, 30))</code>

Empty Set Important Point

PYTHON CODE

```
a = {}  
b = set()  
print(type(a))  
print(type(b))
```

Output:

<class 'dict'>

<class 'set'>

9.4.2 Unique Values

Syntax

set_name = {value1, value2, value1}

1. Sets automatically remove duplicate values.
2. Each value appears only once.
3. This makes sets useful for removing duplicates from data.
4. Sets check uniqueness using the value, not position.

Example 1

PYTHON CODE

```
numbers = {10, 20, 10, 30, 20, 40}  
print(numbers)
```

Output: {40, 10, 20, 30} => Duplicate 10 and 20 are removed.

Removing Duplicates from a List

PYTHON CODE

```
numbers = [10, 20, 10, 30, 20, 40]  
unique_numbers = set(numbers)  
print(unique_numbers)
```

Output: {40, 10, 20, 30}

9.4.3 Set Elements Must Be Immutable

Syntax

```
set_name = {immutable_value1, immutable_value2}
```

Explanation

1. Set elements must be hashable.
2. Immutable values like numbers, strings, and tuples can be stored in a set.
3. Mutable values like lists, dictionaries, and sets cannot be stored in a set.
4. This is because sets internally need stable values to check uniqueness.

Example 1

PYTHON CODE

```
valid_set = {10, "Python", (1, 2)}  
print(valid_set)
```

Output: {10, 'Python', (1, 2)}

Invalid example:

PYTHON CODE

```
invalid_set = {[1, 2], [3, 4]}
```

Output: TypeError: unhashable type: 'list'

Allowed vs Not Allowed Table

Value Type	Allowed in Set?	Example
Integer	Yes	{10, 20}
Float	Yes	{10.5, 20.5}
String	Yes	{"A", "B"}
Boolean	Yes	{True, False}
Tuple	Yes, if tuple contains immutable items	{(1, 2)}
List	No	{[1, 2]}
Dictionary	No	{{"a": 1}}
Set	No	{{1, 2}}

9.4.4 Accessing Set Values

Syntax

```
for item in set_name:
    statement
```

Explanation

1. Sets do not support indexing.
2. Sets do not support slicing.
3. Values can be accessed by looping.
4. Membership can be checked using `in`.

Example 1

PYTHON CODE

```
languages = {"Python", "Java", "C++"}
for language in languages:
    print(language)
```

Possible output:

Java

Python

C++

Output order may differ.

Invalid Access:

PYTHON CODE

```
languages = {"Python", "Java", "C++"}
print(languages[0])
```

Output: TypeError: 'set' object is not subscriptable

Accessing Table

Operation	Allowed?	Example
Looping	Yes	<code>for item in items:</code>
Membership check	Yes	<code>"Python" in items</code>
Indexing	No	<code>items[0]</code>
Slicing	No	<code>items[1:3]</code>

9.4.5 Checking Membership

Syntax

```
value in set_name  
value not in set_name
```

Explanation

1. Sets are very useful for checking whether a value exists.
2. `in` returns `True` if value exists.
3. `not in` returns `True` if value does not exist.
4. Membership checking in sets is usually faster than lists for large data.

Example:

```
numbers = {10, 20, 30, 40}  
  
print(20 in numbers)  
print(50 in numbers)  
print(50 not in numbers)
```

Output:

True

False

True

9.4.6 Adding Set Items

Syntax

```
</> Python  
  
set_name.add(value)  
set_name.update(iterable)
```

Explanation

1. `add()` adds one item.
2. `update()` adds multiple items.
3. If an added value already exists, it is not added again.
4. Sets automatically maintain uniqueness.

Example 1

PYTHON CODE

```
numbers = {10, 20, 30}
numbers.add(40)
numbers.update([50, 60, 20])
print(numbers)
```

Output: {40, 10, 50, 20, 60, 30}

20 was already present, so it is not duplicated.

add() vs update()

Method	Adds	Example
add()	One item	items.add(10)
update()	Multiple items	items.update([10, 20])

9.4.7 Removing Set Items

PYTHON CODE

```
set_name.remove(value)
set_name.discard(value)
set_name.pop()
set_name.clear()
```

1. `remove()` removes a specific item.
2. `discard()` also removes a specific item.
3. `pop()` removes a random item because sets are unordered.
4. `clear()` removes all items.

Example:

PYTHON CODE

```
numbers = {10, 20, 30, 40}
numbers.remove(20)
numbers.discard(50)
print(numbers)
```

Output: {40, 10, 30}

`discard(50)` does not give an error even though 50 is missing.

Removing Methods Table

Method	Purpose	If Value Missing
<code>remove(value)</code>	Removes specific value	Gives <code>KeyError</code>
<code>discard(value)</code>	Removes specific value	No error
<code>pop()</code>	Removes random item	Gives error if set is empty
<code>clear()</code>	Removes all items	No error

9.4.8 Set Operations

Set operations are used to compare or combine sets.

Main set operations:

1. Union
2. Intersection
3. Difference
4. Symmetric difference
5. Subset
6. Superset
7. Disjoint

Assume:

`a = {1, 2, 3}`

`b = {3, 4, 5}`

Set Operations Table

Operation	Symbol	Method	Meaning	Result
Union	<code>a b</code>	<code>a.union(b)</code>	Common values	<code>{3}</code>
Intersection	<code>a & b</code>	<code>a.intersection(b)</code>	Values in <code>a</code> but not in <code>b</code>	<code>{1, 2}</code>
Difference	<code>a - b</code>	<code>a.difference(b)</code>	Values not common in both	<code>{1, 2, 4, 5}</code>
Symmetric difference	<code>a ^ b</code>	<code>a.symmetric_difference(b)</code>	Checks if all items of <code>a</code> are in <code>b</code>	<code>False</code>
Subset	<code>a <= b</code>	<code>a.issubset(b)</code>	Checks if <code>a</code> contains all items of <code>b</code>	<code>False</code>
Superset	<code>a >= b</code>	<code>a.issuperset(b)</code>	Checks if no common items exist	<code>False</code>
Disjoint	No symbol	<code>a.isdisjoint(b)</code>		

Example 1

PYTHON CODE

```
a = {1, 2, 3}
b = {3, 4, 5}
print(a | b)
print(a & b)
print(a - b)
print(a ^ b)
```

Output:

```
{1, 2, 3, 4, 5}
{3}
{1, 2}
{1, 2, 4, 5}
```

9.4.9 Union

Syntax

```
set1 | set2
set1.union(set2)
```

Explanation

1. Union combines two sets.
2. It returns all unique values from both sets.
3. Duplicate/common values appear only once.

Example 1

PYTHON CODE

```
a = {1, 2, 3}
b = {3, 4, 5}
result = a.union(b)
print(result)
```

Output: {1, 2, 3, 4, 5}

a = {1, 2, 3}

b = {3, 4, 5}

Union = all unique values = {1, 2, 3, 4, 5}

9.4.10 Intersection

Syntax

set1 & set2

set1.intersection(set2)

1. Intersection returns only common values.
2. Values must exist in both sets.

PYTHON CODE

```
a = {1, 2, 3}
b = {3, 4, 5}
result = a.intersection(b)
print(result)
```

Output: {3}

9.4.11 Difference

Syntax

set1 - set2

set1.difference(set2)

1. Difference returns values present in the first set but not in the second set.
2. $a - b$ and $b - a$ can give different results.

PYTHON CODE

```
a = {1, 2, 3}
b = {3, 4, 5}
print(a - b)
print(b - a)
```

Output:

{1, 2}

{4, 5}

$a - b$ = values in a but not in b = {1, 2}

$b - a$ = values in b but not in a = {4, 5}

9.4.12 Symmetric Difference

Syntax

`set1 ^ set2`

`set1.symmetric_difference(set2)`

1. Symmetric difference returns values that are not common.
2. It removes common values from the final result.

PYTHON CODE

```
a = {1, 2, 3}
b = {3, 4, 5}
result = a.symmetric_difference(b)
print(result)
```

Output: {1, 2, 4, 5}

9.4.13 Subset, Superset, & Disjoint Sets

Syntax

`set1.issubset(set2)`

`set1.issuperset(set2)`

`set1.isdisjoint(set2)`

1. A subset means all values of one set exist inside another set.
2. A superset means one set contains all values of another set.
3. Disjoint sets have no common values.

PYTHON CODE

```
a = {1, 2}
b = {1, 2, 3, 4}
c = {5, 6}
print(a.issubset(b))
print(b.issuperset(a))
print(a.isdisjoint(c))
```

Output:

True
True
True

Comparison Table

Concept	Meaning	Example	Result
Subset	All items of a are in b	<code>{1, 2} <= {1, 2, 3}</code>	True
Superset	b contains all items of a	<code>{1, 2, 3} >= {1, 2}</code>	True
Disjoint	No common items	<code>{1, 2}.isdisjoint({3, 4})</code>	True

9.4.14 Set Methods

Method	Purpose	Example	Result / Effect
<code>add()</code>	Adds one item	<code>s.add(10)</code>	Adds 10
<code>update()</code>	Adds multiple items	<code>s.update([10, 20])</code>	Adds all items
<code>remove()</code>	Removes item	<code>s.remove(10)</code>	Error if missing
<code>discard()</code>	Removes item safely	<code>s.discard(10)</code>	No error if missing
<code>pop()</code>	Removes random item	<code>s.pop()</code>	Returns removed item
<code>clear()</code>	Removes all items	<code>s.clear()</code>	Empty set
<code>copy()</code>	Creates shallow copy	<code>new = s.copy()</code>	New set
<code>union()</code>	Combines sets	<code>a.union(b)</code>	New set
<code>intersection()</code>	Common items	<code>a.intersection(b)</code>	New set
<code>difference()</code>	Items in first but not second	<code>a.difference(b)</code>	New set
<code>symmetric_difference()</code>	Items not common	<code>a.symmetric_difference(b)</code>	New set
<code>intersection_update()</code>	Keeps only common items	<code>a.intersection_update(b)</code>	Changes a
<code>difference_update()</code>	Removes items found in other set	<code>a.difference_update(b)</code>	Changes a
<code>symmetric_difference_update()</code>	Keeps non-common items	<code>a.symmetric_difference_update(b)</code>	Changes a
<code>issubset()</code>	Checks subset	<code>a.issubset(b)</code>	True/False
<code>issuperset()</code>	Checks superset	<code>a.issuperset(b)</code>	True/False
<code>isdisjoint()</code>	Checks no common items	<code>a.isdisjoint(b)</code>	True/False

9.4.15 Set Operators

Set operations can also be done using operators.

Operator	Meaning	Same As
,		Union
&	Intersection	<code>a.intersection(b)</code>
-	Difference	<code>a.difference(b)</code>
^	Symmetric difference	<code>a.symmetric_difference(b)</code>
<=	Subset check	<code>a.issubset(b)</code>
<	Proper subset check	<code>a < b</code>
>=	Superset check	<code>a.issuperset(b)</code>
>	Proper superset check	<code>a > b</code>

9.4.16 Updating Sets with Operations

Syntax

```
set1.intersection_update(set2)
```

```
set1.difference_update(set2)
```

```
set1.symmetric_difference_update(set2)
```

1. Normal set operation methods return a new set.
2. Update methods change the original set.
3. These are useful when we do not need the old set.

PYTHON CODE

```
a = {1, 2, 3}
b = {3, 4, 5}
a.intersection_update(b)
print(a)
```

Output: {3}

9.4.17 Copying Sets

Syntax

```
new_set = old_set.copy()
```

1. `copy()` creates a shallow copy of a set. Direct assignment does not create a new set.
2. Direct assignment makes both variables point to the same set.

PYTHON CODE

```
a = {10, 20, 30}
b = a.copy()
b.add(40)
print(a)
print(b)
```

Output: {10, 20, 30}
 {40, 10, 20, 30}

Copying Table

Code	Creates New Set?	Meaning
<code>b = a</code>	No	Same set reference
<code>b = a.copy()</code>	Yes	Shallow copy
<code>b = set(a)</code>	Yes	New set

9.4.18 Frozen Sets

A **frozenset** is an immutable version of a set.

Syntax

```
frozenset_name = frozenset(iterable)
```

1. A normal set is mutable. A frozenset is immutable.
2. Values cannot be added or removed from a frozenset. Frozensets can be used as dictionary keys or set elements.
3. Frozensets support read-only set operations like union, intersection, and difference.

PYTHON CODE

```
numbers = frozenset([10, 20, 30])
print(numbers)
print(type(numbers))
```

Output: frozenset({10, 20, 30})
 <class 'frozenset'>

Invalid Operation

PYTHON CODE

```
numbers = frozenset([10, 20, 30])
numbers.add(40)
```

Output: AttributeError: 'frozenset' object has no attribute 'add'

Set vs Frozen Set Table

Point	Set	Frozenset
Mutable	Yes	No
Add items	Allowed	Not allowed
Remove items	Allowed	Not allowed
Unique values	Yes	Yes
Unordered	Yes	Yes
Can be dictionary key	No	Yes
Can be set element	No	Yes
Syntax	{1, 2, 3}	frozenset([1, 2, 3])

Frozenset Methods Table

Method	Available in Frozenset?	Reason
union()	Yes	Does not modify original
intersection()	Yes	Does not modify original
difference()	Yes	Does not modify original
symmetric_difference()	Yes	Does not modify original
issubset()	Yes	Only checks
issuperset()	Yes	Only checks
isdisjoint()	Yes	Only checks
add()	No	Modifies set
remove()	No	Modifies set
discard()	No	Modifies set
clear()	No	Modifies set
update()	No	Modifies set

9.4.19 Set Comprehensions

Syntax

`new_set = {expression for item in sequence}`

With condition:

`new_set = {expression for item in sequence if condition}`

1. Set comprehension is a short way to create a set.
2. It is similar to list comprehension.
3. It automatically keeps only unique values.
4. It can include conditions.

Example 1

PYTHON CODE

```
numbers = [1, 2, 2, 3, 4, 4]
squares = {number * number for number in numbers}
print(squares)
```

Output: {16, 1, 4, 9} :Duplicate input values do not create duplicate set values.

Example 2: With Condition

PYTHON CODE

```
numbers = [1, 2, 3, 4, 5, 6]
even_numbers = {number for number in
numbers if number % 2 == 0}
print(even_numbers)
```

Output: {2, 4, 6}

List Comprehension vs Set Comprehension

Point	List Comprehension	Set Comprehension
Brackets	[]	{ }
Allows duplicates	Yes	No
Ordered	Yes	No fixed order
Result type	List	Set
Example	[x for x in data]	{x for x in data}

9.4.20 Set Conversion

Syntax

`set(iterable)`

`list(set_name)`

`tuple(set_name)`

1. `set()` converts an iterable into a set.
2. This is often used to remove duplicates.
3. A set can be converted back to a list or tuple.
4. Order may change after converting to a set.

Example 1

PYTHON CODE

```
numbers = [10, 20, 10, 30, 20]
unique_numbers = set(numbers)
print(unique_numbers)
print(list(unique_numbers))
```

Output:

{10, 20, 30}

[10, 20, 30]

Order may differ.

Conversion Table

Conversion	Code	Result Type
List to set	<code>set([1, 2, 2])</code>	Set
Tuple to set	<code>set((1, 2, 2))</code>	Set
String to set	<code>set("banana")</code>	Set of unique characters
Set to list	<code>list({1, 2, 3})</code>	List
Set to tuple	<code>tuple({1, 2, 3})</code>	Tuple

9.4.21 Set vs List vs Tuple

Point	List	Tuple	Set
Brackets	<code>[]</code>	<code>()</code>	<code>{}</code>
Ordered	Yes	Yes	No fixed order
Mutable	Yes	No	Yes
Allows duplicates	Yes	Yes	No
Indexing	Yes	Yes	No
Slicing	Yes	Yes	No
Best for	Changeable ordered data	Fixed ordered data	Unique unordered data
Example	<code>[10, 20]</code>	<code>(10, 20)</code>	<code>{10, 20}</code>

Important Set Operations Table

Operation	Code	Meaning
Create set	<code>items = {10, 20, 30}</code>	Creates set
Empty set	<code>items = set()</code>	Creates empty set
Add one item	<code>items.add(40)</code>	Adds one value
Add multiple items	<code>items.update([40, 50])</code>	Adds many values
Remove safely	<code>items.discard(20)</code>	Removes without error
Remove with error	<code>items.remove(20)</code>	Error if missing
Random remove	<code>items.pop()</code>	Removes random item
Empty set	<code>items.clear()</code>	Removes all items
Check value	<code>10 in items</code>	Membership check
Union	<code>`a</code>	<code>b`</code>
Intersection	<code>a & b</code>	Common values
Difference	<code>a - b</code>	Values in <code>a</code> , not in <code>b</code>
Symmetric difference	<code>a ^ b</code>	Non-common values
Subset	<code>a <= b</code>	Checks subset
Superset	<code>a >= b</code>	Checks superset
Copy set	<code>items.copy()</code>	Creates shallow copy
Frozen set	<code>frozenset(items)</code>	Immutable set

9.5 Collections Module in Python

The `collections` module provides special data structures that are more powerful than normal lists, tuples, dictionaries, and sets.

Syntax

```
<> Python

from collections import Counter
from collections import defaultdict
from collections import OrderedDict
from collections import deque
from collections import ChainMap
```

1. `collections` is a built-in Python module.
2. It gives ready-made advanced data structures.
3. These structures help solve common problems easily.
4. They are useful for counting, grouping, ordering, fast queue operations, and combining dictionaries.

Collections Module Overview

Tool	Main Use
<code>Counter</code>	Counting frequency
<code>defaultdict</code>	Dictionary with default values
<code>OrderedDict</code>	Dictionary that manages order
<code>deque</code>	Fast queue and stack operations
<code>ChainMap</code>	Combines multiple dictionaries as one view

9.5.1 Counter

`Counter` is used to count how many times each value appears.

Syntax

```
<> Python

from collections import Counter

counter_name = Counter(iterable)
```

Explanation

1. **Counter** counts repeated values.
2. It returns a dictionary-like object.
3. Items become keys.
4. Their counts become values.
5. It is commonly used for frequency counting.

Flow Chart

Input data

|

v

Counter checks each item

|

v

Counts repeated items

|

v

Returns item-count pairs

Example 1

PYTHON CODE

```
from collections import Counter
letters = "banana"
count = Counter(letters)
print(count)
```

Output: Counter({'a': 3, 'n': 2, 'b': 1})

Example 2

PYTHON CODE

```
from collections import Counter
items = ["apple", "banana", "apple", "mango", "banana", "apple"]
count = Counter(items)
print(count)
```

Output: Counter({'apple': 3, 'banana': 2, 'mango': 1})

Common Counter Methods

Method	Meaning	Example
<code>most_common()</code>	Returns most frequent items	<code>count.most_common()</code>
<code>most_common(n)</code>	Returns top <code>n</code> frequent items	<code>count.most_common(2)</code>
<code>elements()</code>	Returns items repeated by count	<code>count.elements()</code>
<code>update()</code>	Adds more counts	<code>count.update(data)</code>
<code>subtract()</code>	Subtracts counts	<code>count.subtract(data)</code>

9.5.2 defaultdict

`defaultdict` is a dictionary that gives a default value when a key does not exist.

Syntax

```
from collections import defaultdict
dictionary_name = defaultdict(default_type)
```

Explanation

1. Normal dictionaries give `KeyError` if a key does not exist.
2. `defaultdict` avoids this problem.
3. It automatically creates a default value for missing keys.
4. Common default types are `int`, `list`, and `set`.

Flow Chart

```
graph TD
    A[Access dictionary key] --> B{Key exists?}
    B -- Yes --> C[Return value]
    B -- No --> D[Create default value]
```

Example 1: Using **int**

PYTHON CODE

```
from collections import defaultdict
marks = defaultdict(int)
marks["math"] += 10
marks["science"] += 20
print(marks)
```

Output: defaultdict(<class 'int'>, {'math': 10, 'science': 20})

Here, missing keys start with default value **0**.

Common Default Types

Default Type	Default Value	Common Use
int	0	Counting
list	[]	Grouping values
set	set()	Grouping unique values
str	""	Empty text

Example 2: Using **list**

PYTHON CODE

```
from collections import defaultdict

students = defaultdict(list)
students["Python"].append("Aman")
students["Python"].append("Riya")
students["Java"].append("Kabir")
print(students)
```

Output: defaultdict(<class 'list'>, {'Python': ['Aman', 'Riya'], 'Java': ['Kabir']})

Normal Dictionary vs **defaultdict**

Point	Normal Dictionary	defaultdict
Missing key	Gives KeyError	Creates default value
Best for	Simple key-value data	Grouping/counting
Needs manual checking	Yes	No

9.5.3 OrderedDict

`OrderedDict` is a dictionary that remembers and manages the order of items.

Syntax

PYTHON CODE

```
from collections import OrderedDict
dictionary_name = OrderedDict()
```

Explanation

1. `OrderedDict` stores key-value pairs in order.
2. Normal dictionaries also preserve insertion order in modern Python.
3. `OrderedDict` is still useful because it has extra order-related methods.
4. It can move items to the beginning or end.
5. It can remove items from either side.

Example 1

PYTHON CODE

```
from collections import OrderedDict
student = OrderedDict()
student["name"] = "Aman"
student["age"] = 21
student["course"] = "Python"
print(student)
```

Output: `OrderedDict([('name', 'Aman'), ('age', 21), ('course', 'Python')])`

Useful `OrderedDict` Methods

Method	Meaning	Example
<code>move_to_end(key)</code>	Moves key to the end	<code>data.move_to_end("name")</code>
<code>move_to_end(key, last=False)</code>	Moves key to the beginning	<code>data.move_to_end("name", last=False)</code>
<code>popitem()</code>	Removes last item	<code>data.popitem()</code>
<code>popitem(last=False)</code>	Removes first item	<code>data.popitem(last=False)</code>

Normal Dictionary vs **OrderedDict**

Point	Normal Dictionary	OrderedDict
Preserves insertion order	Yes, in modern Python	Yes
Move key to end	Not directly	Yes
Remove first item easily	Not directly	Yes
Best for	General dictionary use	Order-sensitive dictionary logic

9.5.4 **deque**

deque means **double-ended queue**.

It allows fast adding and removing from both ends.

Syntax

```
from collections import deque
```

```
deque_name = deque(iterable)
```

1. **deque** is used when we need fast insert/remove from left and right.
2. It works like a queue and stack.
3. Lists are slower when removing from the beginning.
4. **deque** is useful for queues, recent history, undo operations, and sliding windows.

Example 1

PYTHON CODE

```
from collections import deque
numbers = deque([10, 20, 30])
numbers.append(40)
numbers.appendleft(5)
print(numbers)
```

Output: deque([5, 10, 20, 30, 40])

Common **deque** Methods

Method	Meaning	Example
<code>append()</code>	Adds item at right end	<code>d.append(10)</code>
<code>appendleft()</code>	Adds item at left end	<code>d.appendleft(10)</code>
<code>pop()</code>	Removes item from right end	<code>d.pop()</code>
<code>popleft()</code>	Removes item from left end	<code>d.popleft()</code>
<code>extend()</code>	Adds multiple items at right	<code>d.extend([1, 2])</code>
<code>extendleft()</code>	Adds multiple items at left	<code>d.extendleft([1, 2])</code>
<code>rotate(n)</code>	Rotates items	<code>d.rotate(1)</code>
<code>clear()</code>	Removes all items	<code>d.clear()</code>

List vs deque

Point	List	deque
Add at end	Fast	Fast
Remove from end	Fast	Fast
Add at beginning	Slower	Fast
Remove from beginning	Slower	Fast
Best for	General storage	Queue operations

9.5.5 ChainMap

`ChainMap` combines multiple dictionaries into one view.

Syntax

```
from collections import ChainMap
chain_name = ChainMap(dict1, dict2, dict3)
```

1. `ChainMap` groups multiple dictionaries together.
2. It does not merge them permanently.
3. It creates a combined view.
4. When searching for a key, Python checks dictionaries from left to right.
5. If the same key exists in multiple dictionaries, the first one is used.

Example 1

PYTHON CODE

```
from collections import ChainMap

defaults = {
    "theme": "light",
    "language": "English"
}

user_settings = {
    "theme": "dark"
}

settings = ChainMap(user_settings, defaults)
print(settings["theme"])
print(settings["language"])
```

Output:

dark

English

Explanation:

1. "theme" exists in `user_settings`, so "dark" is used.
2. "language" is not in `user_settings`, so Python checks `defaults`.

Useful ChainMap Features

Feature	Meaning	Example
<code>maps</code>	Shows all dictionaries	<code>settings.maps</code>
<code>new_child()</code>	Adds new dictionary in front	<code>settings.new_child({...})</code>
<code>parents</code>	Removes first dictionary from view	<code>settings.parents</code>

Chapter 10. Functions in Python

A **function** is a reusable block of code that performs a specific task. Instead of writing the same code again and again, we write it once inside a function and call it whenever needed.

Basic idea

Function = reusable block of code

Simple flow

Define function

|

v

Call function

|

v

Function code runs

|

v

Result/output is produced

10.1 What is a Function?

Syntax

```
<> Python
def function_name():
    statement
```

1. A function groups related code together.
2. A function runs only when it is called.
3. Functions help avoid repeated code.
4. Functions make code clean, reusable, and easy to understand.
5. Python has built-in functions and user-defined functions.

Built-in vs User-defined Functions

Type	Meaning	Example
Built-in function	Already provided by Python	<code>print()</code> , <code>len()</code> , <code>type()</code>
User-defined function	Created by programmer	<code>def greet():</code>

Flow Chart

Start

|

v

Function is defined

|

v

Function is called

|

v

Function body executes

|

v

Program continues

PYTHON CODE

```
def greet():  
    print("Hello, welcome to Python")  
  
greet()
```

Output: Hello, welcome to Python

10.2 Defining Functions

Syntax

Python

```
def function_name():  
    statement
```

1. **def** is used to define a function.
2. The function name comes after **def**.
3. Parentheses **()** are required.
4. A colon **:** marks the start of the function body.
5. The function body must be indented.

def	function_name	()	:
keyword	name	parentheses	colon

PYTHON CODE

```
def say_hello():  
    print("Hello")
```

This only defines the function. It does not run yet. To run it, we must call it.

say_hello()

Output: Hello

Empty Function

If we want to create a function but write logic later, use `pass`.

PYTHON CODE

```
def future_function():  
    pass
```

10.3 Calling Functions

Syntax

function_name()

1. Calling a function means executing it.
2. A function can be called once or many times.
3. The function body runs every time the function is called.
4. If a function is defined but never called, its code will not execute.

Example 1

PYTHON CODE

```
def greet():  
    print("Hello")
```

```
greet()  
greet()  
greet()
```

Output:Hello

Hello

Hello

10.4 Parameters

A **parameter** is a variable written inside the function definition. It receives values when the function is called.

Syntax

PYTHON CODE

```
def function_name(parameter):  
    statement
```

Explanation

1. Parameters make functions flexible.
2. Parameters allow us to send data into a function.
3. A function can have one or more parameters.
4. Parameters are written inside parentheses during function definition.

Flow Chart

Function definition has parameter

|

v

Function call sends value

|

v

Parameter receives value

|

v

Function uses that value

Example 1

PYTHON CODE

```
def greet(name):  
    print("Hello", name)  
greet("Aman")
```

Output:

Hello Aman

Here, **name** is a parameter.

10.5 Arguments

An **argument** is the actual value passed to a function during function call.

Syntax

```
function_name(argument)
```

Explanation

1. Parameter is written in function definition.
2. Argument is passed during function call.
3. Arguments provide real values to parameters.

Parameter vs Argument

Term	Where It Appears	Meaning
Parameter	Function definition	Variable that receives value
Argument	Function call	Actual value passed

Example 1

PYTHON CODE

```
def greet(name):  
    print("Hello", name)  
greet("Riya")
```

Output: Hello Riya

Code	Role
name	Parameter
"Riya"	Argument

10.6 Positional Arguments

Positional arguments are matched based on their position.

Syntax

```
function_name(argument1, argument2)
```

Explanation

1. Python passes arguments in the same order as parameters.
2. The first argument goes to the first parameter.
3. The second argument goes to the second parameter.
4. Order matters in positional arguments.

Example 1

PYTHON CODE

```
def student_info(name, age):  
    print("Name:", name)  
    print("Age:", age)  
  
student_info("Aman", 21)
```

Output:

Name: Aman

Age: 21

Flow Chart

student_info("Aman", 21)

v	v
name	age

10.7 Return Values

A **return value** is the result sent back by a function.

Syntax

```
def function_name():
```

```
    return value
```

1. **return** sends a value back to the place where the function was called.
2. A function can return one value or multiple values.
3. After **return**, the function stops executing.
4. If there is no **return**, Python returns **None** automatically.

Flow Chart

```
Function is called
|
v
Function performs task
|
v
return sends value back
|
v
Returned value can be stored or printed
```

Example 1

```
PYTHON CODE
def add(a, b):
    result = a + b
    return result

answer = add(10, 20)
print(answer)
```

Output:

30

Example 2: Function without **return**

```
PYTHON CODE
def greet():
    print("Hello")

result = greet()
print(result)
```

Output: Hello
None

Because **greet()** does not return any value, Python returns **None**.

10.8 Returning Multiple Values

Python functions can return multiple values.

Syntax:

```
</> Python

def function_name():
    return value1, value2
```

1. Multiple values can be returned using commas.
2. Python returns them as a tuple.
3. Returned values can be unpacked into variables.

Example 1

```
PYTHON CODE
def calculate(a, b):
    total = a + b
    difference = a - b
    return total, difference
sum_result, diff_result = calculate(20, 10)
print(sum_result)
print(diff_result)
```

Output:

```
30
10
```

10.9 Default Parameters

A default parameter has a predefined value. If no argument is passed, the default value is used.

Syntax

```
</> Python

def function_name(parameter=value):
    statement
```

1. Default parameters make arguments optional.
2. If an argument is provided, Python uses the given value.
3. If no argument is provided, Python uses the default value.
4. Non-default parameters must come before default parameters.

Example 1

PYTHON CODE

```
def greet(name="Guest"):
    print("Hello", name)
greet("Aman")
greet()
```

Output:

Hello Aman

Hello Guest

Correct and Incorrect Order

Code	Valid?	Reason
<code>def show(name, age=18):</code>	Yes	Default parameter comes after normal parameter
<code>def show(name="Guest", age=18):</code>	Yes	Both have defaults
<code>def show(name="Guest", age):</code>	No	Non-default parameter cannot come after default parameter

Important Warning: Avoid Mutable Default Values

Do not use mutable objects like list or dictionary as default values.

Wrong style:

```
def add_item(item, items=[]):
    items.append(item)
    return items

print(add_item("A"))
print(add_item("B"))
```

Output: ['A']

['A', 'B']

The same list is reused between function calls.

Better style:

```
<> Python

def add_item(item, items=None):
    if items is None:
        items = []

    items.append(item)
    return items

print(add_item("A"))
print(add_item("B"))
```

Output: ['A']

['B']

10.10 Keyword Arguments

Keyword arguments pass values using parameter names.

Syntax

```
function_name(parameter_name=value)
```

1. Keyword arguments use names while calling a function.
2. Order does not matter when keyword arguments are used.
3. They make function calls more readable.
4. Positional arguments must come before keyword arguments.

Example 1

PYTHON CODE

```
def student_info(name, age, course):  
    print("Name:", name)  
    print("Age:", age)  
    print("Course:", course)  
student_info(age=21, course="Python",  
name="Aman")
```

Output: Name: Aman

Age: 21

Course: Python

Positional vs Keyword Arguments

Type	Example	Order Matters?
Positional argument	<code>student_info("Aman", 21, "Python")</code>	Yes
Keyword argument	<code>student_info(age=21, name="Aman", course="Python")</code>	No

Important Rule

Correct:

```
student_info("Aman", age=21, course="Python")
```

Incorrect:

```
student_info(name="Aman", 21, "Python")
```

Positional arguments cannot come after keyword arguments.

10.11 *args

*args is used when we do not know how many positional arguments will be passed.

Syntax

```
def function_name(*args):  
    statement
```

1. *args collects extra positional arguments.
2. The collected values are stored as a tuple.
3. The name args is a convention; the * is important.
4. Use *args when the number of arguments is flexible.

Flow Chart

Function call has many positional arguments

|
v

*args collects them

|
v

Values are stored as a tuple

Example 1

PYTHON CODE

```
def add_numbers(*numbers):  
    total = 0  
    for number in numbers:  
        total += number  
    return total  
print(add_numbers(10, 20, 30))  
print(add_numbers(5, 15))
```

Output:

60

20

Here, numbers behaves like a tuple.

10.12 ****kwargs**

****kwargs** is used when we do not know how many keyword arguments will be passed.

Syntax

```
def function_name(**kwargs):  
    statement
```

Explanation

1. ****kwargs** collects extra keyword arguments.
2. The collected values are stored as a dictionary.
3. Keys are argument names.
4. Values are argument values.
5. The name **kwargs** is a convention; the ****** is important.

Flow Chart

Function call has many keyword arguments

|
v

****kwargs** collects them

|
v

Values are stored as a dictionary

Example 1

PYTHON CODE

```
def show_profile(**details):  
    for key, value in details.items():  
        print(key, value)  
  
show_profile(name="Aman", age=21,  
             course="Python")
```

Output:

name Aman

age 21

course Python

Here, **details** behaves like a dictionary.

10.13 *args vs **kwargs

Point	*args	**kwargs
Collects	Positional arguments	Keyword arguments
Stored as	Tuple	Dictionary
Symbol	Single star *	Double star **
Example call	<code>func(10, 20, 30)</code>	<code>func(name="Aman", age=21)</code>

Example 1

PYTHON CODE

```
def show_data(*args, **kwargs):  
    print(args)  
    print(kwargs)  
  
show_data(10, 20, name="Aman", age=21)
```

Output:

```
(10, 20)  
{'name': 'Aman', 'age': 21}
```

10.14 Function Parameter Order

When using different types of parameters together, the order matters.

Syntax

```
def function_name(normal_parameter, default_parameter=value, *args, **kwargs):  
    statement
```

Explanation

1. Normal parameters come first.
2. Default parameters come after normal parameters.
3. *args comes after normal/default parameters.
4. **kwargs comes last.
5. This order keeps function calls clear and valid.

Parameter Order Table

Order	Parameter Type	Example
1	Normal parameter	<code>name</code>
2	Default parameter	<code>age=18</code>
3	<code>*args</code>	<code>*marks</code>
4	<code>**kwargs</code>	<code>**details</code>

Example 1

```
def student_report(name, age=18, *marks, **details):  
    print("Name:", name)  
    print("Age:", age)  
    print("Marks:", marks)  
    print("Details:", details)  
  
student_report("Aman", 21, 80, 90, 85, course="Python", city="Delhi")
```

Output:

Name: Aman

Age: 21

Marks: (80, 90, 85)

Details: {'course': 'Python', 'city': 'Delhi'}

10.15 Docstrings

A **docstring** is a string written inside a function to explain what the function does.

Syntax

```
def function_name():  
    """Function description."""  
    statement
```

1. A docstring is written using triple quotes.
2. It is usually written as the first statement inside a function.
3. It explains the purpose of the function.
4. It helps other programmers understand the function.
5. It can be viewed using `help()` or `.__doc__`.

Example 1

```
def add(a, b):  
    """Return the sum of two numbers."""  
    return a + b  
  
print(add(10, 20))  
print(add.__doc__)
```

Output: 30

Return the sum of two numbers.

Good Docstring Style

```
</> Python  
  
def calculate_area(length, width):  
    """  
    Return the area of a rectangle.  
  
    length: rectangle length  
    width: rectangle width  
    """  
    return length * width
```

10.16 Function Naming Rules

Function names follow the same basic rules as variable names.

Syntax

```
def function_name():  
    statement
```

1. Function names should be meaningful.
2. Use **snake_case** for function names.
3. Function names should usually describe an action.
4. Avoid using Python keywords as function names.
5. Avoid unclear names like **x()**, **abc()**, or **test1()**.

Chapter 11. Advanced Functions

Advanced functions help us write more flexible, reusable, and compact code.

Before starting, remember:

In Python, functions are objects. This means:

1. A function can be stored in a variable.
2. A function can be passed as an argument.
3. A function can be returned from another function.
4. A function can be written inside another function.

11.1 Functions as First-Class Objects

Syntax

```
def function_name():  
    statement
```

```
new_name = function_name
```

In Python, functions behave like normal objects. We can store a function in a variable and call it using that variable.

Flow Chart

Create function

|
v

Assign function to variable

|
v

Call function using new variable

Example 1

PYTHON CODE

```
def greet():  
    print("Hello Python")  
message = greet  
message()
```

Output:

Hello Python

Here, `message` refers to the same function as `greet`.

11.2 Lambda Functions

A **lambda function** is a small anonymous function. Anonymous means it does not need a normal function name.

Syntax

lambda arguments: expression

1. Lambda functions are used for small one-line functions.
2. They can take any number of arguments.
3. They can contain only one expression.
4. They automatically return the result of the expression.
5. Lambda functions are commonly used with `map()`, `filter()`, and sorting.

Example 1

Normal function:

```
<> Python

def square(number):
    return number * number

print(square(5))
```

Output:

25

Same logic using lambda:

```
<> Python

square = lambda number: number * number
```

Output: 25

Example 2

```
<> Python

add = lambda a, b: a + b

print(add(10, 20))
```

Output: 30

Lambda is best for simple logic. For complex logic, use normal def functions.

11.3 map()

`map()` applies a function to every item of an iterable.

Syntax

`map(function, iterable)`

Explanation

1. `map()` takes a function and an iterable.
2. It applies the function to each item.
3. In Python 3, `map()` returns a map object, which is an iterator.
4. To display all results at once, convert it using `list()`.

Example 1

PYTHON CODE

```
numbers = [1, 2, 3, 4]
squares = map(lambda number: number * number, numbers)
print(list(squares))
```

Output: [1, 4, 9, 16]

Example 2

```
names = ["aman", "riya", "kabir"]
upper_names = map(str.upper, names)
print(list(upper_names))
```

Output: ['AMAN', 'RIYA', 'KABIR']

map() Table

Part	Meaning
<code>lambda number: number * number</code>	Function to apply
<code>numbers</code>	Iterable
<code>map()</code>	Applies function to every item
<code>list()</code>	Converts result into a list

11.4 filter()

`filter()` is used to select items from an iterable based on a condition.

Syntax

`filter(function, iterable)`

Explanation

1. `filter()` takes a function and an iterable.
2. The function must return `True` or `False`.
3. Items that return `True` are kept.
4. Items that return `False` are removed.
5. In Python 3, `filter()` returns a filter object, which is an iterator.

Flow Chart

Iterable values

|
v

`filter()` checks condition

|
|
|
|
|
v

True -> keep item

False -> remove item

Filtered result

Example 1

PYTHON CODE

```
numbers = [1, 2, 3, 4, 5, 6]
even_numbers = filter(lambda number: number % 2 == 0, numbers)
print(list(even_numbers))
```

Output: [2, 4, 6]

map() vs filter()

Point	map()	filter()
Purpose	Transforms every item	Selects matching items
Output length	Usually same as input	Can be smaller
Function returns	New value	<code>True</code> or <code>False</code>
Example use	Square every number	Keep even numbers

11.5 reduce()

`reduce()` combines all items of an iterable into a single final value. `reduce()` is not directly available like `map()` and `filter()`. It must be imported from `functools`.

Syntax

```
from functools import reduce
```

```
reduce(function, iterable)
```

Explanation

1. `reduce()` takes a function and an iterable.
2. It combines values step by step.
3. It returns one final result.
4. It is useful for cumulative calculations.
5. For simple addition, `sum()` is usually better.

Example 1

PYTHON CODE

```
from functools import reduce
numbers = [1, 2, 3, 4]
total = reduce(lambda a, b: a + b, numbers)
print(total)
```

Output: 10

Working idea:

$1 + 2 = 3$

$3 + 3 = 6$

$6 + 4 = 10$

`map()` vs `filter()` vs `reduce()`

Function	Purpose	Final Result
<code>map()</code>	Transform items	Iterator of transformed items
<code>filter()</code>	Select items	Iterator of selected items
<code>reduce()</code>	Combine items	Single value

11.6 Recursion

Recursion means a function calling itself.

Syntax


```
<> Python
def function_name():
    function_name()
```

A correct recursive function must have a stopping condition.

1. Recursion is used when a problem can be broken into smaller versions of the same problem.
2. A recursive function calls itself.
3. Every recursion must have a base case.
4. The base case stops the recursion.
5. Without a base case, recursion continues until Python raises **RecursionError**.

Part	Meaning
Base case	Condition that stops recursion
Recursive case	Function calling itself

Flow Chart

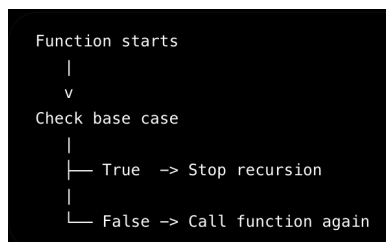

Example 1: Factorial

Factorial means: $5! = 5 \times 4 \times 3 \times 2 \times 1$

```
PYTHON CODE
def factorial(number):
    if number == 1:
        return 1
    return number * factorial(number - 1)
print(factorial(5))
```

Output: 120

$\text{factorial}(5) = 5 * \text{factorial}(4) = 5 * 4 * \text{factorial}(3) = 5 * 4 * 3 * \text{factorial}(2) = 5 * 4 * 3 * 2 * \text{factorial}(1) = 5 * 4 * 3 * 2 * 1 = 120$

11.7 Nested Functions

A nested function is a function defined inside another function.

Syntax

PYTHON CODE

```
def outer_function():  
    def inner_function():  
        statement  
  
    inner_function()
```

1. A nested function is created inside another function.
2. The inner function can be used only inside the outer function.
3. Nested functions are useful for hiding helper logic.
4. They are also used in closures and decorators.

Example 1

PYTHON CODE

```
def outer():  
    print("Outer function started")  
  
    def inner():  
        print("Inner function executed")  
  
    inner()  
  
outer()
```

Output: Outer function started
 Inner function executed

Important point: inner() cannot be called directly outside outer().

11.8 Closures

A closure is created when an inner function remembers variables from its outer function, even after the outer function has finished.

Syntax

Python

```
def outer_function():  
    variable = value  
  
    def inner_function():  
        use variable  
  
    return inner_function
```


1. A closure needs a nested function.
2. The inner function uses a variable from the outer function.
3. The outer function returns the inner function.
4. The inner function remembers the outer variable.
5. Closures are useful for creating customized functions.

```
def multiplier(number):  
    def multiply(value):  
        return value * number  
  
    return multiply  
  
double = multiplier(2)  
print(double(5))
```

Output: 10

11.9 Function Annotations

Function annotations are used to add type hints to function parameters and return values.

Syntax

```
def function_name(parameter: type) -> return_type:  
    statement
```

1. Function annotations describe expected data types. They make code easier to understand.
2. They help editors and tools detect possible mistakes.
3. Python does not automatically enforce these types at runtime.
4. Annotations are stored in the function's `__annotations__` attribute.

Example 1

```
PYTHON CODE  
def add(a: int, b: int) -> int:  
    return a + b  
print(add(10, 20))
```

Output: 30

```
<> Python  
  
def add(a: int, b: int) -> int:  
    return a + b  
  
print(add.__annotations__)
```

Output: {'a': <class 'int'>, 'b': <class 'int'>, 'return': <class 'int'>}

Important point: Type hints are hints. Python does not stop wrong types automatically.

11.10 Higher-Order Functions

A higher-order function is a function that does at least one of these:

1. Takes another function as an argument.
2. Returns another function.

Syntax

</> Python

```
def outer():  
    def inner():  
        statement  
  
    return inner
```

OR

```
def outer(function):  
    function()
```

Explanation

1. Higher-order functions are possible because Python functions are objects.
2. They are used in `map()`, `filter()`, `reduce()`, decorators, and callbacks.
3. They make code flexible and reusable.
4. They are common in functional programming.

Example 1: Function as Argument

PYTHON CODE

```
def shout(text):  
    return text.upper()  
  
def process_text(function, text):  
    return function(text)  
  
result = process_text(shout, "hello")  
print(result)
```

Output: HELLO

Here, `process_text()` is a higher-order function because it accepts another function.

Chapter 12. Scope and Namespaces in Python

Scope means the area of a program where a variable can be accessed.

Namespace means a place where names are stored and mapped to objects.

name -> object/value

Example: x = 10

Here, Python stores the name x and connects it to the value 10.

12.1 Local Scope

A **local scope** is created inside a function. Variables created inside a function are local variables.

Syntax

```
</> Python
def function_name():
    variable_name = value
```

Explanation

1. A local variable is created inside a function.
2. It can be used only inside that function.
3. It cannot be accessed directly outside the function.
4. Local variables are created when the function is called.
5. They are destroyed after the function finishes.

Example 1

```
PYTHON CODE
def show_name():
    name = "Aman"
    print(name)
show_name()
```

Output: Aman

Invalid outside access:

```
PYTHON CODE
print(name)
```

Output: NameError: name 'name' is not defined.

12.2 Global Scope

A **global scope** is the main area of the program. Variables created outside all functions are global variables.

Syntax

PYTHON CODE

```
variable_name = value
```

```
def function_name():  
    statement
```

Explanation

1. A global variable is created outside functions.
2. It can be accessed inside functions.
3. It can also be accessed outside functions.
4. Reading a global variable inside a function does not require the **global** keyword.
5. To modify a global variable inside a function, we need the **global** keyword.

Example 1

PYTHON CODE

```
course = "Python"
```

```
def show_course():  
    print(course)
```

```
show_course()  
print(course)
```

Output:

Python

Python

NOTE: Global variables are accessible throughout the file after they are defined.

12.3 Local vs Global Scope

Point	Local Scope	Global Scope
Created where?	Inside function	Outside functions
Accessible where?	Only inside that function	Inside and outside functions
Lifetime	Exists during function call	Exists while program runs
Example	<code>name = "Aman"</code> inside function	<code>course = "Python"</code> outside function

12.4 Variable Shadowing

Variable shadowing happens when a local variable has the same name as a global variable.

Explanation

1. If a local and global variable have the same name, Python uses the local variable inside the function.
2. The global variable is not changed.
3. This is called shadowing.

Example 1

PYTHON CODE

```
name = "Global Aman"

def show_name():
    name = "Local Aman"
    print(name)

show_name()
print(name)
```

Output:

Local Aman
Global Aman

NOTE: Inside the function, the local variable gets priority over the global variable.

12.5 **global** Keyword

The **global** keyword is used to modify a global variable inside a function.

Syntax

global variable_name

Explanation

1. Use **global** when you want to assign a new value to a global variable inside a function.
2. Without **global**, assignment inside a function creates a local variable.
3. Reading a global variable does not need **global**. Using too many global variables is not recommended.

Example 1

PYTHON CODE

```
count = 0

def increase_count():
    global count
    count += 1

increase_count()
print(count)
```

output: 1

Without **global**

PYTHON CODE

```
count = 0

def increase_count():
    count += 1

increase_count()
```

Output: UnboundLocalError: cannot access local variable 'count' where it is not associated with a value

NOTE: Use global only when you really need to modify a global variable. Better style is usually to return a value:

PYTHON CODE

```
def increase_count(count):  
    return count + 1  
  
count = 0  
count = increase_count(count)  
  
print(count)
```

Output: 1

12.6 Enclosing Scope

An **enclosing scope** exists when a function is defined inside another function.

Syntax

Python

```
def outer_function():  
    variable = value  
  
    def inner_function():  
        statement
```

1. Enclosing scope belongs to the outer function.
2. Inner functions can access variables from the outer function.
3. This scope is between local and global scope.
4. Enclosing scope is important for nested functions and closures.

Example 1

PYTHON CODE

```
def outer():  
    message = "Hello"  
  
    def inner():  
        print(message)  
  
    inner()  
    outer()
```

Output: Hello

12.7 **nonlocal** Keyword

The **nonlocal** keyword is used to modify a variable from the nearest enclosing function scope.

Syntax

nonlocal variable_name

1. **nonlocal** is used inside nested functions. It allows the inner function to modify a variable from the outer function.
2. It does not work with global variables.
3. The variable must already exist in the enclosing function. **nonlocal** is commonly used in closures.

Example 1

```
PYTHON CODE
def outer():
    count = 0
    def inner():
        nonlocal count
        count += 1
        print(count)

    inner()
    outer()
```

Output:1

Without **nonlocal**

```
PYTHON CODE
def outer():
    count = 0

    def inner():
        nonlocal count
        count += 1
        print(count)

    inner()

    outer()
```

Output: UnboundLocalError: cannot access local variable 'count' where it is not associated with a value

global vs nonlocal

Keyword	Used For	Scope Affected
global	Modify global variable	Global scope
nonlocal	Modify enclosing function variable	Enclosing scope
Neither	Normal local variable	Local scope

12.8 Built-in Scope

Built-in scope contains names already provided by Python.

Examples: print, len, type, range, sum, max, min

Explanation

1. Built-in names are available automatically.
2. We do not need to define them.
3. Python searches built-in scope last in the LEGB rule.
4. Avoid using built-in names as variable names.

Example 1

```
numbers = [10, 20, 30]
print(len(numbers))
```

Output: 3

Bad Practice

```
list = [10, 20, 30]
```

This is bad because the list is already a built-in name. Do not use names like list, dict, str, int, sum, or max as variable names.

12.9 LEGB Rule

LEGB is the order Python follows while searching for a variable name.

L -> Local

E -> Enclosing

G -> Global

B -> Built-in

When Python sees a variable name, it searches in this order:

1. **Local scope**: inside the current function.
2. **Enclosing scope**: inside outer functions.
3. **Global scope**: main program/file.
4. **Built-in scope**: built-in Python names.

Example 1

```
PYTHON CODE
x = "global"
def outer():
    x = "enclosing"
    def inner():
        x = "local"
        print(x)

    inner()
outer()
```

Output: local ⇒ Python finds `x` in the local scope first, so it does not search further.

LEGB Search Table

Search Order	Scope	Example
1	Local	Variable inside current function
2	Enclosing	Variable inside outer function
3	Global	Variable outside functions
4	Built-in	<code>print</code> , <code>len</code> , <code>type</code>

12.10 Namespace Concept

A **namespace** is a system that stores names and their related objects.

Syntax Idea

name -> object

1. A namespace maps names to values or objects.
2. Python uses namespaces to avoid name conflicts.
3. Different scopes have different namespaces.
4. Local, global, and built-in scopes each have their own namespaces.
5. The same name can exist in different namespaces without conflict.

Example 1

PYTHON CODE

```
x = 100
def show():
    x = 50
    print(x)

show()
print(x)
```

Output: 50

100

1. The global namespace has `x = 100`. The local namespace inside `show()` has `x = 50`.
2. Both names are `x`, but they belong to different namespaces.

Namespace Table

Namespace	Contains
Local namespace	Names inside a function
Global namespace	Names created at file/program level
Built-in namespace	Python built-in names
Enclosing namespace	Names inside outer functions

12.11 `locals()` and `globals()`

Python provides two built-in functions to inspect namespaces.

Syntax

Python

```
locals()
globals()
```

1. `locals()` returns the current local namespace as a dictionary.
2. `globals()` returns the global namespace as a dictionary.
3. These are mainly used for debugging and learning.
4. Usually, we should not modify program logic using them.

Example 1

```
PYTHON CODE
course = "Python"

def show():
    name = "Aman"
    print(locals())

show()
```

Output: {'name': 'Aman'}

12.12 NameError & UnboundLocalError

These errors are common in scope-related topics.

NameError

NameError occurs when Python cannot find a name in LEGB search.

```
PYTHON CODE
print(age)
```

Output: NameError: name 'age' is not defined

UnboundLocalError

UnboundLocalError occurs when Python treats a variable as local because it is assigned inside a function, but it is used before assignment.

```
PYTHON CODE
x = 10
def show():
    print(x)
    x = 20

show()
```

output: UnboundLocalError: cannot access local variable 'x' where it is not associated with a value

Error	Meaning
NameError	Name not found in any scope
UnboundLocalError	Local variable used before assignment

12.13 Important Scope Summary Table

Concept	Meaning
Local scope	Variable inside current function
Global scope	Variable outside all functions
Enclosing scope	Variable inside outer function
Built-in scope	Python built-in names
<code>global</code>	Modifies global variable inside function
<code>nonlocal</code>	Modifies enclosing function variable
LEGB	Search order for names
Namespace	Mapping of names to objects
<code>locals()</code>	Shows local namespace
<code>globals()</code>	Shows global namespace
<code>NameError</code>	Name not found
<code>UnboundLocalError</code>	Local variable used before assignment

Chapter 13. Modules and Packages in Python

A **module** is a Python file containing reusable code.

A **package** is a folder that contains multiple modules.

Module -> single .py file

Package -> folder containing modules

Example:

math.py -> module

my_package/ -> package

Why Modules and Packages Are Used

1. To organize large programs.
2. To reuse code.
3. To avoid writing the same logic again.
4. To separate code into meaningful files.
5. To use built-in Python features from the standard library.

13.1 Importing Modules

Importing means using code from another module.

Syntax

import module_name

1. **import** loads a module.
2. After importing, we can use functions, classes, and variables from that module.
3. We access module members using dot . notation.
4. Import statements are usually written at the top of the file.

Example 1

```
PYTHON CODE
import math
print(math.sqrt(25))
```

Output: 5.0 => Here, **math** is a module and **sqrt()** is a function inside it.

13.2 Different Ways to Import

Python provides different import styles.

Import Styles Table

Import Style	Syntax	Example	How to Use
Normal import	<code>import module</code>	<code>import math</code>	<code>math.sqrt(25)</code>
Import with alias	<code>import module as alias</code>	<code>import math as m</code>	<code>m.sqrt(25)</code>
Import specific item	<code>from module import item</code>	<code>from math import sqrt</code>	<code>sqrt(25)</code>
Import multiple items	<code>from module import a, b</code>	<code>from math import sqrt, pow</code>	<code>sqrt(25)</code>
Import all	<code>from module import *</code>	<code>from math import *</code>	<code>sqrt(25)</code>

Example 1

PYTHON CODE

```
from math import sqrt

print(sqrt(36))
```

Output: 6.0

Important Point

Avoid using `from module import *` in large programs. It can make code unclear and may cause name conflicts.

13.3 Standard Library Modules

The **standard library** is a collection of modules that come with Python. We do not need to install them separately.

Explanation

1. Standard library modules are built into Python.
2. They help with math, dates, files, operating system tasks, random values, JSON, and more.
3. We can use them by importing them.

Common Standard Library Modules

Module	Purpose	Example Use
<code>math</code>	Mathematical operations	<code>math.sqrt(25)</code>
<code>random</code>	Random values	<code>random.randint(1, 10)</code>
<code>datetime</code>	Date and time	<code>datetime.datetime.now()</code>
<code>os</code>	Operating system tasks	<code>os.getcwd()</code>
<code>sys</code>	Python runtime information	<code>sys.version</code>
<code>json</code>	Work with JSON data	<code>json.dumps(data)</code>
<code>statistics</code>	Basic statistics	<code>statistics.mean(data)</code>
<code>collections</code>	Advanced data structures	Counter, deque
<code>itertools</code>	Iterator tools	<code>itertools.count()</code>
<code>pathlib</code>	Work with file paths	<code>Path("file.txt")</code>

Example 1

PYTHON CODE

```
import random
number = random.randint(1, 10)
print(number)
```

Output: A random number between 1 and 10

Actual output changes every time because it is random.

13.4 Creating Your Own Modules

A Python file can be used as a module.

File Structure

project/

|

|— calculator.py

|— main.py

calculator.py

PYTHON CODE

```
def add(a, b):  
    return a + b
```

main.py

PYTHON CODE

```
import calculator  
  
result = calculator.add(10, 20)  
print(result)
```

Output: 30

Explanation

1. `calculator.py` is a module.
2. `main.py` imports the `calculator` module.
3. The function `add()` is accessed using `calculator.add()`.
4. Both files should be in the same folder for this simple import to work.

13.5 Importing Specific Code from Your Own Module

Syntax

from module_name import function_name

File structure:

project/

```
|  
├── calculator.py  
└── main.py
```

Example 1

`calculator.py`

PYTHON CODE

```
def add(a, b):  
    return a + b  
  
def subtract(a, b):  
    return a - b
```

`main.py`

PYTHON CODE

```
from calculator import add  
print(add(10, 20))
```

Output: 30

13.6 Module Search Path

When we import a module, Python searches for it in specific locations.

Explanation

Python searches in this general order:

1. Current working directory.
2. Paths listed in `PYTHONPATH`, if set.
3. Standard library directories.
4. Installed third-party package directories.

Syntax

```
</> Python  
  
import sys  
  
print(sys.path)
```

13.7 Exploring a Module with `dir()`

`dir()` shows the names available inside a module.

Syntax

`dir(module_name)`

Explanation

1. `dir()` helps us inspect a module.
2. It shows functions, variables, classes, and special names inside the module.
3. It is useful while learning or debugging.

Example 1

```
PYTHON CODE  
import math  
print(dir(math))
```

Output:

List of names available inside the math module

NOTE: `dir()` does not explain what each name does. For explanation, use `help()`.

13.8 `__name__ == "__main__"`

This is used to control whether code should run directly or only when imported.

Syntax

```
<> Python

if __name__ == "__main__":
    statement
```

1. Every Python file has a special variable called `__name__`.
2. If the file is run directly, `__name__` becomes `"__main__"`.
3. If the file is imported, `__name__` becomes the module name.
4. This is useful for testing module code safely.
5. It prevents some code from running during import.

Example 1

`calculator.py`

```
<> Python

def add(a, b):
    return a + b

if __name__ == "__main__":
    print(add(10, 20))
```

When running `calculator.py` directly: 30

When importing `calculator.py` into another file, the function is available, but the test print does not run automatically.

Flow Chart

Python file runs

|
v

Is file run directly?

|
|
|

└─ Yes -> `__name__` is `"__main__"`

└─ No -> `__name__` is module name

13.9 Package Structure

A package is a folder containing Python modules.

Basic Package Structure

```
project/
├── main.py
└── mypackage/
    ├── __init__.py
    ├── calculator.py
    └── messages.py
```

Explanation

1. `mypackage` is a package.
2. `calculator.py` and `messages.py` are modules inside the package.
3. `__init__.py` marks the folder as a regular Python package.
4. `main.py` can import modules from the package.

Example 1

`mypackage/calculator.py`

```
PYTHON CODE
def add(a, b):
    return a + b
```

`main.py`

```
PYTHON CODE
from mypackage.calculator import add

print(add(10, 20))
```

Output: 30

13.10 `__init__.py`

`__init__.py` is a special file used in Python packages.

Explanation

1. `__init__.py` is placed inside a package folder.
2. It tells Python that the folder is a regular package.
3. It can be empty.
4. It can also contain package-level initialization code.
5. It can control what is exposed when importing from the package.

mypackage/

|— `__init__.py`

|— `calculator.py`

|— `messages.py`

Example 1

mypackage/`__init__.py`

PYTHON CODE

```
from .calculator import add
```

`main.py`

PYTHON CODE

```
from mypackage import add  
print(add(10, 20))
```

Output: 30

13.11 Absolute Imports

An absolute import uses the full path from the project/package root.

Syntax

```
from package.module import name
```

Explanation

1. Absolute imports are clear and easy to understand.
2. They show the full location of the imported module.
3. They are generally preferred in larger projects.
4. They reduce confusion compared to complex relative imports.

Example 1

Inside `main.py`:

```
from app.calculator import add
```

This means:

From package `app`,
inside module `calculator`,
import `add`

13.12 Relative Imports

A relative imports code based on the current module's location inside a package.

Syntax

```
from .module import name
```

```
from ..package import module
```

Explanation

1. Relative imports use dots.
2. One dot `.` means current package.
3. Two dots `..` means parent package.
4. Relative imports are used inside packages.
5. They are not meant for simple standalone scripts.

Syntax	Meaning
.	Current package
..	Parent package
...	Grandparent package

Example Structure

```
project/
├──
└── app/
    ├── __init__.py
    ├── calculator.py
    └── reports.py
```

Inside `reports.py`:

```
from .calculator import add
```

This means: Import `add` from `calculator.py` in the same package

Important Point

Relative imports work properly when the module is part of a package. They may fail if the file is run directly as a script.

Better way to run a package module:

```
python -m app.reports
```

13.13 Package Management Basics

Package management means installing, updating, removing, and tracking external Python packages. Python commonly uses `pip` for package management.

Explanation

1. The Python standard library comes with Python.
 2. Third-party packages must be installed separately.
 3. `pip` is used to install third-party packages.
 4. Virtual environments are used to keep project dependencies separate.
 5. `requirements.txt` is used to record project dependencies.
-

13.14 **pip** Basics

pip is Python's package installer.

Common **pip** Commands

Task	Command
Check pip version	<code>python -m pip --version</code>
Install package	<code>python -m pip install package_name</code>
Install specific version	<code>python -m pip install package_name==1.2.3</code>
Upgrade package	<code>python -m pip install --upgrade package_name</code>
Uninstall package	<code>python -m pip uninstall package_name</code>
Show installed packages	<code>python -m pip list</code>
Show package details	<code>python -m pip show package_name</code>

NOTE: Use `python -m pip` instead of only `pip`. This makes sure **pip** belongs to the Python version you are using.

13.15 Virtual Environment Basics

A virtual environment is an isolated Python environment for a project.

1. Different projects may need different package versions.
2. It prevents package conflicts.
3. It keeps the global Python installation clean.
4. It makes projects easier to share and manage.

Create Virtual Environment

System	Command
Windows	<code>python -m venv venv</code>
macOS/Linux	<code>python3 -m venv venv</code>

Activate Virtual Environment

System	Command
Windows PowerShell	<code>venv\Scripts\Activate.ps1</code>
Windows CMD	<code>venv\Scripts\activate.bat</code>
macOS/Linux	<code>source venv/bin/activate</code>

Deactivate

`deactivate`

13.16 requirements.txt

`requirements.txt` stores a list of packages needed for a project.

Syntax

`package_name==version`

Example

`requests==2.32.3`

`numpy==2.0.0`

Task	Command
Save installed packages	<code>python -m pip freeze > requirements.txt</code>
Install from file	<code>python -m pip install -r requirements.txt</code>

Explanation

1. `requirements.txt` helps share project dependencies.
2. Another user can install the same packages using one command.
3. It is commonly used in Python projects.

13.17 Third-Party Packages

Third-party packages are packages created by other developers.

They are not part of the Python standard library.

Package	Common Use
requests	Sending HTTP requests
numpy	Numerical computing
pandas	Data analysis
flask	Web development
django	Web applications
pytest	Testing

13.18 Circular Import Warning

A circular import happens when two modules import each other.

Example Structure

a.py imports b.py

b.py imports a.py

1. Circular imports can cause errors or incomplete imports.
2. They usually happen when modules depend on each other too much.
3. Good project structure helps avoid circular imports.
4. Shared code can be moved into a separate module.

Example Problem

a.py -> imports b.py

b.py -> imports a.py

Python may not finish loading one module before the other needs it.

Better Structure

common.py -> shared logic

a.py imports common.py

b.py imports common.py

Chapter 14. Object-Oriented Programming in Python

Object-Oriented Programming, or **OOP**, is a programming style where code is organized using **classes** and **objects**.

14.1.1 OOPS Fundamentals

Basic idea

Class -> blueprint

Object -> real item created from class

Example idea:

Class: Student;

Objects:

student1

student2

student3

Why OOP is Used

1. To organize large programs.
2. To reuse code.
3. To group data and behavior together.
4. To model real-world entities.
5. To make code easier to maintain.

14.1.1 Classes

A **class** is a blueprint for creating objects.

Syntax

```
<> Python  
  
class ClassName:  
    statement
```

1. A class defines the structure of an object.
2. A class can contain attributes and methods.
3. Class names usually use **PascalCase**.
4. A class does not represent one real object by itself.
5. Objects are created from classes.

Example 1

PYTHON CODE

```
class Student:
    pass

student1 = Student()
print(type(student1))
```

Output: <class '__main__.Student'>

Class Naming Style

Good Class Name	Reason
Student	Clear class name
BankAccount	Uses PascalCase
EmployeeRecord	Meaningful name

14.1.2 Objects

An **object** is an instance created from a class.

Syntax

```
object_name = ClassName()
```

1. An object is created from a class.
2. One class can create many objects.
3. Each object can have its own data.
4. Objects are also called instances.

Example 1

PYTHON CODE

```
class Student:
    pass

student1 = Student()
student2 = Student()
print(student1)
print(student2)
```

Output:

<__main__.Student object at ...>

<__main__.Student object at ...>

The memory address may be different in every run.

Class vs Object

Point	Class	Object
Meaning	Blueprint	Real instance
Created using	<code>class</code> keyword	Class name with <code>()</code>
Example	<code>Student</code>	<code>student1 = Student()</code>
Memory	No object data yet	Stores actual object data

14.1.3 Attributes

Attributes are variables that belong to an object or class.

Syntax

`object_name.attribute_name = value`

Explanation

1. Attributes store data about an object.
2. Each object can have different attribute values.
3. Attributes are accessed using dot . notation.

Example 1

PYTHON CODE

```
class Student:
    pass

student1 = Student()
student1.name = "Aman"
student1.age = 21
print(student1.name)
print(student1.age)
```

Output: Aman

21

Attribute Table

Code	Meaning
<code>student1.name</code>	Accesses <code>name</code> attribute
<code>student1.age</code>	Accesses <code>age</code> attribute
<code>student1.name = "Aman"</code>	Creates/updates attribute

14.1.4 Methods

A **method** is a function defined inside a class.

Syntax

Python

```
class ClassName:
    def method_name(self):
        statement
```

1. Methods define object behavior.
2. Methods are functions inside a class.
3. Instance methods usually take `self` as the first parameter.
4. Methods are called using an object.

Example 1

PYTHON CODE

```
class Student:
    def greet(self):
        print("Hello")

student1 = Student()
student1.greet()
```

Output: Hello

14.1.5 `self`

`self` refers to the current object.

Syntax

```
def method_name(self):  
    statement
```

1. `self` represents the object that is calling the method.
2. It is used to access object attributes and methods.
3. Python automatically passes the object as `self`.
4. `self` is not a keyword, but it is the standard convention.
5. Always use `self` for instance methods.

Example 1

PYTHON CODE

```
class Student:  
    def show_name(self):  
        print(self.name)  
  
student1 = Student()  
student1.name = "Aman"  
student1.show_name()
```

Output: Aman

14.1.6 `__init__`

`__init__` is a special method used to initialize object data.

Syntax

```
<> Python  
  
class ClassName:  
    def __init__(self):  
        statement
```

1. `__init__` runs automatically when an object is created.
2. It is used to set initial attribute values.
3. It is commonly called a constructor.
4. Technically, `__init__` initializes the object after it is created.
5. The actual object creation is handled by `__new__`, which is advanced and usually not needed in core notes.

Example 1

PYTHON CODE

```
class Student:
    def __init__(self, name, age):
        self.name = name
        self.age = age

student1 = Student("Aman", 21)
print(student1.name)
print(student1.age)
```

Output: Aman
21

14.1.7 Instance Variables

Instance variables are variables that belong to a specific object.

Syntax

`self.variable_name = value`

1. Instance variables are usually created inside `__init__`.
2. Each object gets its own copy.
3. Changing one object's instance variable does not affect another object.
4. They are accessed using `object.variable_name`.

Example 1

PYTHON CODE

```
class Student:
    def __init__(self, name):
        self.name = name

student1 = Student("Aman")
student2 = Student("Riya")
print(student1.name)
print(student2.name)
```

Output: Aman
Riya

NOTE: `student1.name` and `student2.name` are separate instance variables.

14.1.8 Class Variables

Class variables are variables shared by all objects of a class.

Syntax

```
</> Python  
  
class ClassName:  
    class_variable = value
```

Explanation

1. Class variables are defined directly inside the class.
2. They are shared by all objects.
3. They are useful for common data.
4. They can be accessed using the class name or object name.
5. Prefer accessing class variables using the class name.

Example 1

PYTHON CODE

```
class Student:  
    school_name = "ABC School"  
  
    def __init__(self, name):  
        self.name = name  
  
student1 = Student("Aman")  
student2 = Student("Riya")  
print(student1.school_name)  
print(student2.school_name)  
print(Student.school_name)
```

Output:

```
ABC School  
ABC School  
ABC School
```

Instance Variable vs Class Variable

Point	Instance Variable	Class Variable
Belongs to	Object	Class
Created where	Usually inside <code>__init__</code>	Inside class, outside methods
Shared?	No	Yes
Access	<code>self.name</code>	<code>ClassName.variable</code>
Example	<code>self.name</code>	<code>school_name</code>

Important Warning

Avoid mutable class variables unless shared data is intentional.

```

</> Python

class Student:
    subjects = []

```

This list is shared by all objects, which can cause unexpected behavior.

14.1.9 Methods vs Functions

A function is independent.

A method belongs to a class or object.

Comparison Table

Point	Function	Method
Defined where?	Outside class	Inside class
Called using	Function name	Object or class
First parameter	No automatic <code>self</code>	Instance method gets <code>self</code>
Example	<code>greet()</code>	<code>student.greet()</code>

14.2 OOPS Principles

14.2.1 Encapsulation

Encapsulation means **binding data and methods together inside a class** and controlling how data is accessed or modified.

Basic Idea

Data + Methods = Encapsulation

1. Encapsulation keeps related data and behavior inside one class.
2. It helps protect data from direct unwanted changes.
3. Python does not have strict private variables like Java or C++.
4. Python uses naming conventions to show access level.
5. Encapsulation is commonly handled using:
 1. Public attributes
 2. Protected attributes
 3. Private/name-mangled attributes
 4. Getter and setter methods
 5. `@property`

PYTHON CODE

```
class BankAccount:
    def __init__(self, balance):
        self.__balance = balance

    def deposit(self, amount):
        if amount > 0:
            self.__balance += amount

    def get_balance(self):
        return self.__balance

account = BankAccount(1000)
account.deposit(500)
print(account.get_balance())
```

Output: 1500

Here, `__balance` is not directly accessed from outside. It is accessed using methods.

Public, Protected, and Private Members

Python uses naming conventions for access control.

Access Level Table

Type	Syntax	Meaning	Example
Public	<code>name</code>	Can be accessed normally	<code>self.name</code>
Protected	<code>_name</code>	Meant for internal use	<code>self._salary</code>
Private / Name mangling	<code>__name</code>	Avoid accidental outside access	<code>self.__pin</code>

Example 1

PYTHON CODE

```
class Student:
    def __init__(self):
        self.name = "Aman"
        self._marks = 85
        self.__grade = "A"

student = Student()
print(student.name)
print(student._marks)
```

Output: Aman

85

Direct access to `__grade` will fail:

```
print(student.__grade)
```

Output: AttributeError: 'Student' object has no attribute '__grade'

Important Point

Double underscore does not make data fully private.

It performs name mangling to avoid accidental access.

Internally, Python changes:

`__grade` -> `_Student__grade`

So technically it can still be accessed, but it should not be used directly.

Getter and Setter Methods

Getter and setter methods are used to read and update private data safely.

Python

```
def get_value(self):  
    return self.__value  
  
def set_value(self, value):  
    self.__value = value
```

1. Getter method reads private data.
2. Setter method updates private data.
3. Setter can validate data before updating.
4. This protects the object from invalid values.

Example 1

PYTHON CODE

```
class Student:  
    def __init__(self, marks):  
        self.__marks = marks  
  
    def get_marks(self):  
        return self.__marks  
  
    def set_marks(self, marks):  
        if marks >= 0:  
            self.__marks = marks  
        else:  
            print("Marks cannot be negative")  
student = Student(80)  
student.set_marks(90)  
print(student.get_marks())
```

Output: 90

Encapsulation Using @property

`@property` allows a method to behave like an attribute.

Syntax

```
<> Python

@property
def attribute_name(self):
    return value
```

1. `@property` is a clean way to control access to data.
2. It allows validation before changing data.
3. It supports getter and setter behavior.
4. It makes code look simple while still protecting data.

Example 1

```
PYTHON CODE
class Student:
    def __init__(self, marks):
        self.marks = marks

    @property
    def marks(self):
        return self._marks

    @marks.setter
    def marks(self, value):
        if value < 0:
            raise ValueError("Marks cannot be negative")
        self._marks = value

student = Student(85)
student.marks = 95
print(student.marks)
```

Output: 95

14.2.2 Inheritance

Inheritance allows one class to reuse the properties and methods of another class.

Syntax

```
</> Python  
  
class ChildClass(ParentClass):  
    statement
```

Explanation

1. Inheritance supports code reuse.
2. The parent class is also called base class or superclass.
3. The child class is also called derived class or subclass.
4. The child class can use parent class attributes and methods.
5. The child class can also define its own attributes and methods.
6. The child class can override parent methods.
7. Inheritance represents an **is-a** relationship.

Basic Example

PYTHON CODE

```
class Animal:  
    def eat(self):  
        print("Eating")  
  
class Dog(Animal):  
    def bark(self):  
        print("Barking")  
  
dog = Dog()  
dog.eat()  
dog.bark()
```

Output: Eating
 Barking

Inheritance Flow

Parent class

|
v
Child class
|
v
Child class can reuse parent features

Why Inheritance is Used

Use	Meaning
Code reuse	Child class reuses parent code
Extensibility	Child class can add new features
Maintainability	Common logic stays in parent class
Polymorphism	Same method can behave differently
Real-world modeling	Represents is-a relationship

Example:

Dog is an Animal

Car is a Vehicle

Student is a Person

Types of Inheritance in Python

Python supports these major types of inheritance:

Type	Meaning
Single inheritance	One child inherits from one parent
Multilevel inheritance	Child inherits from parent, and another child inherits from that child
Hierarchical inheritance	Multiple child classes inherit from one parent
Multiple inheritance	One child inherits from multiple parents
Hybrid inheritance	Combination of two or more inheritance types

Single Inheritance

Single inheritance means one child class inherits from one parent class.

Syntax

```
<> Python  
  
class Parent:  
    pass  
  
class Child(Parent):  
    pass
```

Example 1

```
PYTHON CODE  
class Animal:  
    def eat(self):  
        print("Eating")  
  
class Dog(Animal):  
    def bark(self):  
        print("Barking")  
  
dog = Dog()  
dog.eat()  
dog.bark()
```

Output: Eating
Barking

Multilevel Inheritance

Multilevel inheritance means a class inherits from a child class, forming a chain.

Syntax

Python

```
class A:
    pass

class B(A):
    pass

class C(B):
    pass
```

Example 1

PYTHON CODE

```
class Animal:
    def eat(self):
        print("Eating")

class Dog(Animal):
    def bark(self):
        print("Barking")

class Puppy(Dog):
    def weep(self):
        print("Weeping")

puppy = Puppy()
puppy.eat()
puppy.bark()
puppy.weep()
```

Output:

Eating
Barking
Weeping

Hierarchical Inheritance

Hierarchical inheritance means multiple child classes inherit from one parent class.

Syntax

```
</> Python

class Parent:
    pass

class Child1(Parent):
    pass

class Child2(Parent):
    pass
```

Example 1

```
PYTHON CODE
class Animal:
    def eat(self):
        print("Eating")

class Dog(Animal):
    def bark(self):
        print("Barking")

class Cat(Animal):
    def meow(self):
        print("Meowing")

dog = Dog()
cat = Cat()
dog.eat()
dog.bark()
cat.eat()
cat.meow()
```

Output: Eating
Barking
Eating
Meowing

Diagram

```
Animal
 /  \
v    v
Dog  Cat
```

Multiple Inheritance

Multiple inheritance means one child class inherits from more than one parent class.

Syntax

PYTHON CODE

```
class Parent1:
    pass

class Parent2:
    pass

class Child(Parent1, Parent2):
    pass
```

1. Python supports multiple inheritance.
2. A child class can use methods from multiple parent classes.
3. If parents have methods with the same name, Python uses MRO.
4. MRO means Method Resolution Order.

Example 1

PYTHON CODE

```
class Father:
    def father_skill(self):
        print("Gardening")

class Mother:
    def mother_skill(self):
        print("Painting")

class Child(Father, Mother):
    def child_skill(self):
        print("Coding")

child = Child()

child.father_skill()
child.mother_skill()
child.child_skill()
```

Output:

Gardening
Painting
Coding

Diagram

Father Mother
 \ /

v v

Child

Hybrid Inheritance

Hybrid inheritance is a combination of two or more types of inheritance.

1. Hybrid inheritance mixes different inheritance types.
2. It can include multiple, multilevel, or hierarchical inheritance together.
3. It is powerful but can become complex.
4. MRO is important in hybrid inheritance.

Example 1

PYTHON CODE

```
class Person:
    def show_person(self):
        print("Person")

class Student(Person):
    def show_student(self):
        print("Student")

class Employee(Person):
    def show_employee(self):
        print("Employee")

class TeachingAssistant(Student, Employee):
    def show_ta(self):
        print("Teaching Assistant")

ta = TeachingAssistant()
ta.show_person()
ta.show_student()
ta.show_employee()
ta.show_ta()
```

Output:

Person


Student

Employee

Teaching Assistant

Diagram

Person

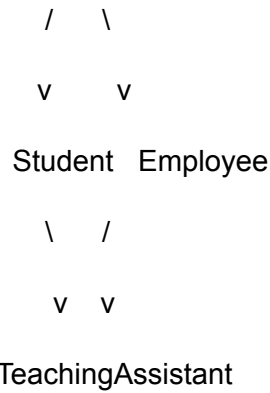

14.17 Method Resolution Order - MRO

MRO is the order Python follows while searching for methods in inheritance.

Syntax

```
</> Python
ClassName.mro()
```

OR

```
</> Python
ClassName.__mro__
```

1. MRO decides which method is called first.
2. It is important in multiple inheritance.
3. Python uses the C3 linearization algorithm for MRO.
4. The search starts from the child class.
5. Then Python checks parent classes according to MRO.
6. Finally, it checks the base `object` class.

Example 1

```
PYTHON CODE
class A:
```

```
def show(self):
    print("A")

class B(A):
    def show(self):
        print("B")

class C(A):
    def show(self):
        print("C")

class D(B, C):
    pass

obj = D()
obj.show()
print(D.mro())
```

Output: B

[<class '__main__.D'>, <class '__main__.B'>, <class '__main__.C'>, <class '__main__.A'>, <class 'object'>]


MRO Flow

D -> B -> C -> A -> object

Since B comes before C, B.show() runs.

Diamond Problem

The diamond problem happens when a child class inherits from two classes that both inherit from the same parent.



1. Class B and class C both inherit from A.
2. Class D inherits from both B and C.
3. If the same method exists in multiple classes, Python uses MRO to decide.
4. Python handles this safely using MRO.
5. `super()` also follows MRO.

Example 1

PYTHON CODE

```
class A:
    def show(self):
        print("A")

class B(A):
    def show(self):
        print("B")

class C(A):
    def show(self):
        print("C")

class D(B, C):
    pass

d = D()
d.show()
```

Output: B

Because the MRO is:

D -> B -> C -> A -> object

Constructor in Inheritance

When a child object is created, Python runs the child class `__init__` method.
If the child class does not have `__init__`, Python uses the parent class `__init__`.

Case 1: Child Has No `__init__`

PYTHON CODE

```
class Person:
    def __init__(self, name):
        self.name = name

class Student(Person):
    pass

student = Student("Aman")
print(student.name)
```

Output: Aman

The child class uses the parent class constructor.

Case 2: Child Has Its Own `__init__`

PYTHON CODE

```
class Person:
    def __init__(self, name):
        self.name = name

class Student(Person):
    def __init__(self, course):
        self.course = course

student = Student("Python")
print(student.course)
```

Output:

Python

Here, parent `__init__` does not run automatically because the child has its own `__init__`.

super()

`super()` is used to call the next method in the MRO, usually from the parent class.

Syntax

`super().method_name()`

Explanation

1. `super()` is commonly used to call parent class methods.
2. It is commonly used inside `__init__`.
3. It avoids directly writing the parent class name.
4. In multiple inheritance, `super()` follows MRO.
5. It helps avoid repeating parent class logic.

Example 1

PYTHON CODE

```
class Person:
    def __init__(self, name):
        self.name = name

class Student(Person):
    def __init__(self, name, course):
        super().__init__(name)
        self.course = course

student = Student("Aman", "Python")

print(student.name)
print(student.course)
```

Output:

Aman

Python

14.2.3 Method Overriding

Method overriding means a child class defines a method with the same name as a parent class method.

Syntax

```
Python

class Parent:
    def method(self):
        statement

class Child(Parent):
    def method(self):
        new_statement
```

Explanation

1. The method name is the same in parent and child.
2. The child class provides its own version.
3. When called on child object, child method runs.
4. This supports polymorphism.
5. Parent method can still be called using `super()`.

Example 1

```
PYTHON CODE
class Animal:
    def sound(self):
        print("Animal sound")

class Dog(Animal):
    def sound(self):
        print("Bark")

dog = Dog()
dog.sound()
```

Output:Bark

Overriding with `super()`

PYTHON CODE

```
class Animal:
    def sound(self):
        print("Animal sound")

class Dog(Animal):
    def sound(self):
        super().sound()
        print("Bark")

dog = Dog()
dog.sound()
```

Output: Animal sound
Bark

14.2.4 Polymorphism

Polymorphism means the same method or operation behaves differently for different objects.

Explanation

1. Polymorphism means “many forms”.
2. The same method name can work differently in different classes.
3. Python supports polymorphism through:
 1. **Method overriding**
 2. **Duck typing**
 3. **Operator overloading**

PYTHON CODE

```
class Dog:
    def sound(self):
        print("Bark")

class Cat:
    def sound(self):
        print("Meow")

animals = [Dog(), Cat()]
for animal in animals:
    animal.sound()
```

Output: Bark

Meow

Polymorphism Types in Python

Type	Meaning	Example
Method overriding	Child changes parent method	<code>Dog.sound()</code>
Duck typing	Object is accepted if it has required method	<code>animal.sound()</code>
Operator overloading	Operator works differently by class	<code>obj1 + obj2</code>

14.2.5 Duck Typing

Duck typing means Python focuses on what an object can do, not its exact type.

Basic Idea

If an object has the needed method, Python can use it.

Example 1

PYTHON CODE

```
class Duck:
    def speak(self):
        print("Quack")

class Person:
    def speak(self):
        print("Hello")

def call_speak(obj):
    obj.speak()

call_speak(Duck())
call_speak(Person())
```

Output:

Quack
Hello

Python does not care whether the object is `Duck` or `Person`. It only checks whether `speak()` exists.

14.2.6 Abstraction

Abstraction means hiding internal implementation and showing only essential features.

Explanation

1. Abstraction focuses on what an object does.
2. It hides how the object does it internally.
3. Python supports abstraction using abstract base classes.
4. Abstract base classes are created using the `abc` module.
5. A class with abstract methods cannot be instantiated directly.
6. Child classes must implement abstract methods.

Example 1

```
PYTHON CODE
from abc import ABC, abstractmethod

class Payment(ABC):
    @abstractmethod
    def pay(self, amount):
        pass

class UpiPayment(Payment):
    def pay(self, amount):
        print("Paid", amount, "using UPI")

payment = UpiPayment()

payment.pay(500)
```

Output: Paid 500 using UPI

Important Point

Payment cannot be used directly because it has an abstract method.

This gives an error:

```
payment = Payment()
```

Output:

TypeError: Can't instantiate abstract class Payment with abstract method pay

Encapsulation vs Abstraction

Point	Encapsulation	Abstraction
Meaning	Protecting and controlling data	Hiding implementation details
Focus	Data access	Essential behavior
Achieved by	Private variables, methods, <code>@property</code>	Abstract classes, interfaces
Example	Hide <code>__balance</code>	Define <code>pay()</code> without showing payment logic

Encapsulation = How data is protected

Abstraction = How unnecessary details are hidden

14.2.7 Composition

Composition means one class contains an object of another class.

Basic Idea

Inheritance = is-a relationship

Composition = has-a relationship

1. Composition is used when one object is made of another object.
2. It represents a **has-a** relationship.
3. It is often preferred over inheritance when there is no true is-a relationship.

Example 1

```
PYTHON CODE
class Engine:
    def start(self):
        print("Engine started")

class Car:
    def __init__(self):
        self.engine = Engine()

    def start(self):
        self.engine.start()

car = Car()
car.start()
```

Output: Engine started

Explanation:

Car has an Engine.

So this is composition.

Association, Aggregation, & Composition

Relationship	Meaning	Example
Association	One class uses another class	Teacher teaches Student
Aggregation	One class has another, but both can exist independently	Department has Teachers
Composition	One class owns another strongly	House has Rooms

Important Difference

Point	Aggregation	Composition
Relationship	Weak has-a	Strong has-a
Child object can exist alone?	Yes	Usually no
Example	Team has Players	Car has Engine

isinstance() and issubclass()

These functions are useful when working with inheritance.

Syntax

`isinstance(object, ClassName)`

`issubclass(ChildClass, ParentClass)`

1. `isinstance()` checks whether an object belongs to a class.
2. It also returns `True` if the object belongs to a child class.
3. `issubclass()` checks whether one class inherits from another class.
4. Both return `True` or `False`.

Example 1

```
PYTHON CODE
class Animal:
    pass

class Dog(Animal):
    pass

dog = Dog()
print(isinstance(dog, Dog))
print(isinstance(dog, Animal))
print(issubclass(Dog, Animal))
```

Output: True

True

True

Inheritance vs Composition

Point	Inheritance	Composition
Relationship	Is-a	Has-a
Code style	Child class extends parent	Class contains another object
Example	Dog is an Animal	Car has an Engine
Reuse method	Inherit methods	Use contained object methods
Flexibility	Can become tightly connected	Usually more flexible

Use Inheritance When

Child really is a type of parent.

Example: Dog is an Animal

Student is a Person

Use Composition When

One object has or uses another object.

Example:

Car has an Engine

Computer has a Processor

Complete Inheritance Types Summary

Type	Structure	Example
Single	A -> B	Animal -> Dog
Multilevel	A -> B -> C	Animal -> Dog -> Puppy
Hierarchical	A -> B, A -> C	Animal -> Dog, Animal -> Cat
Multiple	A + B -> C	Father + Mother -> Child
Hybrid	Combination	Person -> Student/Employee -> TeachingAssistant

OOP Principles Summary

Principle	Meaning	Python Feature
Encapsulation	Control access to data	<code>_name</code> , <code>__name</code> , getter/setter, <code>@property</code>
Inheritance	Reuse parent class code	<code>class Child(Parent)</code>
Polymorphism	Same method, different behavior	Overriding, duck typing
Abstraction	Hide implementation details	<code>ABC</code> , <code>@abstractmethod</code>
Composition	Build one object using another	Object inside object

Important OOP Scenario Table

Scenario	Use
Need to protect data	Encapsulation
Need to reuse common code	Inheritance
Need same method with different behavior	Polymorphism
Need to force child class method structure	Abstraction
Need one object inside another	Composition
Need multiple parent classes	Multiple inheritance
Need to resolve method search order	MRO
Need parent constructor logic	<code>super()</code>
Need to check object/class relationship	<code>isinstance()</code> , <code>issubclass()</code>

14.3 Special Methods / Magic Methods / Dunder Methods

Special methods are predefined methods in Python with double underscores before and after their names.

They are also called:

- Special methods
- Magic methods
- Dunder methods

dunder means **double underscore**.

Syntax

```
</> Python

def __method_name__(self):
    statement
```

Explanation

1. Special methods allow objects to work with Python's built-in operations.
2. They are called automatically by Python.
3. They usually start and end with double underscores.
4. We normally do not call them directly.
5. Instead, we use operators or built-in functions.

Example Idea

`print(obj)` -> calls `obj.__str__()`

`len(obj)` -> calls `obj.__len__()`

`obj[0]` -> calls `obj.__getitem__(0)`

`obj1 + obj2` -> calls `obj1.__add__(obj2)`

Common Special Methods Table

Special Method	Triggered By	Purpose
<code>__init__</code>	<code>ClassName()</code>	Initializes object
<code>__str__</code>	<code>str(obj)</code> , <code>print(obj)</code>	User-friendly string
<code>__repr__</code>	<code>repr(obj)</code>	Developer-friendly string
<code>__len__</code>	<code>len(obj)</code>	Returns length
<code>__getitem__</code>	<code>obj[index]</code>	Indexing/slicing
<code>__add__</code>	<code>obj1 + obj2</code>	Addition
<code>__sub__</code>	<code>obj1 - obj2</code>	Subtraction
<code>__call__</code>	<code>obj()</code>	Makes object callable
<code>__enter__</code>	<code>with obj:</code>	Starts context manager
<code>__exit__</code>	End of <code>with</code> block	Exits context manager

14.3.1 `__str__`

`__str__` returns a user-friendly string representation of an object.

Syntax

```

<> Python

def __str__(self):
    return "text"

```

Explanation

1. `__str__` is called by `str(obj)`.
2. It is also called by `print(obj)`.
3. It should return a string.
4. It is mainly for users.
5. It should be readable and simple.

Example 1

PYTHON CODE

```
class Student:
    def __init__(self, name, course):
        self.name = name
        self.course = course

    def __str__(self):
        return f'{self.name} is studying {self.course}'

student = Student("Aman", "Python")
print(student)
```

Output: Aman is studying Python

14.3.2 `__repr__`

`__repr__` returns a developer-friendly string representation of an object.

Syntax

Python

```
def __repr__(self):
    return "text"
```

1. `__repr__` is called by `repr(obj)`. It is mainly used for debugging.
2. It should return a string. A good `__repr__` often looks like valid Python code.
3. If `__str__` is not defined, Python may use `__repr__` while printing.

PYTHON CODE

```
class Student:
    def __init__(self, name, course):
        self.name = name
        self.course = course

    def __repr__(self):
        return f'Student(name={self.name!r}, course={self.course!r})'

student = Student("Aman", "Python")
print(repr(student))
```

Output: Student(name='Aman', course='Python')

14.3.3 `__len__`

`__len__` defines the behavior of `len(obj)`.

Syntax

```
</> Python

def __len__(self):
    return integer
```

Explanation

1. `__len__` is called by `len(obj)`.
2. It must return a non-negative integer.
3. It is useful for custom container-like classes.
4. If `__bool__` is not defined, Python may use `__len__` to decide truthiness.
5. If `__len__` returns `0`, the object is considered `False` in Boolean context.

Example 1

```
PYTHON CODE
class Team:
    def __init__(self, members):
        self.members = members

    def __len__(self):
        return len(self.members)

team = Team(["Aman", "Riya", "Kabir"])
print(len(team))
```

Output:3

14.3.4 `__getitem__`

`__getitem__` defines indexing and slicing behavior.

Syntax

```
def __getitem__(self, index):  
    return value
```

1. `__getitem__` is called when we use `obj[index]`.
2. It allows custom objects to support indexing.
3. It can also support slicing. It is useful for custom sequence-like classes.
4. If implemented carefully, it can also help an object work in loops.

PYTHON CODE

```
class Team:  
    def __init__(self, members):  
        self.members = members  
  
    def __getitem__(self, index):  
        return self.members[index]  
team = Team(["Aman", "Riya", "Kabir"])  
print(team[0])  
print(team[1])  
print(team[0:2])
```

Output:

```
Aman  
Riya  
['Aman', 'Riya']
```

14.3.5 `__add__`

`__add__` defines custom behavior for the `+` operator.

Syntax

```
def __add__(self, other):  
    return result
```

1. `__add__` is called when `obj1 + obj2` is used.
2. It is used for operator overloading.
3. It should return a new result.
4. If the other object type is not supported, return `NotImplemented`.
5. It should be used only when addition makes logical sense.

Example 1

PYTHON CODE

```
class Money:
    def __init__(self, amount):
        self.amount = amount

    def __add__(self, other):
        if not isinstance(other, Money):
            return NotImplemented
        return Money(self.amount + other.amount)

    def __str__(self):
        return f"Amount: {self.amount}"

money1 = Money(100)
money2 = Money(50)
result = money1 + money2
print(result)
```

Output: Amount: 150

14.3.6 `__sub__`

`__sub__` defines custom behavior for the `-` operator.

Syntax

```
def __sub__(self, other):
    return result
```

1. `__sub__` is called when `obj1 - obj2` is used.
2. It is also part of operator overloading.
3. It should return a meaningful result.
4. Return `NotImplemented` if the other type is unsupported.

Example 1

PYTHON CODE

```
class Money:
    def __init__(self, amount):
        self.amount = amount

    def __sub__(self, other):
        if not isinstance(other, Money):
            return NotImplemented
        return Money(self.amount - other.amount)

    def __str__(self):
        return f"Amount: {self.amount}"

money1 = Money(100)
money2 = Money(40)
result = money1 - money2
print(result)
```

Output: Amount: 60

14.3.7 `__call__`

`__call__` allows an object to be called like a function.

Syntax

```
def __call__(self):
    statement
```

Explanation

1. `__call__` runs when an object is called using parentheses.
2. It makes an object callable.
3. It is useful when an object stores data and also performs an action.
4. It is commonly used in decorators, callbacks, and callable classes.

Example 1

PYTHON CODE

```
class Greeter:
    def __init__(self, name):
        self.name = name

    def __call__(self):
        print("Hello", self.name)

greet_aman = Greeter("Aman")
greet_aman()
```

Output: Hello Aman

14.3.8 `__enter__` and `__exit__`

`__enter__` and `__exit__` are used to create context managers. Context managers work with the `with` statement.

Syntax

PYTHON CODE

```
def __enter__(self):
    return self

def __exit__(self, exc_type, exc_value,
             traceback):
    statement
```

Explanation

1. `__enter__` runs at the start of the `with` block.
2. `__exit__` runs when the `with` block ends.
3. `__exit__` runs even if an error occurs inside the `with` block.
4. `__exit__` receives exception details if an error occurs.
5. If `__exit__` returns `True`, the exception is suppressed.
6. If `__exit__` returns `False` or `None`, the exception continues.

PYTHON CODE

```
class SimpleContext:
    def __enter__(self):
        print("Entering")
        return self

    def __exit__(self, exc_type, exc_value,
        traceback):
        print("Exiting")

with SimpleContext():
    print("Inside with block")
```

Output:

Entering

Inside with block

Exiting

14.3.9 Context Manager Real Use

A common real-world example of a context manager is file handling.

Example 1

Python

```
with open("data.txt", "w") as file:
    file.write("Hello Python")
```

Explanation

1. `open()` returns a file object.
 2. The file object works as a context manager.
 3. The file opens at the start of the `with` block.
 4. The file closes automatically at the end.
 5. This is safer than manually closing the file.
-

14.3.10 Operator Overloading

Operator overloading means giving custom behavior to operators for user-defined classes.

Explanation

1. Operators like `+`, `-`, `*`, `==`, `<`, and `[]` can be customized.
2. This is done using special methods.
3. Operator overloading should be logical.
4. Do not overload operators in a confusing way.
5. Operators internally call matching dunder methods.

Operator Overloading Table

Operator / Operation	Special Method	Example
<code>+</code>	<code>__add__</code>	<code>obj1 + obj2</code>
<code>-</code>	<code>__sub__</code>	<code>obj1 - obj2</code>
<code>*</code>	<code>__mul__</code>	<code>obj1 * obj2</code>
<code>/</code>	<code>__truediv__</code>	<code>obj1 / obj2</code>
<code>//</code>	<code>__floordiv__</code>	<code>obj1 // obj2</code>
<code>%</code>	<code>__mod__</code>	<code>obj1 % obj2</code>
<code>**</code>	<code>__pow__</code>	<code>obj1 ** obj2</code>
<code>==</code>	<code>__eq__</code>	<code>obj1 == obj2</code>
<code>!=</code>	<code>__ne__</code>	<code>obj1 != obj2</code>
<code><</code>	<code>__lt__</code>	<code>obj1 < obj2</code>
<code><=</code>	<code>__le__</code>	<code>obj1 <= obj2</code>
<code>></code>	<code>__gt__</code>	<code>obj1 > obj2</code>
<code>>=</code>	<code>__ge__</code>	<code>obj1 >= obj2</code>
<code>[]</code>	<code>__getitem__</code>	<code>obj[index]</code>
<code>()</code>	<code>__call__</code>	<code>obj()</code>
<code>len()</code>	<code>__len__</code>	<code>len(obj)</code>
<code>str()</code>	<code>__str__</code>	<code>str(obj)</code>
<code>repr()</code>	<code>__repr__</code>	<code>repr(obj)</code>

14.3.11 Comparison Special Methods

Comparison methods allow objects to be compared.

Syntax

```
</> Python  
  
def __eq__(self, other):  
    return result
```

Explanation

1. `__eq__` defines equality using `==`.
2. `__lt__` defines less than using `<`.
3. Other comparison methods work similarly.
4. These methods should return `True` or `False`.
5. Return `NotImplemented` if comparison with the other type is unsupported.

Example 1

```
PYTHON CODE  
class Student:  
    def __init__(self, name, marks):  
        self.name = name  
        self.marks = marks  
  
    def __eq__(self, other):  
        if not isinstance(other, Student):  
            return NotImplemented  
        return self.marks == other.marks  
  
student1 = Student("Aman", 85)  
student2 = Student("Riya", 85)  
print(student1 == student2)
```

Output: True

Here, two students are considered equal because their marks are equal.

Comparison Methods Table

Method	Operator
<code>__eq__</code>	<code>==</code>
<code>__ne__</code>	<code>!=</code>
<code>__lt__</code>	<code><</code>
<code>__le__</code>	<code><=</code>
<code>__gt__</code>	<code>></code>
<code>__ge__</code>	<code>>=</code>

14.3.12 Reverse and In-place Operator Methods

Python also supports reverse and in-place operator methods.

Explanation

1. Reverse methods are used when the left object does not support the operation.
2. In-place methods are used for operators like `+=`, `-=`, `*=`.
3. These are advanced but useful to know.

Table

Type	Example Operator	Method
Normal addition	<code>obj + other</code>	<code>__add__</code>
Reverse addition	<code>other + obj</code>	<code>__radd__</code>
In-place addition	<code>obj += other</code>	<code>__iadd__</code>
Normal subtraction	<code>obj - other</code>	<code>__sub__</code>
Reverse subtraction	<code>other - obj</code>	<code>__rsub__</code>
In-place subtraction	<code>obj -= other</code>	<code>__isub__</code>

14.3.13 `__bool__`

`__bool__` defines truth value behavior of an object.

Syntax

Python

```
def __bool__(self):  
    return True_or_False
```

Explanation

1. `__bool__` is called by `bool(obj)`.
2. It is also used in `if obj:` conditions.
3. It must return `True` or `False`.
4. If `__bool__` is not defined, Python may use `__len__`.
5. If both are missing, most objects are considered `True`.

Example 1

PYTHON CODE

```
class Cart:  
    def __init__(self, items):  
        self.items = items  
  
    def __bool__(self):  
        return len(self.items) > 0  
  
cart = Cart(["Book"])  
  
if cart:  
    print("Cart has items")
```

Output: Cart has items

14.3.14 `__iter__` and `__next__`

These methods make an object iterable.

Syntax

PYTHON CODE

```
def __iter__(self):
    return self

def __next__(self):
    return next_value
```

1. `__iter__` returns an iterator object. `__next__` returns the next value.
2. When no value is left, `__next__` should raise `StopIteration`.
3. These methods are used by loops. They are part of the iterator protocol.

PYTHON CODE

```
class CountUpTo:
    def __init__(self, limit):
        self.current = 1
        self.limit = limit

    def __iter__(self):
        return self

    def __next__(self):
        if self.current > self.limit:
            raise StopIteration

        value = self.current
        self.current += 1
        return value

counter = CountUpTo(3)
for number in counter:
    print(number)
```

Output:

```
1
2
3
```


14.3.15 `__contains__`

`__contains__` defines behavior for the `in` operator.

Syntax

```
def __contains__(self, item):
```

```
    return True_or_False
```

Explanation

1. `__contains__` is called by `item in obj`.
2. It should return `True` or `False`.
3. It is useful for custom container-like classes.

Example 1

PYTHON CODE

```
class Team:
```

```
    def __init__(self, members):
```

```
        self.members = members
```

```
    def __contains__(self, member):
```

```
        return member in self.members
```

```
team = Team(["Aman", "Riya", "Kabir"])
```

```
print("Aman" in team)
```

```
print("Neha" in team)
```

Output:

True

False

Important Rules for Special Methods

Rule	Explanation
Return correct type	<code>__str__</code> and <code>__repr__</code> must return string
<code>__len__</code> must return integer	It should return non-negative integer
Use <code>NotImplemented</code>	For unsupported operator types
Avoid confusing behavior	Operators should behave logically
Do not call directly	Use <code>len(obj)</code> , not <code>obj.__len__()</code>

Special Methods Summary

Method	Meaning	Common Use
<code>__str__</code>	User-friendly string	<code>print(obj)</code>
<code>__repr__</code>	Developer-friendly string	<code>repr(obj)</code>
<code>__len__</code>	Defines length	<code>len(obj)</code>
<code>__getitem__</code>	Defines indexing	<code>obj[index]</code>
<code>__add__</code>	Defines addition	<code>obj1 + obj2</code>
<code>__sub__</code>	Defines subtraction	<code>obj1 - obj2</code>
<code>__call__</code>	Makes object callable	<code>obj()</code>
<code>__enter__</code>	Starts context manager	<code>with obj:</code>
<code>__exit__</code>	Ends context manager	End of <code>with</code>
<code>__eq__</code>	Equality comparison	<code>obj1 == obj2</code>
<code>__lt__</code>	Less-than comparison	<code>obj1 < obj2</code>
<code>__bool__</code>	Truth value	<code>if obj:</code>
<code>__iter__</code>	Returns iterator	<code>for item in obj:</code>
<code>__next__</code>	Returns next item	Iterator protocol
<code>__contains__</code>	Membership test	<code>item in obj</code>

Chapter 15: Advanced OOP in Python

Advanced OOP topics help us write cleaner, safer, and more reusable class-based code.

This section includes:

1. `@classmethod`
 2. `@staticmethod`
 3. `@property`
 4. Abstract base classes
 5. Mixins
 6. Metaclasses
 7. Data classes
-

15.1 `@classmethod`

A **class method** is a method that receives the class as its first argument.

The first parameter is usually named `cls`.

Syntax

```
class ClassName:
    @classmethod
    def method_name(cls):
        statement
```

Explanation

1. `@classmethod` is used to create a class method.
2. A class method receives the class automatically as `cls`.
3. It can access class variables.
4. It can modify class variables.
5. It can be called using the class name or object name.
6. It is commonly used to create alternate constructors.

Example 1

PYTHON CODE

```
class Student:
    school_name = "ABC School"

    def __init__(self, name):
        self.name = name

    @classmethod
    def change_school(cls, new_school):
        cls.school_name = new_school

Student.change_school("XYZ School")

student1 = Student("Aman")

print(student1.school_name)
print(Student.school_name)
```

Output:

XYZ School

XYZ School

Important Points

Point	Explanation
First parameter	cls
Receives	Class
Can access class variables	Yes
Can access instance variables directly	No
Can be called by class	Yes
Can be called by object	Yes

15.2 Class Method as Alternate Constructor

An alternate constructor means creating an object in a different way.

Syntax

Python

```
@classmethod
def method_name(cls, data):
    return cls(...)
```

1. A class normally creates objects using `__init__`.
2. Sometimes data comes in a different format.
3. A class method can convert that data and return an object.
4. `cls(...)` creates an object of the current class.
5. This is useful for flexible object creation.

Example 1

PYTHON CODE

```
class Student:
    def __init__(self, name, age):
        self.name = name
        self.age = age

    @classmethod
    def from_string(cls, data):
        name, age = data.split("-")
        return cls(name, int(age))

student = Student.from_string("Aman-21")
print(student.name)
print(student.age)
```

Output:Aman

15.3 @staticmethod

A **static method** is a method inside a class that does not receive **self** or **cls**.

Syntax

```
class ClassName:
    @staticmethod
    def method_name():
        statement
```

1. **@staticmethod** creates a static method.
2. It does not receive the object as **self**.
3. It does not receive the class as **cls**.
4. It behaves like a normal function placed inside a class.
5. It is used when the method is logically related to the class but does not need object or class data.

Example 1

PYTHON CODE

```
class MathHelper:
    @staticmethod
    def add(a, b):
        return a + b
print(MathHelper.add(10, 20))
```

Output: 30

Important Points

Point	Explanation
First parameter	No automatic first parameter
Receives object?	No
Receives class?	No
Can access instance variables directly?	No
Can access class variables directly?	No

15.4 Instance Method vs Class Method vs Static Method

Point	Instance Method	Class Method	Static Method
Decorator	No decorator	@classmethod	@staticmethod
First parameter	self	cls	No automatic parameter
Receives	Object	Class	Nothing automatically
Access instance data	Yes	No direct access	No
Access class data	Yes	Yes	No direct access
Common use	Object behavior	Class-level behavior	Helper logic
Call style	obj.method()	Class.method()	Class.method()

15.5 @property

@property allows a method to be accessed like an attribute.

Syntax

```
class ClassName:
    @property
    def attribute_name(self):
        return value
```

Explanation

1. @property is used to create managed attributes.
2. It allows method logic to run when accessing an attribute.
3. It helps with encapsulation.
4. It can be used for validation.
5. It makes code cleaner than normal getter methods.

Example 1

PYTHON CODE

```
class Student:
    def __init__(self, marks):
        self._marks = marks

    @property
    def marks(self):
        return self._marks

student = Student(85)
print(student.marks)
```

Output: 85

Important point:

student.marks looks like an attribute, but internally it calls the marks() method.

15.6 @property Setter

A setter is used to control how a property value is updated.

Syntax

```
@property
def name(self):
    return self._name
```

```
@name.setter
def name(self, value):
    self._name = value
```

Explanation

1. A getter returns the value.
2. A setter updates the value.
3. The setter can validate the value before saving it.
4. This protects objects from invalid data.
5. The property name and setter name must match.

Example 1

PYTHON CODE

```
class Student:
    def __init__(self, marks):
        self.marks = marks

    @property
    def marks(self):
        return self._marks

    @marks.setter
    def marks(self, value):
        if value < 0:
            raise ValueError("Marks cannot be negative")
        self._marks = value

student = Student(80)
student.marks = 95
print(student.marks)
```

Output: 95

Getter and Setter Table

Part	Purpose
@property	Reads value
@marks.setter	Updates value
self._marks	Internal storage attribute
student.marks	Public property access

15.7 Read-only Property

A property becomes read-only if we define only getter and no setter.

Syntax

@property

```
def property_name(self):
```

```
    return value
```

Explanation

1. If no setter is defined, the property cannot be assigned directly.
2. This is useful for calculated values.
3. It protects values from direct modification.

PYTHON CODE

```
class Rectangle:
    def __init__(self, length, width):
        self.length = length
        self.width = width

    @property
    def area(self):
        return self.length * self.width

rectangle = Rectangle(10, 5)

print(rectangle.area)
```

Output:

50

Invalid update:

```
rectangle.area = 100
```

Output:

AttributeError: property 'area' of 'Rectangle' object has no setter

15.8 Abstract Base Classes

An **abstract base class** defines a common structure that child classes must follow.

Syntax

```
<> Python

from abc import ABC, abstractmethod

class ClassName(ABC):
    @abstractmethod
    def method_name(self):
        pass
```

1. Abstract base classes are created using **ABC**.
2. Abstract methods are created using **@abstractmethod**.
3. A class with abstract methods cannot be instantiated directly.
4. Child classes must implement all abstract methods.
5. Abstract base classes are useful when many classes should follow the same structure.

Abstract class

|
v

Defines required method

|
v

Child class must implement method

|
v

Child object can be created

```
PYTHON CODE
from abc import ABC, abstractmethod

class Shape(ABC):
    @abstractmethod
    def area(self):
        pass

class Square(Shape):
    def __init__(self, side):
        self.side = side

    def area(self):
        return self.side * self.side

square = Square(5)
print(square.area())
```

Output: 25

15.9 Why Abstract Base Classes Are Used

Abstract base classes are used when we want to force child classes to implement required methods.

Every payment class must have `pay()` method.

UPI payment -> `pay()`

Card payment -> `pay()`

Cash payment -> `pay()`

Benefit	Explanation
Common structure	All child classes follow same design
Prevents incomplete classes	Child must implement abstract methods
Improves readability	Required methods are clear
Supports polymorphism	Same method name works across classes

15.10 Mixins

A **mixin** is a small class that provides extra reusable behavior to another class.

Syntax

```
class MixinName:
    def method_name(self):
        statement
```

```
class MainClass(MixinName):
    pass
```

1. A mixin is used to add extra features.
2. A mixin is usually not meant to be used alone.
3. Mixins are commonly used with multiple inheritance.
4. A mixin should be small and focused.
5. Mixin class names often end with **Mixin**.

Example 1

PYTHON CODE

```
class JsonMixin:
    def to_json(self):
        return self.__dict__

class Student(JsonMixin):
    def __init__(self, name, age):
        self.name = name
        self.age = age

student = Student("Aman", 21)

print(student.to_json())
```

Output: {'name': 'Aman', 'age': 21}

Important Points

Point	Explanation
Purpose	Add reusable behavior
Usually used alone?	No
Common with	Multiple inheritance
Naming style	Ends with Mixin
Best design	Small and focused

15.11 Mixin vs Normal Parent Class

Point	Normal Parent Class	Mixin
Purpose	Represents main inheritance relationship	Adds extra behavior
Relationship	Usually is-a	Usually feature-based
Used alone	Often yes	Usually no
Example	Dog inherits Animal	Student uses JsonMixin
Size	Can be large	Should be small

15.12 Metaclasses

A **metaclass** is the class of a class.

Basic Idea

Object is created from class. Class is created from metaclass.

1. In Python, classes are also objects.
2. The default metaclass in Python is `type`.
3. A metaclass controls how a class is created.
4. Metaclasses are advanced.
5. Most normal Python programs do not need custom metaclasses.
6. For Core Python, understanding the basic idea is enough.

```
<> Python  
  
class Student:  
    pass  
  
student = Student()  
  
print(type(student))  
print(type(Student))
```

Output: <class '__main__.Student'>
<class 'type'>

Code	Meaning
<code>type(student)</code>	<code>student</code> is an object of <code>Student</code>
<code>type(Student)</code>	<code>Student</code> is an object of <code>type</code>

15.13 Data Classes

A **data class** is a class mainly used to store data. It reduces repeated code like `__init__`, `__repr__`, and comparison methods.

Syntax

```
PYTHON CODE  
from dataclasses import dataclass  
  
@dataclass  
class ClassName:  
    field_name: type
```

Explanation

1. Data classes are created using `@dataclass`.
2. They are useful for classes that mainly store data.
3. Fields are declared using type annotations.
4. Python automatically creates `__init__`.
5. Python automatically creates useful `__repr__`.
6. Data classes were introduced in Python 3.7.

Example 1

```
PYTHON CODE
from dataclasses import dataclass

@dataclass
class Student:
    name: str
    age: int
    course: str

student = Student("Aman", 21, "Python")
print(student)
```

15.14 Normal Class vs Data Class

Comparison Table

Point	Normal Class	Data Class
Need to write <code>__init__</code>	Yes	Automatically generated
Useful <code>__repr__</code>	Need to write manually	Automatically generated
Type annotations	Optional	Used for fields
Best for	Behavior-heavy classes	Data-storing classes
Less repeated code	No	Yes

15.15 Default Values in Data Classes

Data class fields can have default values.

Syntax

@dataclass

class ClassName:

field1: type

field2: type = default_value

1. Fields can have default values.
2. Fields without default values must come before fields with default values.
3. This rule is similar to function parameters.

15.16 Mutable Defaults in Data Classes

Do not directly use mutable default values like lists in data classes.

Wrong Style

```
<> Python

from dataclasses import dataclass

@dataclass
class Student:
    name: str
    subjects: list = []
```

This is not allowed in modern Python data classes.

Correct Style : Use `field(default_factory=list)`.

```
<> Python

from dataclasses import dataclass, field

@dataclass
class Student:
    name: str
    subjects: list = field(default_factory=list)

student1 = Student("Aman")
student2 = Student("Riya")

student1.subjects.append("Python")

print(student1.subjects)
print(student2.subjects)
```

Output: ['Python']

□

1. Mutable defaults can accidentally be shared.
2. `default_factory=list` creates a new list for each object.
3. This avoids shared mutable data problems.

15.17 Frozen Data Classes

A frozen data class creates objects that cannot be modified after creation.

Syntax

```
</> Python

@dataclass(frozen=True)
class ClassName:
    field_name: type
```

Explanation

1. `frozen=True` makes data class objects immutable-like.
2. After object creation, fields cannot be reassigned normally. It is useful for fixed data.
3. It is similar in idea to immutability, but internal mutable fields can still be modified if they exist.

Example 1

```
PYTHON CODE
from dataclasses import dataclass

@dataclass(frozen=True)
class Point:
    x: int
    y: int

point = Point(10, 20)
print(point)
```

Output:

Point(x=10, y=20)

Invalid update:

point.x = 50

Output: dataclasses.FrozenInstanceError: cannot assign to field 'x'

Chapter 16. File Handling and Error Management

This chapter has three main parts:

1. **File Operations**
2. **Exception Handling**
3. **File Formats**

File handling is used to store and read data from files.

Exception handling is used to handle runtime errors safely.

16.1 File Operations

16.1.1 File Handling

File handling means working with files using Python.

Python can:

1. Open files
2. Read files
3. Write files
4. Append data
5. Close files
6. Work with text files, binary files, CSV, JSON, and XML

16.1.2 Opening Files

A file is opened using the `open()` function.

Syntax

```
file = open("file_name", "mode")
```

With encoding:

```
file = open("file_name", "mode", encoding="utf-8")
```

Explanation

1. `open()` opens a file.
2. The first argument is the file name or path.
3. The second argument is the file mode.
4. Encoding is commonly used for text files.
5. `utf-8` is a common and recommended encoding.

Example 1

```
file = open("data.txt", "r", encoding="utf-8")
```

This opens `data.txt` in read mode.

16.1.3 Closing Files

Syntax

```
file.close()
```

1. Closing a file releases system resources. If a file is not closed, data may not be saved properly.
2. The `with` statement is preferred because it closes the file automatically.

Example 1

```
file = open("data.txt", "r", encoding="utf-8")
file.close()
```

16.1.4 Reading Files

Reading means getting data from a file.

Method	Meaning
<code>read()</code>	Reads the entire file
<code>readline()</code>	Reads one line
<code>readlines()</code>	Reads all lines into a list

Example 1

```
file = open("data.txt", "r", encoding="utf-8")
content = file.read()
print(content)
file.close()
```

Output: Hello Python
Welcome to file handling

16.1.5 Reading Line by Line

Reading line by line is useful for large files.

Syntax

for line in file:

statement

1. This reads one line at a time.
2. It is memory-friendly.
3. It is better than reading a very large file at once.

Example 1

with open("data.txt", "r", encoding="utf-8") as file:

for line in file:

print(line.strip())

Output: Hello Python

Welcome to file handling

`strip()` removes extra newline characters from the line.

16.1.6 Writing Files

Writing means saving data into a file.

Syntax

open("file_name", "w")

1. "w" means write mode. If the file does not exist, Python creates it.
2. If the file already exists, old content is removed.
3. New content is written from the beginning.

Example 1

with open("data.txt", "w", encoding="utf-8") as file:

file.write("Hello Python")

This writes text into `data.txt`.

NOTE: Write mode overwrites old file content.

16.1.7 Appending Files

Appending means adding new data at the end of an existing file.

Syntax

```
open("file_name", "a")
```

Explanation

1. "a" means append mode. New data is added at the end.
2. Old content is not removed. If the file does not exist, Python creates it.

Example 1

with open("data.txt", "a", encoding="utf-8") as file:

```
    file.write("\nNew line added")
```

16.1.8 File Modes

File modes tell Python how the file should be opened.

Mode	Meaning	File Must Exist?	Old Content
"r"	Read text file	Yes	Not changed
"w"	Write text file	No	Removed if file exists
"a"	Append text file	No	Kept
"x"	Create new file	No	Error if file exists
"b"	Binary mode	Depends	Depends
"t"	Text mode	Depends	Depends
"+"	Read and write	Depends	Depends

Common Mode Combinations

Mode	Meaning
"rt"	Read text file
"wt"	Write text file
"at"	Append text file
"rb"	Read binary file
"wb"	Write binary file
"r+"	Read and write existing file
"w+"	Write and read, overwrites file
"a+"	Append and read

Important point: Default mode is "rt", which means read text.

16.1.9 **with** Statement

The **with** statement is the recommended way to work with files.

Syntax

```
with open("file_name", "mode") as file:  
    statement
```

1. **with** automatically closes the file. It is safer than manually using `close()`.
2. It works even if an error happens inside the block. It makes file handling cleaner.

Example 1

```
with open("data.txt", "r", encoding="utf-8") as file:  
    content = file.read()  
    print(content)
```

No need to write:

```
file.close()
```

16.1.10 File Object Methods

Method	Meaning
<code>read()</code>	Reads entire file
<code>read(size)</code>	Reads given number of characters/bytes
<code>readline()</code>	Reads one line
<code>readlines()</code>	Reads all lines into a list
<code>write(text)</code>	Writes text
<code>writelines(list)</code>	Writes multiple strings
<code>seek(position)</code>	Moves file pointer
<code>tell()</code>	Returns current file pointer position
<code>close()</code>	Closes file
<code>flush()</code>	Forces buffered data to be written

16.1.11 Binary Files

Binary files store data in bytes.

- Images
- Videos
- Audio files
- PDF files
- Executable files

Syntax

```
open("file_name", "rb")  
open("file_name", "wb")
```

Explanation

1. `"rb"` means read binary. `"wb"` means write binary.
2. Binary mode works with bytes, not normal strings.
3. Encoding is not used in binary mode. Binary files are useful for non-text data.

16.1.12 File Paths

Type	Meaning	Example
Relative path	Path from current folder	"data.txt"
Absolute path	Full path from root/drive	"C:/Users/Aman/data.txt"
Folder path	File inside folder	"files/data.txt"
Parent folder path	File in parent folder	"../data.txt"

16.1.13 Basic **os** Module

The **os** module helps work with the operating system.

Syntax

```
import os
```

Common **os** Functions

Function	Meaning
<code>os.getcwd()</code>	Gets current working directory
<code>os.listdir()</code>	Lists files and folders
<code>os.mkdir("folder")</code>	Creates folder
<code>os.remove("file.txt")</code>	Deletes file
<code>os.rename("old", "new")</code>	Renames file/folder
<code>os.path.exists(path)</code>	Checks if path exists
<code>os.path.isfile(path)</code>	Checks if path is a file
<code>os.path.isdir(path)</code>	Checks if path is a folder
<code>os.path.join(a, b)</code>	Joins paths safely

16.1.14 Basic **pathlib** Module

`pathlib` is a modern way to work with file paths.

Syntax

```
from pathlib import Path
```

1. `pathlib` works with paths as objects. It is cleaner than manually joining strings.
2. It is recommended for modern Python code. It works across operating systems.

Common `pathlib` Methods

Code	Meaning
<code>Path("data.txt")</code>	Creates path object
<code>path.exists()</code>	Checks if path exists
<code>path.is_file()</code>	Checks if path is file
<code>path.is_dir()</code>	Checks if path is folder
<code>path.read_text()</code>	Reads text file
<code>path.write_text()</code>	Writes text file
<code>path.mkdir()</code>	Creates folder
<code>path.unlink()</code>	Deletes file

16.1.15 Encoding

Encoding decides how text is stored in bytes.

Syntax: `open("file.txt", "r", encoding="utf-8")`

1. Text files store text using an encoding.
2. `utf-8` supports most common characters.
3. Always mention encoding when working with text files.
4. Encoding problems can cause `UnicodeDecodeError`.

Example 1

```
with open("data.txt", "w", encoding="utf-8") as file:  
    file.write("Python is easy")
```

16.2 Exception Handling

An exception is an error that happens while the program is running. Exception handling allows us to handle errors safely without crashing the whole program.

Example Runtime Error

```
number = int("abc")
```

Output: ValueError: invalid literal for int() with base 10: 'abc'

Why Exception Handling is Used

1. To prevent sudden program crashes.
2. To handle risky code safely.
3. To clean up resources properly.
4. To continue program execution when possible.

16.2.1 try-except

`try-except` is used to handle exceptions.

Syntax

try:

 risky_code

except ExceptionType:

 handling_code

1. Code that may cause an error is written inside `try`.
2. Error handling code is written inside `except`.
3. If an exception occurs, Python jumps to the matching `except` block.
4. If no exception occurs, the `except` block is skipped.

Flow Chart

try block runs

|

v

Error occurs?

|

├ Yes -> except block runs

|

└ No -> except block skipped

Example 1

PYTHON CODE

```
try:
    number = int("abc")
except ValueError:
    print("Invalid number")
```

Output: Invalid number

16.2.2 Catching Exception Object

We can store the exception object using **as**.

Syntax

```
except ExceptionType as error:
    statement
```

Example 1

PYTHON CODE

```
try:
    number = int("abc")
except ValueError as error:
    print(error)
```

Output: invalid literal for int() with base 10: 'abc'

16.2.3 Multiple **except** Blocks

Multiple **except** blocks are used to handle different errors differently.

Syntax

PYTHON CODE

```
try:
    risky_code
except ErrorType1:
    handling_code
except ErrorType2:
    handling_code
```

Explanation

1. Different exceptions can need different handling.
2. Specific exceptions should come before general exceptions.
3. Python runs only the first matching `except` block.
4. `Exception` should usually come last.

Example 1

PYTHON CODE

```
try:
    numbers = [10, 20, 30]
    print(numbers[5])
except IndexError:
    print("Invalid index")
except ValueError:
    print("Invalid value")
except Exception:
    print("Some other error occurred")
```

Output: Invalid index

16.2.4 Handling Multiple Exceptions Together

Multiple exception types can be handled in one `except` block.

Syntax

PYTHON CODE

```
except (ErrorType1, ErrorType2):
    statement
```

Example 1

PYTHON CODE

```
try:
    value = int("abc")
except (ValueError, TypeError):
    print("Invalid conversion")
```

Output: Invalid conversion

16.2.5 **else** in Exception Handling

The **else** block runs only when no exception occurs.

Syntax

PYTHON CODE

```
try:
    risky_code
except ExceptionType:
    handling_code
else:
    code_if_no_error
```

1. **else** runs only if the **try** block has no exception. It is useful for success logic.
2. It keeps error handling separate from normal code.

PYTHON CODE

```
try:
    number = int("100")
except ValueError:
    print("Invalid number")
else:
    print("Conversion successful:", number)
```

Output: Conversion successful: 100

16.2.6 **finally**

The **finally** block always runs.

Syntax

PYTHON CODE

```
try:
    risky_code
except ExceptionType:
    handling_code
finally:
    cleanup_code
```

Explanation

1. **finally** runs whether an exception occurs or not.
2. It is used for cleanup operations.
3. It is useful for closing files, network connections, or database connections.
4. With file handling, **with** is usually cleaner than manually using **finally**.

Example 1

PYTHON CODE

```
try:
    file = open("data.txt", "r", encoding="utf-8")
    print(file.read())
except FileNotFoundError:
    print("File not found")
finally:
    print("Finally block executed")
```

Output: Finally block executed

The file output depends on whether the file exists.

16.2.7 try-except-else-finally Flow

```
try
|
v
Error occurs?
|
|—— Yes -> except -> finally
|
|—— No -> else -> finally
```

Structure

PYTHON CODE

```
try:
    risky_code
except ExceptionType:
    error_handling
else:
    success_code
finally:
    cleanup_code
```

16.2.8 Raising Exceptions

Raising an exception means creating an error manually.

Syntax

```
raise ExceptionType("message")
```

1. `raise` is used to manually trigger an exception.
2. It is useful for validation.
3. It stops normal flow and sends control to exception handling.
4. We can raise built-in or custom exceptions.

Example 1

PYTHON CODE

```
age = -5
if age < 0:
    raise ValueError("Age cannot be negative")
```

Output: ValueError: Age cannot be negative

16.2.9 Re-raising Exceptions

Re-raising means raising the same exception again after catching it.

Syntax

`raise`

1. Plain `raise` is used inside an `except` block.
2. It re-raises the current exception.
3. It is useful when we want to log an error but still allow it to continue upward.

Example 1

PYTHON CODE

```
try:
    number = int("abc")
except ValueError:
    print("Logging error")
    raise
```

Output: Logging error

ValueError: invalid literal for int() with base 10: 'abc'

16.2.10 Custom Exceptions

A custom exception is a user-defined exception class.

Syntax

PYTHON CODE

```
class CustomError(Exception):  
    pass
```

Explanation

1. Custom exceptions are created by inheriting from `Exception`.
2. They make errors more meaningful.
3. They are useful in larger projects.
4. Custom exception names usually end with `Error`.

Example 1

PYTHON CODE

```
class InsufficientBalanceError(Exception):  
    pass  
  
balance = 500  
withdraw_amount = 1000  
if withdraw_amount > balance:  
    raise InsufficientBalanceError("Not enough  
balance")
```

Output: InsufficientBalanceError: Not enough balance

16.2.11 Exception Hierarchy

BaseException

|
v

Exception

|

├── ArithmeticError
├── LookupError
├── OSError
├── RuntimeError
├── ValueError
└── TypeError

Exception	When It Happens
<code>ValueError</code>	Correct type, invalid value
<code>TypeError</code>	Operation with wrong type
<code>NameError</code>	Name not defined
<code>IndexError</code>	Invalid list/tuple index
<code>KeyError</code>	Missing dictionary key
<code>FileNotFoundError</code>	File does not exist
<code>ZeroDivisionError</code>	Division by zero
<code>ImportError</code>	Import fails
<code>ModuleNotFoundError</code>	Module not found
<code>PermissionError</code>	No permission for file operation
<code>UnicodeDecodeError</code>	Text decoding fails

16.2.12 Bare `except` Warning

A bare `except` catches almost everything and should usually be avoided.

Bad Style

PYTHON CODE

```
try:
    number = int("abc")
except:
    print("Error")
```

Better Style

PYTHON CODE

```
try:
    number = int("abc")
except ValueError:
    print("Invalid number")
```

Why Bare `except` is Bad

Problem	Explanation
Too broad	Catches errors you did not expect
Hides bugs	Makes debugging difficult
Poor readability	Does not show what error is handled
Can catch system-exit style errors	Not safe for normal use

16.2.13 File Handling with Exception Handling

Error	Meaning
<code>FileNotFoundError</code>	File does not exist
<code>PermissionError</code>	No permission
<code>IsADirectoryError</code>	Expected file but got folder
<code>UnicodeDecodeError</code>	Encoding issue
<code>OSError</code>	General operating system error

Example 1

PYTHON CODE

```
try:
    with open("data.txt", "r", encoding="utf-8")
    as file:
        content = file.read()
except FileNotFoundError:
    print("File not found")
else:
    print(content)
```

16.3 File Formats

16.3.1 Text Files

A text file stores human-readable text.

Examples:

- .txt
- .log
- .md
- .csv
- .json
- .xml

Explanation

1. Text files store characters.
2. Text files should be opened with encoding.
3. Common modes are "r", "w", and "a".
4. Text mode is default in Python.

16.3.2 CSV Files

CSV means **Comma-Separated Values**. CSV files store table-like data.

Example CSV Data

name,age,course

Aman,21,Python

1. CSV files store rows and columns. Values are commonly separated by commas.
2. Python provides the built-in `csv` module. CSV is commonly used for spreadsheets and data export. Use `newline=""` when opening CSV files for writing.

Reading CSV File

PYTHON CODE

```
import csv

with open("students.csv", "r",
encoding="utf-8") as file:
    reader = csv.reader(file)

    for row in reader:
        print(row)
```

Possible output:['name', 'age', 'course']
 ['Aman', '21', 'Python']
 ['Riya', '20', 'Java']

Writing CSV File

PYTHON CODE

```
import csv

with open("students.csv", "w",
encoding="utf-8", newline="") as file:
    writer = csv.writer(file)

    writer.writerow(["name", "age", "course"])
    writer.writerow(["Aman", 21, "Python"])
```

16.3.3 `csv.reader` vs `csv.DictReader`

Tool	Output Type	Best Use
<code>csv.reader()</code>	List for each row	Simple row-based reading
<code>csv.DictReader()</code>	Dictionary for each row	Column-name based reading
<code>csv.writer()</code>	Writes rows	Simple CSV writing
<code>csv.DictWriter()</code>	Writes dictionaries	Column-name based writing

16.3.4 JSON Files

JSON means **JavaScript Object Notation**. JSON is commonly used for APIs and configuration files.

Example JSON Data

```
PYTHON CODE
{
    "name": "Aman",
    "age": 21,
    "course": "Python"
}
```

Explanation

1. JSON stores data in key-value format. It looks similar to Python dictionaries.
2. Python provides the built-in `json` module.
3. JSON is very common in web development and APIs. JSON keys must be strings.

Python and JSON Conversion

Python	JSON
<code>dict</code>	object
<code>list</code>	array
<code>str</code>	string
<code>int, float</code>	number
<code>True</code>	true
<code>False</code>	false
<code>None</code>	null

Reading JSON File

```
PYTHON CODE
import json

with open("student.json", "r",
encoding="utf-8") as file:
    data = json.load(file)
    print(data["name"])
```

Writing JSON File

PYTHON CODE

```
import json

student = {
    "name": "Aman",
    "age": 21,
    "course": "Python"
}

with open("student.json", "w",
encoding="utf-8") as file:
    json.dump(student, file, indent=4)
```

16.3.5 json.load() vs json.loads()

Function	Meaning	Input
<code>json.load()</code>	Reads JSON from file	File object
<code>json.loads()</code>	Reads JSON from string	JSON string
<code>json.dump()</code>	Writes JSON to file	File object
<code>json.dumps()</code>	Converts Python object to JSON string	Python object

16.3.6 XML Files

XML means **Extensible Markup Language**.

XML stores data using tags.

Example XML Data

```
<student>
  <name>Aman</name>
  <age>21</age>
  <course>Python</course>
</student>
```

Chapter 17. Advanced Python Concepts

Advanced Python concepts help us write cleaner, memory-efficient, reusable, and professional Python code.

This chapter covers:

1. Decorators
2. Generators and Iterators
3. Context Managers
4. Regular Expressions

17.1 Decorators

17.1.1 Decorators

A **decorator** is a function that takes another function and adds extra behavior to it without changing the original function code.

Basic Idea

Decorator = function that modifies/enhances another function

Syntax

```
</> Python

@decorator_name
def function_name():
    statement
```

This=>

```
</> Python

@decorator_name
def function_name():
    statement
```

is equal to:

```
</> Python

def function_name():
    statement

function_name = decorator_name(function_name)
```

1. Decorators are based on functions being first-class objects. A decorator takes a function as input.
2. It usually defines an inner wrapper function. It returns the wrapper function.
3. The wrapper adds extra behavior before or after the original function.

Flow Chart

Original function



Decorator receives function



Wrapper adds extra behavior



Decorated function is returned

17.1.2 Function Decorators

A function decorator is used to add extra behavior to a function.

Syntax

Python

```
def decorator_name(func):  
    def wrapper():  
        extra_code  
        func()  
        extra_code  
    return wrapper
```

PYTHON CODE

```
def my_decorator(func):  
    def wrapper():  
        print("Before function")  
        func()  
        print("After function")  
    return wrapper  
  
@my_decorator  
def greet():  
    print("Hello")  
greet()
```

Output: Before function

Hello

After function

1. `my_decorator` receives `greet`. `wrapper` adds extra behavior.
2. `greet()` now actually calls `wrapper()`. Inside `wrapper`, the original `greet()` is called.

17.1.3 Decorators with Function Arguments

If the decorated function has arguments, the wrapper should accept `*args` and `**kwargs`.

Syntax

PYTHON CODE

```
def decorator_name(func):
    def wrapper(*args, **kwargs):
        return func(*args, **kwargs)
    return wrapper
```

Example 1

PYTHON CODE

```
def show_call(func):
    def wrapper(*args, **kwargs):
        print("Function is being called")
        return func(*args, **kwargs)
    return wrapper

@show_call
def add(a, b):
    return a + b

print(add(10, 20))
```

Output: Function is being called
30

17.1.4 `functools.wraps`

`functools.wraps` preserves the original function's metadata. Without `wraps`, the decorated function may lose its original name and docstring.

Syntax

</> Python

```
from functools import wraps

def decorator_name(func):
    @wraps(func)
    def wrapper(*args, **kwargs):
        return func(*args, **kwargs)
    return wrapper
```


1. Decorators replace the original function with a wrapper.
2. Because of this, metadata like function name and docstring can be lost.
3. `@wraps(func)` copies metadata from the original function to the wrapper.
4. Professional decorators should usually use `functools.wraps`.

PYTHON CODE

```
from functools import wraps

def my_decorator(func):
    @wraps(func)
    def wrapper(*args, **kwargs):
        return func(*args, **kwargs)
    return wrapper

@my_decorator
def greet():
    """This function greets the user."""
    print("Hello")

print(greet.__name__)
print(greet.__doc__)
```

Output: greet

This function greets the user.

17.1.5 Decorators with Arguments

Decorators can also accept their own arguments. This requires one extra outer function.

Syntax

PYTHON CODE

```
def decorator_with_args(value):
    def actual_decorator(func):
        def wrapper(*args, **kwargs):
            statement
            return func(*args, **kwargs)
        return wrapper
    return actual_decorator
```

1. The outer function receives decorator arguments. The middle function receives the original function.
2. The inner wrapper runs extra logic. This is useful when decorator behavior needs customization.

PYTHON CODE

```
from functools import wraps

def repeat(times):
    def decorator(func):
        @wraps(func)
        def wrapper(*args, **kwargs):
            for _ in range(times):
                func(*args, **kwargs)
            return wrapper
        return decorator

@repeat(3)
def greet():
    print("Hello")

greet()
```

Output: Hello

Hello

Hello

17.1.6 Multiple Decorators

A function can have more than one decorator.

Syntax

PYTHON CODE

```
@decorator1
@decorator2
def function_name():
    statement
```

NOTE: Decorators are applied from bottom to top.

PYTHON CODE

```
@decorator1
@decorator2
def greet():
    pass
```

is equal to:

PYTHON CODE

```
greet = decorator1(decorator2(greet))
```

17.1.7 Class Decorators

A class decorator modifies or enhances a class.

Syntax

PYTHON CODE

```
@decorator_name  
class ClassName:  
    statement
```

1. A class decorator receives a class as input. It can add or modify class behavior.
2. It returns the modified class. Class decorators are less common than function decorators.
3. They are useful for logging, registration, validation, and configuration.

17.1.8 Built-in and Standard Decorators

Decorator	From	Purpose
<code>@staticmethod</code>	Built-in	Creates static method
<code>@classmethod</code>	Built-in	Creates class method
<code>@property</code>	Built-in	Creates managed attribute
<code>@property_name.setter</code>	Built-in	Adds setter to property
<code>@dataclass</code>	<code>dataclasses</code>	Generates data class methods
<code>@abstractmethod</code>	<code>abc</code>	Defines abstract method
<code>@wraps</code>	<code>functools</code>	Preserves function metadata
<code>@lru_cache</code>	<code>functools</code>	Caches function results

17.2 Generators and Iterators

Generators and iterators are used to work with values one at a time. They are memory-efficient because they do not need to store all values at once.

17.2.1 Iterable vs Iterator

Explanation

An iterable is an object we can loop over. An iterator is an object that gives values one by one using `next()`.

Term	Meaning	Example
Iterable	Can be looped over	list, tuple, string, dictionary, set, range
Iterator	Gives next value using <code>next()</code>	object from <code>iter()</code>

Example 1

PYTHON CODE

```
numbers = [10, 20, 30]
```

```
iterator = iter(numbers)
```

```
print(next(iterator))
```

```
print(next(iterator))
```

```
print(next(iterator))
```

Output:

10

20

30

17.2.2 Iterator Protocol

The iterator protocol uses two methods:

1. `__iter__()`
2. `__next__()`

Syntax

PYTHON CODE

```
def __iter__(self):  
    return self
```

```
def __next__(self):  
    return next_value
```

Explanation

1. `__iter__()` returns an iterator object.
2. `__next__()` returns the next value.
3. When no values are left, `__next__()` raises `StopIteration`.
4. `for` loops use this protocol internally.

Example 1

PYTHON CODE

```
class CountUpTo:
    def __init__(self, limit):
        self.current = 1
        self.limit = limit

    def __iter__(self):
        return self

    def __next__(self):
        if self.current > self.limit:
            raise StopIteration

        value = self.current
        self.current += 1
        return value

counter = CountUpTo(3)

for number in counter:
    print(number)
```

Output:

1
2
3

17.2.3 `__iter__`

`__iter__` returns an iterator object.

Syntax

```
PYTHON CODE
def __iter__(self):
    return self
```

Explanation

1. `__iter__()` is called by `iter(object)`.
2. It is also used automatically for loops.
3. If the object itself is the iterator, it returns `self`.
4. If the object is only iterable, it can return a separate iterator object.

Example 1

```
PYTHON CODE
numbers = [10, 20, 30]

iterator = iter(numbers)
print(iterator)
```

Output: A list_iterator object

17.2.4 `__next__`

`__next__` returns the next value from an iterator.

Syntax

```
PYTHON CODE
def __next__(self):
    return value
```

1. `__next__()` is called by `next(iterator)`.
2. It returns one value at a time.
3. It should raise `StopIteration` when there are no values left.
4. Without `StopIteration`, the iteration may not stop correctly.

Example 1

PYTHON CODE

```
numbers = iter([10, 20])
```

```
print(next(numbers))
```

```
print(next(numbers))
```

```
print(next(numbers))
```

Output:

10

20

StopIteration

The third `next()` raises `StopIteration` because no values are left.

17.2.5 Generator Functions

A generator function is a function that uses `yield`.

Syntax

PYTHON CODE

```
def generator_name():  
    yield value
```

Explanation

1. A generator function returns a generator object.
2. It does not run fully at once.
3. It pauses at `yield`.
4. When `next()` is called again, it continues from where it paused.
5. Generators are memory-efficient.

Example 1

PYTHON CODE

```
def count_up_to_three:  
    yield 1  
    yield 2  
    yield 3
```

Correct code:

PYTHON CODE

```
def count_up_to_three():  
    yield 1  
    yield 2  
    yield 3  
  
counter = count_up_to_three()  
  
print(next(counter))  
print(next(counter))  
print(next(counter))
```

Output:

1
2
3

17.2.6 yield

yield is used to return a value from a generator without ending the function permanently.

Syntax

yield value

1. **yield** gives one value at a time. It pauses the function.
2. The function state is saved.
3. On the next call, execution continues after the previous **yield**.
4. When the function finishes, Python raises **StopIteration**.

return vs yield

Point	return	yield
Used in	Normal functions	Generator functions
Gives	Final result	One value at a time
Function state	Ends function	Pauses function
Memory use	May store full result	Memory-efficient
Output	Normal value	Generator object

17.2.7 Generator Expressions

A generator expression is a short way to create a generator.

Syntax

(expression for item in iterable)

Explanation

1. Generator expressions look like list comprehensions.
2. They use parentheses `()`.
3. They produce values lazily.
4. They do not create a full list in memory.
5. They are useful for large data.

Example 1

PYTHON CODE

```
squares = (number * number for number in
range(1, 5))
```

```
for value in squares:
    print(value)
```

Output:

```
1
4
9
16
```

17.2.8 `yield from`

`yield from` is used to yield values from another iterable or generator.

Syntax

`yield from iterable`

1. `yield from` simplifies nested loops in generators. It passes values from another iterable directly.
2. It is useful when one generator uses another generator.
3. It makes generator code cleaner.

17.2.9 One-time Consumption of Iterators

Iterators and generators are usually consumed once.

Explanation

1. Once a value is taken from an iterator, it is not repeated.
2. After all values are consumed, the iterator is exhausted.
3. To iterate again, create a new iterator or generator.

Example 1

```
values = (x for x in range(3))
```

```
print(list(values))
```

```
print(list(values))
```

Output:

```
[0, 1, 2]
```

```
[]
```

The second list is empty because the generator was already consumed.

17.2.10 **itertools**

itertools is a standard library module for working with iterators.

Syntax

```
import itertools
```

Explanation

1. **itertools** provides memory-efficient iterator tools.
2. It is useful for combinations, permutations, counting, grouping, and chaining.
3. Many **itertools** functions return iterators.
4. Results may need to be converted using **list()** for display.

Common **itertools** Tools

Tool	Meaning
<code>count()</code>	Infinite counting
<code>cycle()</code>	Repeats iterable forever
<code>repeat()</code>	Repeats a value
<code>chain()</code>	Joins iterables lazily
<code>islice()</code>	Slices an iterator
<code>combinations()</code>	Unique combinations
<code>permutations()</code>	All possible arrangements
<code>product()</code>	Cartesian product
<code>groupby()</code>	Groups consecutive matching items

17.2.11 Memory Efficiency

Generators are memory-efficient because they produce values only when needed.

1. Lists store all values in memory.
2. Generators produce one value at a time.
3. This is called lazy evaluation.
4. Generators are useful for large files, large ranges, and data streams.

Example 1

PYTHON CODE

```
numbers = (number for number in
range(1000000))
print(next(numbers))
print(next(numbers))
```

Output:

0

1

Only needed values are produced.

17.3 Context Managers

A context manager is an object that manages setup and cleanup automatically.

The most common example is file handling using `with`.

Syntax

with resource as name:

statement

1. Context managers are used with the `with` statement.
2. They handle setup before the block starts.
3. They handle cleanup after the block ends.
4. Cleanup happens even if an error occurs.
5. They are useful for files, database connections, locks, and network connections.

Flow Chart

with block starts

|

v

__enter__ runs

|

v

Block code runs

|

v

__exit__ runs

Example 1

PYTHON CODE

```
with open("data.txt", "w", encoding="utf-8") as  
file:
```

```
    file.write("Hello Python")
```

The file closes automatically after the `with` block.

17.3.1 `__enter__`

`__enter__` runs at the beginning of a `with` block.

Syntax

Python

```
def __enter__(self):  
    return self
```

1. `__enter__()` is called when the `with` block starts. It usually prepares or opens a resource.
2. The value returned by `__enter__()` is stored after `as`. It is part of the context manager protocol.

17.3.2 `__exit__`

`__exit__` runs when the `with` block ends.

Syntax

```
def __exit__(self, exc_type, exc_value, traceback):  
    statement
```

1. `__exit__()` is called at the end of the `with` block. It is used for cleanup.
2. It receives exception details if an error occurs. If it returns `True`, the exception is suppressed.
3. If it returns `False` or `None`, the exception continues normally.

`__exit__` Parameters

Parameter	Meaning
<code>exc_type</code>	Exception class/type
<code>exc_value</code>	Exception object/message
<code>traceback</code>	Traceback object
<code>None, None, None</code>	Passed if no exception occurred

17.3.3 Custom Context Manager Using Class

Syntax

```
PYTHON CODE
class ClassName:
    def __enter__(self):
        return self

    def __exit__(self, exc_type, exc_value,
        traceback):
        cleanup_code
```

Example 1

```
PYTHON CODE
class SimpleContext:
    def __enter__(self):
        print("Entering")
        return self

    def __exit__(self, exc_type, exc_value,
        traceback):
        print("Exiting")

with SimpleContext():
    print("Inside block")
```

Output: Entering
Inside block
Exiting

17.3.4 contextlib

`contextlib` is a standard library module for creating and working with context managers.

Syntax

```
from contextlib import contextmanager
```

1. `contextlib` provides utilities for context managers.
2. It helps create context managers without writing a full class.
3. The most common tool is `@contextmanager`. It is useful for simple setup-cleanup logic.

17.3.5 @contextmanager

`@contextmanager` converts a generator function into a context manager.

Syntax

```
from contextlib import contextmanager
```

```
@contextmanager
def manager_name():
    setup_code
    yield value
    cleanup_code
```

Explanation

1. Code before `yield` works like `__enter__`. The yielded value is used after `as`.
2. Code after `yield` works like `__exit__`. Cleanup should be placed in `finally` for safety.
3. This is useful for simple context managers.

Class Context Manager vs @contextmanager

Point	Class-based	@contextmanager
Uses	<code>__enter__</code> , <code>__exit__</code>	<code>yield</code>
Best for	Complex managers	Simple managers
Code length	More	Less

16.3.6 Resource Management

Resource management means safely opening and closing resources.

Resource	Why Context Manager Helps
File	Closes automatically
Database connection	Disconnects safely
Lock	Releases lock
Network connection	Closes connection
Temporary setup	Cleans up after use

17.4 Regular Expressions

A regular expression, or **regex**, is a pattern used to search, match, extract, replace, or split text.

Basic Idea

Regex = pattern matching for text

Example Uses

1. Validate email format.
 2. Extract phone numbers.
 3. Find dates in text.
 4. Replace unwanted characters.
 5. Split text using complex patterns.
-

17.4.1 **re** Module

Python provides the built-in **re** module for regular expressions.

Syntax

```
import re
```

Explanation

1. **re** is Python's regular expression module.
2. It provides functions like **search()**, **match()**, **findall()**, **sub()**, and **split()**.
3. Regex patterns are usually written as raw strings.
4. Raw strings use prefix **r**.

Raw String Example

```
pattern = r"\d+"
```

This is preferred over:

```
pattern = "\\d+"
```

NOTE: Use raw strings for regex patterns to avoid escape-character confusion.

17.4.2 Pattern Matching

Pattern matching means checking whether text follows a specific pattern.

PYTHON CODE

```
import re

text = "My age is 21"
result = re.search(r"\d+", text)
print(result.group())
```

Output: 21

17.4.3 Regex Metacharacters

Metacharacters are special characters with special meaning in regex.

Pattern	Meaning	Example Match
.	Any character except newline	a, 1, @
^	Start of string	^Hello
\$	End of string	world\$
*	Zero or more	a*
+	One or more	a+
?	Zero or one	a?
{n}	Exactly n times	a{3}
{n,}	n or more times	a{2,}
{n,m}	Between n and m times	a{2,4}
[]	Character set	[abc]
[^]	Not in set	[^0-9]
,	,	OR
()	Group	(ab)+
\	Escape character	\.

17.4.4 Common Regex Character Classes

Pattern	Meaning
<code>\d</code>	Digit, same as <code>[0-9]</code>
<code>\D</code>	Non-digit
<code>\w</code>	Word character: letters, digits, underscore
<code>\W</code>	Non-word character
<code>\s</code>	Whitespace
<code>\S</code>	Non-whitespace
<code>\b</code>	Word boundary
<code>\A</code>	Start of string
<code>\Z</code>	End of string

17.4.5 Groups and Capturing

Groups are created using parentheses `()`.

They are used to capture parts of a match.

Syntax

`(pattern)`

Explanation

1. Parentheses create groups.
2. Capturing groups store matched parts.
3. `group(0)` gives the full match.
4. `group(1)` gives the first captured group.
5. `group(2)` gives the second captured group.

17.4.6 Non-capturing Groups

A non-capturing group groups a pattern without storing it.

Syntax

`(?:pattern)`

Explanation

1. Non-capturing groups are used for grouping only.
2. They do not create a captured group number.
3. They are useful when we need grouping but do not need to extract that part.

17.4.7 `search()`

`search()` looks for the first match anywhere in the string.

Syntax

`re.search(pattern, text)`

Explanation

1. Searches the entire string. Returns the first match object.
2. Returns `None` if no match is found.
3. Use `.group()` to get matched text.

17.4.8 `match()`

`match()` checks for a match only at the beginning of the string.

Syntax

`re.match(pattern, text)`

Explanation

1. Checks only from the start of the string. Returns match object if pattern matches at the beginning.
2. Returns `None` if pattern appears later.

17.4.9 fullmatch()

`fullmatch()` checks whether the whole string matches the pattern.

Syntax

`re.fullmatch(pattern, text)`

Explanation

1. It checks the entire string.
2. It returns a match only if the full string matches.
3. It is useful for validation.

17.4.10 findall()

`findall()` returns all non-overlapping matches as a list.

Syntax

`re.findall(pattern, text)`

Explanation

1. Finds all matches.
2. Returns a list.
3. If the pattern has capturing groups, it returns captured groups.
4. If no match is found, it returns an empty list.

17.4.11 finditer()

`finditer()` returns an iterator of match objects.

Syntax

`re.finditer(pattern, text)`

1. It finds all matches. It returns match objects one by one.
2. It is useful when we need match positions.
3. It is more memory-friendly for large text than `findall()`.

17.4.12 `sub()`

`sub()` replaces matched text with new text.

Syntax

```
re.sub(pattern, replacement, text)
```

Explanation

1. Finds matches using pattern. Replaces them with replacement text.
2. Returns the modified string. Original string is not changed.

17.4.13 `split()`

`split()` splits a string using a regex pattern.

Syntax

```
re.split(pattern, text)
```

1. Splits text wherever the pattern matches.
2. More powerful than normal string `split()`.
3. Useful when separators are multiple or irregular.

17.4.14 `re.compile()`

`re.compile()` creates a reusable regex pattern object.

Syntax

```
pattern = re.compile(r"pattern")
```

Explanation

1. Compiled patterns can be reused.
2. This makes code cleaner when using the same pattern many times.
3. It can be useful for repeated matching.
4. Pattern objects have methods like `search()`, `findall()`, `sub()`, and `split()`

Chapter 18. Concurrent and Asynchronous Programming

Concurrent programming means handling multiple tasks during the same time period. It does not always mean tasks are running at the exact same instant.

Basic Terms

Term	Meaning
Concurrency	Managing multiple tasks at once
Parallelism	Running multiple tasks at the same time
I/O-bound task	Task waiting for input/output, like file, network, database
CPU-bound task	Task doing heavy calculation
Thread	Lightweight unit of execution inside a process
Process	Independent program execution with separate memory
Async programming	Single-threaded cooperative concurrency using <code>async</code> and <code>await</code>

Choosing the Right Tool

Task Type	Better Tool
Waiting for network/API/file/database	<code>threading</code> , <code>ThreadPoolExecutor</code> , or <code>asyncio</code>
Heavy CPU calculation	<code>multiprocessing</code> or <code>ProcessPoolExecutor</code>
Many async network operations	<code>asyncio</code>
Simple parallel task execution	<code>concurrent.futures</code>

18.1 Multithreading

Multithreading means running multiple threads inside the same process.


Python provides the `threading` module for thread-based concurrency. The official docs describe `threading` as thread-based parallelism and also point to `ThreadPoolExecutor` as a higher-level interface.

Syntax

import threading

1. A thread is a small unit of execution.
2. Multiple threads can run inside one process.
3. Threads share the same memory.
4. Threads are useful for I/O-bound tasks.
5. Threads can cause race conditions when shared data is modified.
6. Locks are used to protect shared data.

Flow Chart

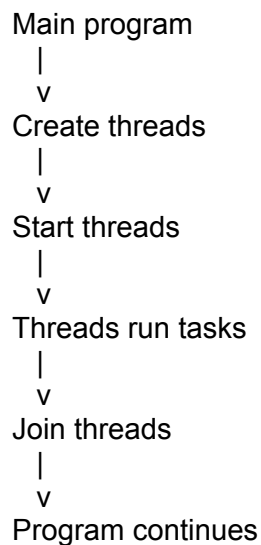

18.1.1 threading Module

The `threading` module provides classes and tools for working with threads.

Tool	Purpose
<code>Thread</code>	Creates and manages a thread
<code>Lock</code>	Prevents multiple threads from changing shared data at the same time
<code>RLock</code>	Re-entrant lock; same thread can acquire it multiple times
<code>Semaphore</code>	Limits how many threads can access a resource
<code>Event</code>	Allows communication between threads
<code>Condition</code>	Allows threads to wait for a condition
<code>current_thread()</code>	Returns current thread object

<code>active_count()</code>	Returns number of active threads
-----------------------------	----------------------------------

18.1.2 Creating Threads

Syntax

```
thread = threading.Thread(target=function_name)
```

```
thread.start()
```

```
thread.join()
```

Explanation

1. `target` is the function that the thread will run.
2. `start()` starts the thread.
3. `join()` waits for the thread to finish.
4. Without `join()`, the main program may continue while the thread is still running.

Example 1

PYTHON CODE

```
import threading
```

```
def show_message():
```

```
    print("Thread is running")
```

```
thread =
```

```
threading.Thread(target=show_message)
```

```
thread.start()
```

```
thread.join()
```

```
print("Main program finished")
```

Output:

Thread is running

Main program finished

18.1.3 Managing Threads

Method / Attribute	Meaning
<code>start()</code>	Starts thread execution
<code>join()</code>	Waits for thread to finish
<code>is_alive()</code>	Checks whether thread is still running
<code>name</code>	Thread name
<code>daemon</code>	If <code>True</code> , thread stops when main program exits

18.1.4 Race Conditions

A race condition happens when multiple threads access and modify shared data at the same time, causing incorrect results.

Explanation

1. Threads share memory.
2. If two threads change the same variable together, the result can become unpredictable.
3. This problem is called a race condition.
4. Locks are used to avoid race conditions.

Example Idea

Thread 1 reads count = 0

Thread 2 reads count = 0

Thread 1 updates count to 1

Thread 2 updates count to 1

Expected result: 2

Actual result: 1

18.1.5 Locks

A lock allows only one thread to access a critical section at a time.

Syntax

```
lock = threading.Lock()
```

```
with lock:
```

```
    shared_data_update
```

1. A lock protects shared data.
2. Only one thread can hold the lock at a time.
3. Other threads must wait.
4. Use **with lock**: because it releases the lock automatically.

Example 1

PYTHON CODE

```
import threading
```

```
count = 0
```

```
lock = threading.Lock()
```

```
def increase():
```

```
    global count
```

```
    for _ in range(100000):
```

```
        with lock:
```

```
            count += 1
```

```
thread1 = threading.Thread(target=increase)
```

```
thread2 = threading.Thread(target=increase)
```

```
thread1.start()
```

```
thread2.start()
```

```
thread1.join()
```

```
thread2.join()
```

```
print(count)
```

Output: 200000

18.1.6 Synchronization

Synchronization means coordinating threads so they work safely together.

Synchronization Tools Table

Tool	Purpose
Lock	Allows one thread at a time
RLock	Allows same thread to acquire lock multiple times
Semaphore	Allows limited number of threads
Event	One thread signals another thread
Condition	Threads wait until a condition becomes true
Queue	Thread-safe data exchange between threads

18.2 Multiprocessing

Multiprocessing means running multiple processes.

Python provides the `multiprocessing` module for process-based parallelism. `ProcessPoolExecutor` is also documented as a higher-level interface for running tasks in background processes.

Syntax

```
import multiprocessing
```

Explanation

1. A process has its own Python interpreter and memory space.
2. Processes do not share normal memory like threads.
3. Multiprocessing is useful for CPU-bound tasks.
4. It can use multiple CPU cores.
5. Communication between processes needs special tools like `Queue`, `Pipe`, `Manager`, or shared memory.

Thread vs Process

Point	Thread	Process
Memory	Shared memory	Separate memory
Creation cost	Lighter	Heavier
Best for	I/O-bound tasks	CPU-bound tasks
Communication	Easier but risky	Needs special tools
Race condition risk	Higher with shared data	Lower by default

18.2.1 Managing Processes

Method / Attribute	Meaning
<code>start()</code>	Starts process
<code>join()</code>	Waits for process to finish
<code>is_alive()</code>	Checks whether process is running
<code>terminate()</code>	Stops process forcefully
<code>pid</code>	Process ID
<code>name</code>	Process name
<code>exitcode</code>	Process exit status

18.2.2 Process Pools

A process pool manages multiple worker processes.

Syntax

```
from multiprocessing import Pool
```

1. A pool reuses worker processes. It is useful when many tasks need to be processed.

2. It avoids manually creating many process objects.
3. For many cases, `ProcessPoolExecutor` is simpler and more modern.

18.2.3 Memory Sharing Basics

Processes have separate memory by default.

1. Normal variables are not automatically shared between processes.
2. Each process gets its own memory space.
3. To share data, special multiprocessing tools are needed.
4. Shared memory should be used carefully.

Memory Sharing Tools

Tool	Purpose
<code>multiprocessing.Queue</code>	Send data between processes
<code>multiprocessing.Pipe</code>	Two-way communication
<code>multiprocessing.Manager</code>	Shared list/dict-like objects
<code>multiprocessing.Value</code>	Shared single value
<code>multiprocessing.Array</code>	Shared array
<code>multiprocessing.shared_memory</code>	Direct shared memory block

18.3 Concurrent Futures

The `concurrent.futures` module provides a high-level interface for running callables asynchronously using threads, processes, or interpreters. The main executors are `ThreadPoolExecutor` and `ProcessPoolExecutor`.

Syntax

```
from concurrent.futures import ThreadPoolExecutor
```

```
from concurrent.futures import ProcessPoolExecutor
```

Explanation

1. `concurrent.futures` is easier than manually creating threads/processes.

2. It uses executors to manage workers. It returns **Future** objects.
3. A **Future** represents a result that may not be ready yet.
4. It is useful for running many tasks concurrently.

18.3.1 ThreadPoolExecutor

ThreadPoolExecutor runs tasks using a pool of threads. Best for I/O-bound tasks

Example 1

PYTHON CODE

```
from concurrent.futures import
ThreadPoolExecutor

def square(number):
    return number * number

with ThreadPoolExecutor() as executor:
    results = executor.map(square, [1, 2, 3, 4])

print(list(results))
```

Output: [1, 4, 9, 16]

18.3.2 ProcessPoolExecutor

ProcessPoolExecutor runs tasks using a pool of processes. Best for CPU-bound tasks

PYTHON CODE

```
from concurrent.futures import ProcessPoolExecutor

def square(number):
    return number * number

if __name__ == "__main__":
    with ProcessPoolExecutor() as executor:
        results = executor.map(square, [1, 2, 3, 4])
    print(list(results))
```

Output: [1, 4, 9, 16]

18.3.3 Futures

A **Future** represents a task that may complete later.

Method	Meaning
<code>result()</code>	Gets result, waits if needed
<code>done()</code>	Checks whether task is completed
<code>cancel()</code>	Attempts to cancel task
<code>cancelled()</code>	Checks whether task was cancelled
<code>exception()</code>	Returns exception if task failed
<code>add_done_callback()</code>	Runs callback when task finishes

Example 1

```
PYTHON CODE
from concurrent.futures import
ThreadPoolExecutor

def square(number):
    return number * number

with ThreadPoolExecutor() as executor:
    future = executor.submit(square, 5)

print(future.result())
```

Output: 25

18.4 Async Programming

Async programming is used to write concurrent code using **async** and **await**.

Python's official **asyncio** documentation describes it as a library for writing concurrent code using **async/await**, commonly used for high-performance network servers, web servers,

database libraries, and distributed task queues. **Best for I/O-bound tasks with many waiting operations**

18.4.1 **asyncio**

asyncio is Python's standard library module for asynchronous programming.


Syntax

```
import asyncio
```

1. **asyncio** runs asynchronous tasks.
2. It uses an event loop.
3. It is usually single-threaded cooperative concurrency.
4. Tasks pause when they reach **await**.
5. While one task is waiting, another task can run.

Flow Chart

Event loop starts

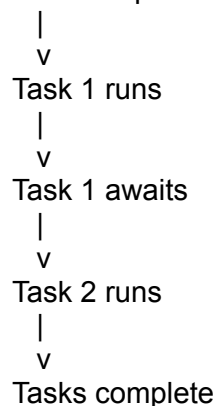

18.4.2 **async** and Coroutines

A coroutine is created using **async def**.

Syntax

```
async def function_name():  
    statement
```

Explanation

1. **async def** defines a coroutine function.
2. Calling a coroutine function returns a coroutine object.

3. The coroutine does not run immediately just because it is called.
4. It must be awaited or run by the event loop.
5. `asyncio.run()` is commonly used to start the main coroutine.

Example 1

PYTHON CODE

```
import asyncio

async def greet():
    print("Hello async")

asyncio.run(greet())
```

Output: Hello async

18.4.3 await

`await` pauses a coroutine until an awaitable finishes.

Syntax

`await awaitable`

Explanation

1. `await` can be used only inside `async def`. It pauses the current coroutine.
2. It allows the event loop to run other tasks.
3. It is used with coroutines, tasks, and async operations.

Example 1

PYTHON CODE

```
import asyncio

async def main():
    print("Start")
    await asyncio.sleep(1)
    print("End")

asyncio.run(main())
```

Output: Start

End

18.4.4 Event Loop

The event loop manages and runs async tasks.

1. The event loop schedules coroutines. It switches between tasks when they await.
2. `asyncio.run()` creates and manages the event loop for most programs.
3. Beginners should usually use `asyncio.run()` instead of manually creating loops.

18.4.5 Tasks

A task schedules a coroutine to run concurrently.

Syntax

```
task = asyncio.create_task(coroutine())
```

1. A task wraps a coroutine. It schedules the coroutine to run on the event loop.
2. Multiple tasks can run concurrently. `await task` gets the final result.

Example 1

PYTHON CODE

```
import asyncio

async def work(name):
    await asyncio.sleep(1)
    print(name, "done")

async def main():
    task1 = asyncio.create_task(work("Task 1"))
    task2 = asyncio.create_task(work("Task 2"))

    await task1
    await task2
    asyncio.run(main())
```

Output:

Task 1 done
Task 2 done
Both tasks wait concurrently.

18.4.6 `asyncio.gather()`

`asyncio.gather()` runs multiple awaitables concurrently and collects their results.

18.4.7 Async Futures

An `asyncio.Future` represents a result that may be available later.

1. `asyncio.Future` is a low-level awaitable object.
2. It is mainly used inside asyncio libraries and frameworks.
3. In normal application code, prefer coroutines and tasks.
4. Do not confuse `asyncio.Future` with `concurrent.futures.Future`.

Python's docs note that `asyncio.Future` is usually for low-level callback-based code and recommend not exposing Future objects in user-facing APIs.

Future Comparison

Type	Module	Used With
<code>concurrent.futures.Future</code>	<code>concurrent.futures</code>	Thread/process executors
<code>asyncio.Future</code>	<code>asyncio</code>	Event loop and async tasks

18.4.8 Async Context Managers

Async context managers are used with `async with`. They use:

`__aenter__`

`__aexit__`

not normal `__enter__` and `__exit__`.

Syntax

PYTHON CODE

```
class ClassName:
    async def __aenter__(self):
        return self
```

```
async def __aexit__(self, exc_type,
exc_value, traceback):
    pass
```

Explanation

1. `async with` is used for async resource management.
2. `__aenter__` runs when the async context starts.
3. `__aexit__` runs when the async context ends.
4. These methods can use `await`.
5. They are common in async database connections, HTTP clients, and network resources.

Example 1

PYTHON CODE

```
import asyncio

class AsyncManager:
    async def __aenter__(self):
        print("Entering async context")
        return self

    async def __aexit__(self, exc_type,
exc_value, traceback):
        print("Exiting async context")

async def main():
    async with AsyncManager():
        print("Inside async context")

asyncio.run(main())
```

Output:

```
Entering async context
Inside async context
Exiting async context
```

18.4.9 Async vs Threading vs Multiprocessing

Feature	Threading	Multiprocessing	Asyncio
Unit	Thread	Process	Coroutine/task
Memory	Shared	Separate	Shared in same thread
Best for	I/O-bound blocking work	CPU-bound work	I/O-bound non-blocking work
Runs in	Same process	Separate processes	Event loop
Communication	Shared data, queue	Queue, pipe, manager	Awaitables, tasks
Main risk	Race conditions	Process overhead	Blocking the event loop
Common tool	<code>threading</code>	<code>multiprocessing</code>	<code>asyncio</code>

Important Async Rule

Do not put long blocking code inside async functions.

If blocking code runs inside the event loop, it delays other async tasks. Python's asyncio development docs note that CPU-intensive work can block the event loop and delay other tasks, and executors can be used to run such work elsewhere.

SOME LOVE BY FOLLOWING **CodeWithNishchal** on social media:

- Instagram: <https://www.instagram.com/codewithnishchal/>
- LinkedIn: <https://www.linkedin.com/in/nishchal-muradia/>
- YouTube: <https://www.youtube.com/@CodeWithNishchal>
- Telegram <https://t.me/codewithnishchal>
- Watch My Latest Time Complexity Series: [Time Complexity](#)
- Join My IG Community for Tech discussions : [CodeN' community](#)