

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concent, & that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
8		ADD P/N G4	2023.01.31	Michael.Qin
9		Add Dimensions	2023.04.11	Michael.Qin
10		B5, CC1=> CC2	2023.08.15	Michael.Qin

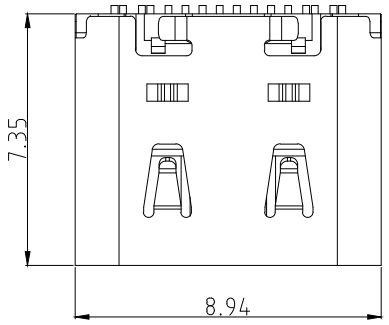






② SECTION B-B

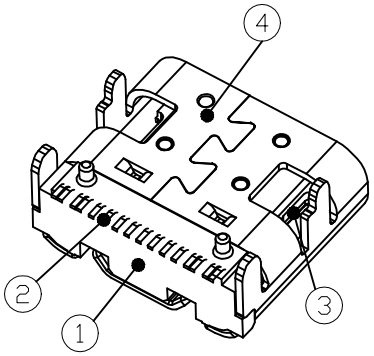

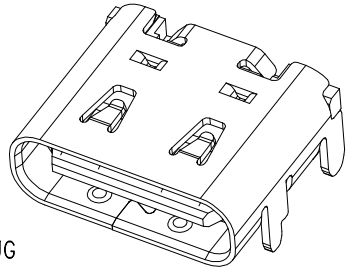


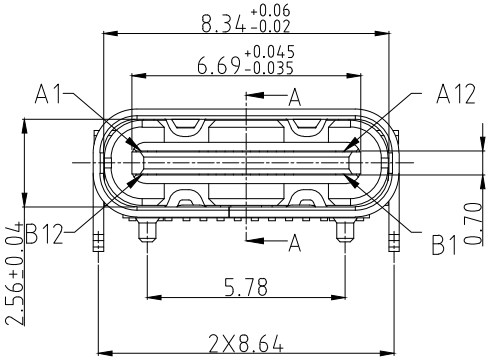

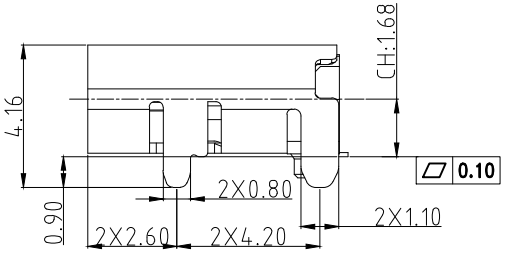




⑨

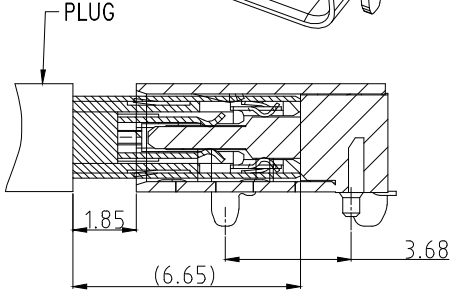

⑦ MATING

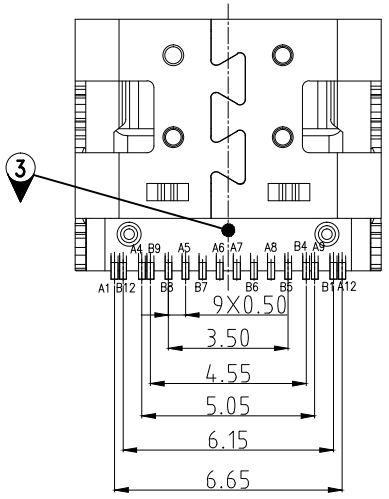

Amphenol Shenzhen RoHS Compliant 2011/65/EU

USB TYPE-C PIN ASSIGNMENTS:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			Vbus	CC1	D+	D−	SBU1	Vbus			GND
GND			Vbus	SBU2	D−	D+	CC2	Vbus			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

⑩

ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH
4	SHELL	1	STAINLESS STEEL	50u" NICKEL OVERALL.
3	MID PLATE	1	STAINLESS STEEL	50u" NICKEL OVERALL.
2	TERMINAL	1	COPPER ALLOY	MATING SIDE:SEE PN Number; SOLDER TAIL:Gold Flash,50u" NICKEL OVERALL.
1	MAIN HOUSING	1	HIGH TEMPERATURE	

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED
TOLERANCES

	U.S.	METRIC
.X	+/−	0.50
.XX	+/−	0.15
.XXX	+/−	0.10
FRACTIONS	+/−	
ANGLES	+/−	3°

FOR MATERIALS AND FINISHES SEE NOTES
REMOVE SHARP EDGES
DIMENSIONS U.S. (METRIC) / INCHES (MM)

APPROVAL		DATE
DRAWN	Allan.Lai	08/15/23
CHECKED	Michael.Qin	08/15/23
CHECKED	Michael.Qin	
DRAWING FILE :		

ANGLE OF PROJECTION

Amphenol
Amphenol East Asia Limited

TITLE: Customer Drawing For USBC 2.0 16PIN SCK SR-SMT CH=1.68


SIZE	DRAWING NO.	REV.
A3	C12402012	10

SCALE	NONE	SHEET 1 OF 3

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concent, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		please see sheet 1		

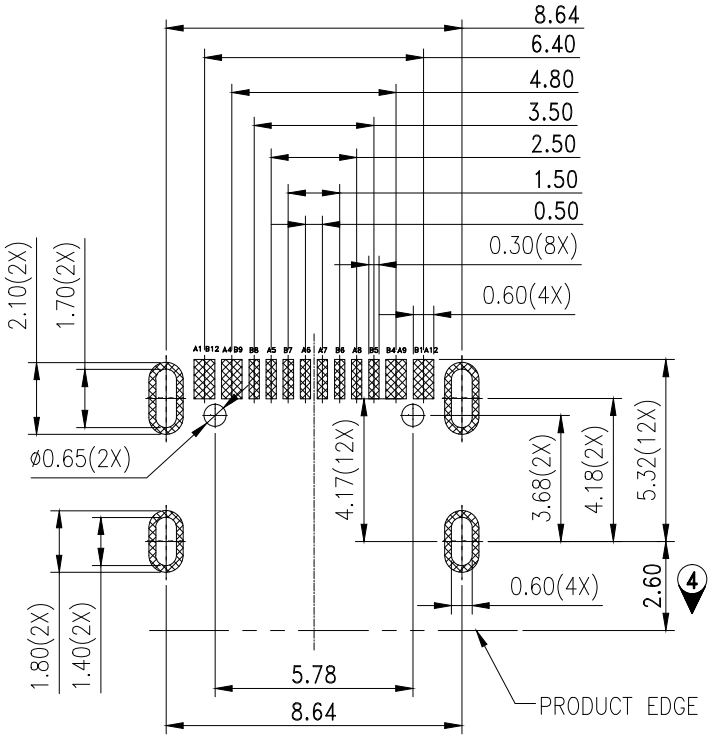

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05

NOTES:

1.Material : See Bill Of Material

2.Waterproof : No Waterproof

3.Electrical Characteristics:
- Low Level Contact Resistance: 40mΩ Max
- Insulation resistance :100MΩ Min
- Dielectric Withstanding Voltage:100 VAC
- Contact Current Rating :5A Max

4.Mechanical Characteristics:
- Insertion Force: 5~20N
- Extraction Force: 8~20N
- After Durability Extraction Force: 6~20N

5.Durability: 10000 Cycles

6.Packaging Type: Carrier Reel.

7.Material Should Be Fulfilled Amphenol SPEC# SSN002 And Customer Requirements, For HALOGEN FREE Products, Also Need To Meet SSN004

8.Part Number:12402012XX12A

Plating Spec:
- E2: Mating Area: Gold flash; Solder Area: Gold flash; 50u"Min Nickel Under Plating Over All
- 6 E5: Mating Area: Au 30u"; Solder Area: Gold flash; 50u"Min Nickel Under Plating Over All
- 8 G4: Mating Area: Au 4u"; Solder Area: Gold flash; 50u"Min Nickel Under Plating Over All

Package Spec.
- 2:Reel

Date Code Description
- 1:Without D/C

A:HF

Amphenol Shenzhen RoHS Compliant 2011/65/EU

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC
.X +/-		0.50
.XX +/-		0.15
.XXX +/-		0.10
FRACTIONS +/-		
ANGLES +/-		3°

FOR MATERIALS AND FINISHES SEE NOTES

REMOVE SHARP EDGES

DIMENSIONS: U.S. / INCHES; (METRIC) / (MM)

	APPROVAL	DATE
DRAWN	Allan.Lai	08/15/23
CHECKED	Michael.Qin	08/15/23
CHECKED	Michael.Qin	

DRAWING FILE :

ANGLE OF PROJECTION

Amphenol

Amphenol East Asia Limited

TITLE: Customer Drawing For USBC 2.0 16PIN SCK SR-SMT CH=1.68


SIZE	DRAWING NO.	REV.
A3	C12402012	10


SCALE	NONE	SHEET 2 OF 3


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
please see sheet 1				

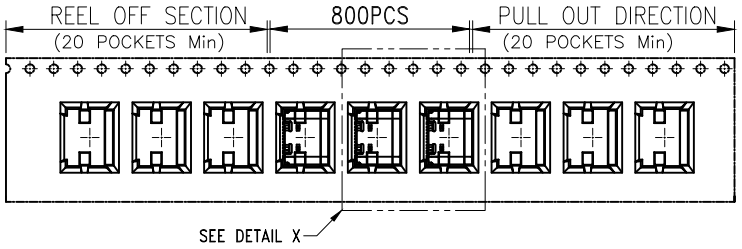

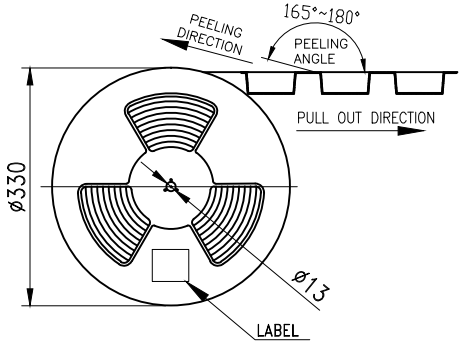

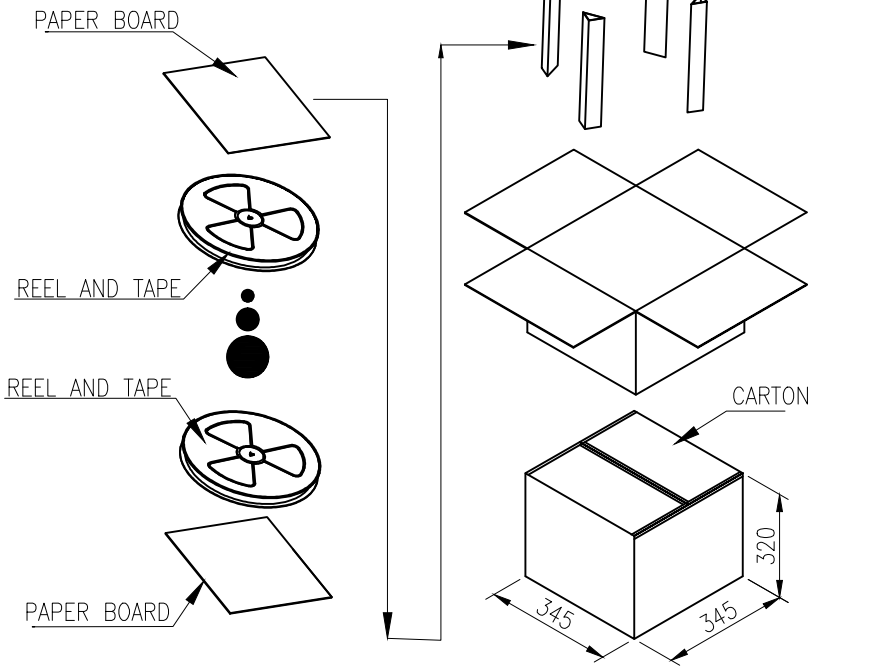

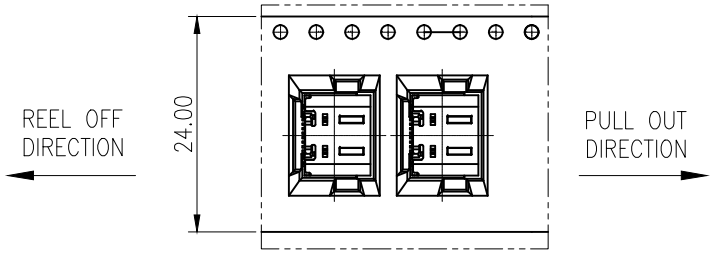

	REEL	CARTON
CONNECTOR (PCS)	800	8000

Amphenol Shenzhen RoHS Compliant 2011/65/EU

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC
.X +/-		0.50
.XX +/-		0.15
.XXX +/-		0.10
FRACTIONS +/-		
ANGLES +/-		3°
FOR MATERIALS AND FINISHES SEE NOTES		
REMOVE SHARP EDGES		
DIMENSIONS		
U.S.	INCHES	
(METRIC)	(MM)	

APPROVAL		DATE
DRAWN	Allan.Lai	08/15/23
CHECKED	Michael.Qin	08/15/23
CHECKED	Michael.Qin	
DRAWING FILE :		
ANGLE OF PROJECTION		

Amphenol

Amphenol East Asia Limited

TITLE: Customer Drawing For USBC 2.0 16PIN SCK SR-SMT CH=1.68

SIZE	DRAWING NO.	REV.
A3	C12402012	10
SCALE	NONE	SHEET 3 OF 3